




**FAST FILL
SYSTEMS**

PRODUCT
CATALOGUE
2027

**FUEL FASTER.
WORK LONGER.**



QUALITY. SERVICE. INNOVATION.

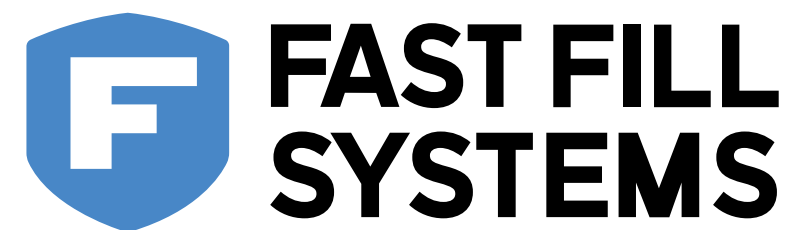

2055 S. Tracy Hall Parkway, Provo, UT 84606

801.491.3600

orders@fastfillsystems.com

www.fastfillsystems.com

To offer you a more engaging visual experience, some images in this catalog have been created using Artificial Intelligence (AI). For this reason, the visual appearance may vary slightly from the actual product; however, Fast Fill Systems guarantees that all technical information and data provided are 100% real and accurate.

ABOUT US



04

It started with a fuel nozzle.

Our story began in a small home garage, where Nozzle Tech, USA LLC repaired and rebuilt diesel fuel nozzles. Working with equipment that had already spent time in the field gave the business a practical starting point: understanding the products people relied on and the demands they faced every day.

Today, Fast Fill Systems brings that focus to fueling and fluid-transfer equipment for heavy-duty operations. From the nozzle in your operator's hands to the components on your tank, our products serve the people who keep equipment working.

Quality. Service. Innovation. These values connect our beginnings with the work we do today.



FIND WHAT YOU NEED


Start with the task. Find the right page.

Need a complete tank-side configuration, a replacement part or help identifying your system? Choose a starting point below. If you already have a part number, go straight to the part-number index.

[About Us](#)[Fuel Nozzles](#)[Kits & Systems](#)[Fuel Receivers](#)[Vents & Breathers](#)[Shutoff Valves & Level Controls](#)[Fluid Couplers](#)[Installation & Connection Accessories](#)[Service Parts & Tools](#)[Rebuilds](#)[Resources & Support](#)[Glossary & Part Number Index](#)[Distributors](#)[How to Request a Quote](#)




FUEL NOZZLES

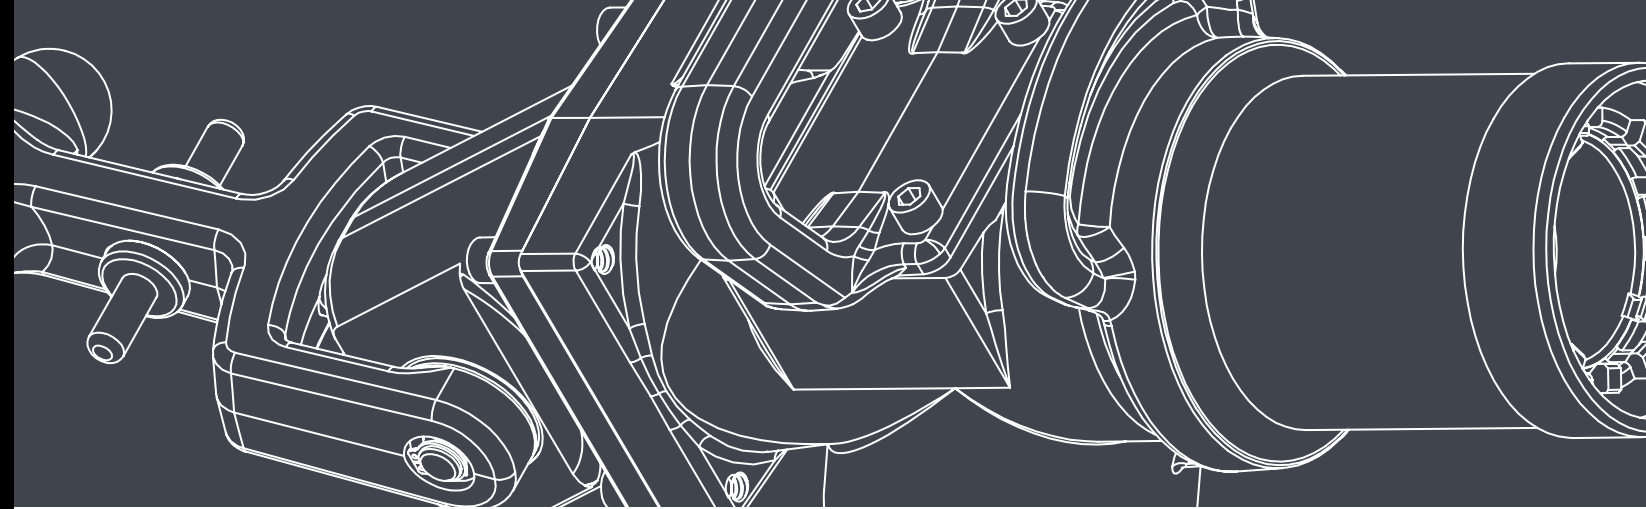

Make every fueling connection count.

Your operators handle a fuel nozzle every time a machine comes in to refuel. Its weight, grip and connection all become part of their working day. Fast Fill fuel nozzles bring together rugged construction and fast-fill functionality for demanding equipment and environments. Explore the range to find the handling characteristics, flow capacity and configuration that fit the way your operation works.

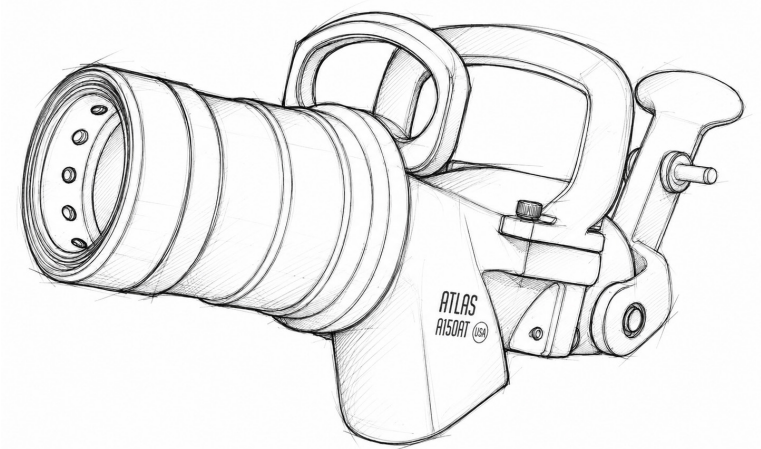



ATLAS

N150AT



Front End Plug
P150T


- Keeps the latching mechanism of the nozzle clean from dirt and grime for fast, clean coupling



150 GPM
FAST REFUELING (567 LPM)

BUILT FOR

- Mining equipment
- Construction equipment
- Fuel trucks
- Agriculture
- Rail
- Industrial fleets

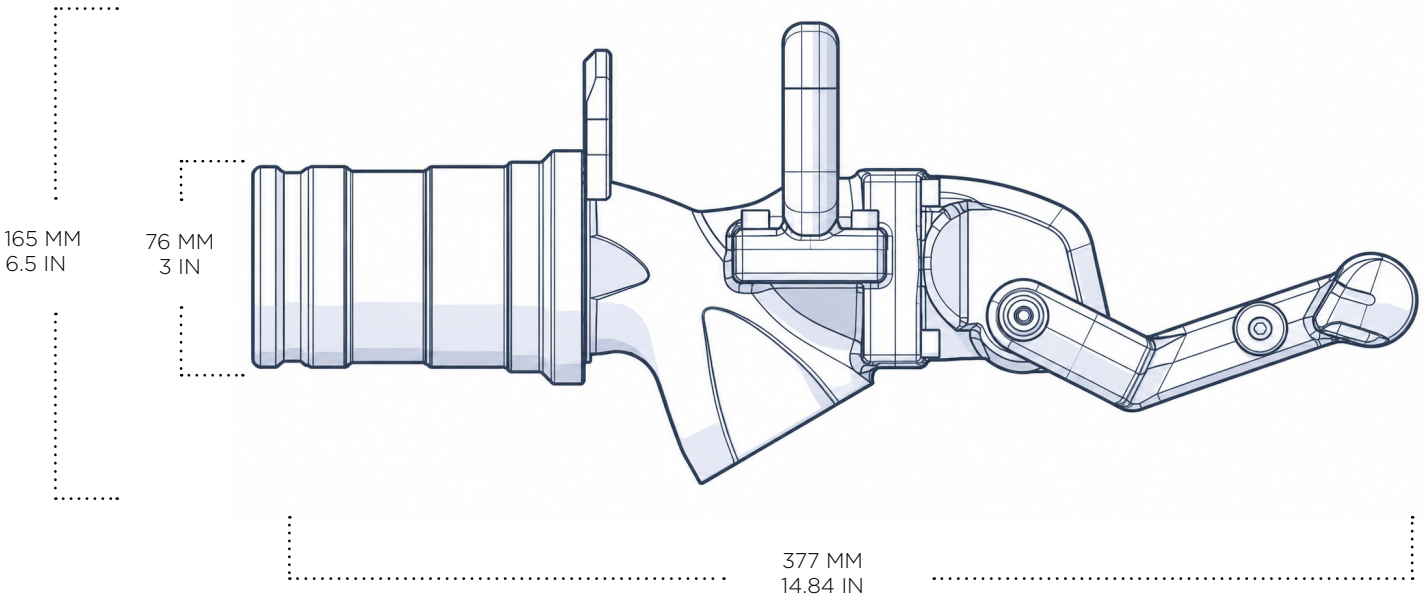

KEY SPECIFICATIONS

Parameter	Value
Model	N150AT
Minimum Flow	95 LPM / 25 GPM
Maximum Flow	567 LPM / 150 GPM
Maximum Operating Pressure	8.6 bar / 125 PSI
Fuel Port	1-1/2 in NPT
Latching Mechanism	12 stainless-steel ball bearings




View in room

Scan the QR code below to view this product in room virtually.



FUEL RECEIVERS

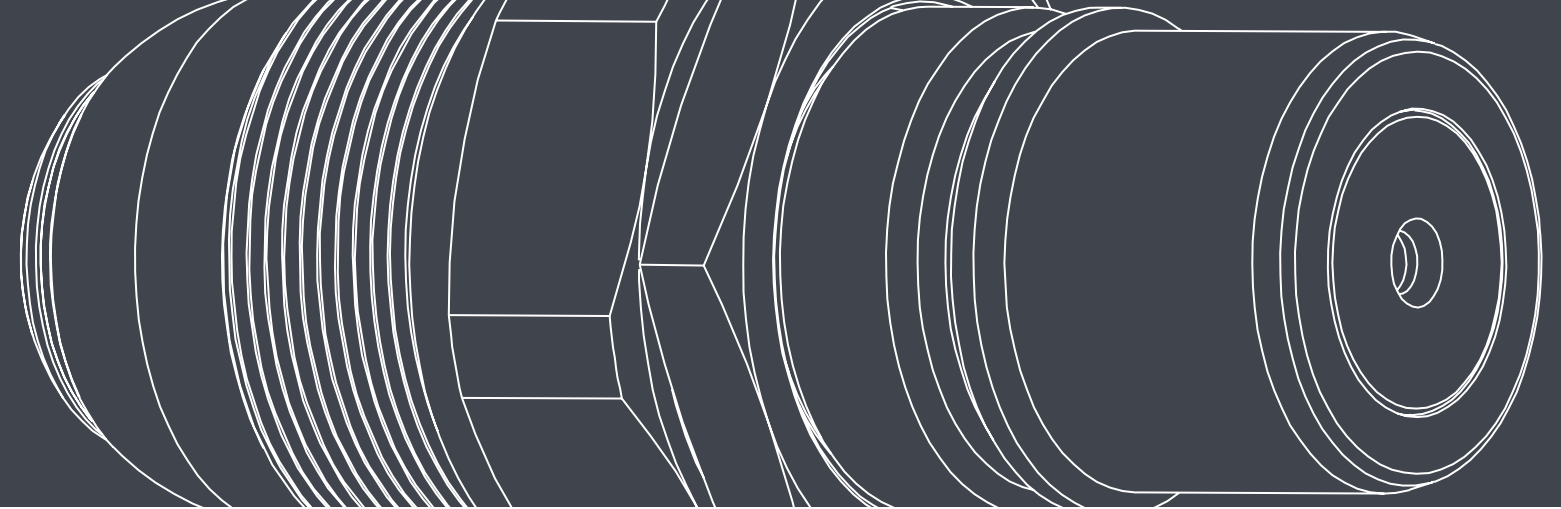

A dependable connection starts at the tank.

The receiver is where your fueling equipment meets the machine. It needs to stand up to repeated connections while matching the requirements of the nozzle and tank-side system. Fast Fill offers receiver options for different mounting, material and service needs, including check-valve configurations designed to allow receiver replacement without draining the tank. Find the connection that fits your installation and maintenance approach.



CHECK VALVE

R800CV

FUEL RECEIVERS




BUILT FOR

Diesel equipment tanks ·
Service-intensive fleets ·
Mining and construction
equipment

**NO TANK
DRAINING**
FOR MATCHED RECEIVER REPLACEMENT

182 MM
7.166 IN

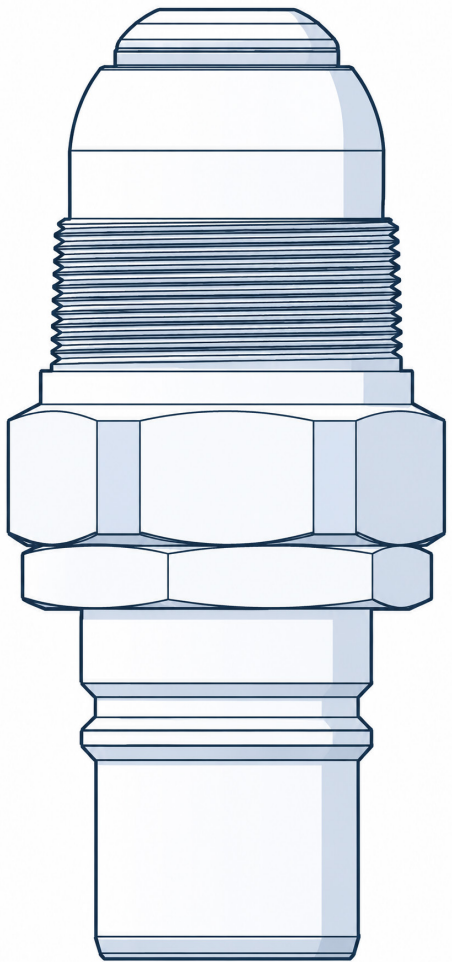

76.2 MM
3 IN

KEY SPECIFICATIONS

Parameter	Value
Model	R800CV
Maximum Flow	800 LPM / 211 GPM*
Application	Diesel fueling
Valve Function	One-way check valve
Service Function	Receiver replacement without tank draining
Replacement Receiver	Matched component; part number to confirm



View in room

Scan the QR code below to view this product in room virtually.

* With the N1000PSLp nozzle and a correctly sized installation.
** Component operating limit; not an allowable tank pressure.



STANDARD RECEIVER


R150Sc-A



BUILT FOR

- Mining equipment ·
- Construction equipment ·
- Agricultural equipment ·
- Diesel fleets ·

**SOLID
STEEL**
NICKEL-PLATED FOR REPEATED COUPLING

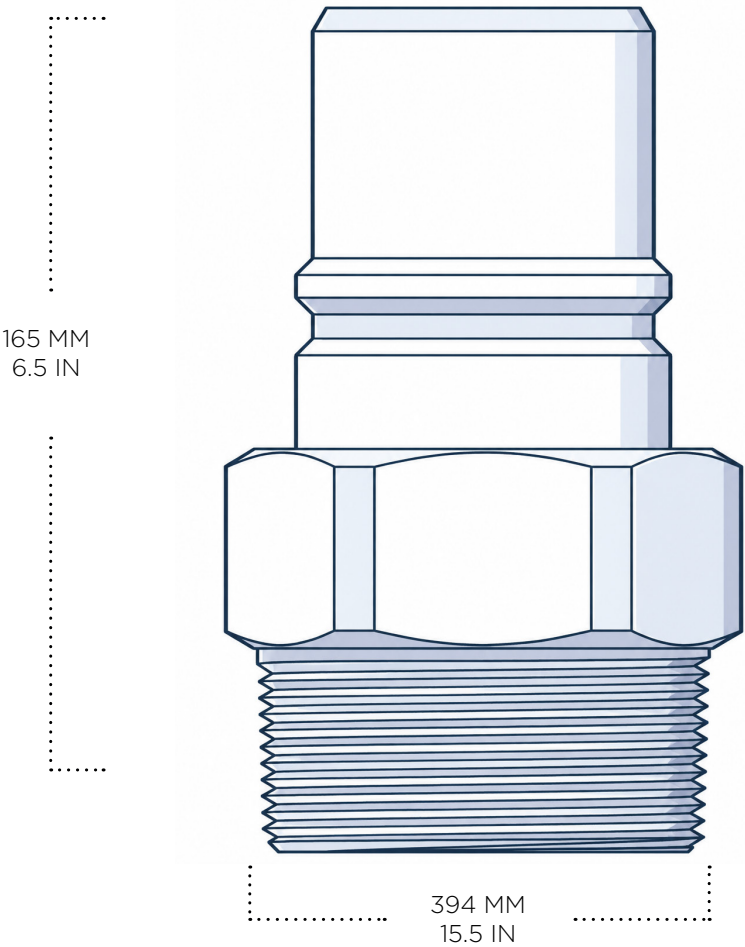

KEY SPECIFICATIONS

Parameter	Value
Model	R150Sc-A
Maximum Flow	800 LPM / 211 GPM
Maximum Operating Pressure	8.6 bar / 125 PSI
Tank Installation Thread	2 in NPT
Construction	Nickel-plated steel
Standard Shutoff Option	9 PSI configuration
Protective Cap	Plastic cap included



View in room


Scan the QR code below to view this product in room virtually.



PRESSURELESS



Fast Fill Systems

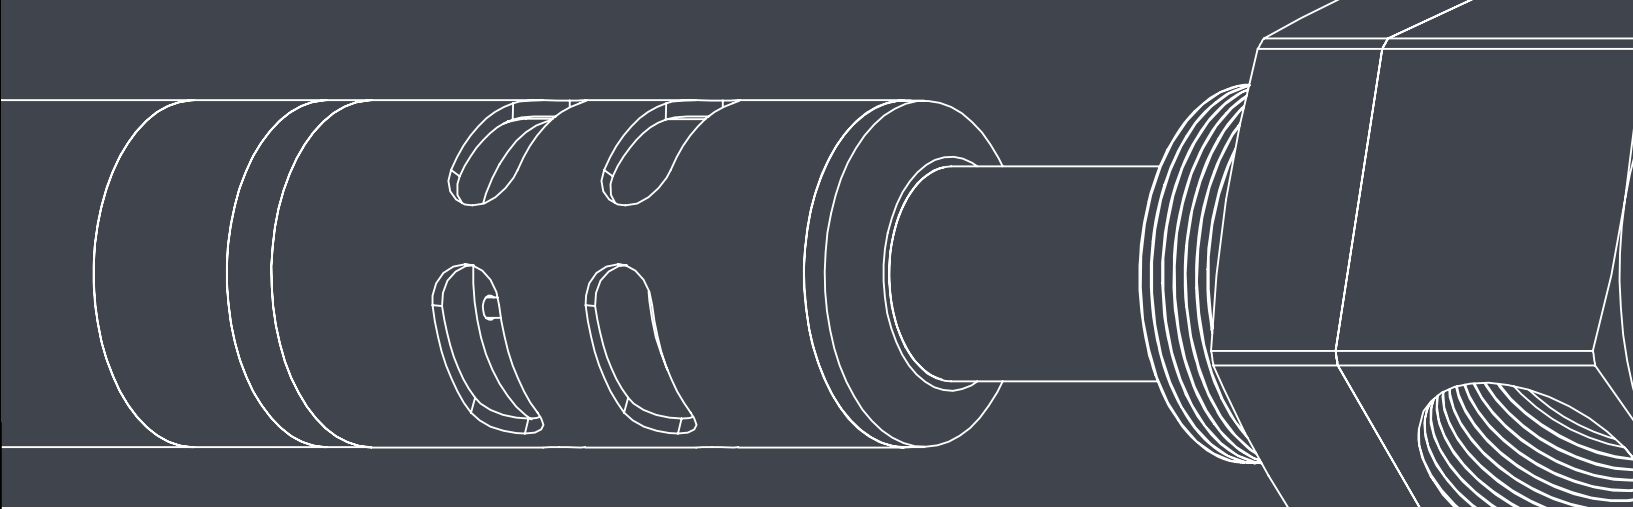

Lose the pressure. Not the performance.

Pressureless fill systems bring unique advantages to fast delivery of fuel and other fluids. The benefit is that your tank is protected from the internal pressures that are typically required to shut off a pressure-sensitive nozzle. In these Fast Fill systems, the pressure is isolated within the level control and signal lines to alleviate unnecessary strain on the tank walls. The level controllers are adjustable for higher or lower shutoff levels, according to your specific needs. Finally, in the two-part level control/shutoff valve, the fuel receiver can be replaced without the need to drain your tank, as it serves as a check valve to hold back the tank's fluid.

PRESSURELESS



HIGH FLOW PRESSURELESS

PLA-M SV




Fill large tanks at high flow without using tank pressurization as the shutoff signal. Paired with the SureLoc 1000 nozzle, a system equipped with the PLA-M SV shutoff valve supports flow rates up to 1,000 LPM. The level control sets the target fill level and transmits a hydraulic signal to close the inlet shutoff valve, while internal or external signal-line connections provide installation flexibility. The shutoff valve also allows the receiver to be serviced without draining the tank.

BUILT FOR

- Large diesel tanks ·
- Mining equipment ·
- High-volume equipment fueling ·

1000 LPM
PRESSURELESS FILLING
WITH SURELOC 1000

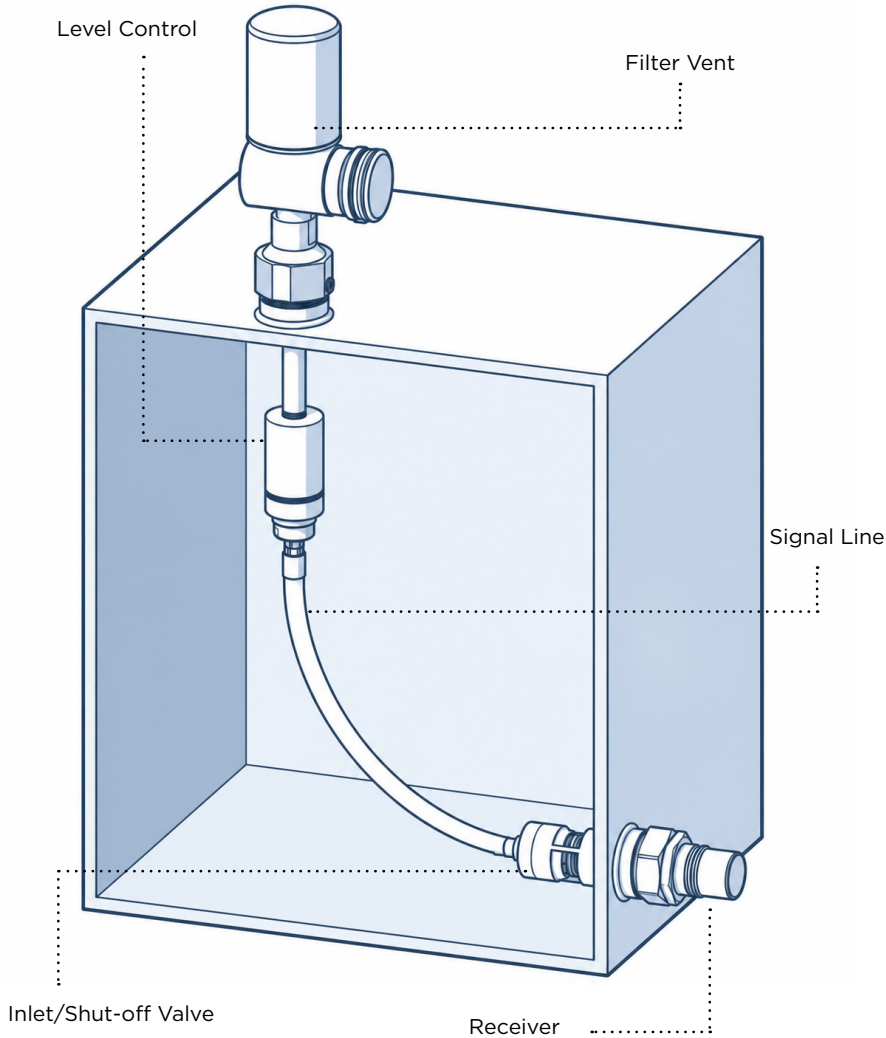

KEY SPECIFICATIONS

Parameter	Value
System	PLA-M SV
Maximum System Flow	1,000 LPM / 264 GPM*
Maximum Operating Pressure	8.6 bar / 125 PSI**
Tank Installation Thread	2 in NPT
Level Control	Adjustable automatic shutoff
Signal-Line Routing	Internal or external
Required Nozzle	SureLoc 1000 — N1000PSLp

* With the N1000PSLp nozzle and a correctly sized installation.
** Component operating limit; not an allowable tank pressure.



View in room

Scan the QR code below to view this product in room virtually.

PRESSURELESS



SMALL TANK PRESSURELESS

PLA 80-VSC




ONE TANK PORT

FILL AND VENT THROUGH ONE OPENING

BUILT FOR

- Agricultural equipment ·
- Compact construction ·
- equipment ·
- Transit fleets ·
- Multi-tank installations ·

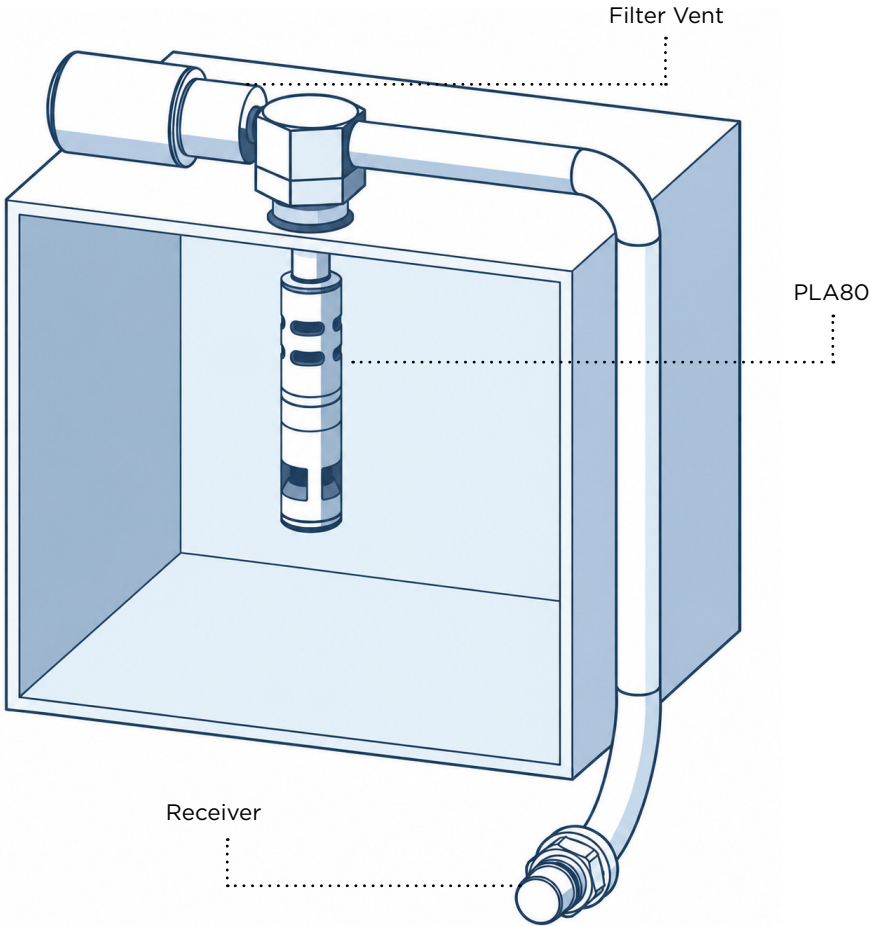

KEY SPECIFICATIONS

Parameter	Value
System	PLA80 / PLA80-SVLC
Tank Installation Thread	2 in NPT
Fluid Inlet Thread	1-1/4 in FNPT
Vent Port Thread	1 in FNPT
Level Control	Adjustable automatic shutoff
Tank Configuration	Single tank or configured multi-tank system
Venting Options	Low-profile or remote filter vent





View in room

Scan the QR code below to view this product in room virtually.



FUEL VENTS

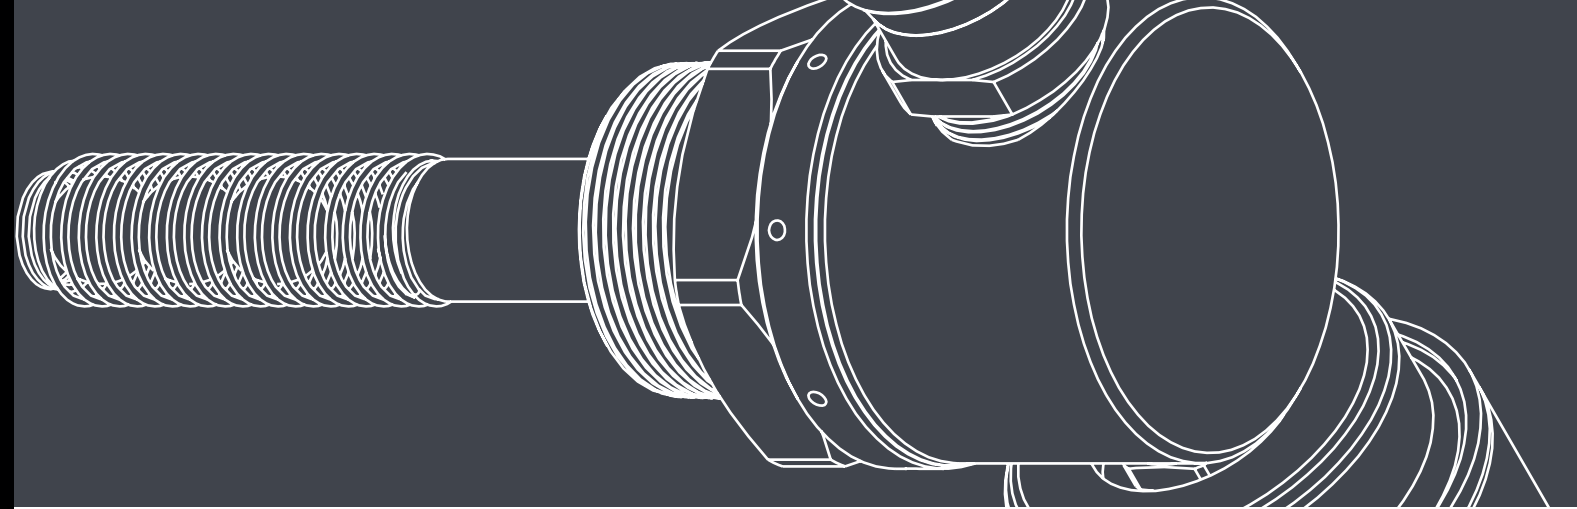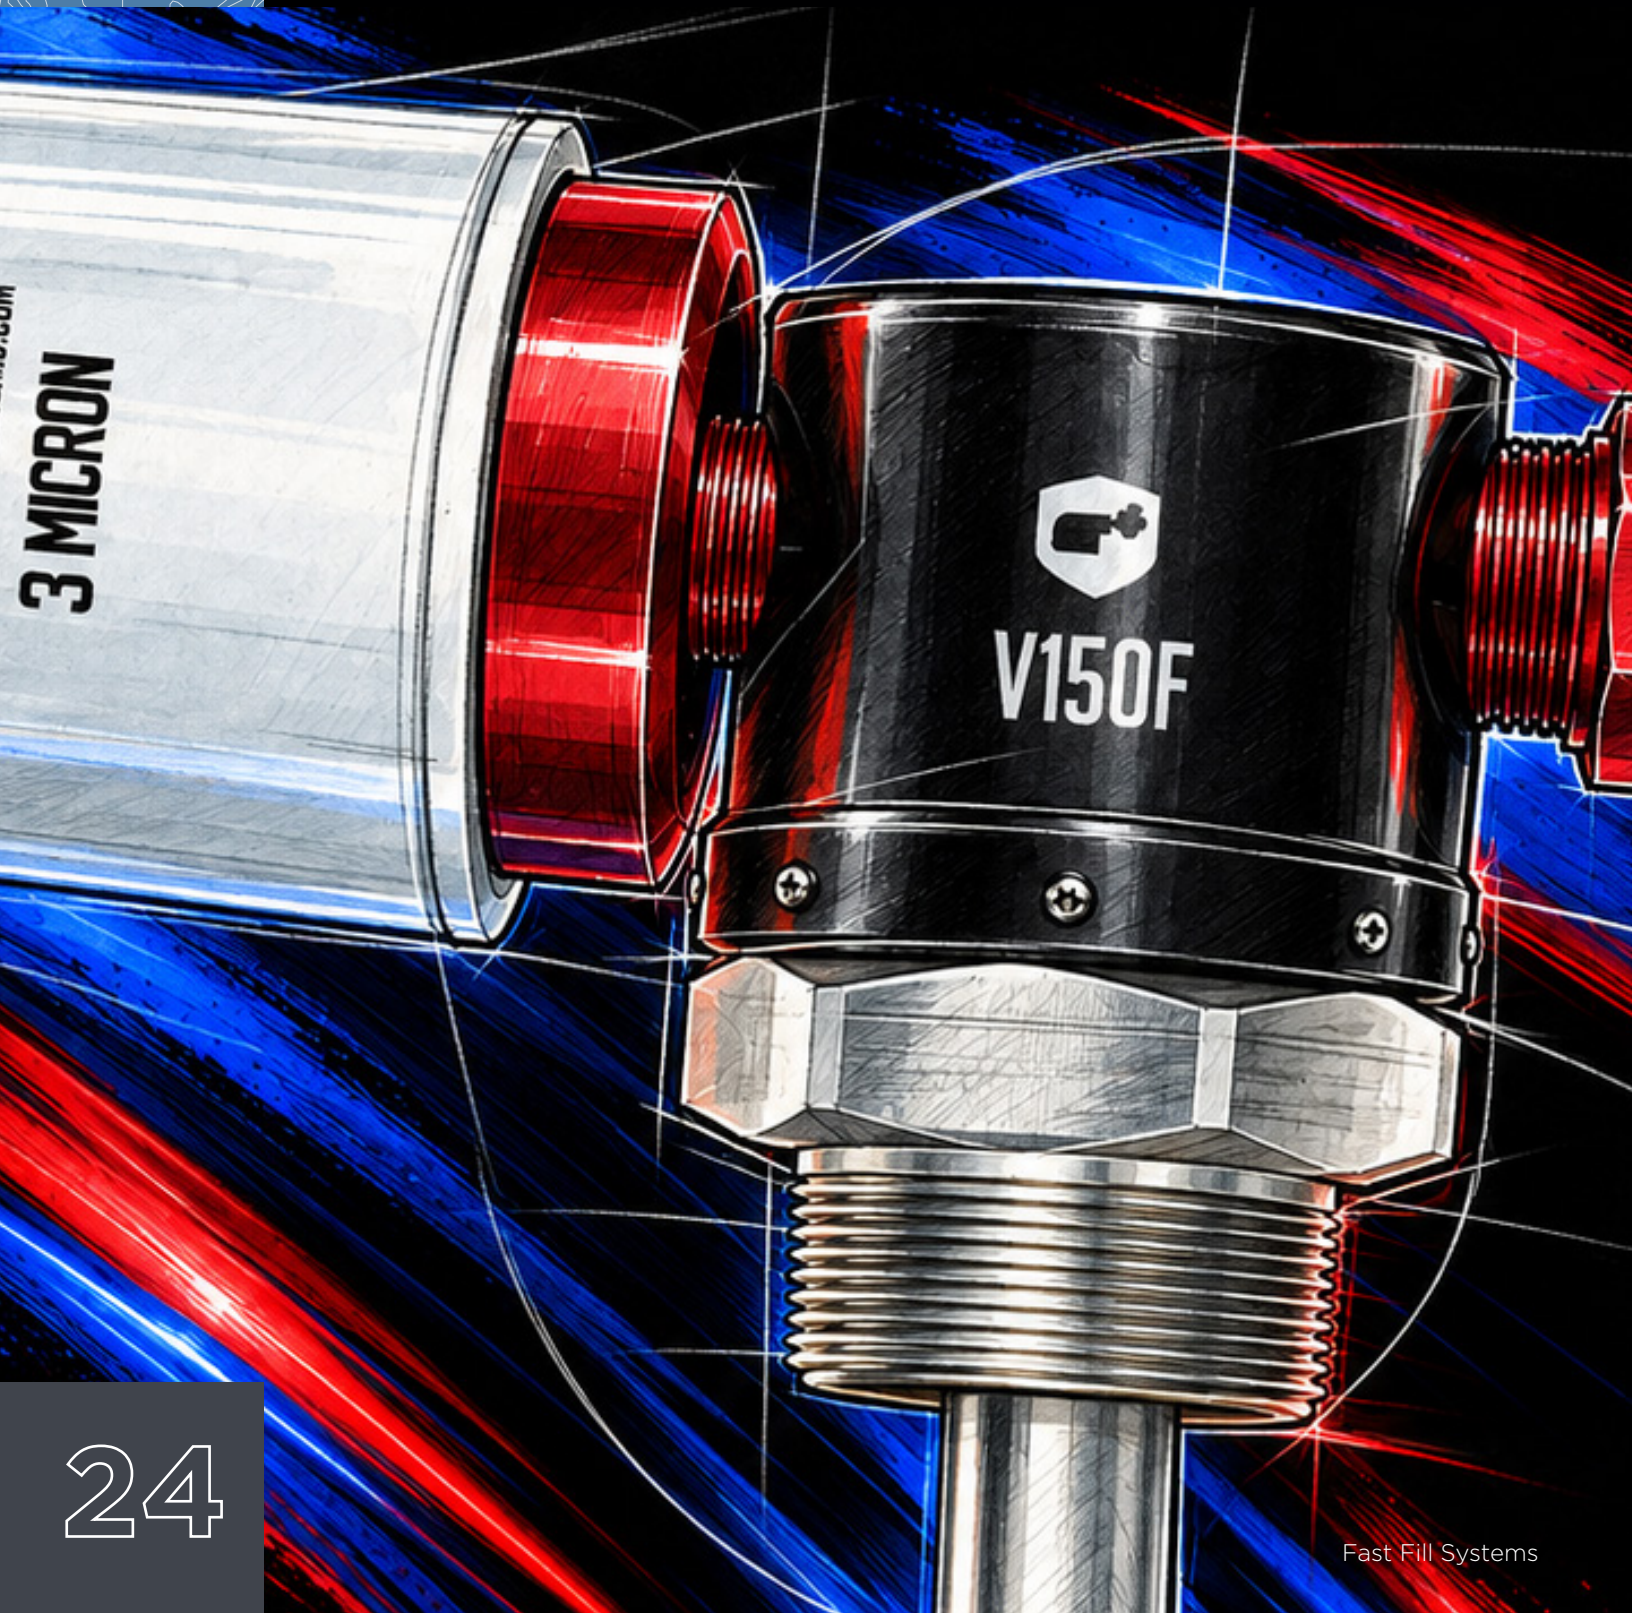

Control what you can't see.


Vents, or breathers as they are commonly known, are another important component in a smoothly functioning fuel system. Vents play a vital role in the fill level and shutoff of your tank; however, they provide the easiest access point for dust and contaminants to enter your fuel system. Our filtered vents make use of check valves to ensure that outgoing air bypasses the filter, and incoming air is channeled through it. Fast Fill Systems pressurized vents also serve a dual purpose as a fail-safe pressure relief valve. Correct venting is pivotal in high-volume fueling.

Help keep airborne dirt out of the fuel tank with filtered breathing for pressurized fueling systems. The V150F directs incoming air through a 3-micron filter, while outgoing air and fuel vapor leave through a one-way valve. Available stem lengths support different fill-level requirements, combining tank venting, filtration and level control in a single assembly.



FILTERED FUEL VENT

V150F

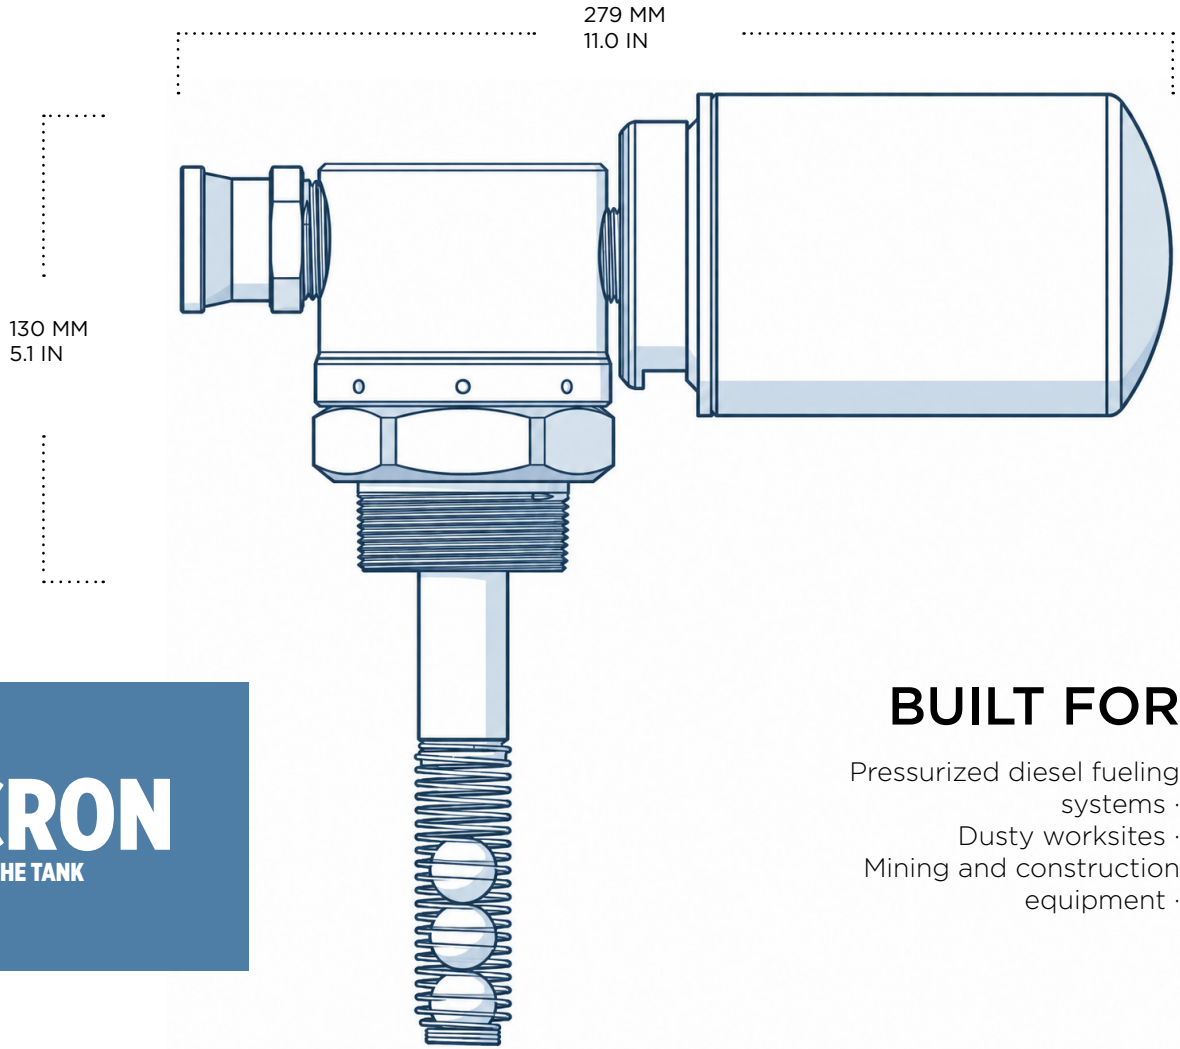

3 MICRON
FILTERED AIR INTO THE TANK

BUILT FOR

- Pressurized diesel fueling systems ·
- Dusty worksites ·
- Mining and construction equipment ·

KEY SPECIFICATIONS

Parameter	Value
Model	V150F
System Type	Pressurized fueling
Tank Installation Thread	2 in NPT
Air Filter Rating	3 micron
Published Relief Pressure	13 PSI / approximately 0.90 bar
Level-Control Stem	5 in standard; 7 in or 12 in optional
Replacement Filter	FFV-MF



View in room

Scan the QR code below to view this product in room virtually.

FILTERED FUEL VENT

STANDARD FUEL VENT

V150




BUILT FOR

- Pressurized diesel fueling systems ·
- Tank retrofits ·
- Heavy equipment ·

**SET THE
FILL LEVEL**
STEM OPTIONS FOR YOUR INSTALLATION

The V150 provides the venting and level-control function used in a traditional pressurized fast-fill system. Air escapes as fuel enters the tank. When fuel reaches the configured level, the vent closes so tank pressure can activate the matched nozzle’s shutoff. Different stem lengths allow the installation to be configured for the required fill level.

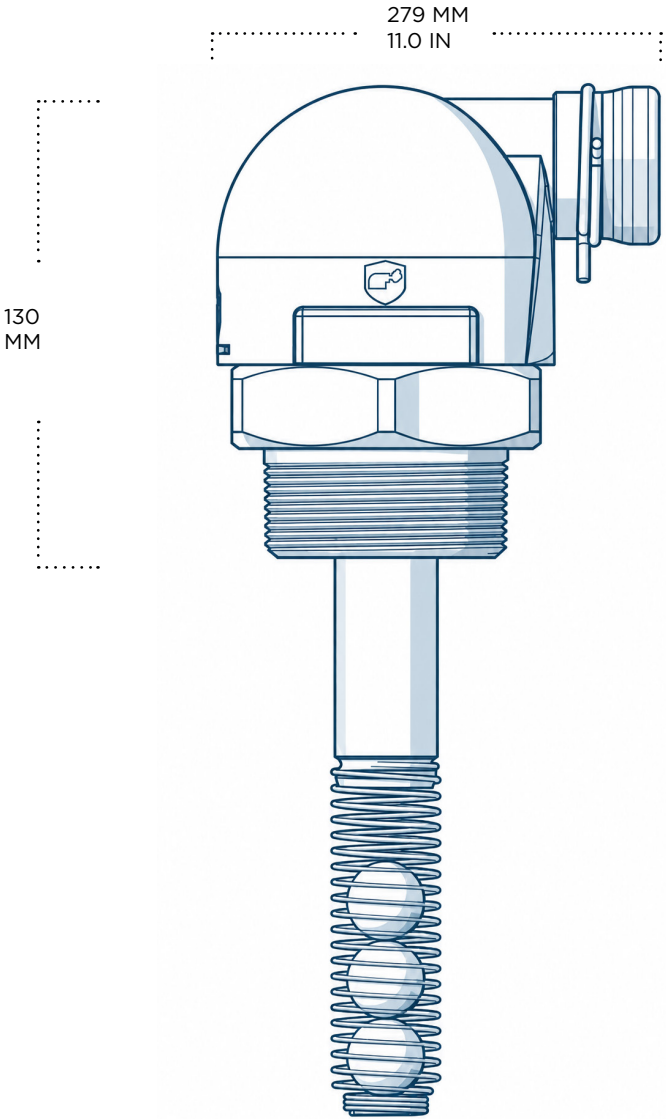

KEY SPECIFICATIONS

Parameter	Value
Model	V150
System Type	Pressurized fast-fill fueling
Primary Function	Tank venting and fill-level control
Standard Stem Length	5 in / 127 mm
Optional Stem Lengths	7 in / 178 mm; 12 in / 305 mm
Shutoff Method	Vent closure enables pressure-based nozzle shutoff



View in room

Scan the QR code below to view this product in room virtually.

FUEL VENTS

COMPLETE SYSTEM

PRESSURELESS SYSTEMS



INSTALLED CONFIGURATION

Controlled filling. Less tank stress.

Bring the fill connection, level control and tank venting together in one coordinated fueling system. Fast Fill Systems pressureless technology uses a hydraulic signal to close the inlet shutoff valve at the selected fuel level, without relying on tank pressurization to trigger shutoff. An adjustable level control sets the fill point, while a matched filter vent lets the tank breathe. In the two-part level-control and shutoff-valve arrangement, the receiver can be replaced without draining the tank.

ADJUSTABLE FILL LEVEL

Set the shutoff point to suit the tank installation.

FLEXIBLE INSTALLATION

Position the fill connection and level control to suit the equipment.

SIMPLER RECEIVER SERVICE

Replace the matched receiver without draining the tank.

CONFIGURED AROUND YOUR TANK

Each component has a clear role. Fuel enters through the receiver and shutoff valve while displaced air exits through the vent. When fuel reaches the selected level, the level control sends a hydraulic signal that closes the inlet valve and stops filling.

The shutoff signal stays within the control circuit, so the tank does not need to be pressurized to stop fuel delivery.

FILL	DETECT	STOP
Fuel enters.	The level control	The hydraulic signal
Displaced	responds at the	closes the inlet
air leaves.	selected fill level.	shutoff valve.

R150CVRc-J

Provides the nozzle connection at the inlet shutoff-valve assembly.

FFV150-PL

Allows displaced air to escape during filling and filters incoming air as the tank breathes.

PLA-M VLCE


Detects the selected fuel level and initiates the hydraulic shutoff signal.

PLA-M SV

Allows fuel into the tank during filling and closes when it receives the shutoff signal.

PL-P-6

Carries the hydraulic signal from the level control to the inlet shutoff valve.

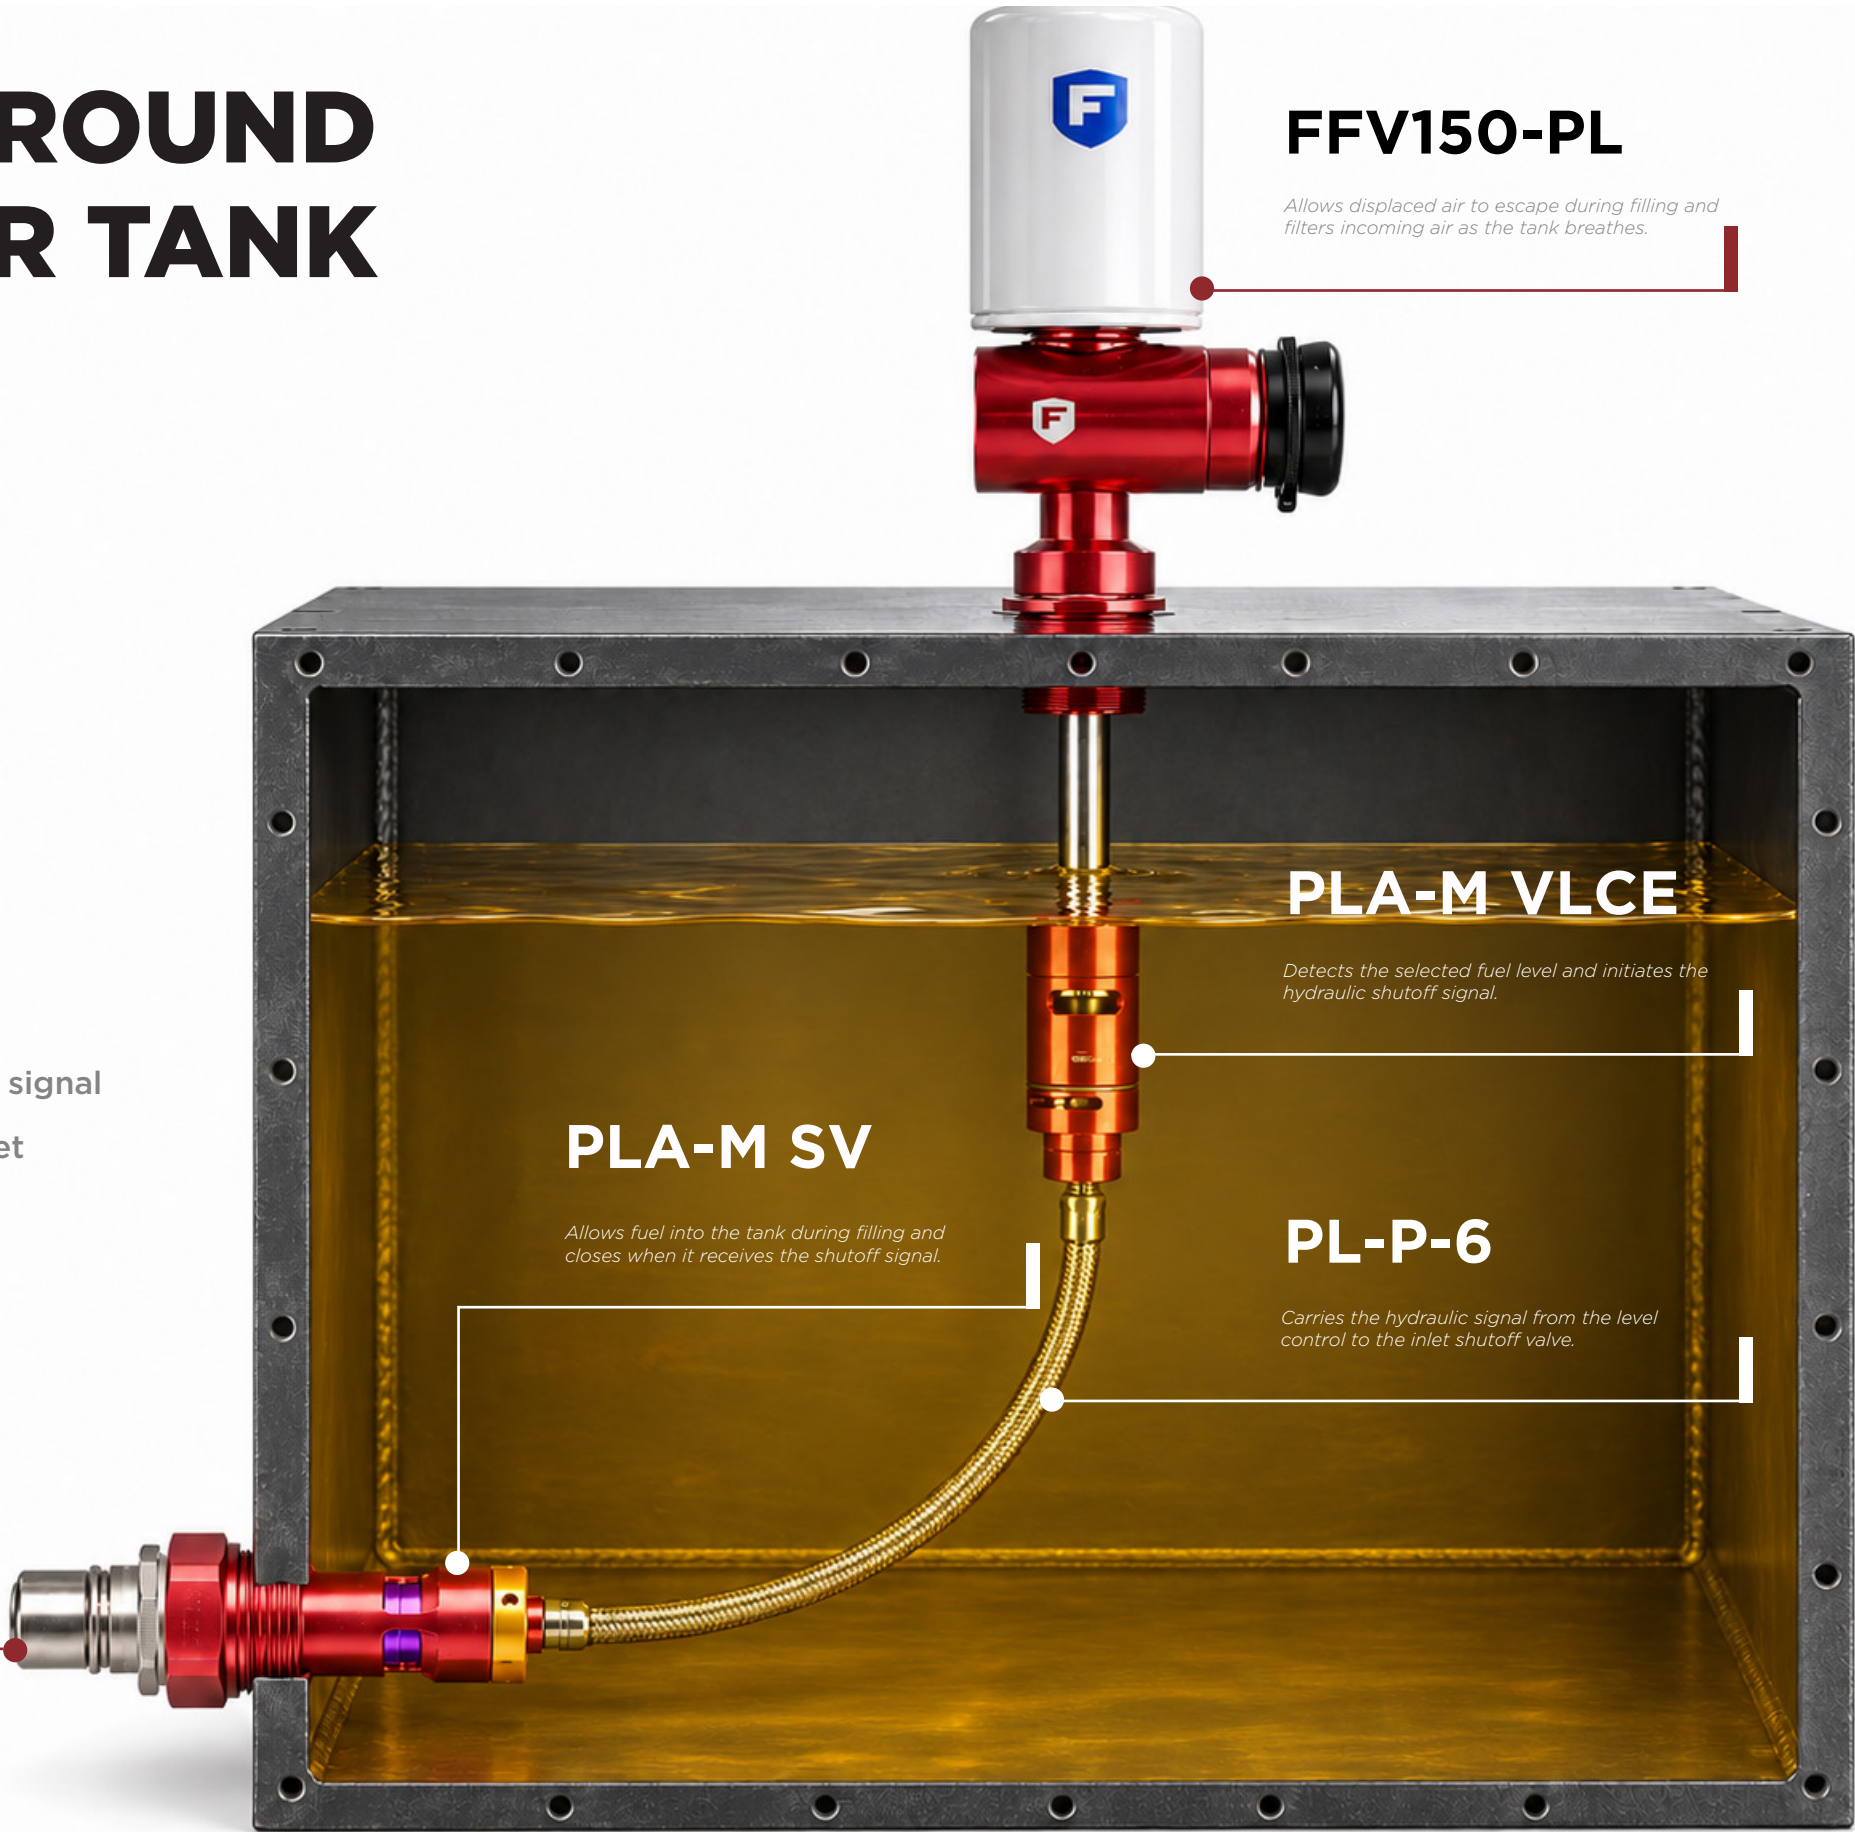

FFV150-LP


Allows displaced air to escape during filling and filters incoming air as the tank breathes.

COMPACT SYSTEM.
CONTROLLED FILLING.

Fuel travels from the receiver through the fill pipe to the PLA80 assembly. As the tank fills, displaced air leaves through the vent connection and FFV150-LP filter vent.

When fuel reaches the selected level, the integrated control stops incoming flow. Filling and venting share the same tank opening, simplifying the tank layout.

Typical installation shown. Receiver, piping and mounting hardware must be matched to the application.

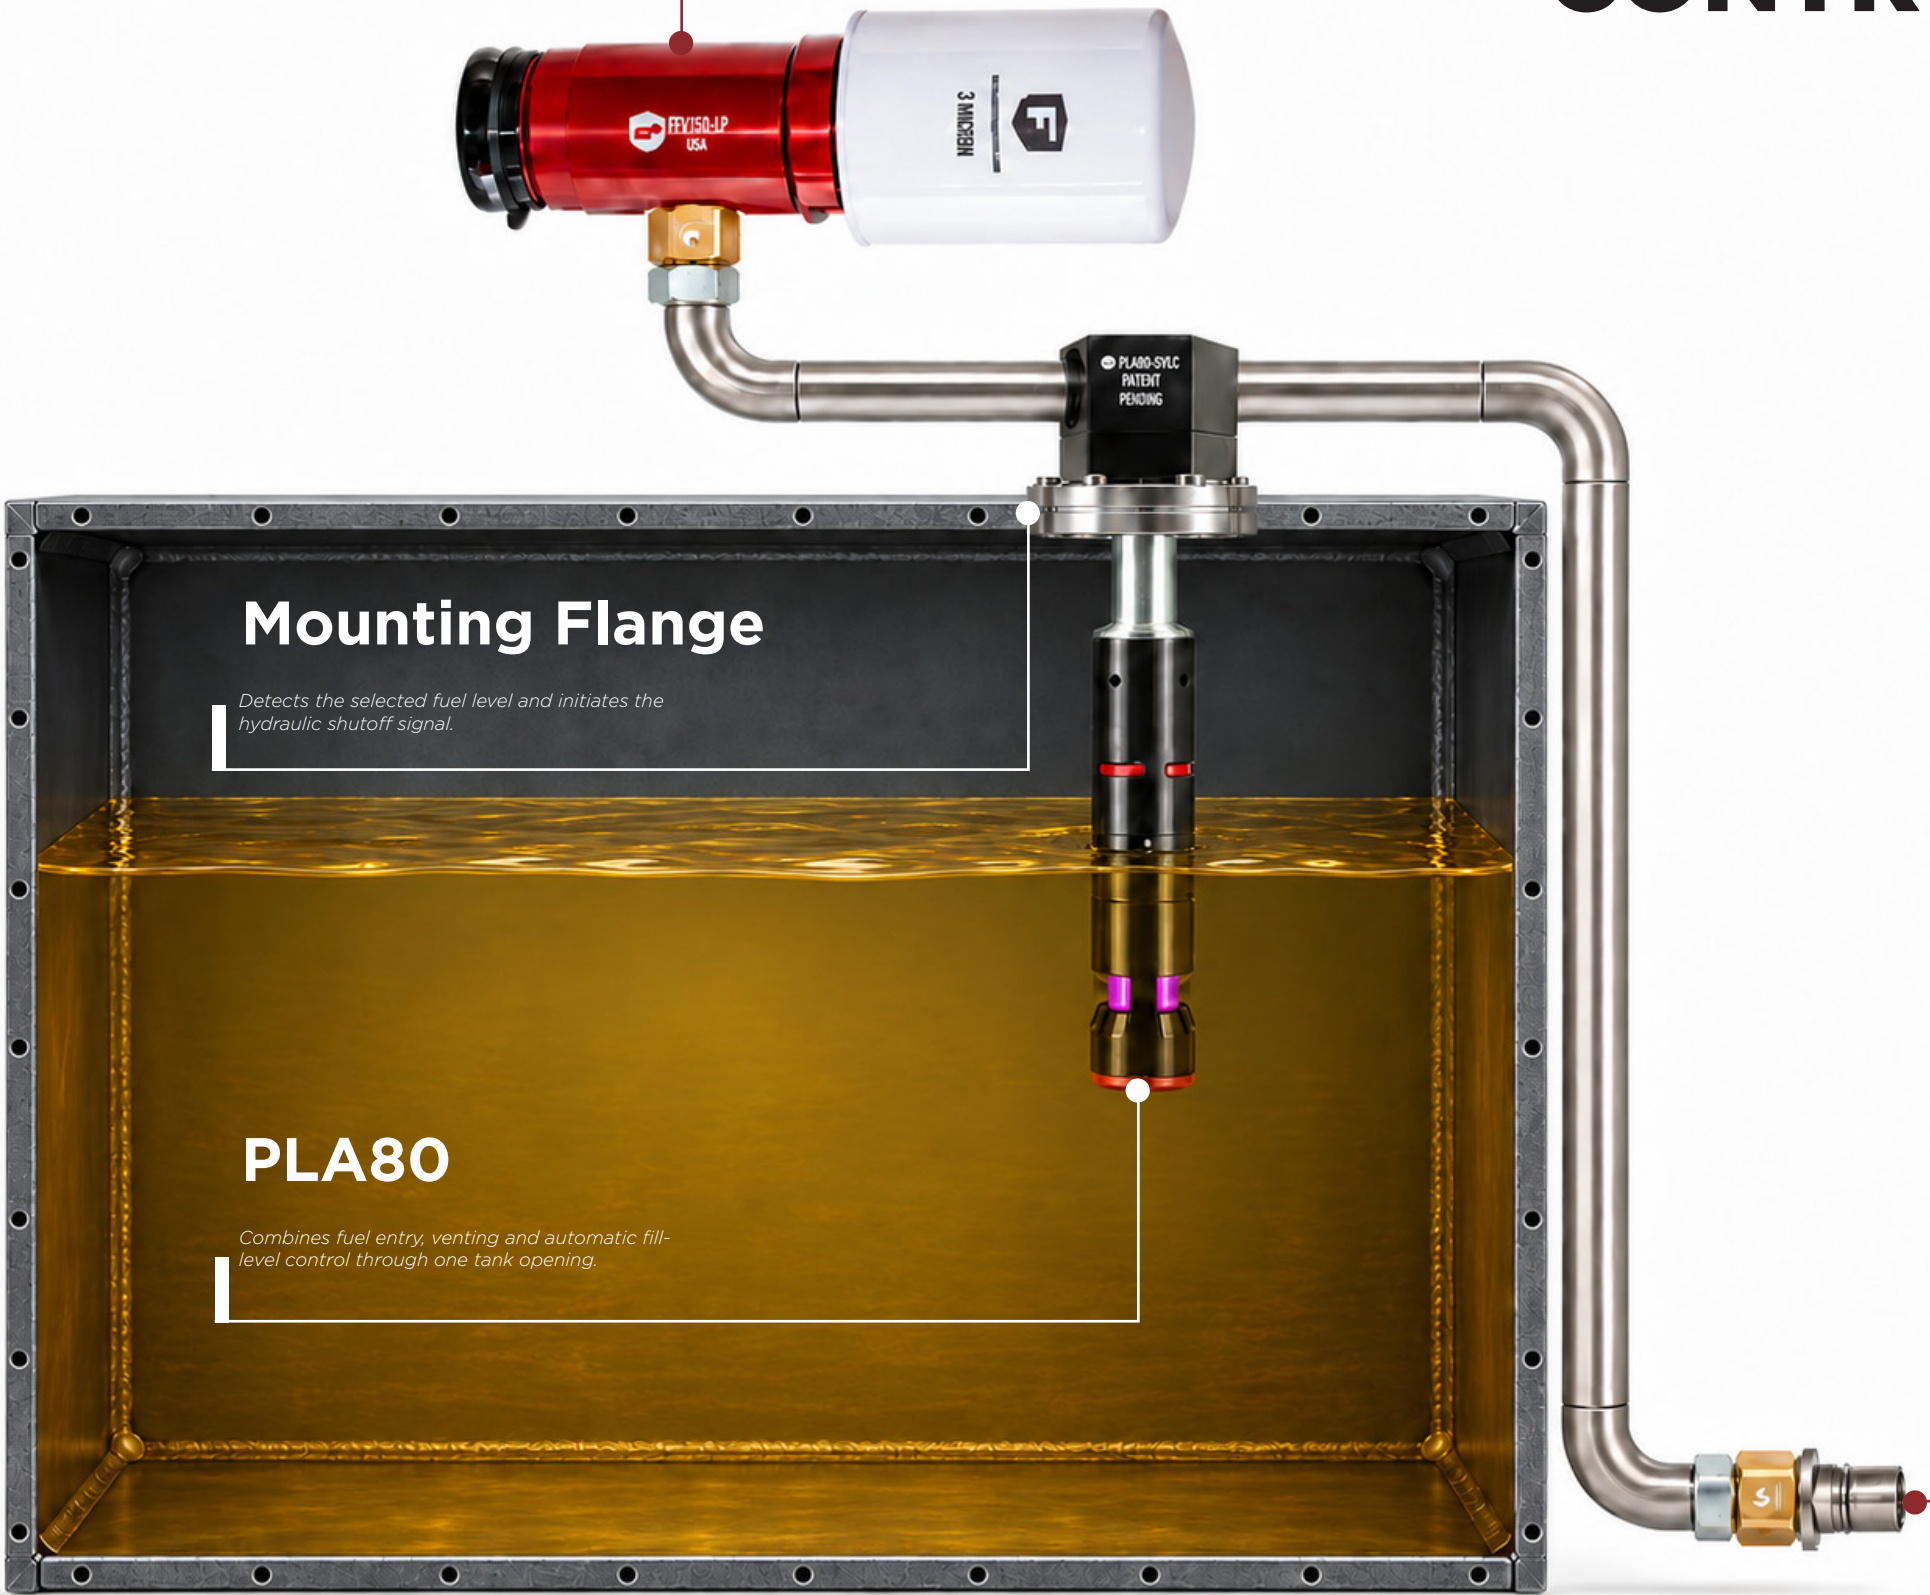

Mounting Flange

Detects the selected fuel level and initiates the hydraulic shutoff signal.

PLA80


Combines fuel entry, venting and automatic fill-level control through one tank opening.

Fuel Receiver

Allows fuel into the tank during filling and closes when it receives the shutoff signal.



COUPLERS

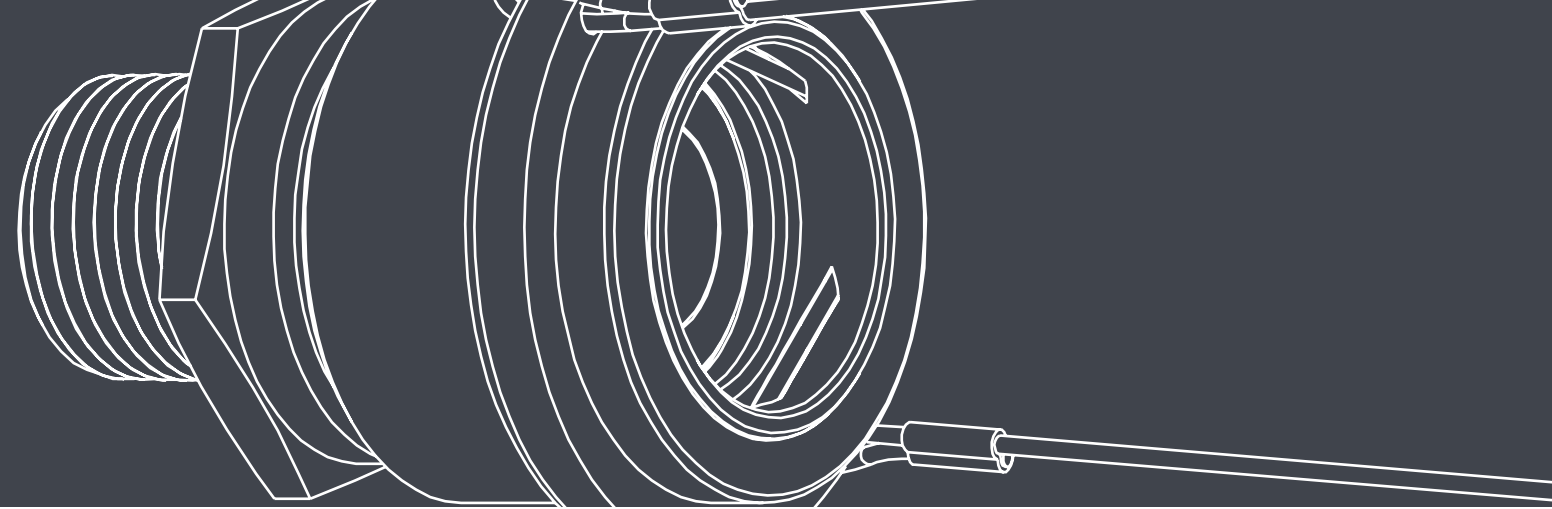


The right fluid. The right connection.

Four widely used couplers have been the primary means for fluid transfer of crankcase oils, coolant, hydraulic oils, and transmission oils. These couplers continue to provide a sturdy option and have been refined to be more reliable than ever. Options exist for remote bulkhead mounting, multiple thread options, and various latching mechanisms.

COUPLERS



MATRIX

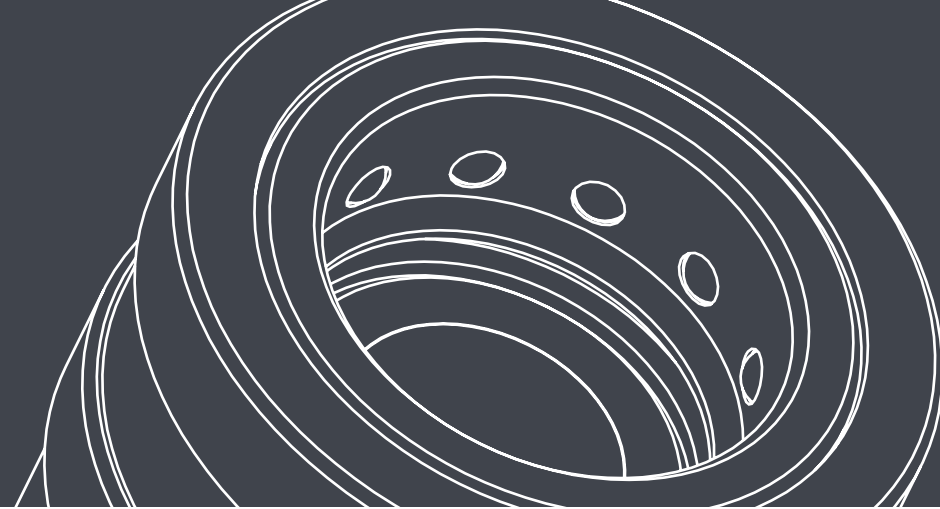

No guesswork. No mix-up.

The Matrix line is a sleek and cohesive collection of quick couplers designed to eliminate the problem of cross-contamination of fluids. The entire series is color-coordinated between nozzle and receiver, and each can only be coupled to its matching piece. Many sites utilize more fluids than can be uniquely assigned to the standard industry couplers.

Twelve unique colors and sizes are available for even the most complex fueling or maintenance stations. There are multiple flow rates and threading configurations to meet your unique fluid transfer needs. The Matrix Series boasts an evac tool that fits, like a master key, to all of the receivers for easy tank drain.

MATRIX



801.491.3600 //
orders@fastfillsystems.com //
www.fastfillsystems.com //

