




GOLDENLION

Industrial Gaming PC Solution

**One platform.
Infinite possibilities.**

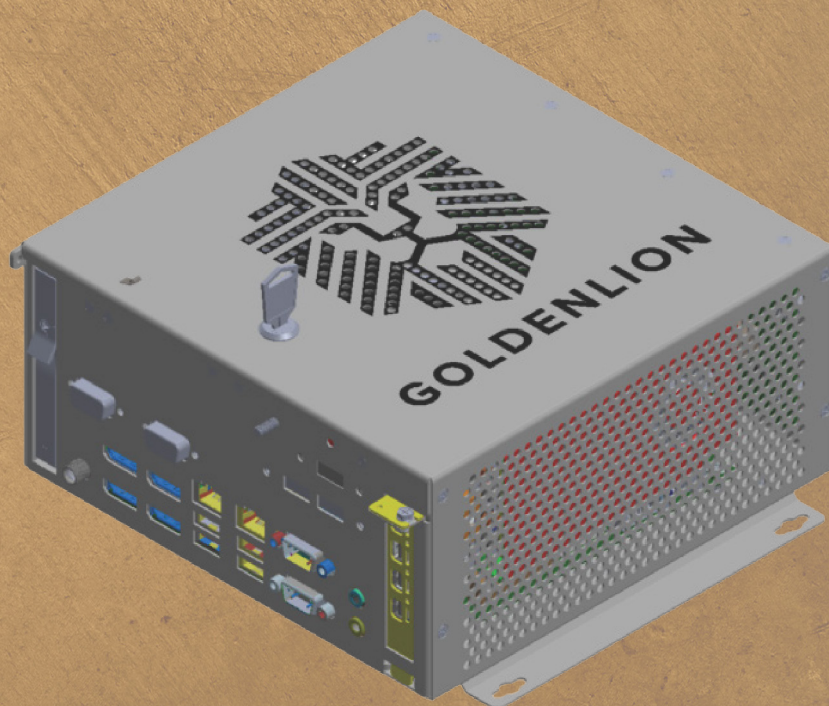

GLI

GLI certification ready

24/7

Designed for 24/7
operation

EU

Designed and
manufactured in the EU

GOLDENLION Industrial Gaming PC Solution

High-performance, reliable, and secure industrial-grade gaming PC solution designed for demanding environments in the gaming industry.

GLI Certification Ready

PRODUCT HIGHLIGHTS

Based on Kontron D3723-R \ D3713-V \ D3713-R mITX motherboard

High reliability and long-term availability

Designed for 24/7 operation

Designed and manufactured in the EU

CPU

AMD Ryzen™ Embedded R2000 Series \ V1000 Series\ R1000 Series

Dual or quad 64bit cores

Zen architecture with up to 3,8 GHz boost frequency

CPU Cooling: Active or passive cooling

GRAPHIC PROCESSING UNIT

AMD Radeon™ Vega Graphics (within SoC)

Drives up to four independent displays in 4K via DisplayPort V1.4

Optional dedicated low profile GPU

MEMORY

2x DDR4 SODIMM sockets

DDR4 2400/2666/3200 SDRAM, Dual Channel

Up to 32 GByte memory, ECC/non-ECC

STORAGE

1x Bay 2.5" SATA HDD/SSD Single Bay with option for CFast

1x m.2 2230/42/80 Key-M (PCIe/NVMe)

1x m.2 2242/3052/2260/2280 Key-B (SATA, PCIe x2, USB 2.0)

ETHERNET

Intel® i210 & Realtek RTL8111H with 10/100/1000 MBit/s,

Wake-on-LAN (WoL) by interesting Packets, Link Status Change and

Magic Packet™, PXE Support, BIOS MAC Address Display, Teaming Support

PERIPHERAL PORTS

Serial Ports: 1x RS232/422/485; 3x RS232, optional 1x RS232/422/485; 3x RS232 USB Ports:

2x USB 3.2 Gen2, 3x USB 3.2 Gen1, 2x USB 2.0, 1x internal USB 2.0 stick socket 1x miniPCIe

AUDIO

Audio: Integrated 5.1 multichannel audio

AUTHENTICATE

AMD integrated TPM V2.0 onboard & socket for optional TPM Module

HOUSING

Metal case with keylock
Intrusion alert switch

FEATURES

Gaming I/O connector board:

24x digital inputs (internal pull-up)
32x digital outputs (open-drain, PWM support)
8x AUX outputs
8x independent electromechanical counter output with disconnection detection 8x monitored intrusion
32kB EEPROM (I²C)
8Mb battery backed SRAM
2x TTL UART
1x SPI
1x I²C
1x ccTalk
1x SAS interface
1x Dallas interface
Dallas Security chip for unlocking communication with I/O board
Compatible library with OS Linux and OS Windows

Motherboard:

FAN monitored & controlled CPU / AUX1
TEMP monitored CPU / onboard sensors
HDD Password / EraseDisk
BIOS POST- / BIOS Boot- / OS- HW Watchdog
Your own boot logo

POWER SUPPLY REQUIREMENTS

DC-In Jack with locking function
Input voltage 8 V - 34 V (max. 10 A /max. 130 W)

DIMENSIONS

Overall dimensions: 240/240/108 mm (w/d/h)
Chassis dimensions: 210/210/100 mm (w/d/h)



GOLDENLION

CONTACT INFORMATION

Company	EMKO IPC s.r.o.
Address	Ripska 11f, Brno 627 00, Czech Republic
Email	info@emkoipc.cz
Phone	+420 515 917 670
Website	www.emkoipc.com