

26.01.08 PHY (U16) 전원 수정

UART4 장치 선택 헤더 (J21) 일체화 수정

6







5

4


3

2


1

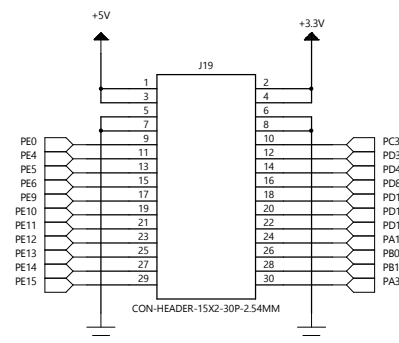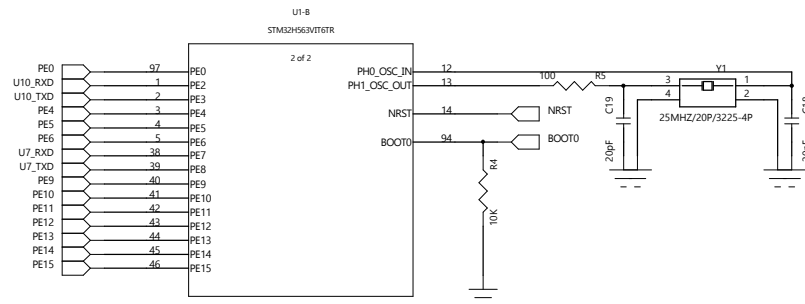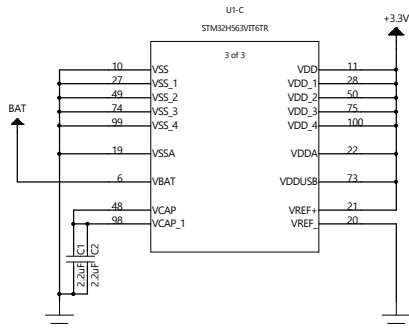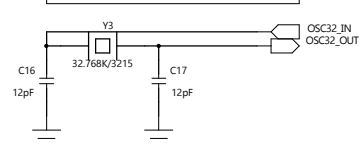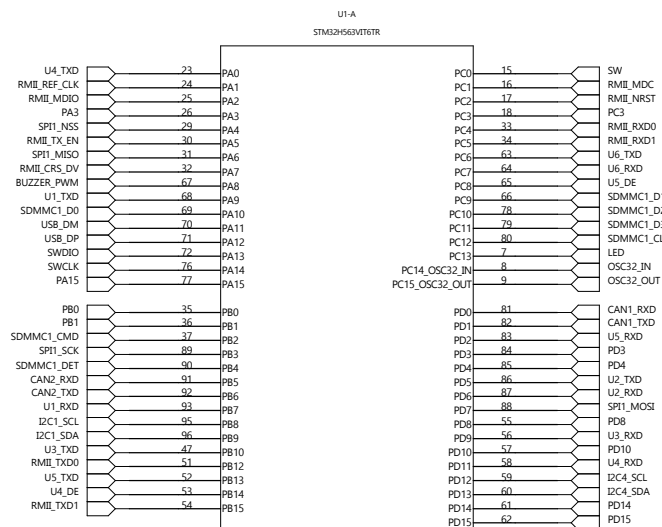


Debug Conn




RTC VBAT



BOOT0



RESET



TITLE:		STM32H5_KIT	
SHEET:		MCU	
REV:		1	
SHEET: OF 2		7	

6

5

4

3

2

1

D

D

C


C

B












B







A

A

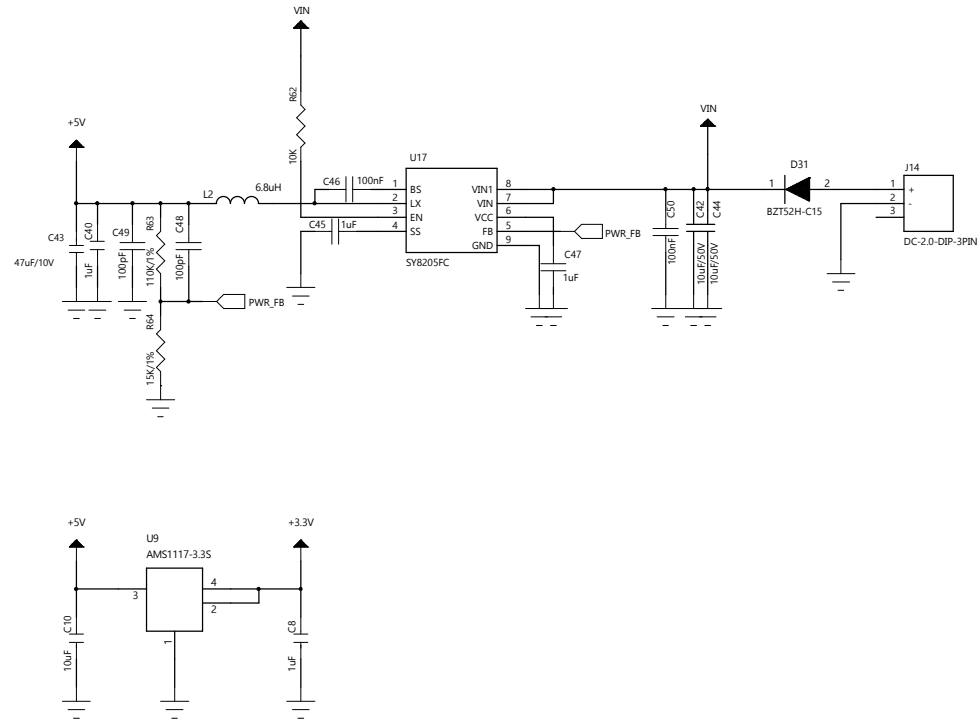

TITLE:		STM32H5_KIT	
SHEET:		REV:	
POWER		1	
SHEET: OF 3		7	

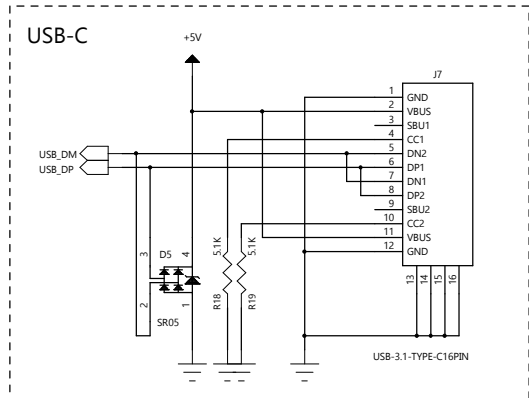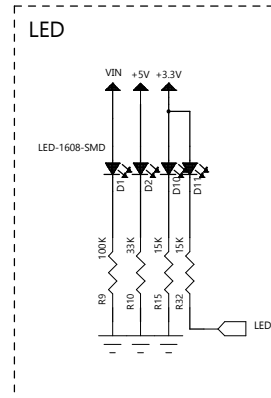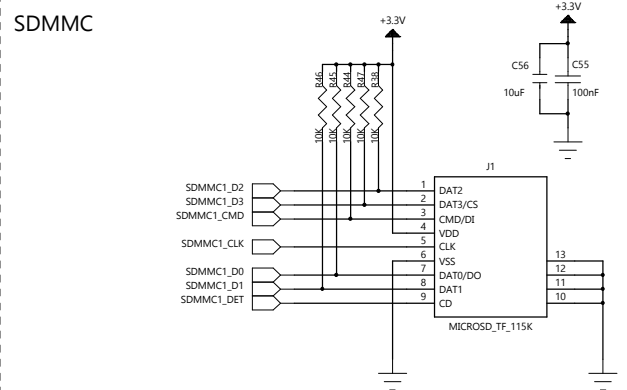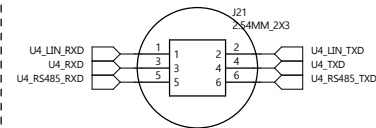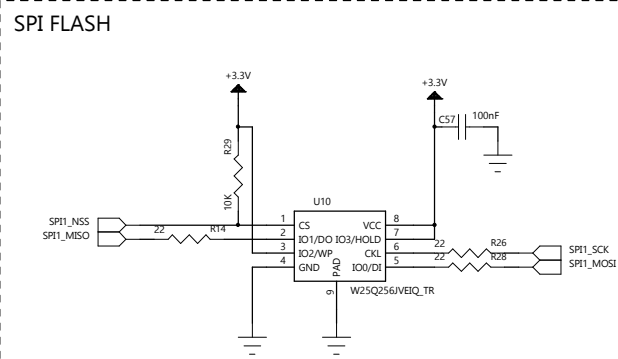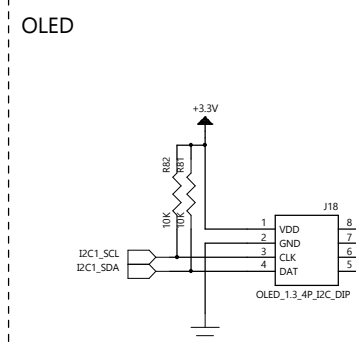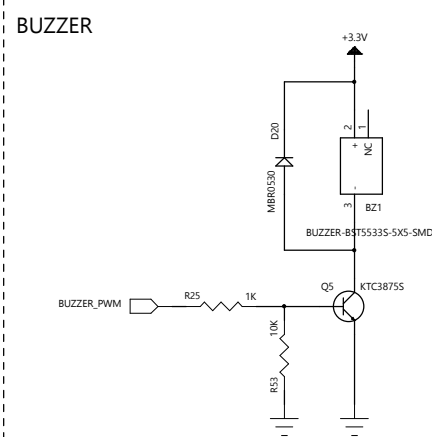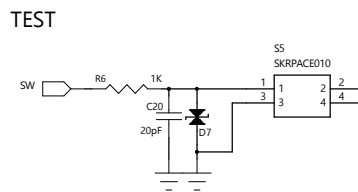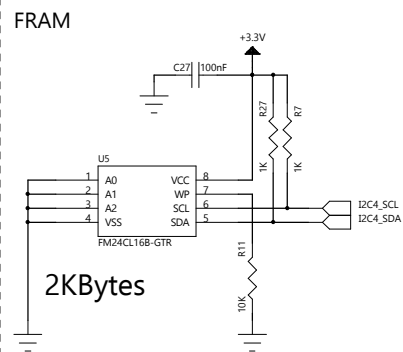


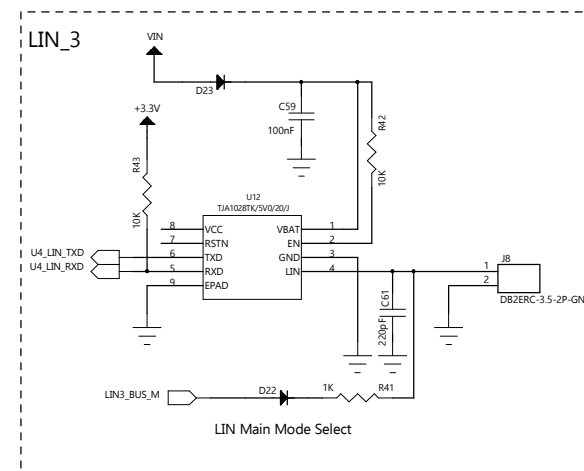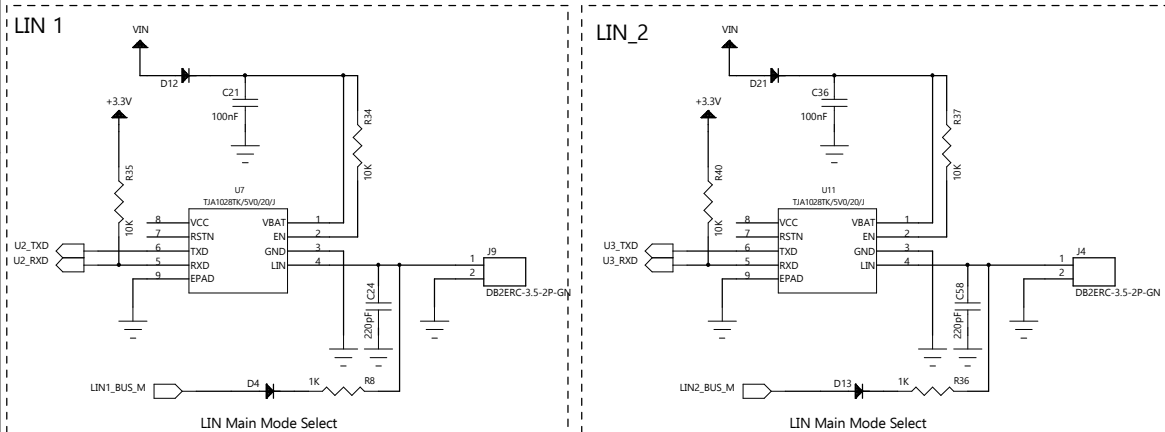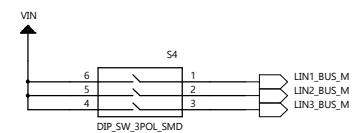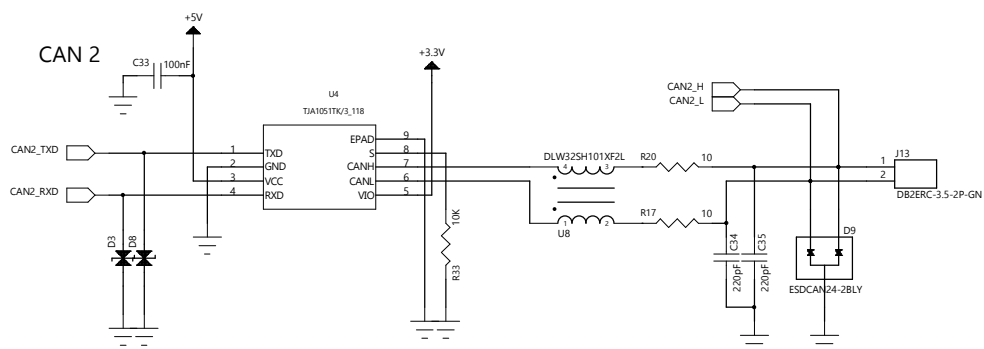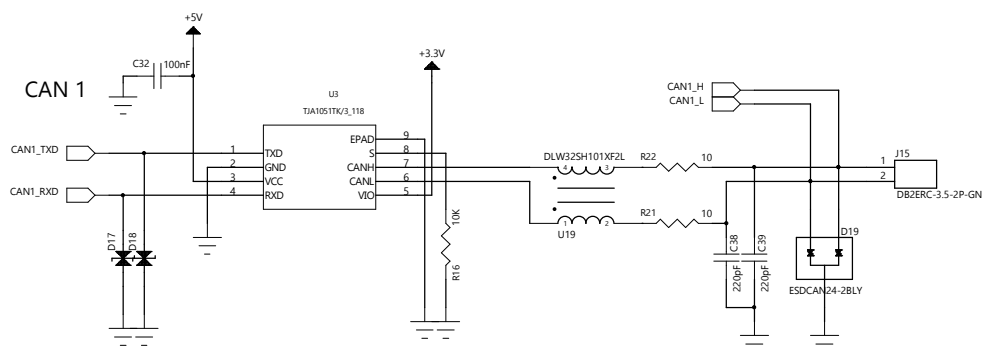


D

D

RS485 1

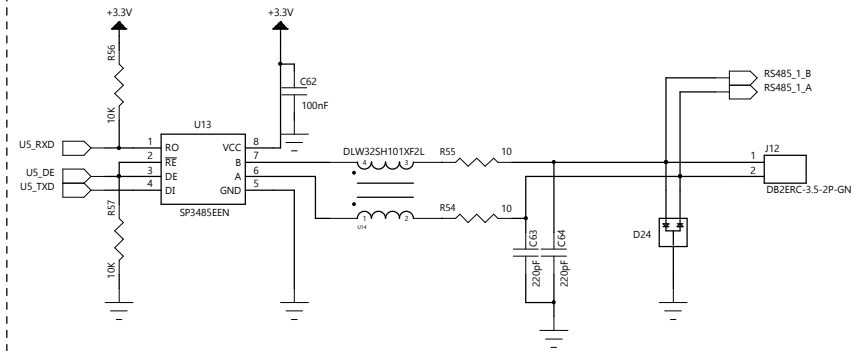




RS232

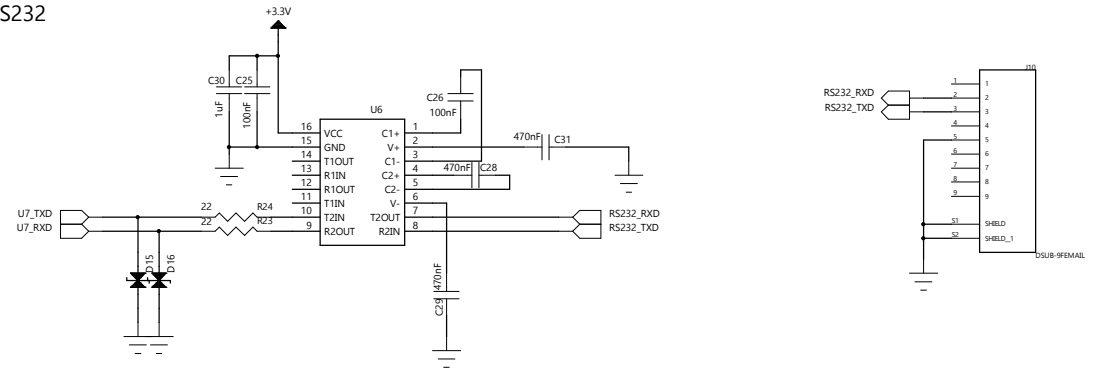

C


C

RS485 2

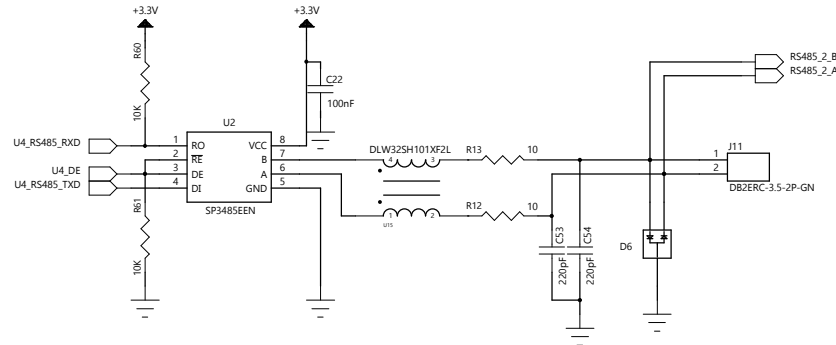

B

B



A

A

TITLE:		STM32H5_KIT	
SHEET:		REV:	
RS485_RS232		1	
SHEET: OF6		7	

D

C

B



A

D

C

B

A

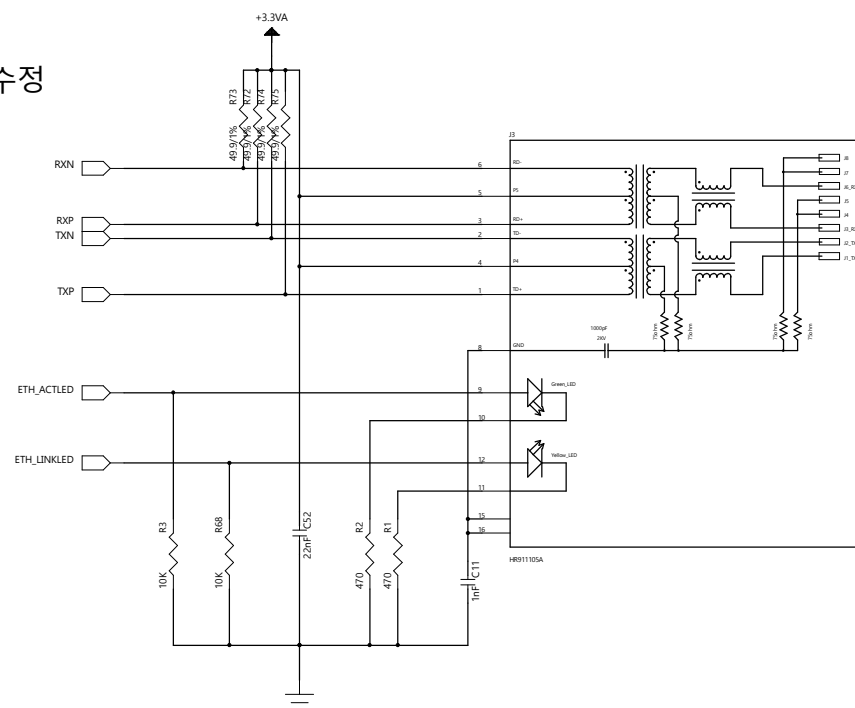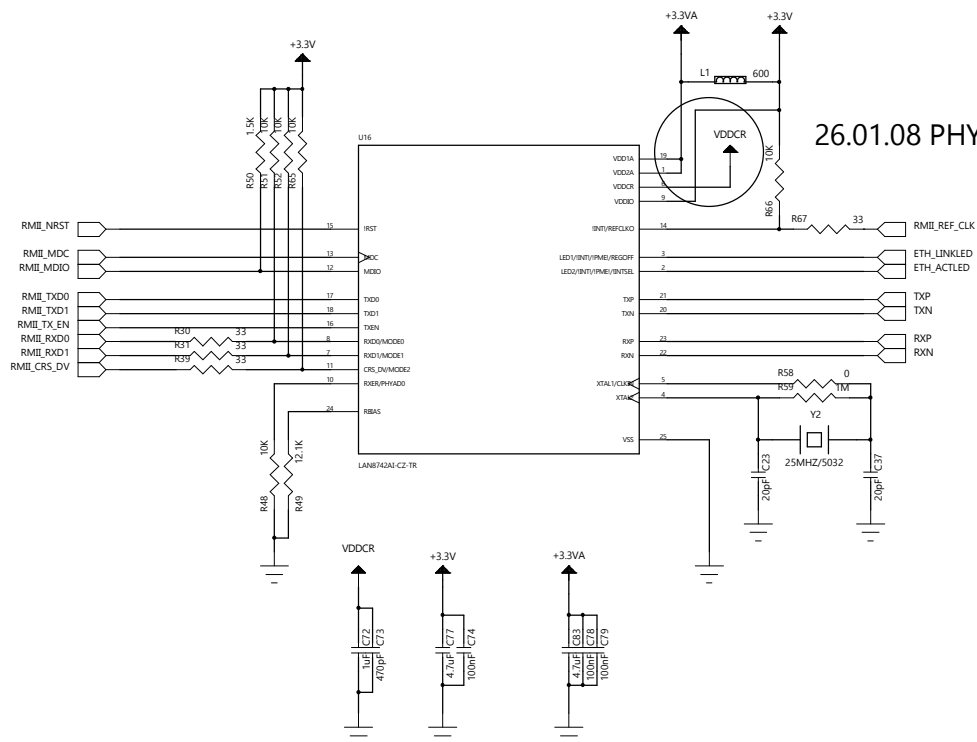

TITLE:		STM32H5_KIT	
SHEET:		REV:	
ETHERNET		1	
SHEET: OF 7		7	