

# FUJI Engineering



## KEY FEATURES

- > Long Life
- > Teahnology
- > Scratch Proof
- > Seria/ Parallel Type
- > Great Aesthetic Look
- > Multicolor Touch Buttons
- > Capacative & Smooth Touch

## ELEVATOR MODERNISATION






## FET

Integrated solution for elevator up to 4m/sec

Model Description: FET 4008 T  
(1) (2) (3)

| Model                  | Power (Kw)                                                | Origin and language    | Option |
|------------------------|-----------------------------------------------------------|------------------------|--------|
| <b>FET:STO Version</b> | 4008 = 8.3KW<br>4017 = 17KW<br>4022 = 22KW<br>4037 = 37KW | T : Thailand / English | Black  |

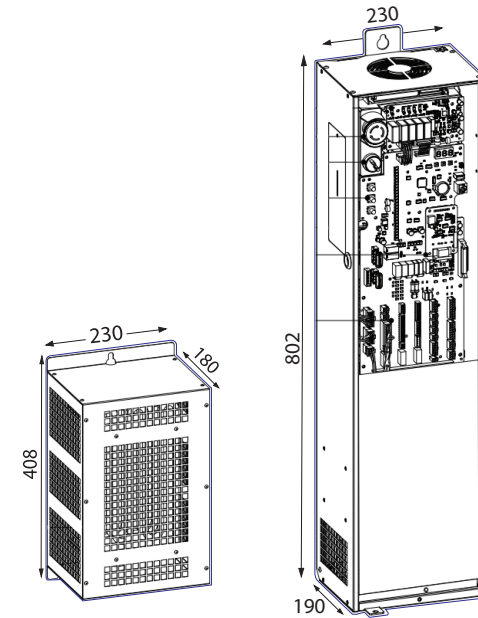

## SOLUTION HIGHLIGHTS

| Noise control for MRL                                                                                                                                               | Excellent comfort                                            | Small size and low weight                                               |
|---------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------|-------------------------------------------------------------------------|
| <b>50dBa</b> No contact noise (STO VERSION)<br><br><b>10dBa</b> Brake noise control reduce 10db<br><br><b>12k</b> high frequency running Reduce motor running noise | High - Performance Improve 150%<br><br>PI adaptive algorithm | <b>MR 230x190x802 17kg</b><br><br><b>Conducive to the layout of MRL</b> |

| Parameters Setting Free                                                                                                                                                                                                                                                                                   | Reduce fault rate                                                                                                                        | Speccialist remote guida                                                        |
|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------|
| <b>Motor runing</b><br>No need motor tuning in factory (work with communication encoder)<br><br><b>Function One - click debugging</b><br>Floor number learning automatically<br>Door limit state learning automatically<br>PI adaptive control<br>Balance testing<br>Dynamic holding brake force testing. | <b>Cabinet Maintenance-free</b><br><br>> <b>STO version maintenance-free</b><br><br>> <b>PESSRAL solution UCMP board long life cycle</b> | > <b>Support APP remote guidance</b><br><br>> <b>Cabinet Maintenance - free</b> |






## FEN

Integrated solution for elevators up to 4m/sec

Model Description: **FEN** **4005** **T**  
(1) (2) (3)

| Model                          | Power (Kw)                                                                               | Origin and language  | Option |
|--------------------------------|------------------------------------------------------------------------------------------|----------------------|--------|
| <b>FEN</b><br>Standard Version | 4005 = 5.5KW<br>4007 = 7.5KW<br>4011 = 11KW<br>4015 = 15KW<br>4018 = 18KW<br>4022 = 22KW | T : Thailand/English | Black  |

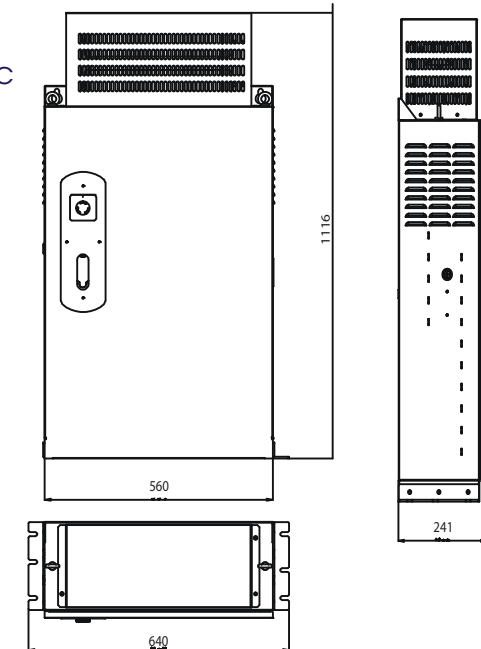

### Application Features

- EN81-20 Safety Certified
- Supports PM gearless and asynchronous geared traction Machines
- Smooth ride performance
- "Direct To Floor" technology
- Rapid commissioning step through sequence
- Anti-rollback without any external load cell ( gearless machines)
- Pre-torque function (analog signal from load cell for geared machines)
- Flexible programmable I/O's
- Static auto tuning for asynchronous and synchronous machines (without brake opening)

### Feature Highlights


- Standard: 48 floors, full collective (full serial connection)
- Duplex onboard group control (CANbus serial communication)
- Automatic door control mode
- electable fireman operation
- Supports 1 ph. 220 Vac UPS (quasi & sine wave) for rescue operation with intelligent light load direction search
- Comprehensive trip diagnostics





# FES

AS380S Series  
Elevator Intergeated Controls

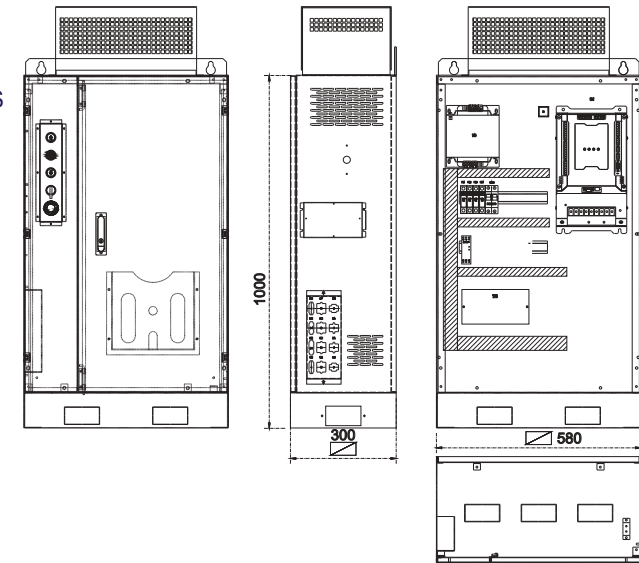

Model Description: FES 4005 T  
(1) (2) (3)

| Model                        | Power (Kw)                                                                               | Origin and language  | Option              |
|------------------------------|------------------------------------------------------------------------------------------|----------------------|---------------------|
| <b>FES</b><br>Silent Version | 4005 = 5.5KW<br>4007 = 7.5KW<br>4011 = 11KW<br>4015 = 15KW<br>4018 = 18KW<br>4022 = 22KW | T : Thailand/English | Galvanized metallic |

## Technical Indicators

- Power supply: 3 phase , AC380~415V , 50/60Hz
- Rated power : 5.5 - 22kW
- Rated speed : ≤2.5m/s
- Motor type : Synchronous/Asynchronous
- Motor brake : DC110V , ≤3A
- Illumination : AC220V
- Standard : EN81-20
- Environment : -10~45 °C
- Cabinet material : Galvanized sheet
- Control method : Single / Duplex / Group control
- Control cabinet dimension(mm) : 1000\*580\*300
- Brake resistor cabinet dimension(mm) : 420\*255\*117~420\*255\*255
- Installation : Ground mounted

## Main Features

- Design base on EN81-20 and comply with CE.
- UCMP , Self-monitoring on braking force periodically.
- Door lock bypass device for bypassing hall or car door lock.
- Monitoring of door lock circuit, to prevent the car door or hall door unexpectedly shorted
- Protection for second brake added to ensure safer and reliable operation.






## FJD1-B450 SERIES

PM Traction Machine

### Traction Machine Parameter

- Rated Voltage : AC380V
- Brake Voltage : DC110V
- Weight : 130kg
- Duty : S5 - 40%
- Max Static Load : 2000kg
- Wrap : Single
- Insulation : F
- Protection : IP41
- Traveling height : 45m

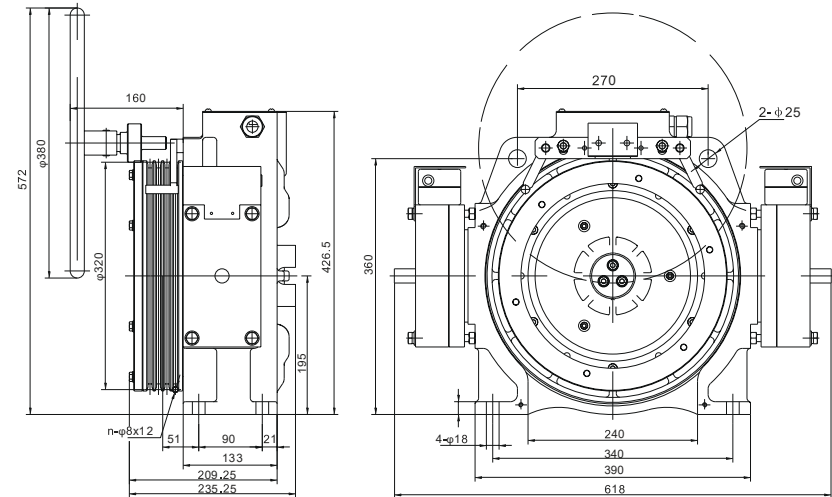

### ELEVATOR TRACTION MACHINE (ROPING2:1)

| Model       | Capacity (kg) | Speed (m/s) | Power (kW) | Current (A) | Motor Speed (rpm) | Frequency (Hz) | Sheave (mm) | Poles (2P) | Torque (N.m) | Ropes (mm) | Groove     | Cut Angle | Groove Angle | Shaft Load (kg) | weight (kg) |
|-------------|---------------|-------------|------------|-------------|-------------------|----------------|-------------|------------|--------------|------------|------------|-----------|--------------|-----------------|-------------|
| <b>FJD1</b> | 450           | 1           | 3.3        | 9           | 119               | 19.9           | 320         | 20         | 270          | 4xφ8x12    | Undercut v | β=105°    | γ=40°        | 2000            | 130         |
|             |               | 1.5         | 4.5        | 13          | 179               | 29.8           | 320         | 20         | 240          |            |            |           |              |                 |             |
|             |               | 1.6         | 4.8        | 13          | 191               | 31.8           | 320         | 20         | 240          |            |            |           |              |                 |             |
|             |               | 1.75        | 5.2        | 13          | 209               | 34.8           | 320         | 20         | 240          |            |            |           |              |                 |             |








## FJD1-B1000 SERIES

### PM Traction Machine

#### Traction Machine Parameter

- ♦ Rated Voltage : AC380V
- ♦ Brake Voltage : DC110V
- ♦ Weight : 270kg
- ♦ Duty : S5 - 40%
- ♦ Max Static Load : 3500kg
- ♦ Wrap : Single
- ♦ Insulation : F
- ♦ Protection : IP41

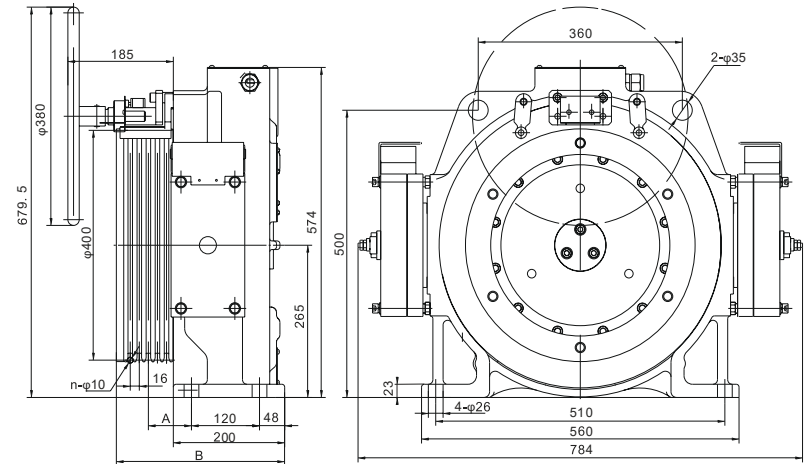

#### ELEVATOR TRACTION MACHINE (ROPING2:1)

| Model | Capacity<br>(kg) | Speed<br>(m/s) | Power<br>(kW) | Current<br>(A) | Motor<br>Speed<br>(rpm) | Frequency<br>(Hz) | Sheave<br>(mm) | Poles<br>(2P) | Torque<br>(N.m) | Ropes<br>(mm) | Groove        | Cut Angle | Groove<br>Angle | Shaft Load<br>(kg) | Weight<br>(kg) |
|-------|------------------|----------------|---------------|----------------|-------------------------|-------------------|----------------|---------------|-----------------|---------------|---------------|-----------|-----------------|--------------------|----------------|
| FJD1  | 630              | 1              | 4.2           | 10             | 95                      | 23.8              | 400            | 30            | 420             | 4xφ 10x16     | Undercut<br>V | β=105°    | γ=40°           | 3500               | 270            |
|       |                  | 1.5            | 6.3           | 17             | 143                     | 35.8              | 400            | 30            | 420             |               |               |           |                 |                    |                |
|       |                  | 1.6            | 6.7           | 17             | 153                     | 38.3              | 400            | 30            | 420             |               |               |           |                 |                    |                |
|       |                  | 1.75           | 7.3           | 17             | 167                     | 41.8              | 400            | 30            | 420             |               |               |           |                 |                    |                |
|       | 800              | 1              | 5.3           | 12             | 95                      | 23.8              | 400            | 30            | 532             | 5xφ 10x16     |               |           |                 |                    |                |
|       |                  | 1.5            | 8             | 21             | 143                     | 35.8              | 400            | 30            | 532             |               |               |           |                 |                    |                |
|       |                  | 1.6            | 8.5           | 21             | 153                     | 38.3              | 400            | 30            | 532             |               |               |           |                 |                    |                |
|       |                  | 1.75           | 9.3           | 21             | 167                     | 41.8              | 400            | 30            | 532             |               |               |           |                 |                    |                |
|       | 1000             | 1              | 6.6           | 15             | 95                      | 23.8              | 400            | 30            | 665             | 5xφ 10x16     |               |           |                 |                    |                |
|       |                  | 1.5            | 10            | 25             | 143                     | 35.8              | 400            | 30            | 665             |               |               |           |                 |                    |                |
|       |                  | 1.6            | 10.6          | 25             | 153                     | 38.3              | 400            | 30            | 665             |               |               |           |                 |                    |                |
|       |                  | 1.75           | 11.6          | 27             | 167                     | 41.8              | 400            | 30            | 665             |               |               |           |                 |                    |                |






## FJD1-B1600 SERIES

### PM Traction Machine

#### Traction Machine Parameter

- Rated Voltage : AC380V
- Brake Voltage : DC110V
- Weight : 430kg
- Duty : S5 - 40%
- Max Static Load : 5500kg
- Wrap : Single
- Insulation : F
- Protection : IP41

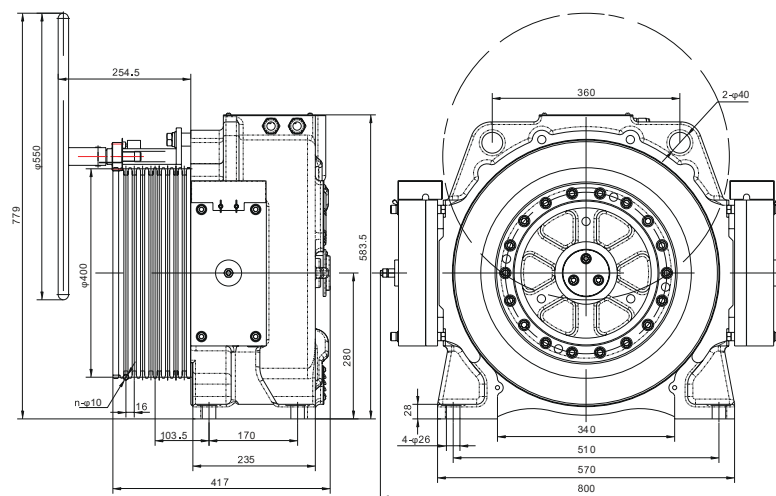

#### ELEVATOR TRACTION MACHINE (ROPING2:1)

| Model | Capacity (kg) | Speed (m/s) | Power (kW) | Current (A) | Motor Speed (rpm) | Frequency (Hz) | Sheave (mm) | Poles (2P) | Torque (N.m) | Ropes (mm) | Groove     | Cut Angle | Groove Angle | Shaft Load (kg) | Weight (kg) |  |  |  |  |  |
|-------|---------------|-------------|------------|-------------|-------------------|----------------|-------------|------------|--------------|------------|------------|-----------|--------------|-----------------|-------------|--|--|--|--|--|
| FJD1  | 1250          | 1.0         | 8.7        | 20          | 95                | 23.8           | 400         | 30         | 866          | 6xφ 10x16  | Undercut V | β=105°    | γ=40°        | 5500            | 430         |  |  |  |  |  |
|       |               | 1.5         | 13.0       | 35          | 143               | 35.8           | 400         | 30         | 866          |            |            |           |              |                 |             |  |  |  |  |  |
|       |               | 1.6         | 13.8       | 35          | 153               | 38.3           | 400         | 30         | 866          |            |            |           |              |                 |             |  |  |  |  |  |
|       |               | 1.75        | 15.1       | 35          | 167               | 41.8           | 400         | 30         | 866          |            |            |           |              |                 |             |  |  |  |  |  |
|       |               | 2.0         | 17.3       | 40          | 191               | 47.8           | 400         | 30         | 866          |            |            |           |              |                 |             |  |  |  |  |  |
|       | 1350          | 2.5         | 21.6       | 50          | 239               | 59.8           | 400         | 30         | 866          | 8xφ 10x16  |            |           |              |                 |             |  |  |  |  |  |
|       |               | 1.0         | 9.3        | 22          | 95                | 23.8           | 400         | 30         | 935          |            |            |           |              |                 |             |  |  |  |  |  |
|       |               | 1.5         | 14.0       | 38          | 143               | 35.8           | 400         | 30         | 935          |            |            |           |              |                 |             |  |  |  |  |  |
|       |               | 1.6         | 15.0       | 38          | 153               | 38.3           | 400         | 30         | 935          |            |            |           |              |                 |             |  |  |  |  |  |
|       |               | 1.75        | 16.4       | 38          | 167               | 41.8           | 400         | 30         | 935          |            |            |           |              |                 |             |  |  |  |  |  |
|       | 1600          | 2.0         | 18.7       | 43          | 191               | 47.8           | 400         | 30         | 935          | 8xφ 10x16  |            |           |              |                 |             |  |  |  |  |  |
|       |               | 2.5         | 23.4       | 54          | 239               | 59.8           | 400         | 30         | 935          |            |            |           |              |                 |             |  |  |  |  |  |
|       |               | 1.0         | 11.1       | 26          | 95                | 23.8           | 400         | 30         | 1108         |            |            |           |              |                 |             |  |  |  |  |  |
|       |               | 1.5         | 16.6       | 45          | 143               | 35.8           | 400         | 30         | 1108         |            |            |           |              |                 |             |  |  |  |  |  |
|       |               | 1.6         | 17.7       | 45          | 153               | 38.3           | 400         | 30         | 1108         |            |            |           |              |                 |             |  |  |  |  |  |
|       |               | 1.75        | 19.4       | 45          | 167               | 41.8           | 400         | 30         | 1108         |            |            |           |              |                 |             |  |  |  |  |  |
|       |               | 2.0         | 22.2       | 51          | 191               | 47.8           | 400         | 30         | 1108         |            |            |           |              |                 |             |  |  |  |  |  |
|       |               | 2.5         | 27.7       | 64          | 239               | 59.8           | 400         | 30         | 1108         |            |            |           |              |                 |             |  |  |  |  |  |







## FJD1-B2500 SERIES

### PM Traction Machine

#### Traction Machine Parameter

- ♦ Rated Voltage : AC380V
- ♦ Brake Voltage : DC110V
- ♦ Weight : 430kg
- ♦ Duty : S5 - 40%
- ♦ Max Static Load : 7000kg
- ♦ Wrap : Single
- ♦ Insulation : F
- ♦ Protection : IP41

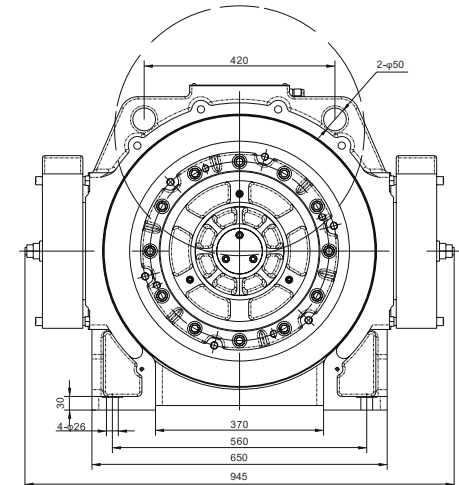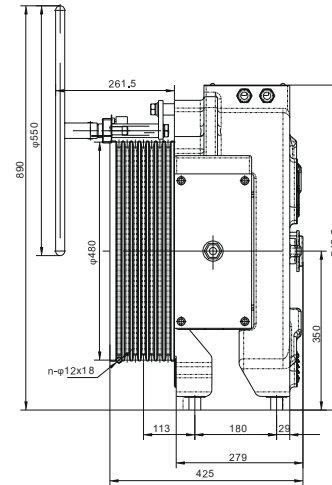

#### ELEVATOR TRACTION MACHINE (ROPING2:1)

| Model | Capacity<br>(kg) | Speed<br>(m/s) | Power<br>(kW) | Current<br>(A) | Motor<br>Speed<br>(rpm) | Frequency<br>(Hz) | Sheave<br>(mm) | Poles<br>(2P) | Torque<br>(N.m) | Ropes<br>(mm) | Groove        | Cut Angle | Groove<br>Angle | Shaft Load<br>(kg) | Weight<br>(kg) |
|-------|------------------|----------------|---------------|----------------|-------------------------|-------------------|----------------|---------------|-----------------|---------------|---------------|-----------|-----------------|--------------------|----------------|
| FJD1  | 2000             | 1.0            | 13.1          | 32             | 80                      | 26.7              | 480            | 40            | 1570            | 6xφ 10x16     | Undercut<br>V | β=105°    | γ=40°           | 7000               | 660            |
|       |                  | 1.5            | 19.6          | 50             | 119                     | 39.7              | 480            | 40            | 1570            |               |               |           |                 |                    |                |
|       |                  | 1.6            | 20.9          | 50             | 127                     | 42.3              | 480            | 40            | 1570            |               |               |           |                 |                    |                |
|       |                  | 1.75           | 22.9          | 50             | 139                     | 46.3              | 480            | 40            | 1570            |               |               |           |                 |                    |                |
|       |                  | 2.0            | 26.2          | 62             | 159                     | 53.0              | 480            | 40            | 1570            |               |               |           |                 |                    |                |
|       | 2.5              | 32.7           | 75            | 199            | 66.3                    | 480               | 40             | 1570          | 7xφ 10x16       |               |               |           |                 |                    |                |
|       | 1.0              | 15.9           | 39            | 80             | 26.7                    | 480               | 40             | 1570          |                 |               |               |           |                 |                    |                |
|       | 1.5              | 23.8           | 61            | 119            | 39.7                    | 480               | 40             | 1570          |                 |               |               |           |                 |                    |                |
|       | 1.6              | 25.4           | 61            | 127            | 42.3                    | 480               | 40             | 1570          |                 |               |               |           |                 |                    |                |
|       | 1.75             | 27.8           | 61            | 139            | 46.3                    | 480               | 40             | 1570          |                 |               |               |           |                 |                    |                |
|       | 2.0              | 31.7           | 78            | 159            | 53.0                    | 480               | 40             | 1570          |                 |               |               |           |                 |                    |                |
|       | 2.5              | 39.7           | 98            | 199            | 66.3                    | 480               | 40             | 1570          |                 |               |               |           |                 |                    |                |









## FJD2-B450 (φ240) Series

- ♦ Rated Voltage : AC380V
- ♦ Brake Voltage : DC110V
- ♦ Weight : 140kg
- ♦ Duty : S5 - 40%
- ♦ Max Static Load : 2500kg
- ♦ Wrap : Single
- ♦ Insulation : F
- ♦ Protection : IP41

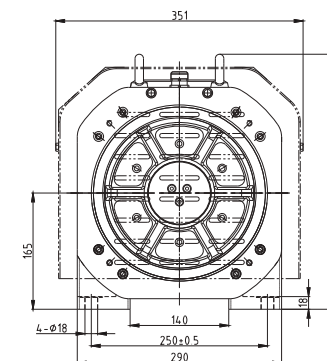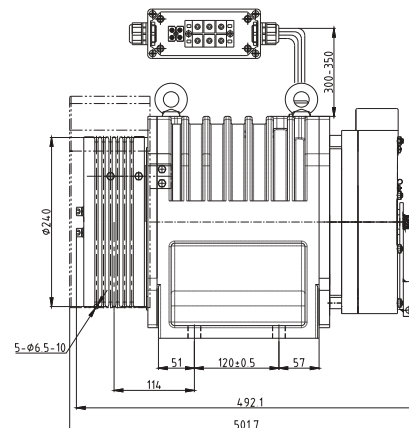

### ELEVATOR TRACTION MACHINE (ROPING2:1)



| Model       | Load (Kg) | Elevator Speed (m/s) | Rated Output (kW) | Rated Current (A) | Rated Speed (rpm) | Frequency (Hz) | Sheave Diameter (mm) | Poles (2p) | Torque (N.m) | Ropes     | Groove     | Cut Angle | Groove Angle |
|-------------|-----------|----------------------|-------------------|-------------------|-------------------|----------------|----------------------|------------|--------------|-----------|------------|-----------|--------------|
| <b>FJD2</b> | 400       | 0.5                  | 1.3               | 4                 | 80                | 13.3           | 240                  | 20         | 100          | 5xφ6.5x10 | Undercut U | β=90°     | γ=30°        |
|             |           | 1.0                  | 2.7               | 7                 | 159               | 26.5           | 240                  | 20         | 160          | 5xφ6.5x10 | Undercut U | β=90°     | γ=30°        |
|             |           | 1.5                  | 4.0               | 11                | 239               | 39.8           | 240                  | 20         | 160          | 5xφ6.5x10 | Undercut U | β=90°     | γ=30°        |
|             |           | 1.6                  | 4.3               | 11                | 255               | 42.4           | 240                  | 20         | 160          | 5xφ6.5x10 | Undercut U | β=90°     | γ=30°        |
|             | 450       | 1.75                 | 4.7               | 11                | 279               | 46.4           | 240                  | 20         | 160          | 5xφ6.5x10 | Undercut U | β=90°     | γ=30°        |
|             |           | 0.5                  | 1.5               | 5                 | 80                | 13.3           | 240                  | 20         | 180          | 5xφ6.5x10 | Undercut U | β=90°     | γ=30°        |
|             |           | 1.0                  | 3.0               | 8                 | 159               | 26.5           | 240                  | 20         | 180          | 5xφ6.5x10 | Undercut U | β=90°     | γ=30°        |
|             |           | 1.5                  | 4.5               | 12                | 239               | 39.8           | 240                  | 20         | 180          | 5xφ6.5x10 | Undercut U | β=90°     | γ=30°        |
|             |           | 1.6                  | 4.8               | 12                | 255               | 42.4           | 240                  | 20         | 180          | 5xφ6.5x10 | Undercut U | β=90°     | γ=30°        |
|             |           | 1.75                 | 5.2               | 12                | 279               | 46.4           | 240                  | 20         | 180          | 5xφ6.5x10 | Undercut U | β=90°     | γ=30°        |





### FJD2-B450 (φ320) Series


- ♦ Rated Voltage : AC380V
- ♦ Brake Voltage : DC110V
- ♦ Weight : 157kg
- ♦ Duty : S5 - 40%
- ♦ Max Static Load : 2500kg
- ♦ Wrap : Single
- ♦ Insulation : F
- ♦ Protection : IP41

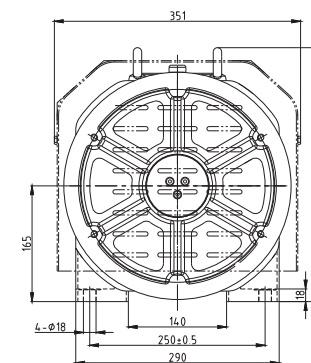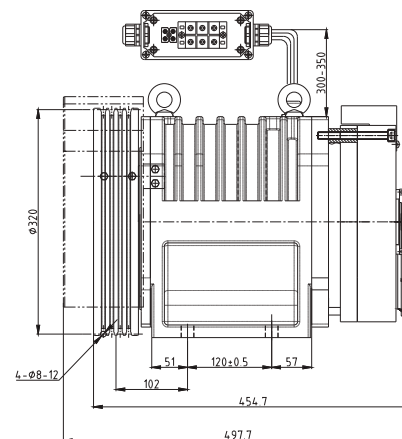

#### ELEVATOR TRACTION MACHINE (ROPING2:1)


| Model       | Load (Kg) | Elevator Speed (m/s) | Rated Output (kW) | Rated Current (A) | Rated Speed (rpm) | Frequency (Hz) | Sheave Diameter (mm) | Poles (2p) | Torque (N.m) | Ropes   | Groove     | Cut Angle | Groove Angle |
|-------------|-----------|----------------------|-------------------|-------------------|-------------------|----------------|----------------------|------------|--------------|---------|------------|-----------|--------------|
| <b>FJD2</b> | 450       | 0.5                  | 1.5               | 4                 | 60                | 9.9            | 320                  | 20         | 240          | 4xφ8x12 | Undercut U | β=90°     | γ=30°        |
|             |           | 1.0                  | 3.0               | 8                 | 119               | 19.9           | 320                  | 20         | 240          | 4xφ8x12 | Undercut U | β=90°     | γ=30°        |
|             |           | 1.5                  | 4.5               | 12                | 179               | 29.8           | 320                  | 20         | 240          | 4xφ8x12 | Undercut U | β=90°     | γ=30°        |
|             |           | 1.6                  | 4.8               | 12                | 191               | 31.8           | 320                  | 20         | 240          | 4xφ8x12 | Undercut U | β=90°     | γ=30°        |
|             |           | 1.75                 | 5.2               | 12                | 209               | 34.8           | 320                  | 20         | 240          | 4xφ8x12 | Undercut U | β=90°     | γ=30°        |



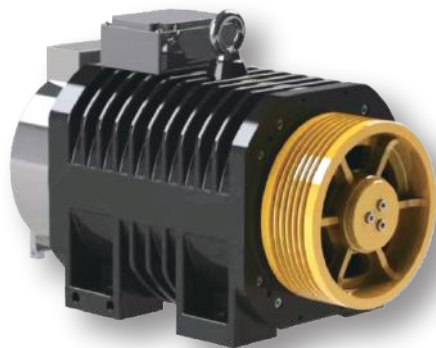

## FJD2-B800 (φ240) Series

- Rated Voltage : AC380V
- Brake Voltage : DC110V
- Weight : 200kg
- Duty : S5 - 40%
- Max Static Load : 2500kg
- Wrap : Single
- Insulation : F
- Protection : IP41

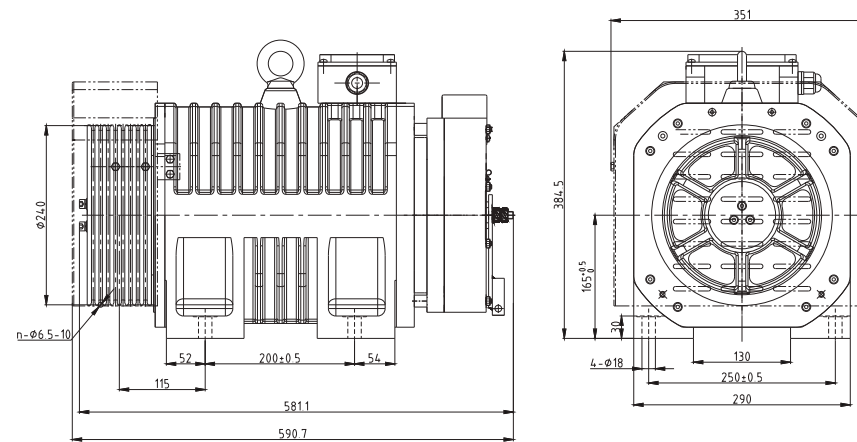

### ELEVATOR TRACTION MACHINE (ROPING2:1)


| Model       | Load (kg) | Elevator Speed (m/s) | Rated Output (kW) | Rated Current (A) | Rated Speed (rpm) | Frequency (Hz) | Sheave Diameter (mm) | Poles (2p) | Torque (N.m) | Ropes     | Groove     | Cut Angle | Groove Angle |
|-------------|-----------|----------------------|-------------------|-------------------|-------------------|----------------|----------------------|------------|--------------|-----------|------------|-----------|--------------|
| <b>FJD2</b> | 630       | 0.5                  | 2.0               | 5                 | 80                | 13.3           | 240                  | 20         | 244          | 6xφ6.5x10 | Undercut U | β=90°     | γ=30°        |
|             |           | 1.0                  | 4.1               | 10                | 159               | 26.5           | 240                  | 20         | 244          | 6xφ6.5x10 | Undercut U | β=90°     | γ=30°        |
|             |           | 1.5                  | 6.1               | 16                | 239               | 39.8           | 240                  | 20         | 244          | 6xφ6.5x10 | Undercut U | β=90°     | γ=30°        |
|             |           | 1.6                  | 6.5               | 16                | 255               | 42.4           | 240                  | 20         | 244          | 6xφ6.5x10 | Undercut U | β=90°     | γ=30°        |
|             |           | 1.75                 | 7.1               | 16                | 279               | 46.4           | 240                  | 20         | 244          | 6xφ6.5x10 | Undercut U | β=90°     | γ=30°        |
|             | 800       | 0.5                  | 2.6               | 6                 | 80                | 13.3           | 240                  | 20         | 310          | 8xφ6.5x10 | Undercut U | β=90°     | γ=30°        |
|             |           | 1.0                  | 5.2               | 12                | 159               | 26.5           | 240                  | 20         | 310          | 8xφ6.5x10 | Undercut U | β=90°     | γ=30°        |
|             |           | 1.5                  | 7.8               | 21                | 239               | 39.8           | 240                  | 20         | 310          | 8xφ6.5x10 | Undercut U | β=90°     | γ=30°        |
|             |           | 1.6                  | 8.3               | 21                | 255               | 42.4           | 240                  | 20         | 310          | 8xφ6.5x10 | Undercut U | β=90°     | γ=30°        |
|             |           | 1.75                 | 9.0               | 21                | 279               | 46.4           | 240                  | 20         | 310          | 8xφ6.5x10 | Undercut U | β=90°     | γ=30°        |





## FJD2-B630 (φ320) Series

- Rated Voltage : AC380V
- Brake Voltage : DC110V
- Weight : 200kg
- Duty : S5 - 40%
- Max Static Load : 2500kg
- Wrap : Single
- Insulation : F
- Protection : IP41

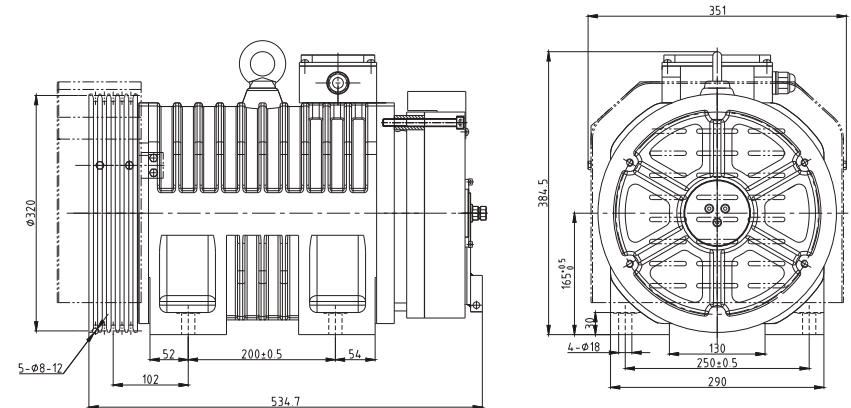

### ELEVATOR TRACTION MACHINE (ROPING2:1)

| Model       | Load (kg) | Elevator Speed (m/s) | Rated Output (kW) | Rated Current (A) | Rated Speed (rpm) | Frequency (Hz) | Sheave Diameter (mm) | Poles (2p) | Torque (N.m) | Ropes   | Groove     | Cut Angle | Groove Angle |
|-------------|-----------|----------------------|-------------------|-------------------|-------------------|----------------|----------------------|------------|--------------|---------|------------|-----------|--------------|
| <b>FJD2</b> | 630       | 0.5                  | 2.1               | 5                 | 60                | 9.9            | 320                  | 20         | 336          | 5xφ8x12 | Undercut U | β=90°     | γ=30°        |
|             |           | 1.0                  | 4.2               | 10                | 119               | 19.9           | 320                  | 20         | 336          | 5xφ8x12 | Undercut U | β=90°     | γ=30°        |
|             |           | 1.5                  | 6.3               | 16                | 179               | 29.8           | 320                  | 20         | 336          | 5xφ8x12 | Undercut U | β=90°     | γ=30°        |
|             |           | 1.6                  | 6.7               | 16                | 191               | 31.8           | 320                  | 20         | 336          | 5xφ8x12 | Undercut U | β=90°     | γ=30°        |
|             |           | 1.75                 | 7.3               | 16                | 209               | 34.8           | 320                  | 20         | 336          | 5xφ8x12 | Undercut U | β=90°     | γ=30°        |



**FUJI**  
Engineering



***SMOOTH  
ELEVATOR  
TRANSPORT  
POWERED BY  
SMOOTHER  
TECHNOLOGY.***

ติดต่อเรา

THAI FUJI ELEVATOR CO.,LTD.

เพิ่ม | 232-234 ถนนพระราม 3 บางคอแหลม กรุงเทพฯ 10120 ประเทศไทย

โทร | +66-22894953 แฟกซ์ | +66-22894953

เว็บไซต์: [thai-fuji.com](http://thai-fuji.com)

