

FUJI  **Global
Korea**



WE ELAVATE SAFETY & QUALITY

- *Take less space*
- *Use 40-60% less energy*
- *Make less noise*



FJE1 CONTROL CABINET

WITH LEADING SMART TECHNOLOGY


- ◆ Remote technical support through APP.
- ◆ Remote monitoring through the IoT.
- ◆ Communication encoder supported.
- ◆ Balance coefficient auto-tuning.
- ◆ Noise reduction design < 50dBA.

Model Description: FJE1 4008 K
(1) (2) (3)


SOLUTION HIGHLIGHTS

Noise control for MRL	Excellent comfort	Small size and low weight
50dBa No contact noise (STO VERSION)	High - Performance Improve 150%	MR 230x190x802 17kg
10dBa Brake noise control reduce 10db	PI adaptive algorithm	Conductive to the layout of MRL
12k high frequency running Reduce motor running noise		

Parameters Setting Free	Reduce fault rate	Specialist remote guide
Motor runing No need motor tuning in factory (work with communication encoder) Function One: click debugging Floor number learning automatically Door limit state learning automatically PI adaptive control Balance testing Dynamic holding brake force testing	Cabinet Maintenance-free ➢ STO version maintenance-free ➢ PESSRAL solution UCMP board long life cycle	➢ Support APP remote guidance ➢ Cabinet Maintenance - free

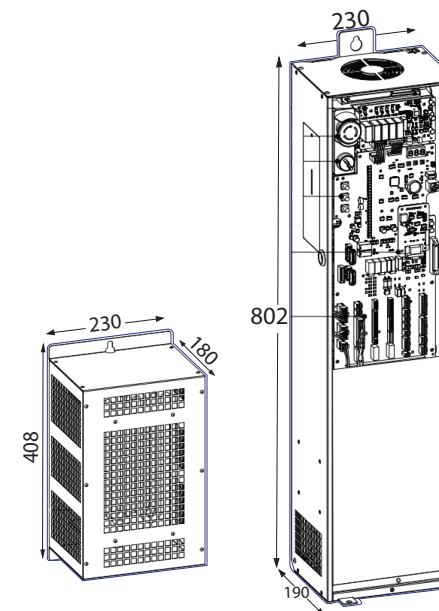

Model	Power (Kw)	Origin and language	Option
FJE1: STO Version	4008 = 8.3KW 4017 = 17KW 4022 = 22KW 4037 = 37KW	K: Korea / English	Blue sky white

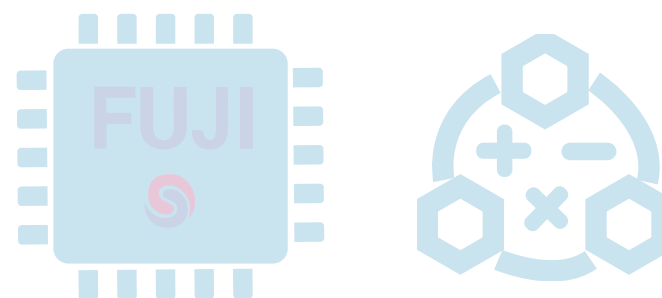



FJE2
Integrated solution for elevators up to 4 m/sec
EN81-20 Safety Certified


Model Description: FJE2 4005 K
(1) (2) (3)

Application Features

- Supports PM gearless and asynchronous geared traction Machines
 - Smooth ride performance
 - "Direct To Floor" technology
 - Rapid commissioning step through sequence
- Anti-rollback without any external load cell (gearless machines)
 - Pre-torque function (analog signal from load cell for geared machines)
 - Flexible programmable I/O's
 - Static auto tuning for asynchronous and synchronous machines (without brake opening)


Feature Highlights

- Standard: 48 floors, full collective (full serial connection)
- Duplex onboard group control (CANbus serial communication)
- Automatic door control mode
- Selectable fireman operation
- Supports 1 ph. 220 Vac UPS (quasi & sine wave) for rescue operation with intelligent light load direction search
- Comprehensive trip diagnostics

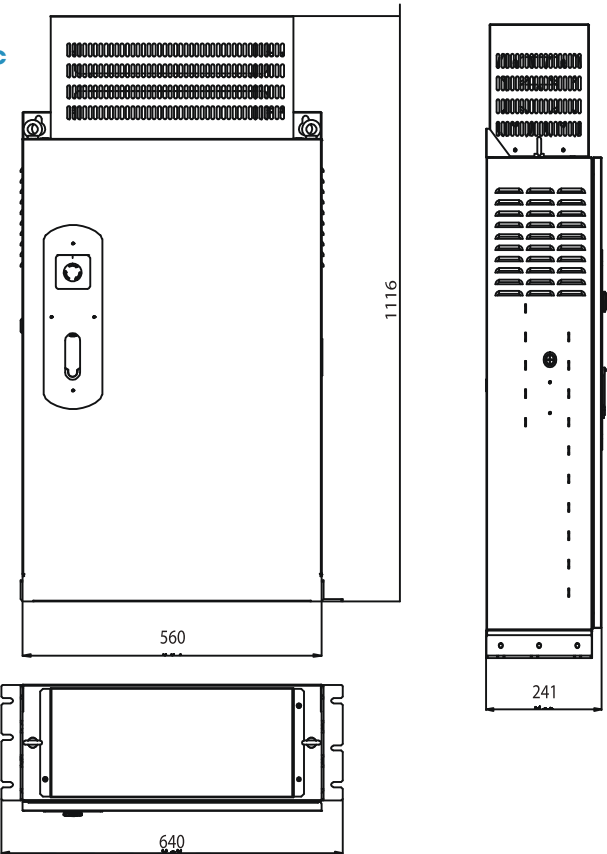


Model	Power (Kw)	Origin and language	Option
FJE2 Standard Version	4005 = 5.5KW 4007 = 7.5KW 4011 = 11KW 4015 = 15KW 4018 = 18KW 4022 = 22KW	K: Korea/English	Black



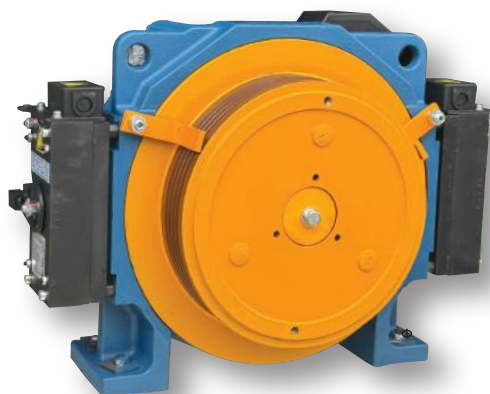

► FJK1-B (φ325mm) ELEVATOR TRACTION MACHINE

Voltage : 380V
Suspension : 2 : 1
Brake : DC110V 2x0.84A(2x1.1A)
Weight: 200kg
Max Static Load : 2000kg

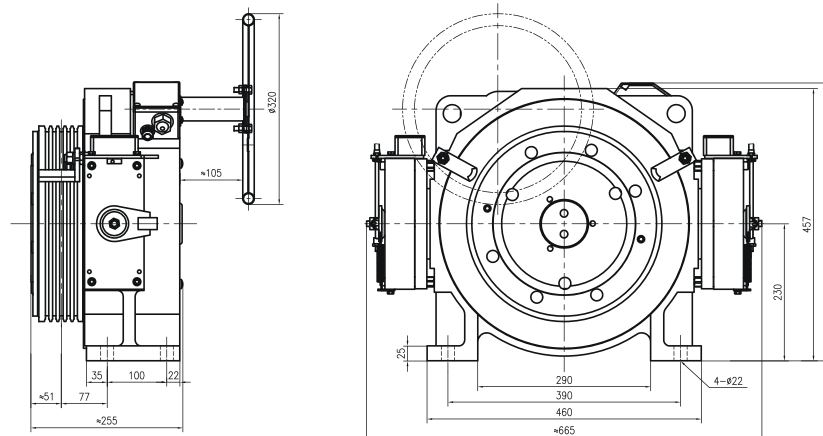


ELEVATOR TRACTION MACHINE (ROPING2:1)

Spec	Load (kg)	Lift Speed (m/s)	Sheave Diam(mm)	Rope Sheave (mm)	Current (A)	Torque (Nm)	Rated Speed (rpm)	Frequency (Hz)	Power (Kw)	Pole	Rating	INS Class	IP Code
FJK1	320	1.0	Φ325	3xφ8x12	6.3	200	118	31.5	2.5	32	S5(40%)	F	IP41
	320	1.5	Φ325	3xφ8x12	8.9	200	177	47.2	3.7	32	S5(40%)	F	IP41
	320	1.6	Φ325	3xφ8x12	8.9	200	189	50.4	4	32	S5(40%)	F	IP41
	320	1.75	Φ325	3xφ8x12	9.4	200	206	54.9	4.3	32	S5(40%)	F	IP41
	450	1.0	Φ325	4xφ8x12	8.3	265	118	31.5	3.3	32	S5(40%)	F	IP41
	450	1.5	Φ325	4xφ8x12	11.7	265	177	47.2	4.9	32	S5(40%)	F	IP41
	450	1.6	Φ325	4xφ8x12	11.7	265	189	50.4	5.2	32	S5(40%)	F	IP41
	450	1.75	Φ325	4xφ8x12	12.5	265	206	54.9	5.7	32	S5(40%)	F	IP41
	550	1.5	Φ325	5xφ8x12	12.2	290	177	47.2	5.4	32	S5(40%)	F	IP41
	550	1.6	Φ325	5xφ8x12	12.2	290	189	50.4	5.7	32	S5(40%)	F	IP41
	550	1.75	Φ325	5xφ8x12	13.2	290	206	54.9	6.3	32	S5(40%)	F	IP41
	630	1.0	Φ325	5xφ8x12	9.6	310	118	31.5	3.8	32	S5(40%)	F	IP41
	630	1.5	Φ325	5xφ8x12	13.6	325	177	47.2	6	32	S5(40%)	F	IP41
	630	1.6	Φ325	5xφ8x12	13.6	325	189	50.4	6.4	32	S5(40%)	F	IP41
	630	1.75	Φ325	5xφ8x12	14.8	325	206	54.9	7	32	S5(40%)	F	IP41

1.For machine room less, the standard configuration of this machine does not include manual brake release, customers use electric brake release please.The manual brake release is optional.

2.When this machine is used for loading 630kg,the coefficient of elevator balance system shouldn't be less than 0.47.


3.When this machine is used for loading≤450kg,the current of brakes are 2x0.84A; when this machine is used for loading > 450kg, ,the current of brakes are 2x1.1A.

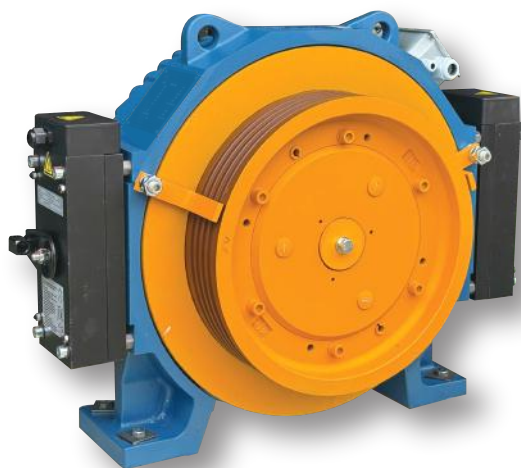

▶ FUJK1-B (φ400mm)

ELEVATOR TRACTION MACHINE

Voltage : 380V
Suspension : 2 : 1
Brake : DC110V 2x1.0A(2x1.1A)
Weight: 285kg
Max Static Load : 3000kg

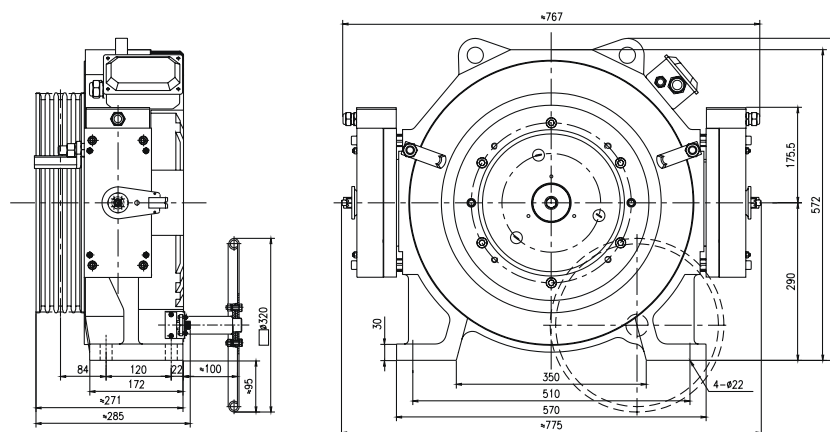

ELEVATOR TRACTION MACHINE (ROPING2:1)

Spec	Load (kg)	Lift Speed (m/s)	Sheave Diam(mm)	Rope Sheave (mm)	Current (A)	Torque (Nm)	Rated Speed (rpm)	Frequency (Hz)	Power (Kw)	Pole (Kw)	Rating	INS Class	IP Code
FUJK1	630	1.0	Φ400	4xΦ10x16	9.7	420	96	25.6	4.2	32	S5(40%)	F	IP41
	630	1.5	Φ400	4xΦ10x16	14.9	420	144	38.4	6.3	32	S5(40%)	F	IP41
	630	1.6	Φ400	4xΦ10x16	14.9	420	153	40.8	6.7	32	S5(40%)	F	IP41
	630	1.75	Φ400	4xΦ10x16	15.9	420	167	44.5	7.3	32	S5(40%)	F	IP41
	630	2.0	Φ400	4xΦ10x16	18.3	420	192	51.2	8.4	32	S5(40%)	F	IP41
	800	1.0	Φ400	5xΦ10x16	12.1	530	96	25.6	5.3	32	S5(40%)	F	IP41
	800	1.5	Φ400	5xΦ10x16	18.8	530	144	38.4	8.0	32	S5(40%)	F	IP41
	800	1.6	Φ400	5xΦ10x16	18.8	530	153	40.8	8.5	32	S5(40%)	F	IP41
	800	1.75	Φ400	5xΦ10x16	20.7	530	167	44.5	9.3	32	S5(40%)	F	IP41
	800	2.0	Φ400	5xΦ10x16	23.2	530	192	51.2	10.7	32	S5(40%)	F	IP41
	1000/1050	1.0	Φ400	5xΦ10x16	14.7	650	96	25.6	6.5	32	S5(40%)	F	IP41
	1000/1050	1.5	Φ400	5xΦ10x16	22.9	650	144	38.4	9.8	32	S5(40%)	F	IP41
	1000/1050	1.6	Φ400	5xΦ10x16	22.9	650	153	40.8	10.4	32	S5(40%)	F	IP41
	1000/1050	1.75	Φ400	5xΦ10x16	25.1	650	167	44.5	11.4	32	S5(40%)	F	IP41
	1000/1050	2.0	Φ400	5xΦ10x16	28.2	650	192	51.2	13.1	32	S5(40%)	F	IP41


REMARK

For machine room less, the standard configuration of this machine does not include manual brake release, customers use electric brake release please.
The manual brake release is optional.




FJK2 - B450KG (φ240) SERIES

Rated Voltage : AC380V
 Brake Voltage : DC110V
 Weight : 140kg
 Duty : S5-40%
 Max Static Load : 2500kg
 Wrap : Single
 Insulation : F
 Protection : Ip41
 Traveling Height : <90

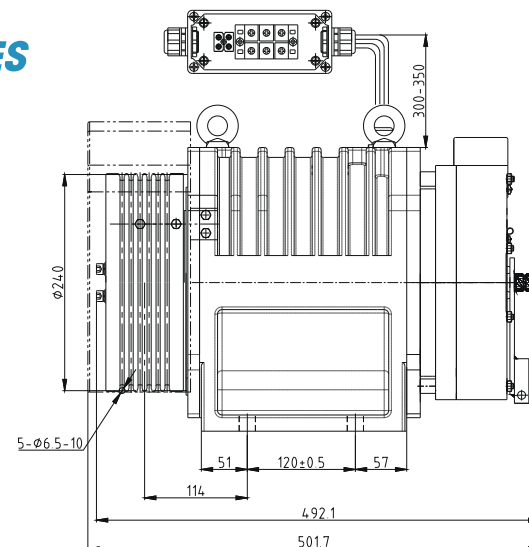

ELEVATOR TRACTION MACHINE (ROPING2:1)



Model	Load (kg)	Elevator Speed (m/s)	Rated Output (kW)	Rated Current (A)	Rated Speed (rpm)	Frequency (Hz)	Sheave Diameter (mm)	Poles (2p)	Torque (N.m)	Ropes	Groove	Cut Angle	Groove Angle
FJK2	400	0.5	1.3	4	80	13.3	240	20	100	5xφ6.5x10	Undercut U	β=90°	Y=30°
	400	1.0	2.7	7	159	26.5	240	20	160	5xφ6.5x10	Undercut U	β=90°	Y=30°
	400	1.5	4.0	11	239	39.8	240	20	160	5xφ6.5x10	Undercut U	β=90°	Y=30°
	400	1.6	4.3	11	255	42.4	240	20	160	5xφ6.5x10	Undercut U	β=90°	Y=30°
	400	1.75	4.7	11	279	46.4	240	20	160	5xφ6.5x10	Undercut U	β=90°	Y=30°
	450	0.5	1.5	5	80	13.3	240	20	180	5xφ6.5x10	Undercut U	β=90°	Y=30°
	450	1.0	3.0	8	159	26.5	240	20	180	5xφ6.5x10	Undercut U	β=90°	Y=30°
	450	1.5	4.5	12	239	39.8	240	20	180	5xφ6.5x10	Undercut U	β=90°	Y=30°
	450	1.6	4.8	12	255	42.4	240	20	180	5xφ6.5x10	Undercut U	β=90°	Y=30°
	450	1.75	5.2	12	279	46.4	240	20	180	5xφ6.5x10	Undercut U	β=90°	Y=30°

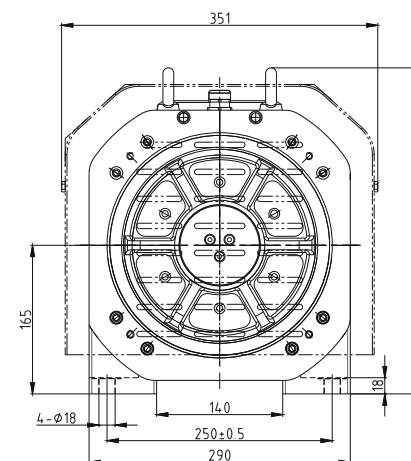




FJK2 - B450KG (φ320) SERIES

Rated Voltage : AC380V
 Brake Voltage : DC110V
 Weight : 157kg
 Duty : S5-40%
 Max Static Load : 2500kg
 Wrap : Single
 Insulation : F
 Protection : Ip41
 Traveling Height : <90

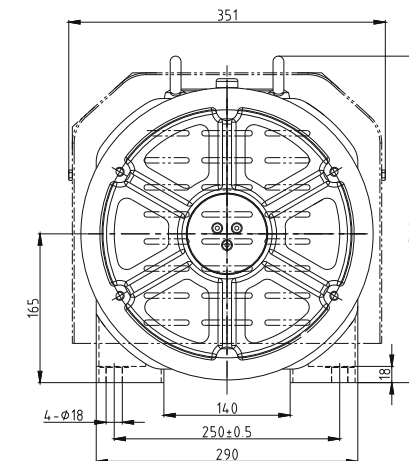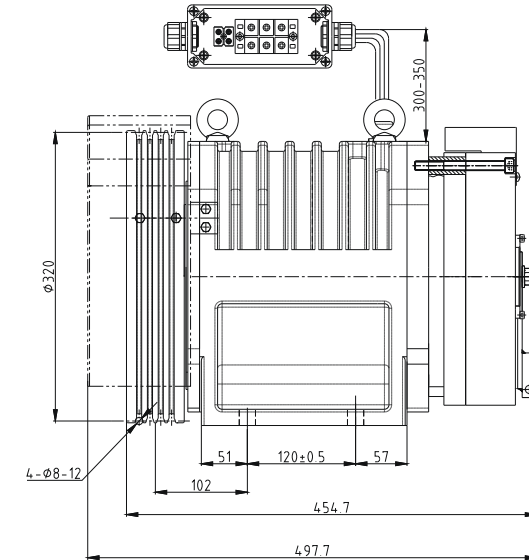


ELEVATOR TRACTION MACHINE (ROPING2:1)

Model	Load (Kg)	Elevator Speed (m/s)	Rated Output (kW)	Rated Current (A)	Rated Speed (rpm)	Frequency (Hz)	Sheave Diameter (mm)	Poles (2p)	Torque (N.m)	Ropes	Groove	Cut Angle	Groove Angle
FJK2	450	0.5	1.5	4	60	9.9	320	20	240	4xφ8x12	Undercut U	β=90°	γ=30°
	450	1.0	3.0	8	119	19.9	320	20	240	4xφ8x12	Undercut U	β=90°	γ=30°
	450	1.5	4.5	12	179	29.8	320	20	240	4xφ8x12	Undercut U	β=90°	γ=30°
	450	1.6	4.8	12	191	31.8	320	20	240	4xφ8x12	Undercut U	β=90°	γ=30°
	450	1.75	5.2	12	209	34.8	320	20	240	4xφ8x12	Undercut U	β=90°	γ=30°

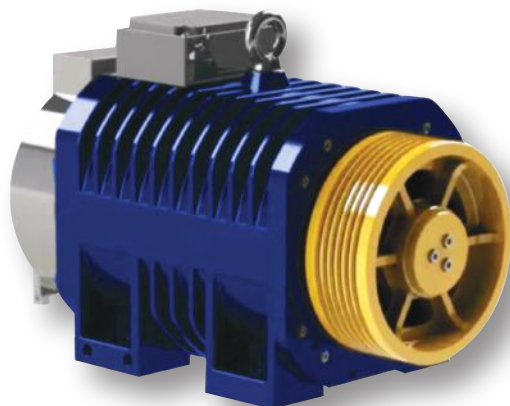


FJK2 - B630-800KG (Φ240) SERIES


Rated Voltage : AC380V
 Brake Voltage : DC110V
 Weight : 200kg
 Duty : S5-40%
 Max Static Load : 2500kg
 Wrap : Single
 Insulation : F
 Protection : Ip41
 Traveling Height : <90

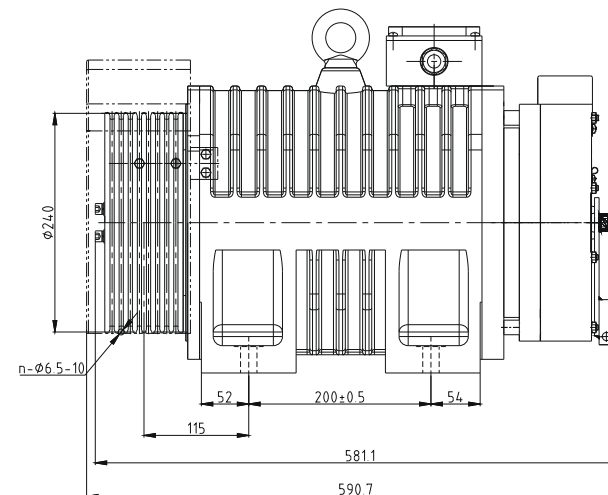

ELEVATOR TRACTION MACHINE (ROPING2:1)


Model	Load (kg)	Elevator Speed (m/s)	Rated Output (kW)	Rated Current (A)	Rated Speed (rpm)	Frequency (Hz)	Sheave Diameter (mm)	Poles (2p)	Torque (N.m)	Ropes	Groove	Cut Angle	Groove Angle
FJK2	630	0.5	2.0	5	80	13.3	240	20	244	6xφ6.5x10	Undercut U	β=90°	γ=30°
	630	1.0	4.1	10	159	26.5	240	20	244	6xφ6.5x10	Undercut U	β=90°	γ=30°
	630	1.5	6.1	16	239	39.8	240	20	244	6xφ6.5x10	Undercut U	β=90°	γ=30°
	630	1.6	6.5	16	255	42.4	240	20	244	6xφ6.5x10	Undercut U	β=90°	γ=30°
	630	1.75	7.1	16	279	46.4	240	20	244	6xφ6.5x10	Undercut U	β=90°	γ=30°
	800	0.5	2.6	6	80	13.3	240	20	310	8xφ6.5x10	Undercut U	β=90°	γ=30°
	800	1.0	5.2	12	159	26.5	240	20	310	8xφ6.5x10	Undercut U	β=90°	γ=30°
	800	1.5	7.8	21	239	39.8	240	20	310	8xφ6.5x10	Undercut U	β=90°	γ=30°
	800	1.6	8.3	21	255	42.4	240	20	310	8xφ6.5x10	Undercut U	β=90°	γ=30°
	800	1.75	9.0	21	279	46.4	240	20	310	8xφ6.5x10	Undercut U	β=90°	γ=30°

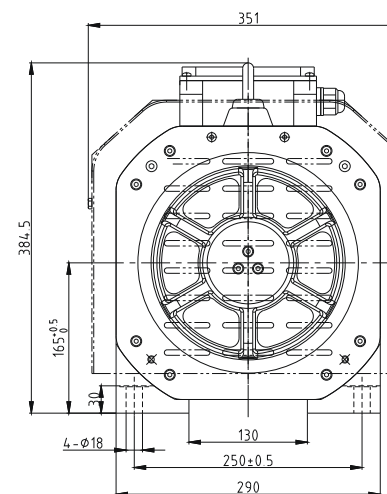

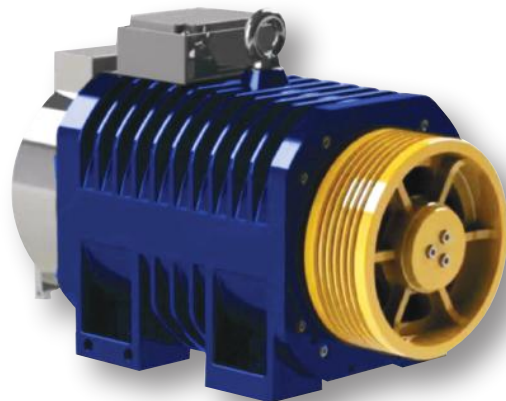


FJK2 - B630KG (Φ320 SERIES)

Rated Voltage : AC380V
 Brake Voltage : DC110V
 Weight : 200kg
 Duty : S5-40%
 Max Static Load : 2500kg
 Wrap : Single
 Insulation : F
 Protection : Ip41
 Traveling Height : <90

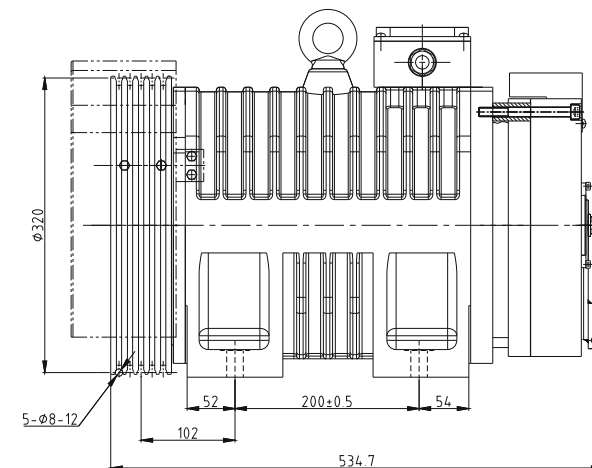

ELEVATOR TRACTION MACHINE (ROPING2:1)

Model	Load (kg)	Elevator Speed (m/s)	Rated Output (kW)	Rated Current (A)	Rated Speed (rpm)	Frequency (Hz)	Sheave Diameter (mm)	Poles (2p)	Torque (N.m)	Ropes	Groove	Cut Angle	Groove Angle
FJK2	630	0.5	2.1	5	60	9.9	320	20	336	5xΦ8x12	Undercut U	β=90°	Y=30°
	630	1.0	4.2	10	119	19.9	320	20	336	5xΦ8x12	Undercut U	β=90°	Y=30°
	630	1.5	6.3	16	179	29.8	320	20	336	5xΦ8x12	Undercut U	β=90°	Y=30°
	630	1.6	6.7	16	191	31.8	320	20	336	5xΦ8x12	Undercut U	β=90°	Y=30°
	630	1.75	7.3	16	209	34.8	320	20	336	5xΦ8x12	Undercut U	β=90°	Y=30°

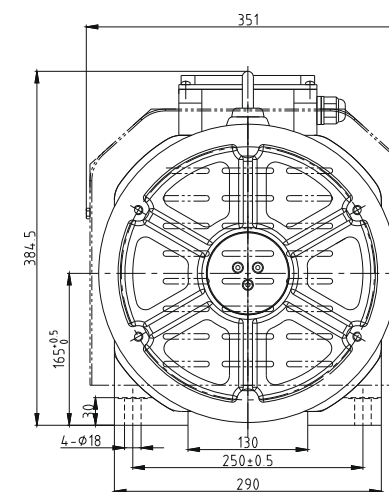



Copyright © 2024 by 후지글로벌코리아. 판권 소유
연락하세요

후지글로벌코리아
서울시 광진구 광나루로 361 파라곤 102동 1901호
T전화번호: +82 10 6488 6706
팩스: +82 2 446 6735
웹사이트: fujiglobal.kr

