

Chapter 1

Introduction

Instructors: 宿红毅 李凡 杨松
耿晶 阮思捷 胡琳梅

School of Computer
Beijing Institute of Technology

Key Points

基本概念	概念，组成，功能	熟练掌握
	分类与拓扑结构	熟练掌握
	发展	了解
	Internet 标准化	掌握
网络体系结构	分层结构 / 相关概念	熟练掌握
	ISO/OSI 参考模型	熟练掌握
	TCP/IP 参考模型	熟练掌握
	LAN 参考模型	熟练掌握


Chapter 1: Roadmap

- 1.1 Computer network and the Internet**
- 1.2 Network edge and core**
- 1.3 Network access and physical media**
- 1.4 Transmission Technology**
- 1.5 Type and Topology**
- 1.6 Network Performance**
- 1.7 Protocol layers, service models**
- 1.8 Architecture, OSI and TCP/IP Models**
- 1.9 Internet History**



What is a computer network?

■ Tanenbaum's definition

Interconnected collection of autonomous computers connected by a communication technology

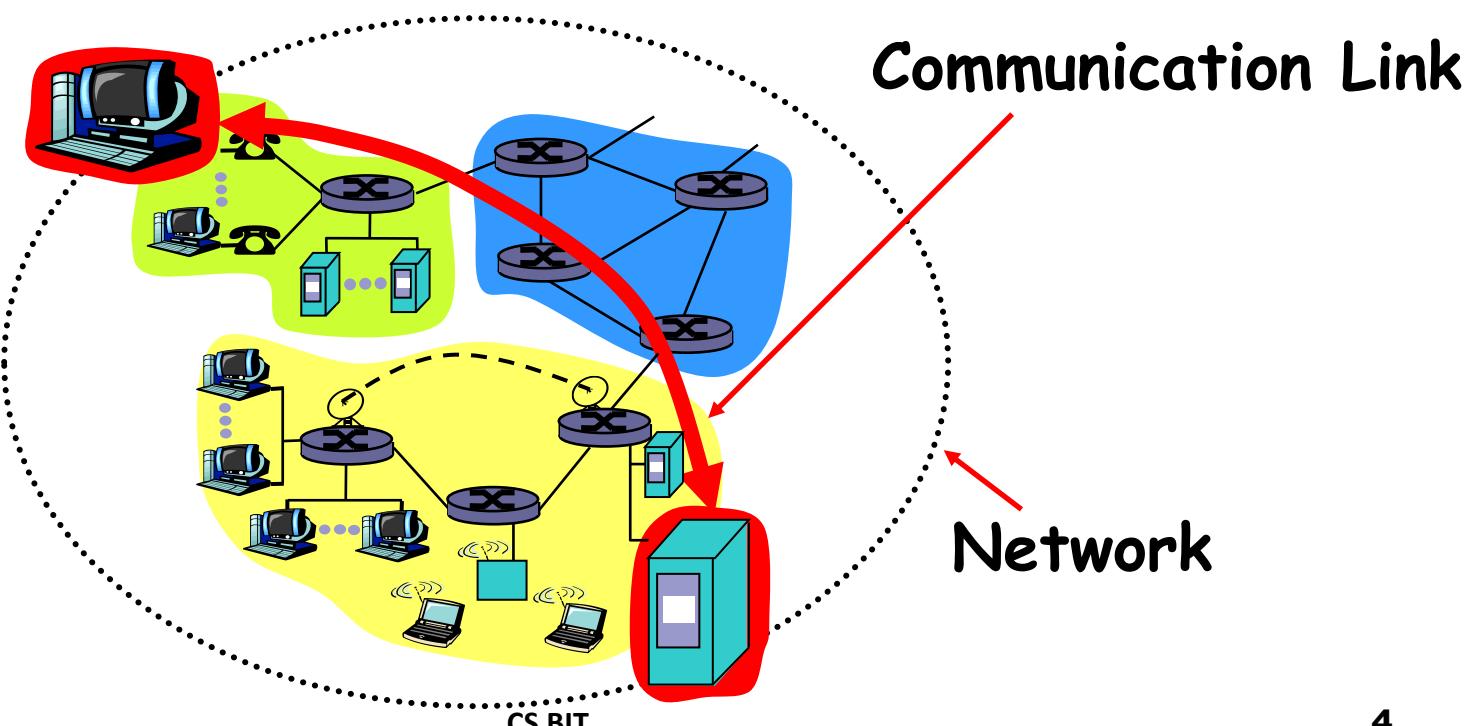

Autonomous computers

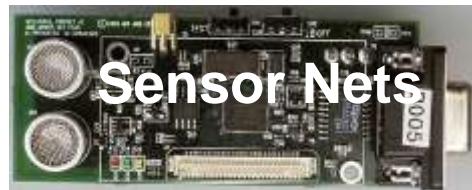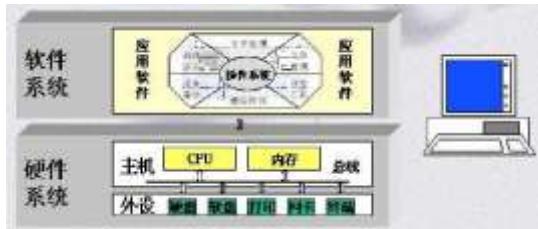

Sensor Nets



Set-top boxes



Media Players



Robots



Smart phones




Automobiles



Cameras




Servers


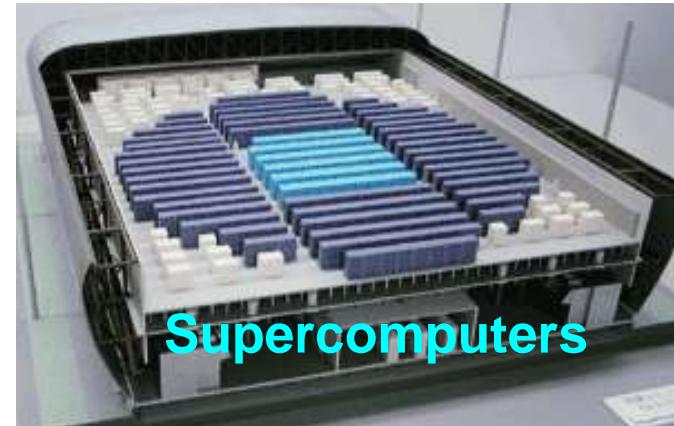


Supercomputers


Connected by comm. technology

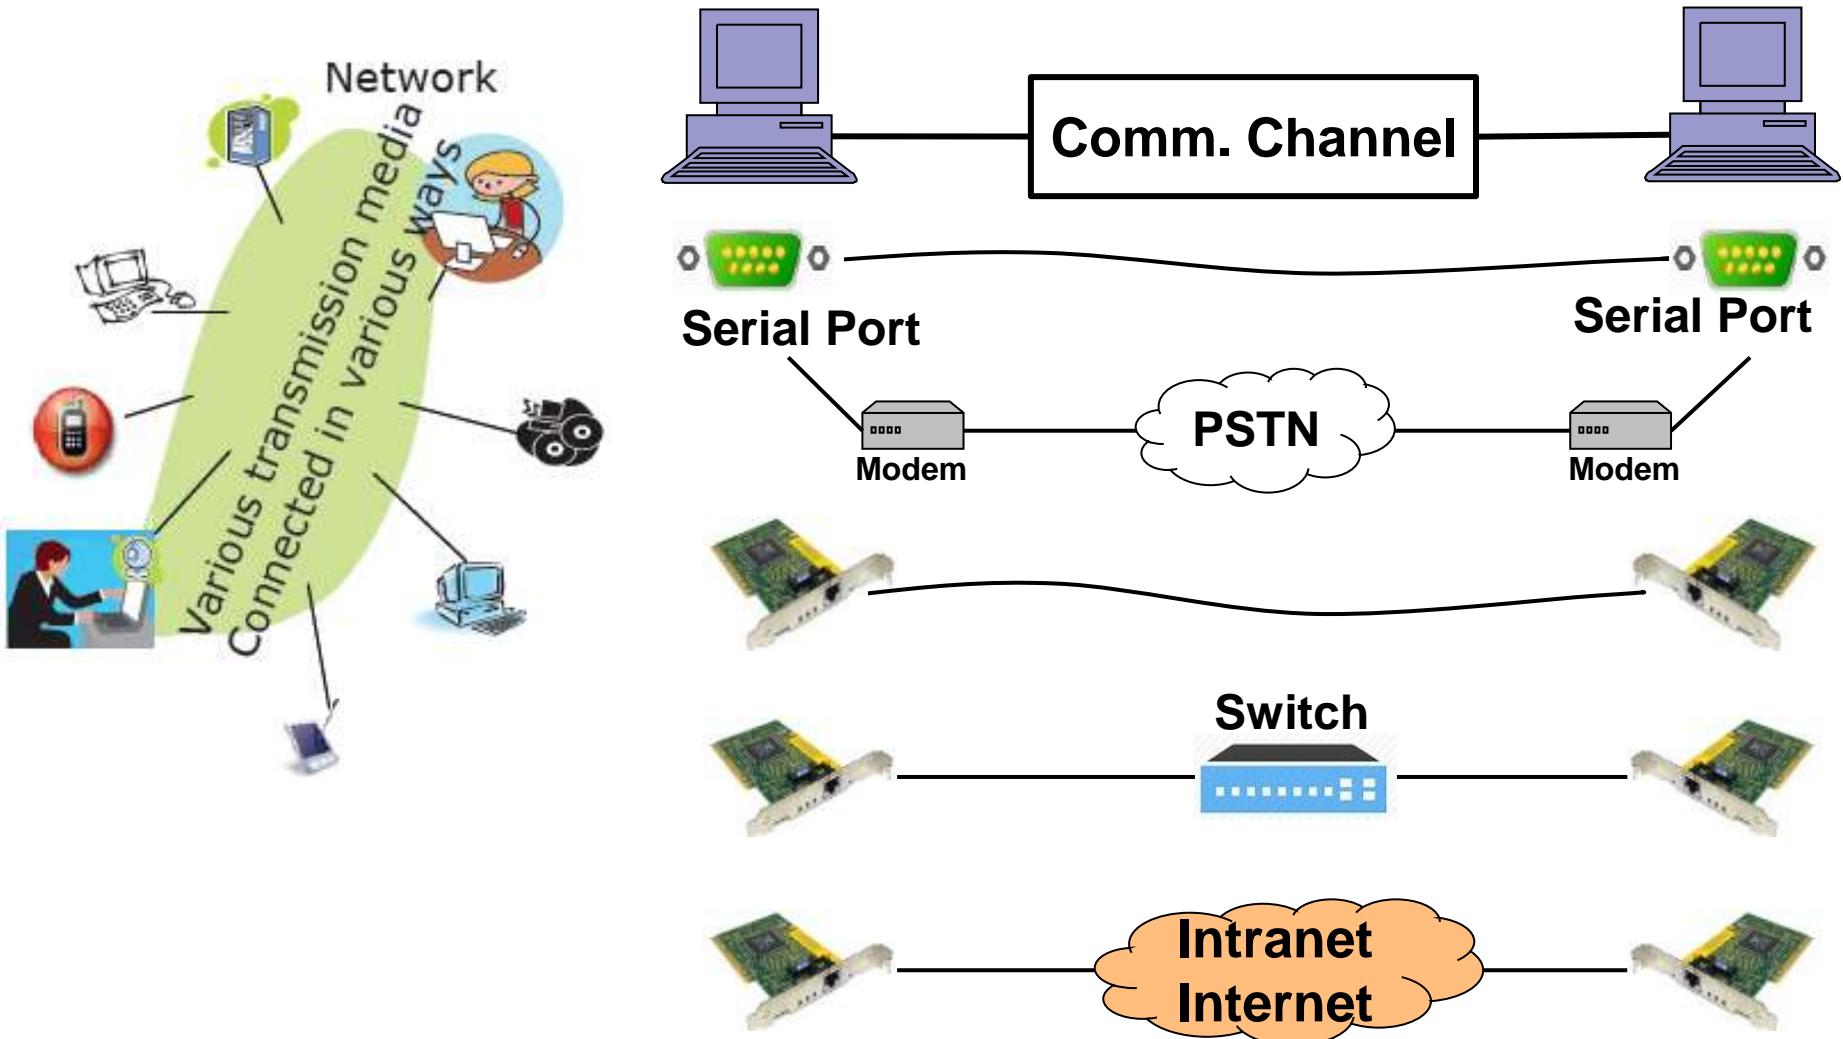

Interconnected collection

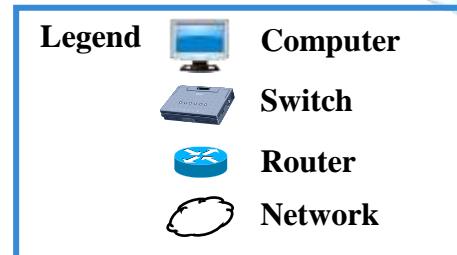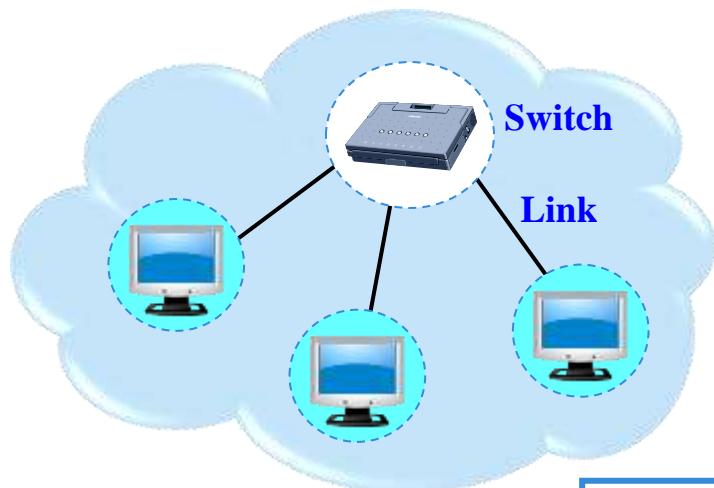

A simple computer network

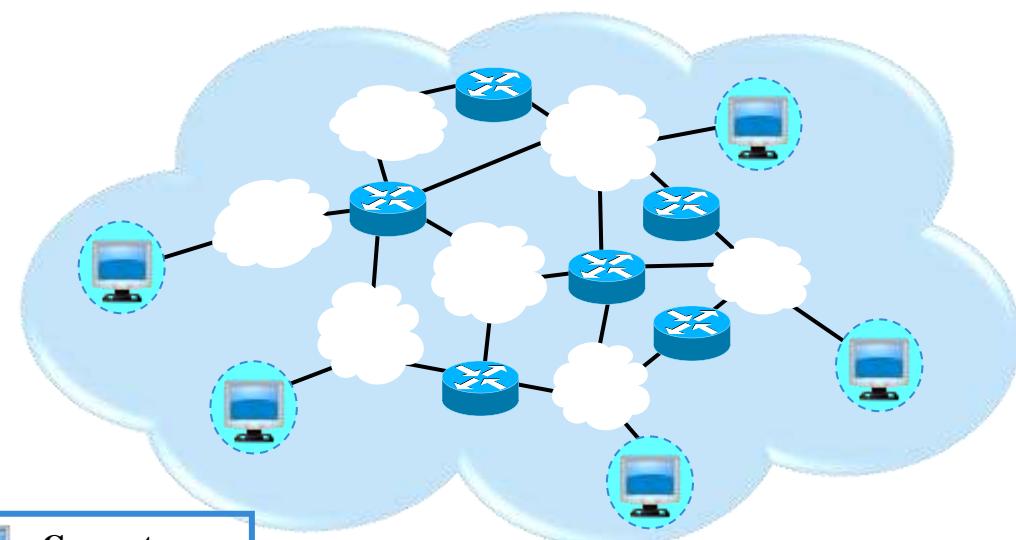

An interconnected network

Services/Functions Provided by a computer network

Communication (通信)


- Allow users to exchange various information easily, quickly and economically.
- as if these user terminals are all directly connected to each other.

Sharing (资源共享)

- Sharing of information, software, and hardware, etc.
- Because of the existence of the network, these resources are as convenient to use as if they are right next to the user.



What is the Internet?

- “**a network of networks**”
- “**collection of networks interconnected by routers**”

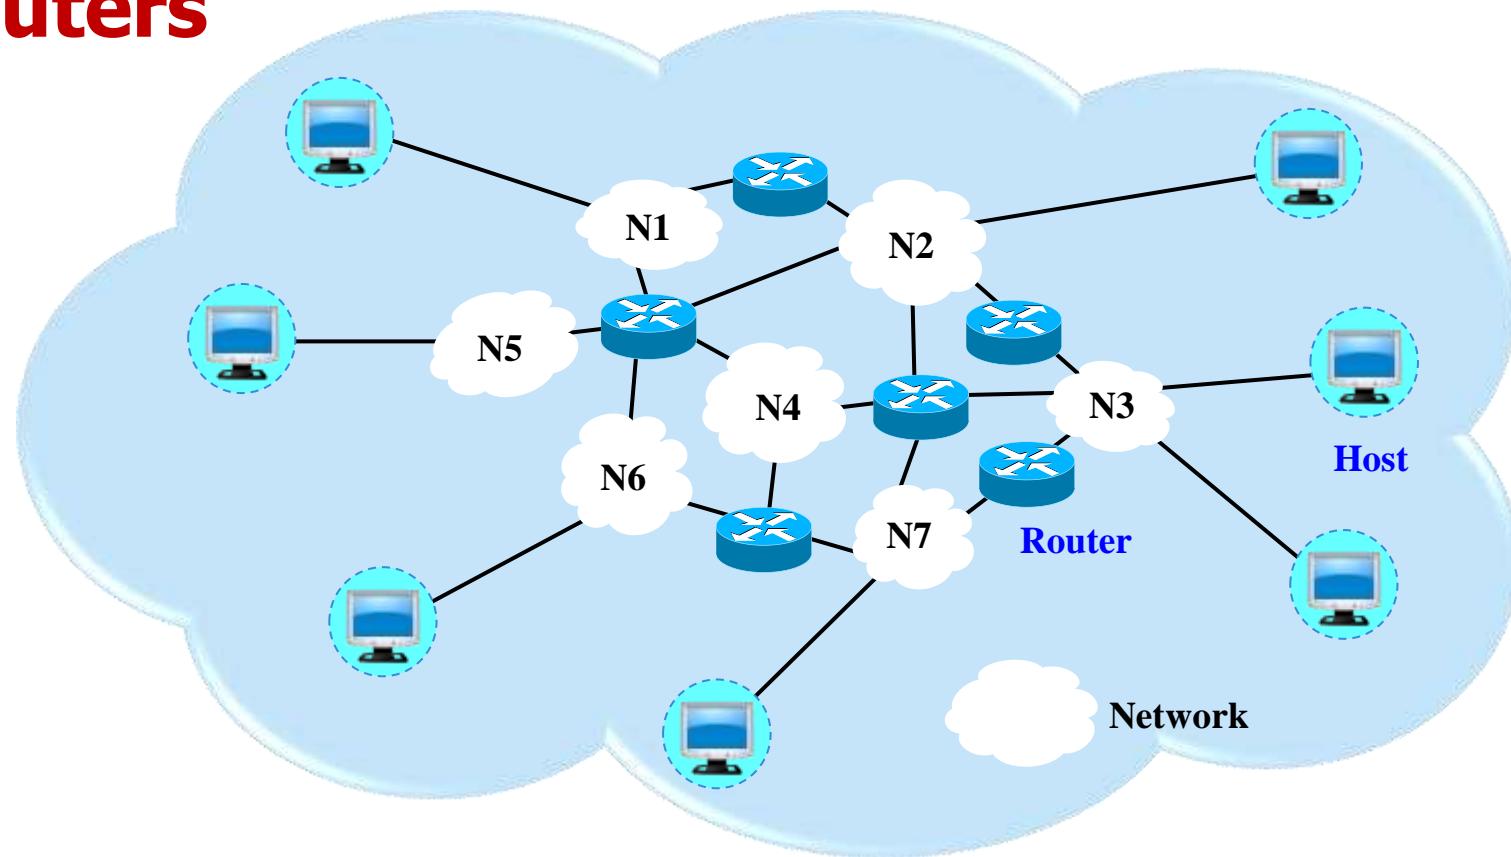

What is the Internet?

- Global scale, general purpose,
heterogeneous-technologies, public,
computer network.

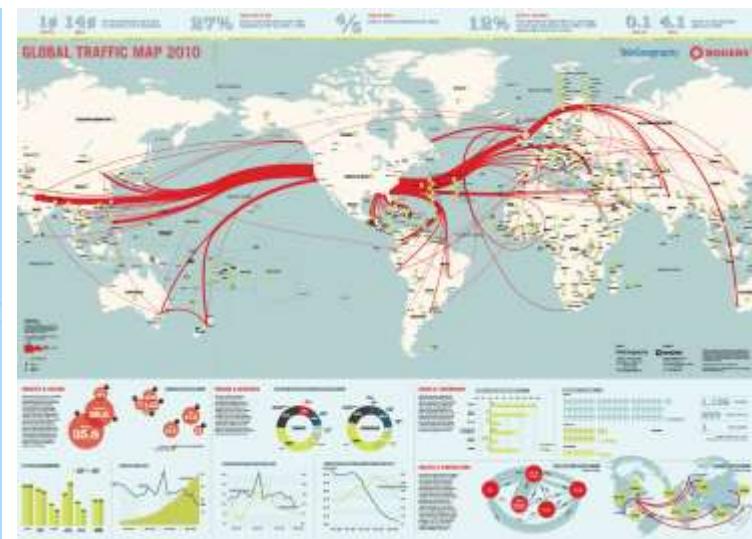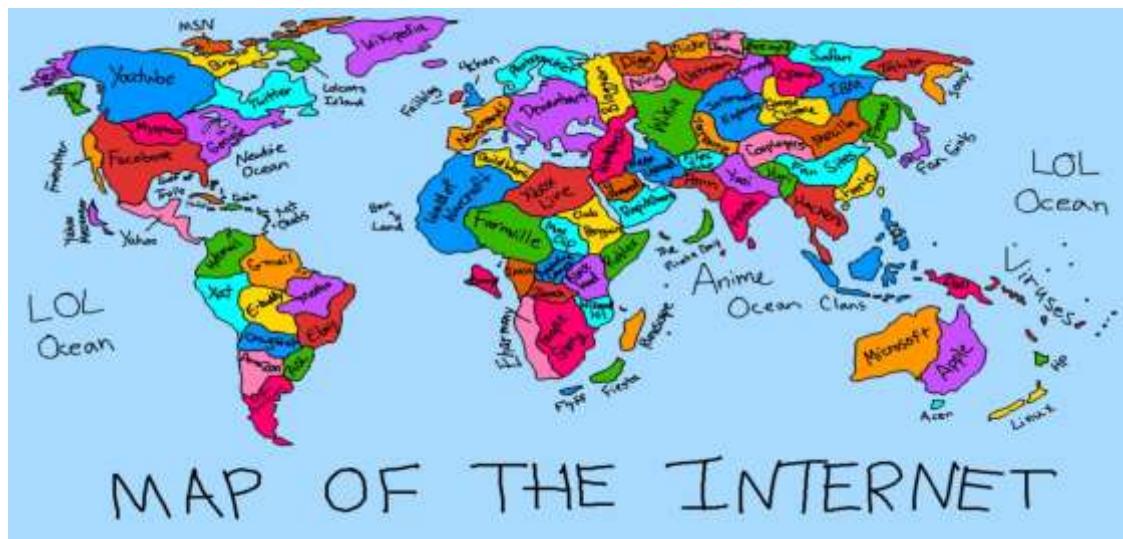


What's the Internet: “nuts and bolts” view

- Millions of connected computing devices:
hosts, end-systems

- PCs, Servers
- Tablets
- Phones, Smart Phones
- Sensors
- Toasters

running *network apps.*

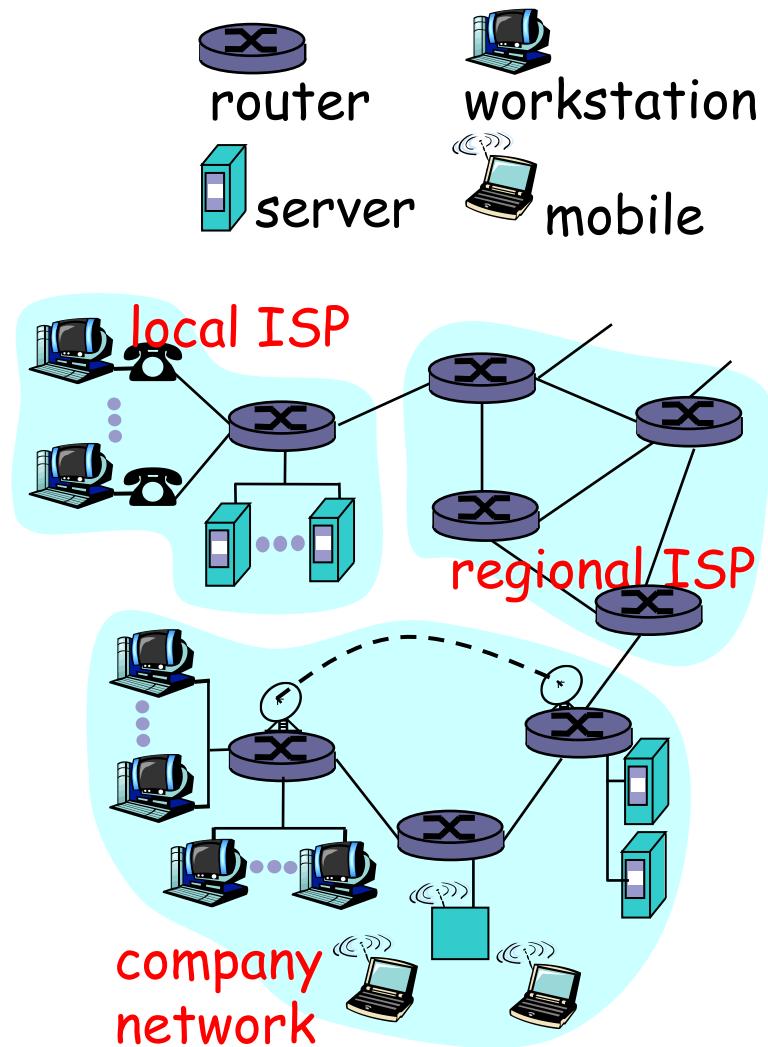


What's the Internet: “nuts and bolts” view

■ *Communication links*

- fiber, copper,
- radio, satellite

■ *Routers:*

- **forward packets
(chunks) of data thru
network**

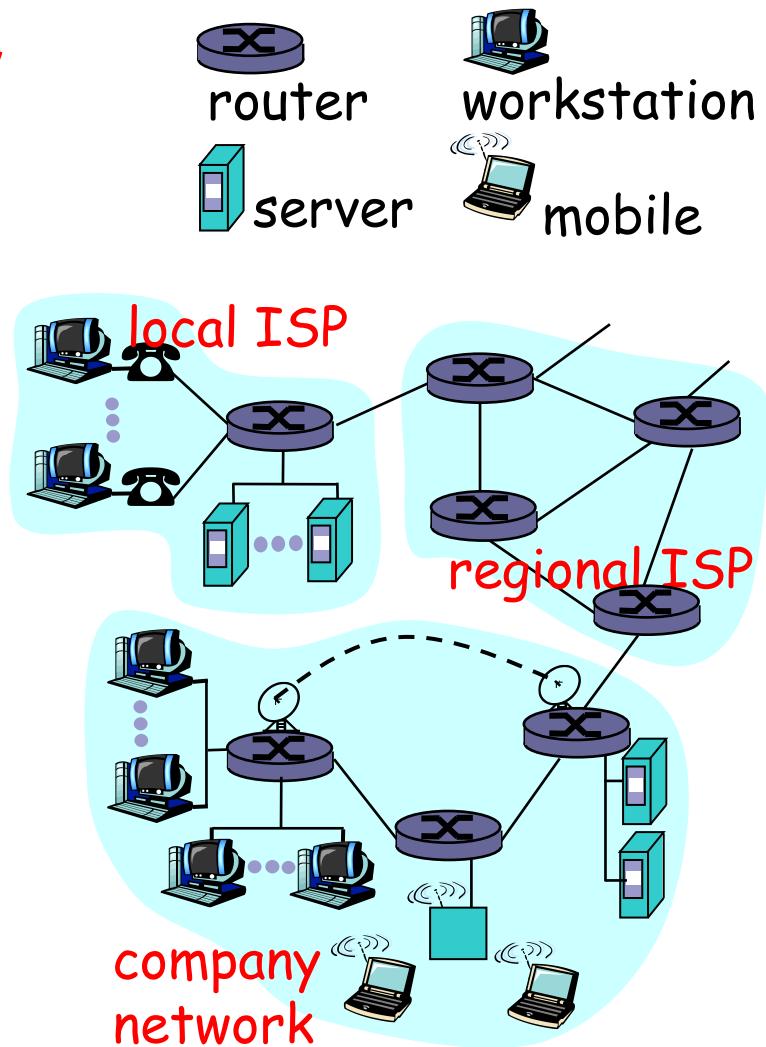


What's the Internet: “nuts and bolts” view

- **Protocols: control sending, receiving of messages**

- e.g., TCP, IP, HTTP, FTP, PPP

- ***Internet: “network of networks”***

- loosely **hierarchical**
 - **public Internet** versus **private intranet**

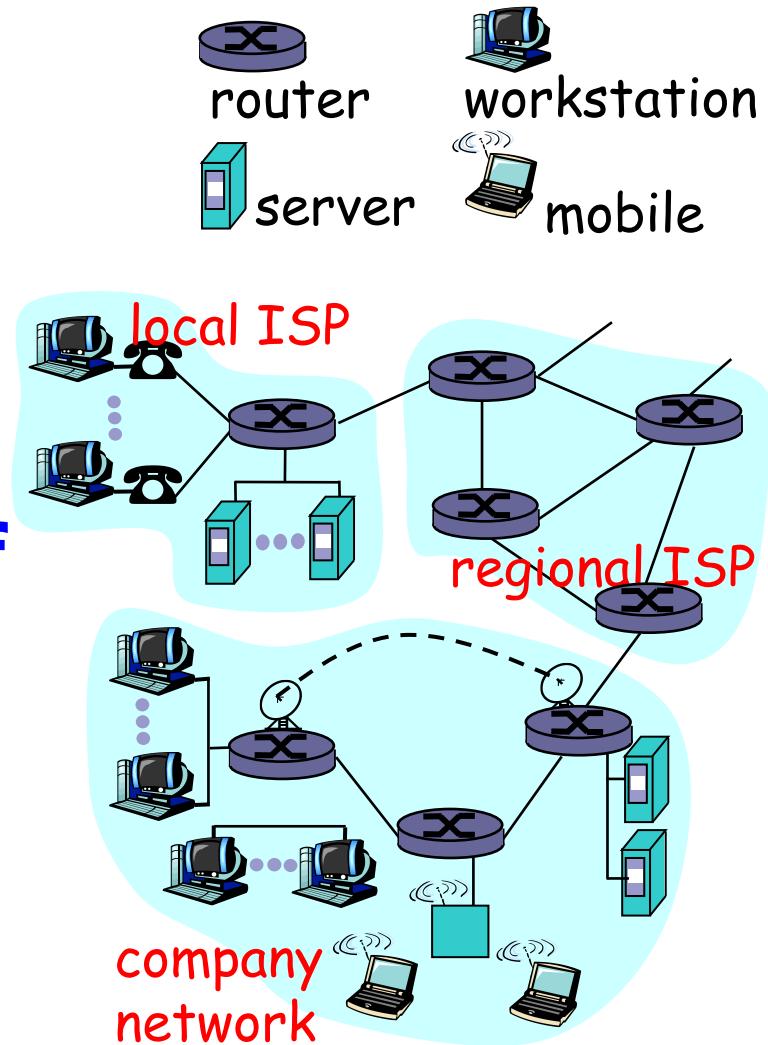

What's the Internet: a service view


■ **communication**

infrastructure enables distributed applications:

- WWW, email, games, e-commerce, databases, voting, telephony, multimedia, IM, ...
- more?

■ **communication services provided:**

- **Datagram (Connectionless)**
vs.
- **Virtual Circuit (connection-oriented)**

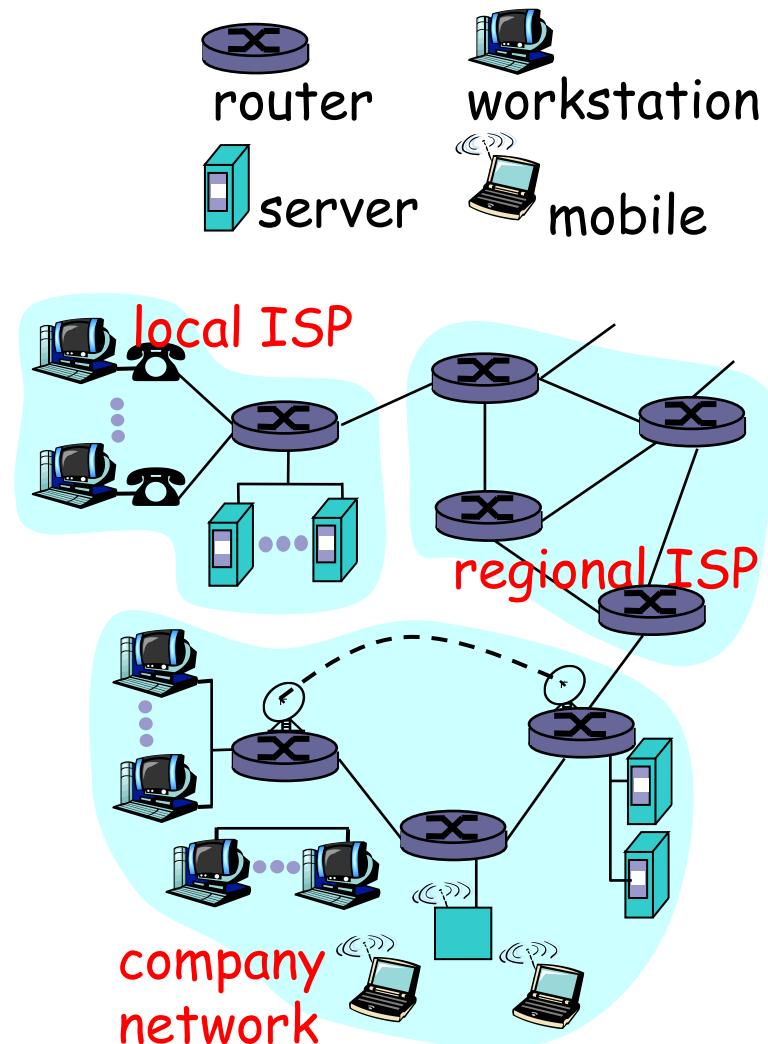

What's a protocol?

human protocols:

- “what’s the time?”
- “I have a question”
- introductions

... specific msgs sent

... specific actions taken
when msgs received, or
other events


network protocols:

- machines rather than humans
- all communication activity in Internet governed by protocols

*Protocols define **format**
& **order** of messages
sent and received
among network entities,
and **actions** taken on
message transmission
and receipt.*

What's a protocol?

a human protocol and a computer network protocol:

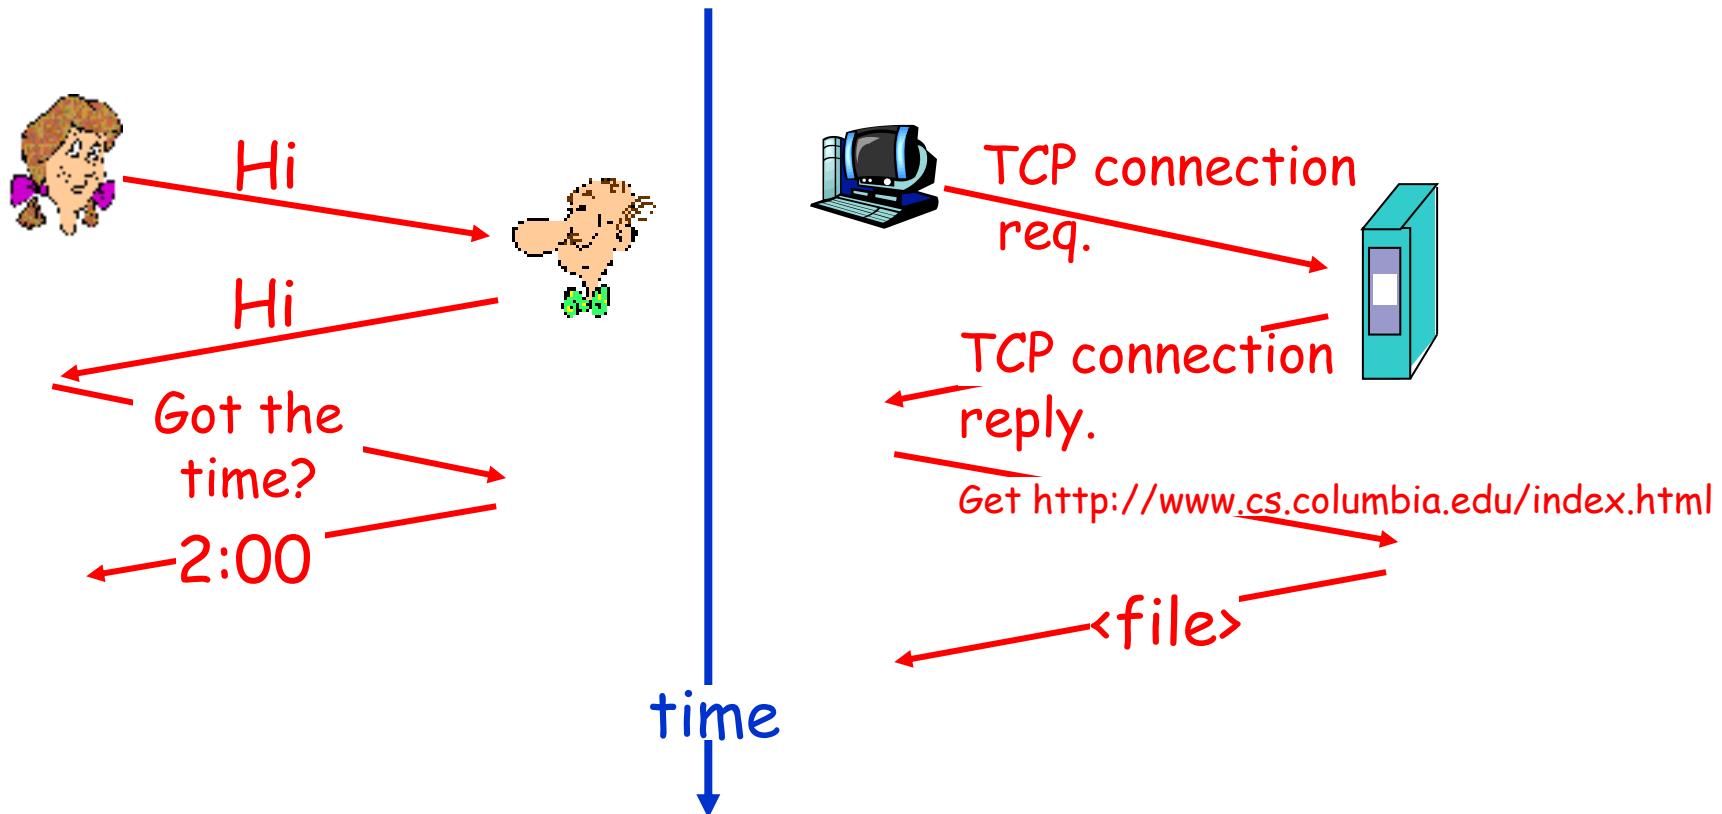


Q: Other human protocol?


Who is Who in the Internet ?




◆ **Internet Society (ISOC)**

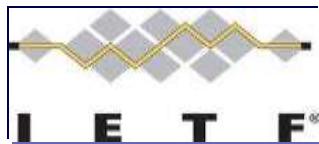

◆ **Internet Engineering Task Force (IETF)**

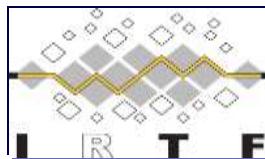


◆ **Internet Research Task Force (IRTF)**




◆ **Internet Architecture Board (IAB)**

Who is Who in the Internet ?

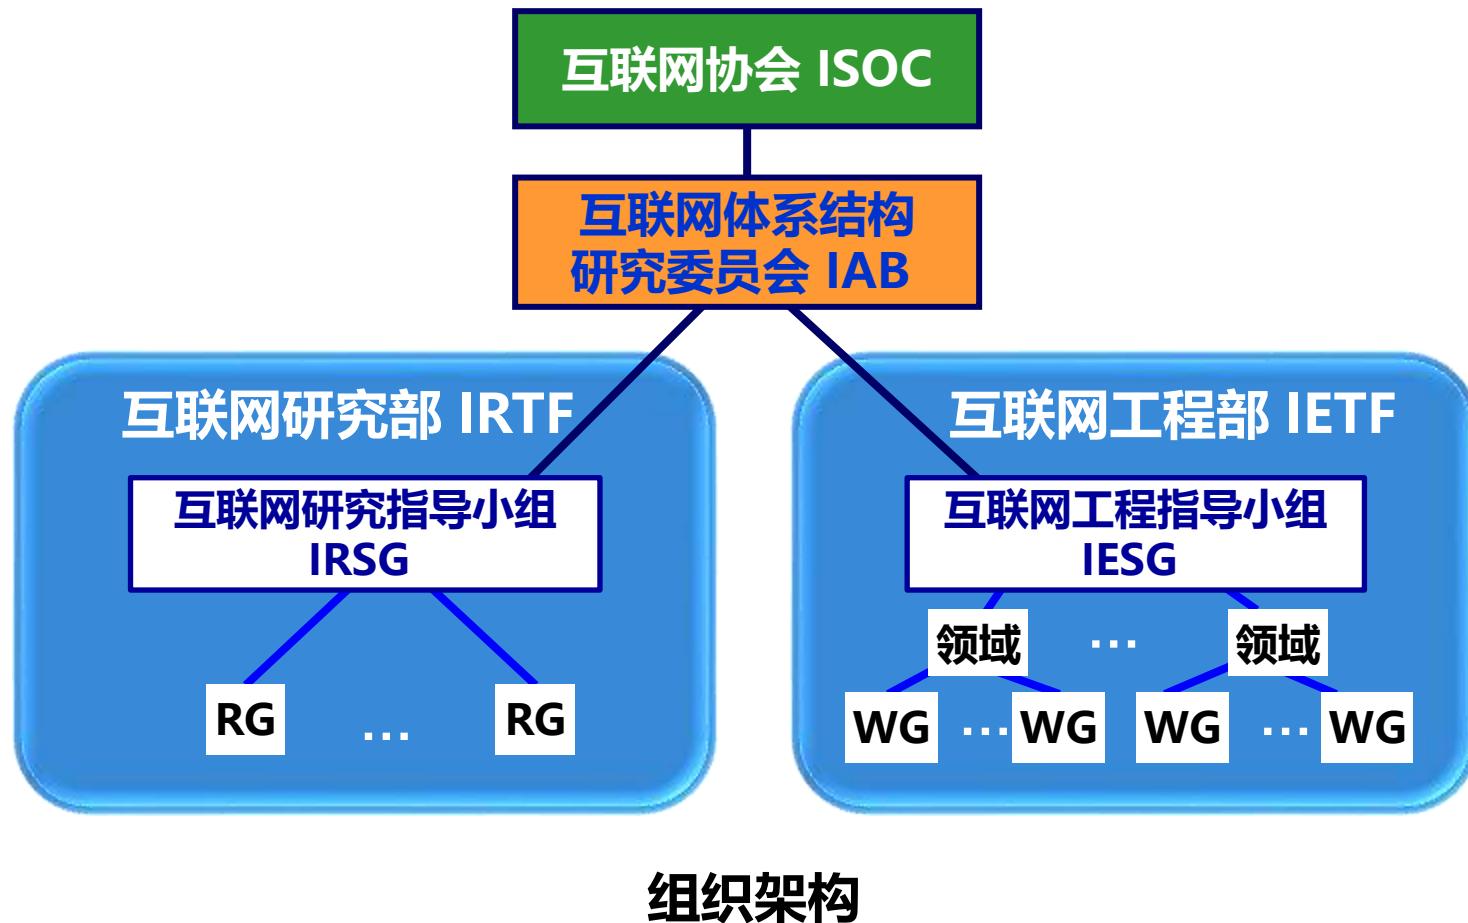

Internet Standardization Process

- All standards of the Internet are published as **RFC** (**R**equest **f**or **C**omments). But not all RFCs are Internet Standards !

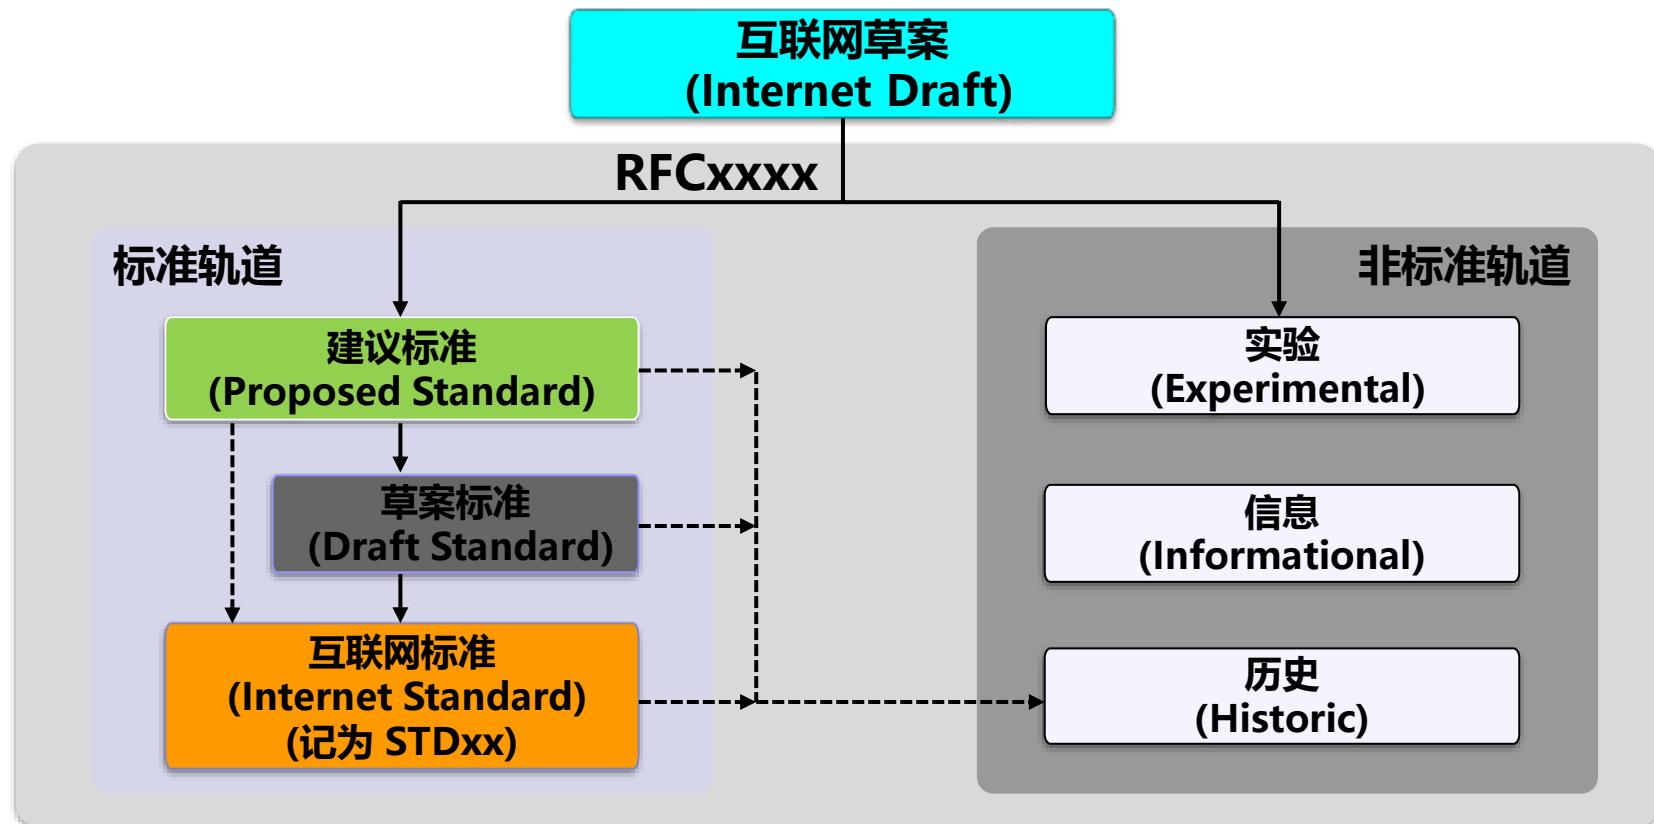

Chapter 1: Roadmap

- 1.1 Computer network and the Internet**
- 1.2 Network edge and core**
- 1.3 Network access and physical media**
- 1.4 Transmission Technology**
- 1.5 Type and Topology**
- 1.6 Network Performance**
- 1.7 Protocol layers, service models**
- 1.8 Architecture, OSI and TCP/IP Models**
- 1.9 Internet History**

A closer look at network structure

■ Network edge:


- applications and hosts
- resources

■ Network core:

- routers
- network of networks
- communications

■ physical media, Access networks:


- communication links
- access

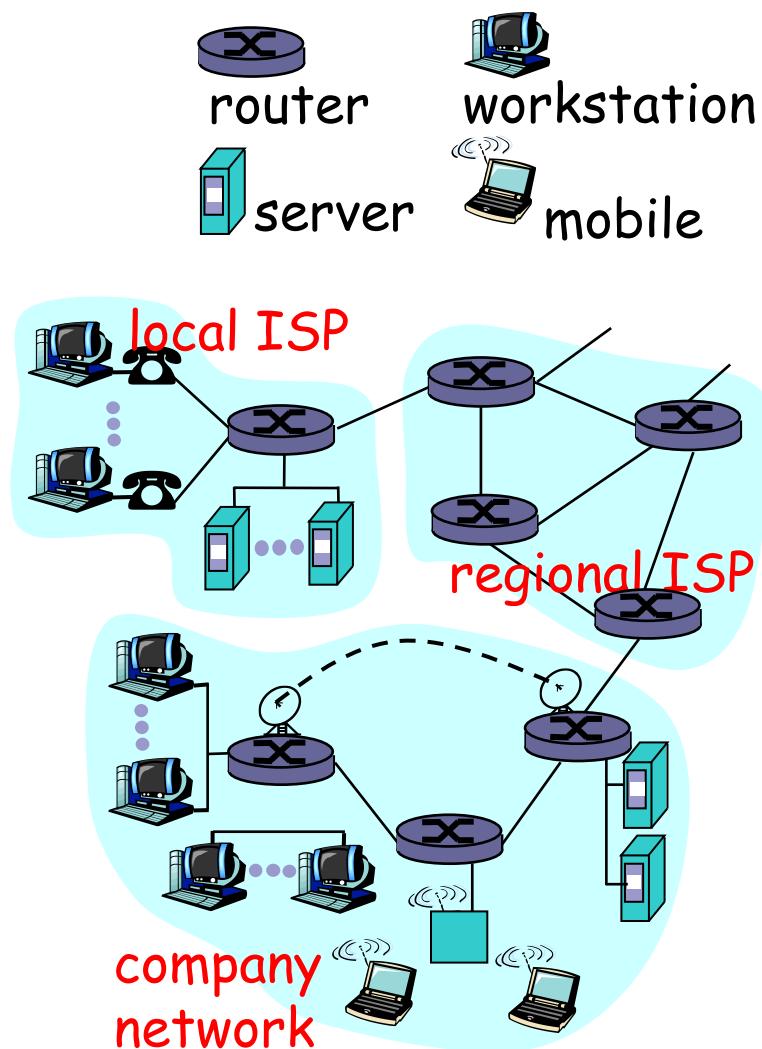

The network edge

■ End Systems (hosts)

- run application programs
- e.g., WWW, email
- at “edge of network”

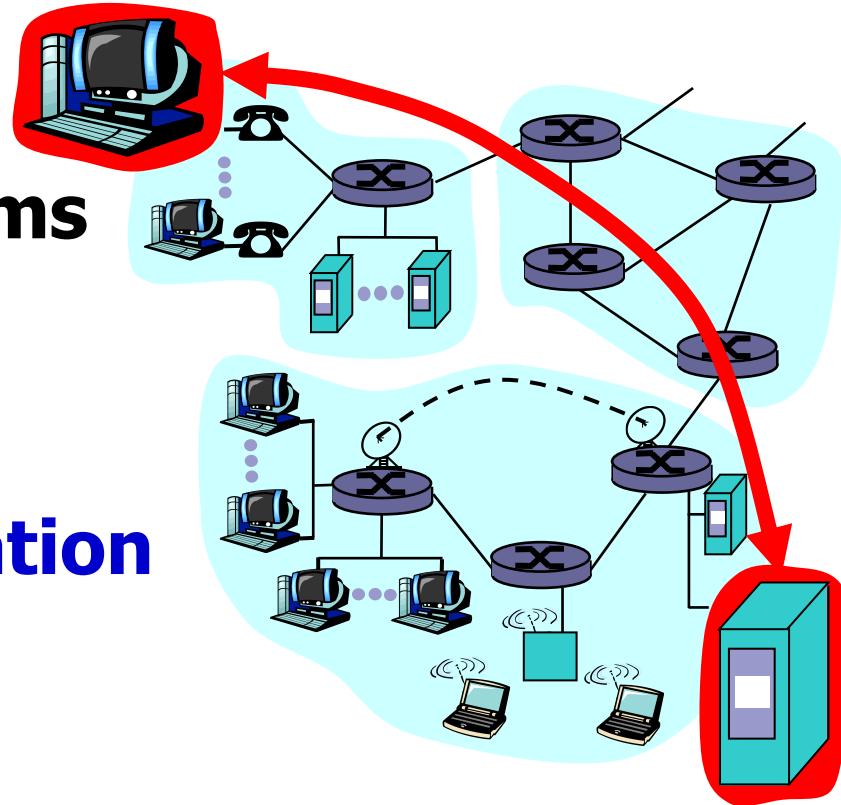


■ End-to-End Communication

- client/server model
- peer-to-peer model


Host A communicate with host B **actually means:** "a program running on host A communicates with another program running on host B"

End-to-End Communication = process-to-process Communication

Client / Server Model

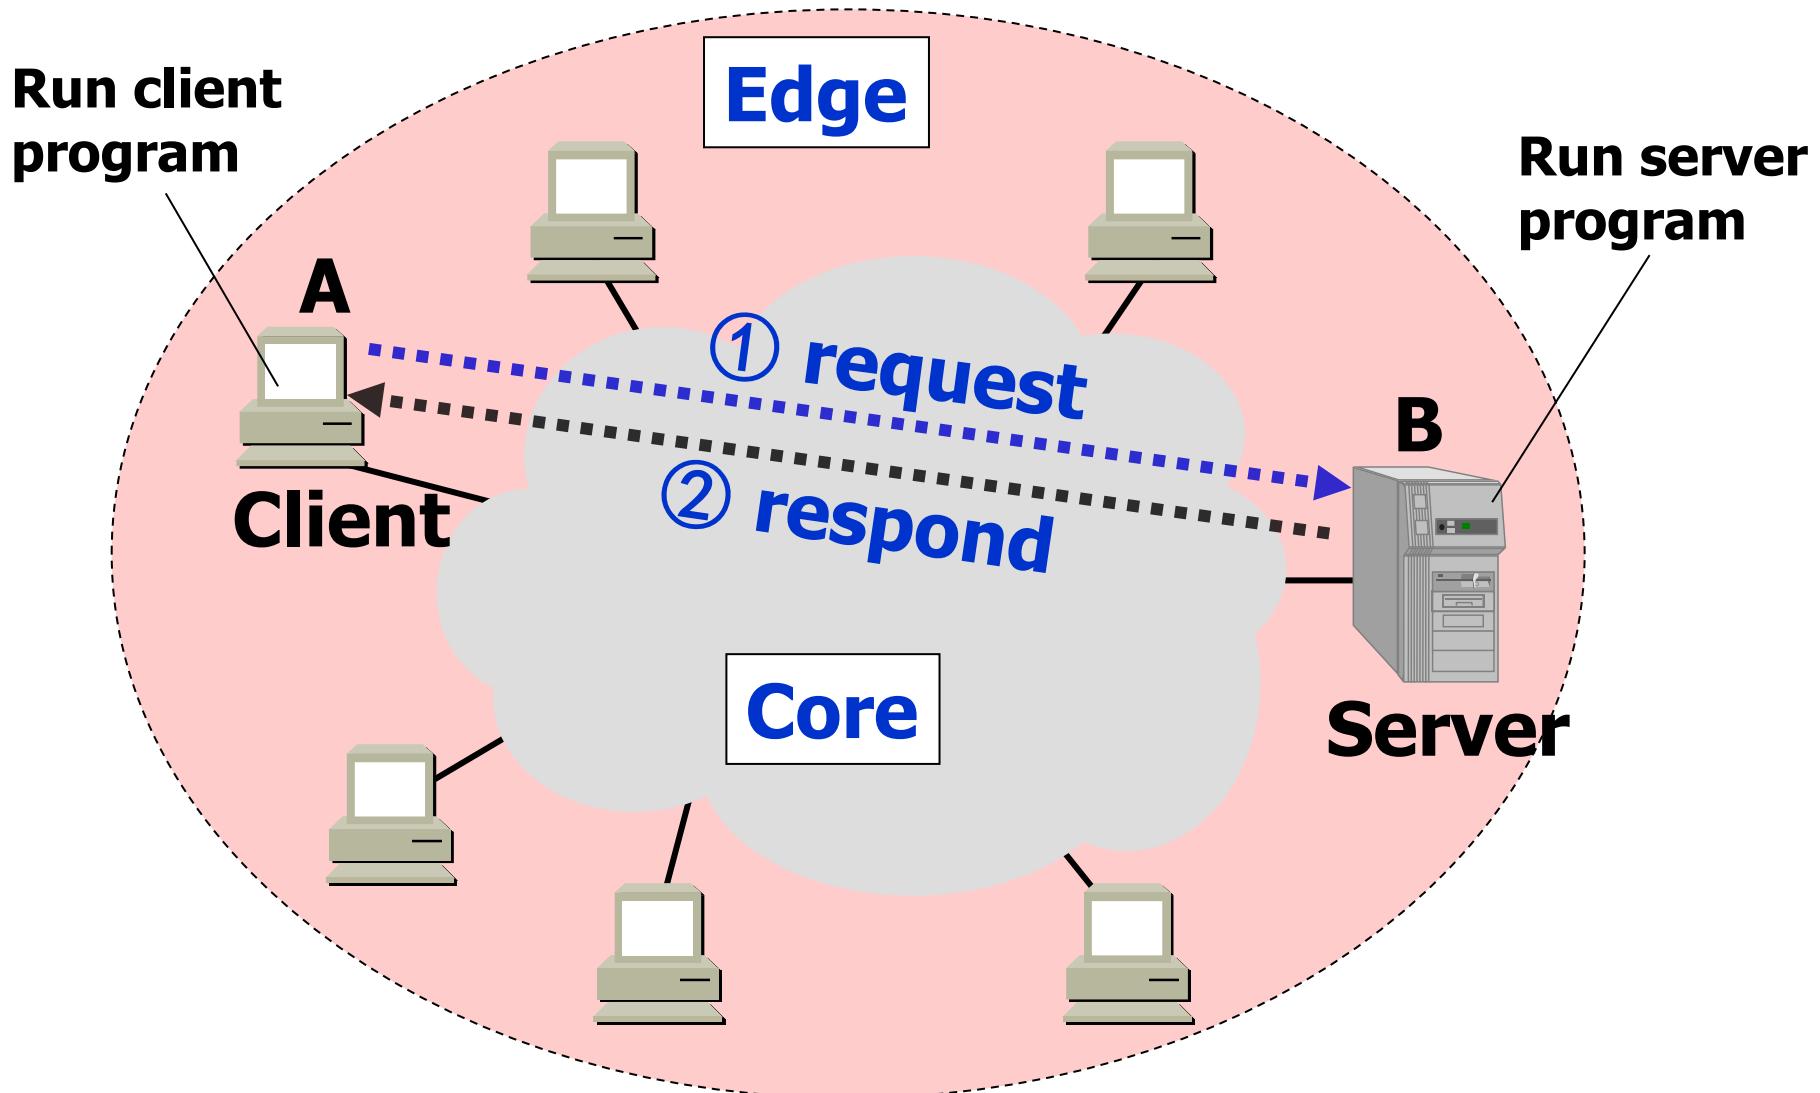


Peer-to-Peer model

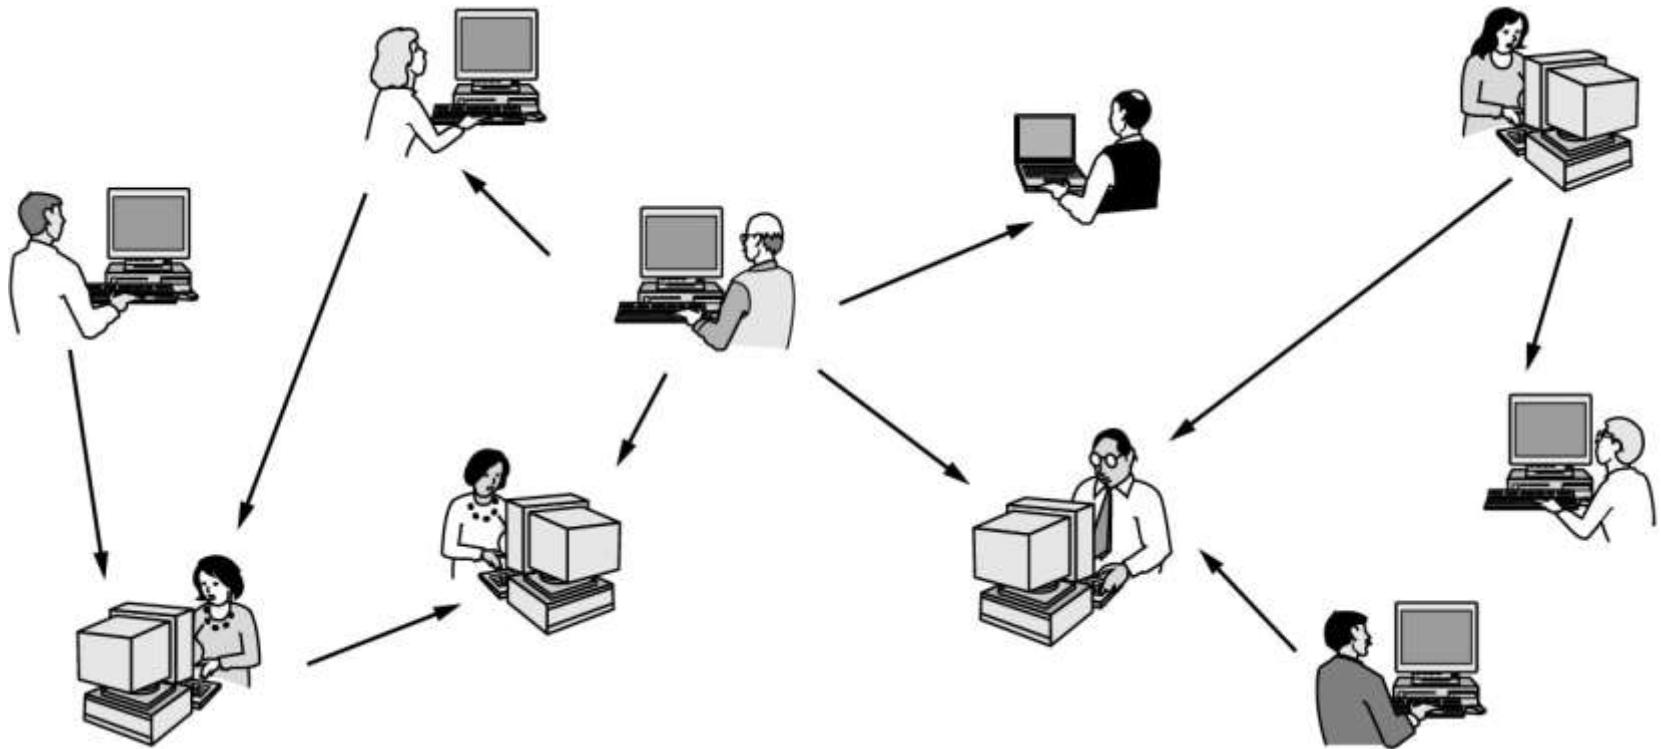


In a **peer-to-peer** system there are no fixed clients and servers.

Peer-to-Peer model

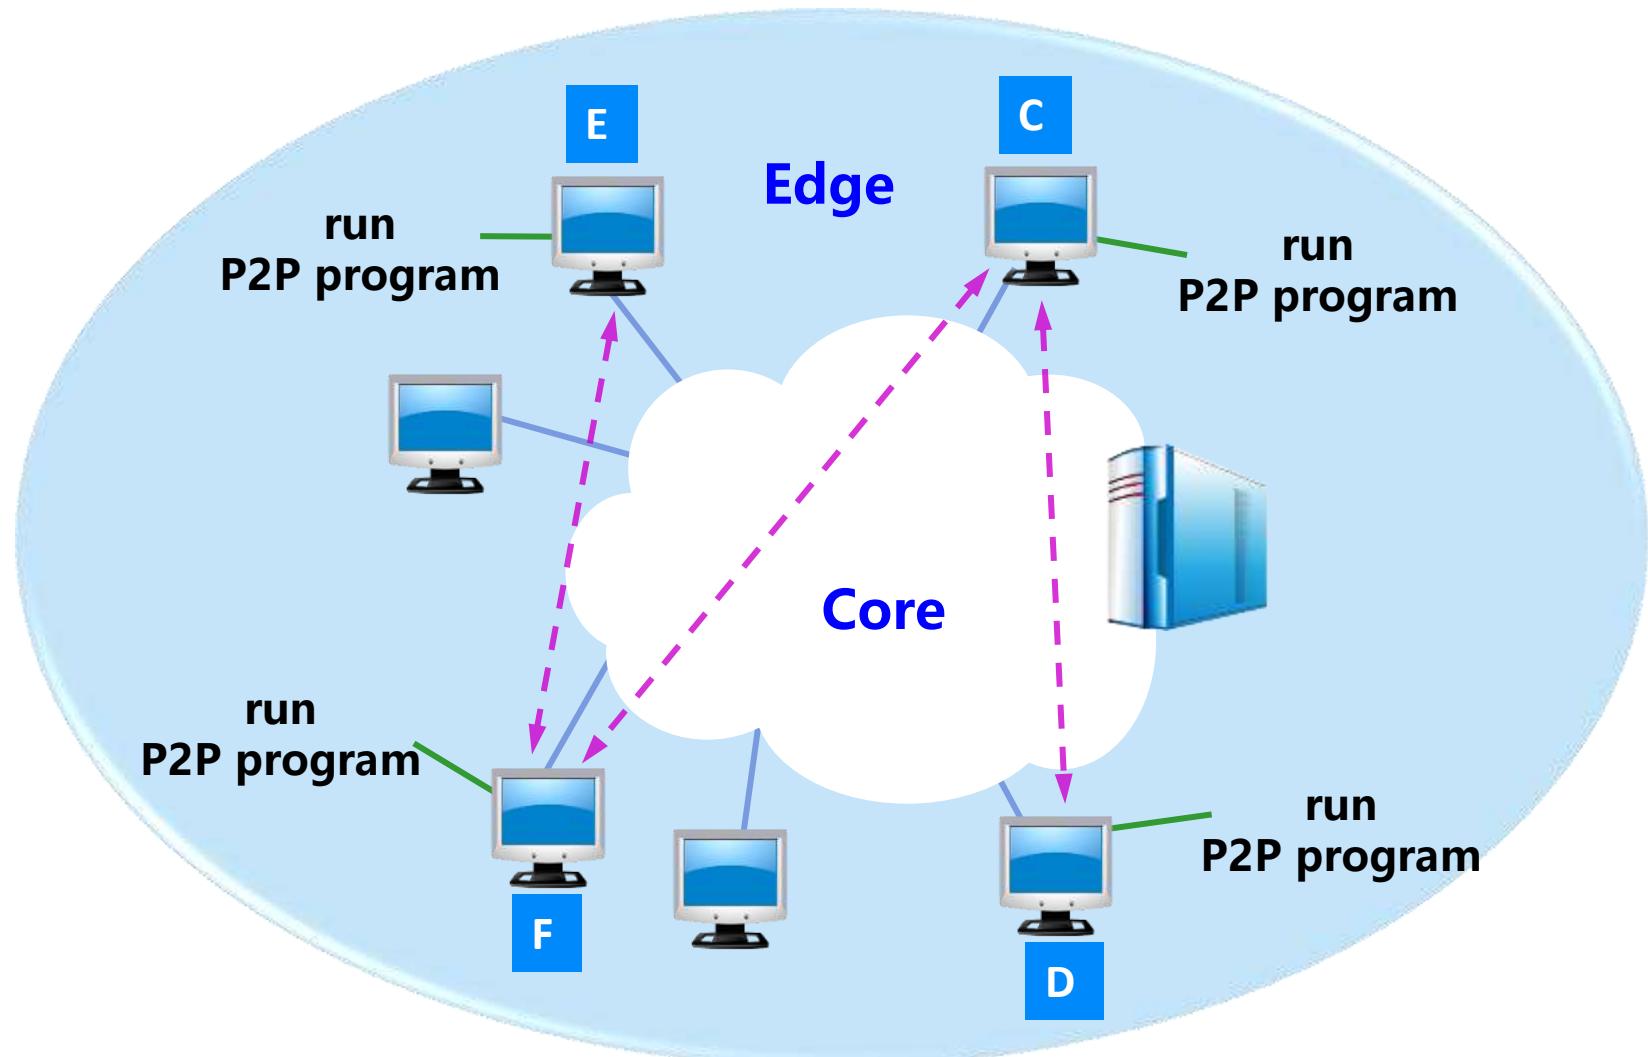

The Network Core


- Network core provides the capability to **scale** the size of the network in a structured fashion that **minimizes overall complexity** when the size of the network grows.

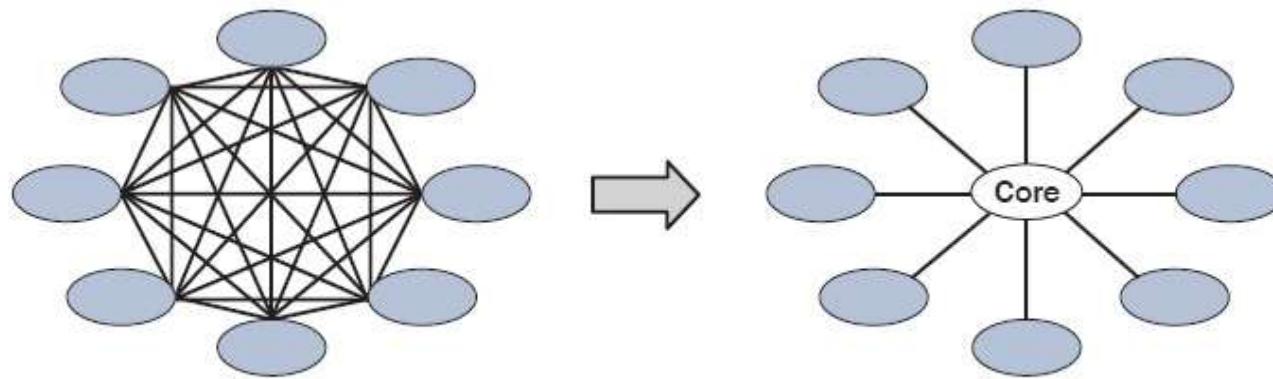

Connectivity without core vs. with core

The Network Core


- Generally: mesh of interconnected routers
- Support end system communication.
- Q: How is data transferred through core?

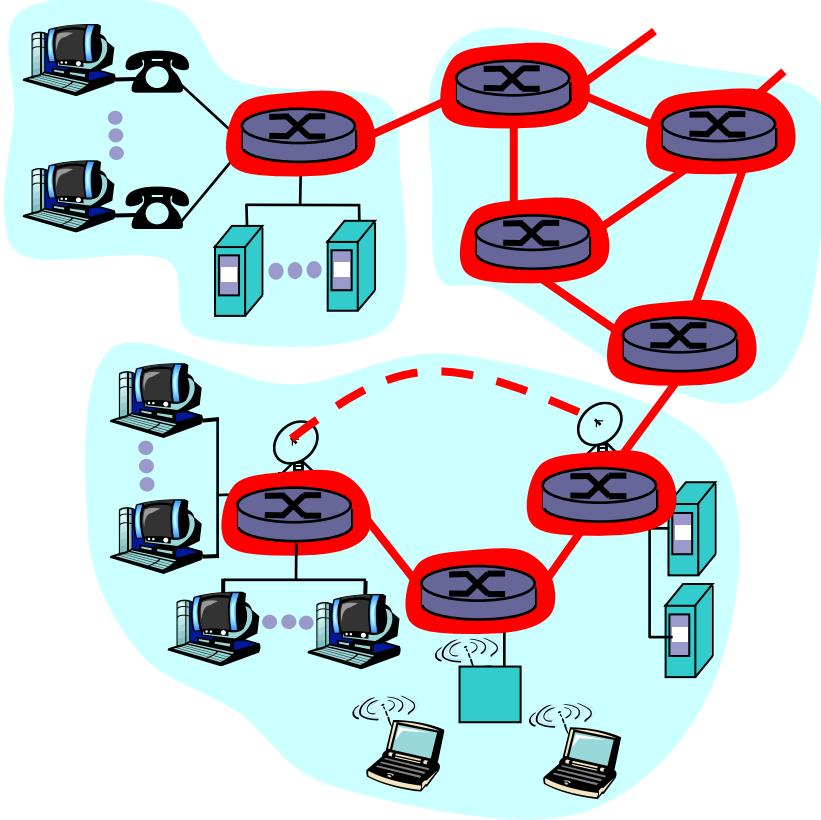

The Network Core

■ Solution


- **Circuit switching:** dedicated circuit per call: telephone net
- **Message switching:** application units
- **Packet-switching:** data sent thru net in discrete “chunks”

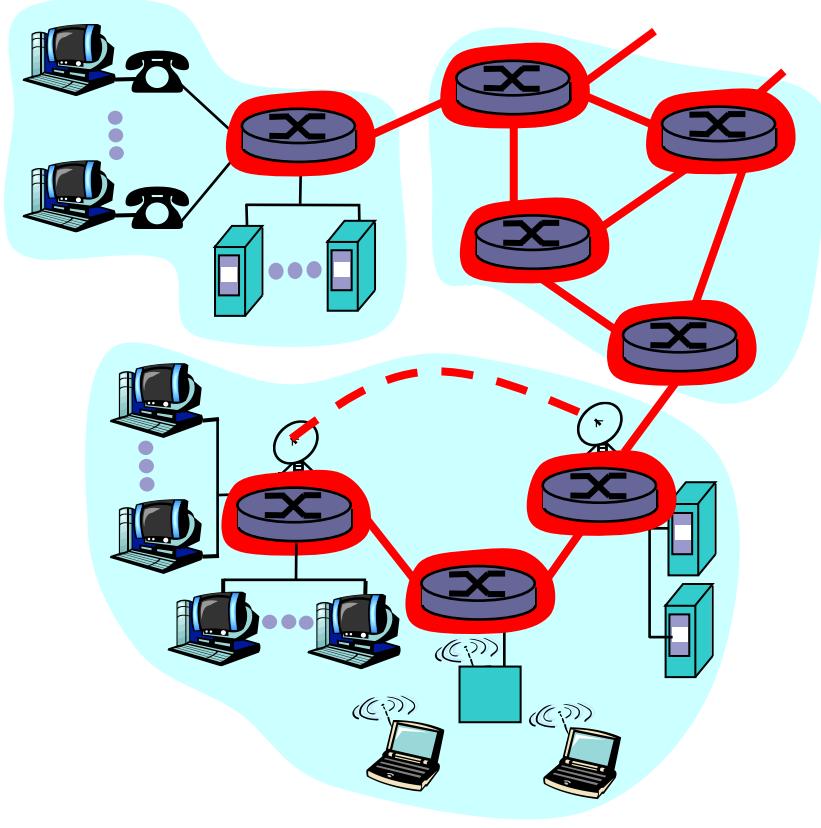

Network Core: Circuit Switching

End-end resources reserved for “call”


- Resources: link bandwidth, switch capacity, etc.
- dedicated resources: no sharing
- circuit-like (guaranteed) performance
- call setup required

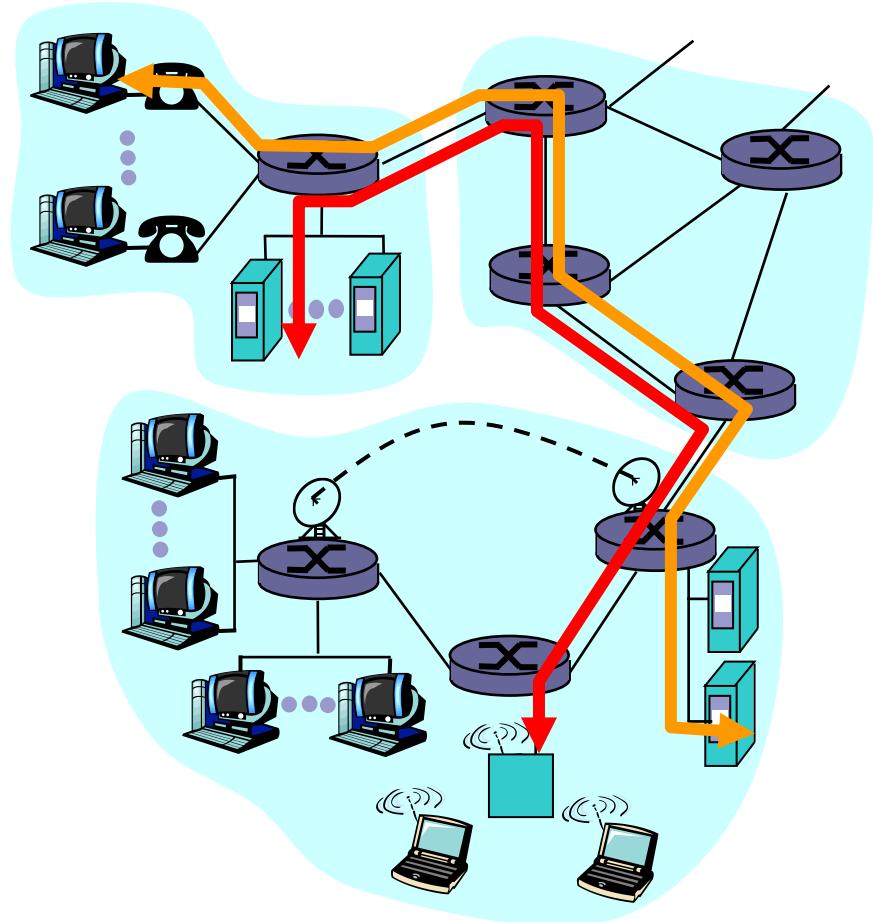


Telephone network uses circuit switching



Communication between 2 telephones: just one pair of wires

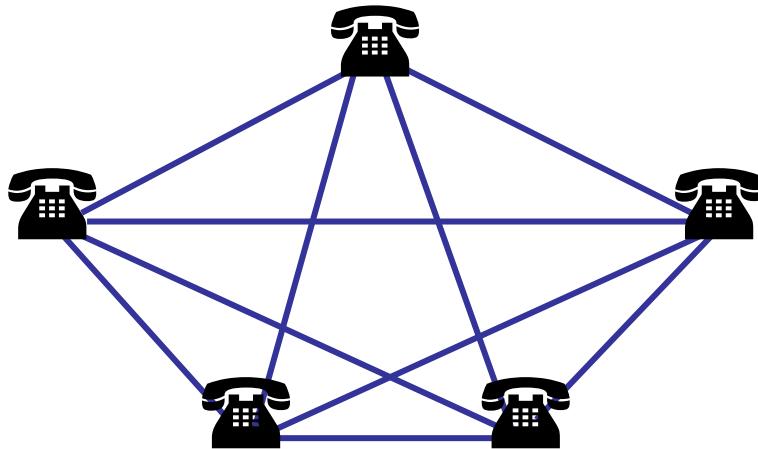


Communication between
any 2 of 5 telephones: 10
pairs of wires required

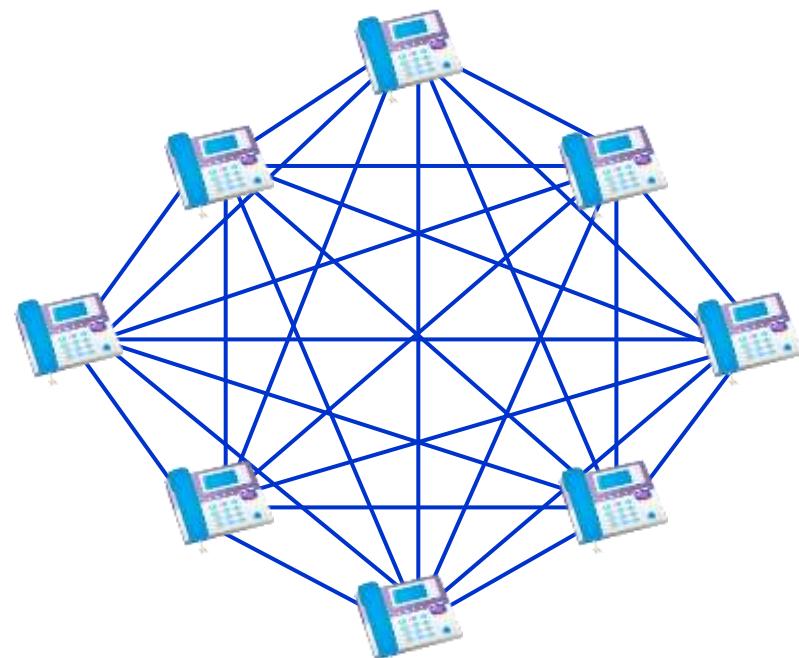

Direct connection between any 2
of N telephones requires $N(N -$
 $1)/2$ pairs of wires!!!


Telephone network uses circuit switching

- When the number of telephones increases, it is a more economical and efficient method to implement communication between telephones **by means of switches.**

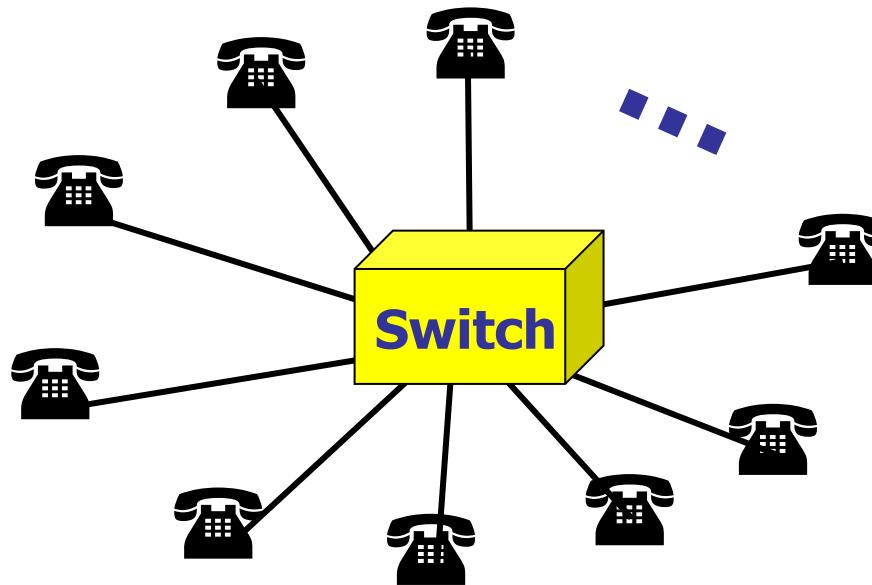


What does “switching” mean?

- The transfer of one telephone line to another so that they are connected.
- From the perspective of the allocation of communication resources, "switching" is to **dynamically allocate the resources** of the transmission line in some way.

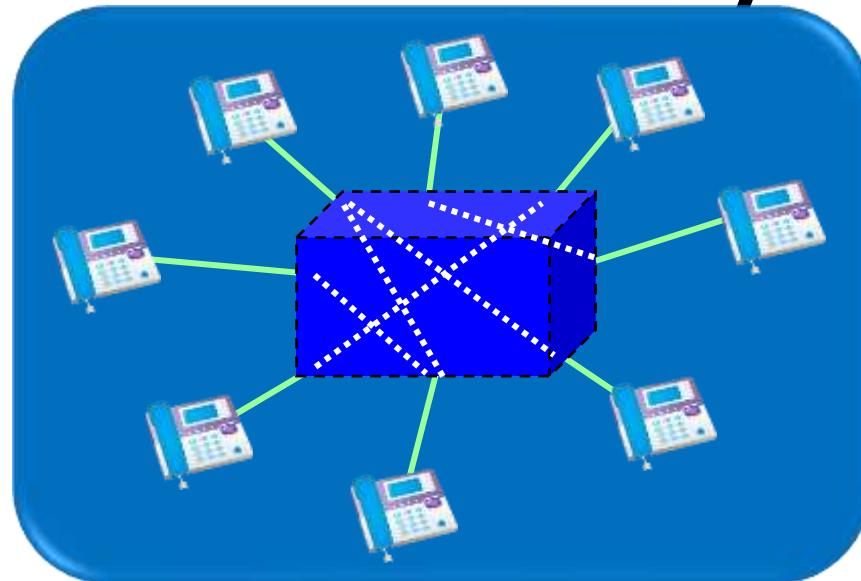


The switch in “circuit switching”

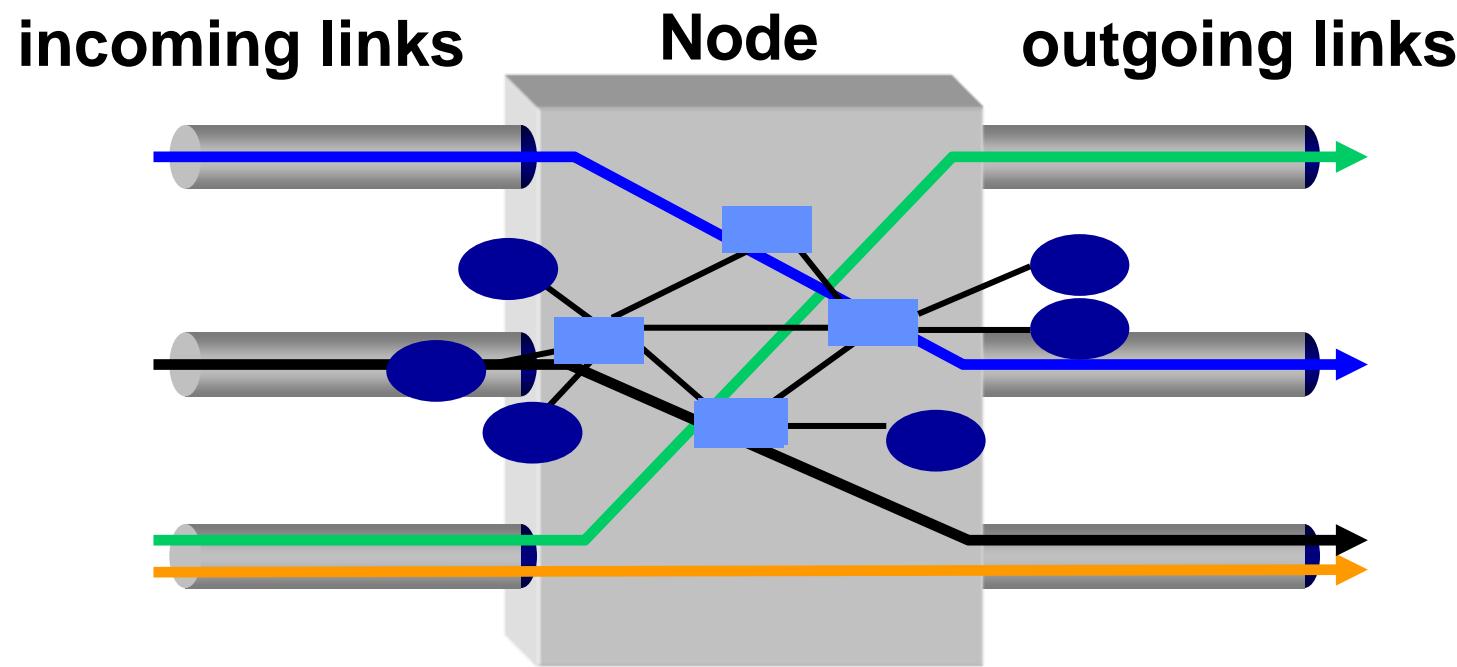

How does the node connect the incoming link to the outgoing link?


Circuit Switching With Human Operator

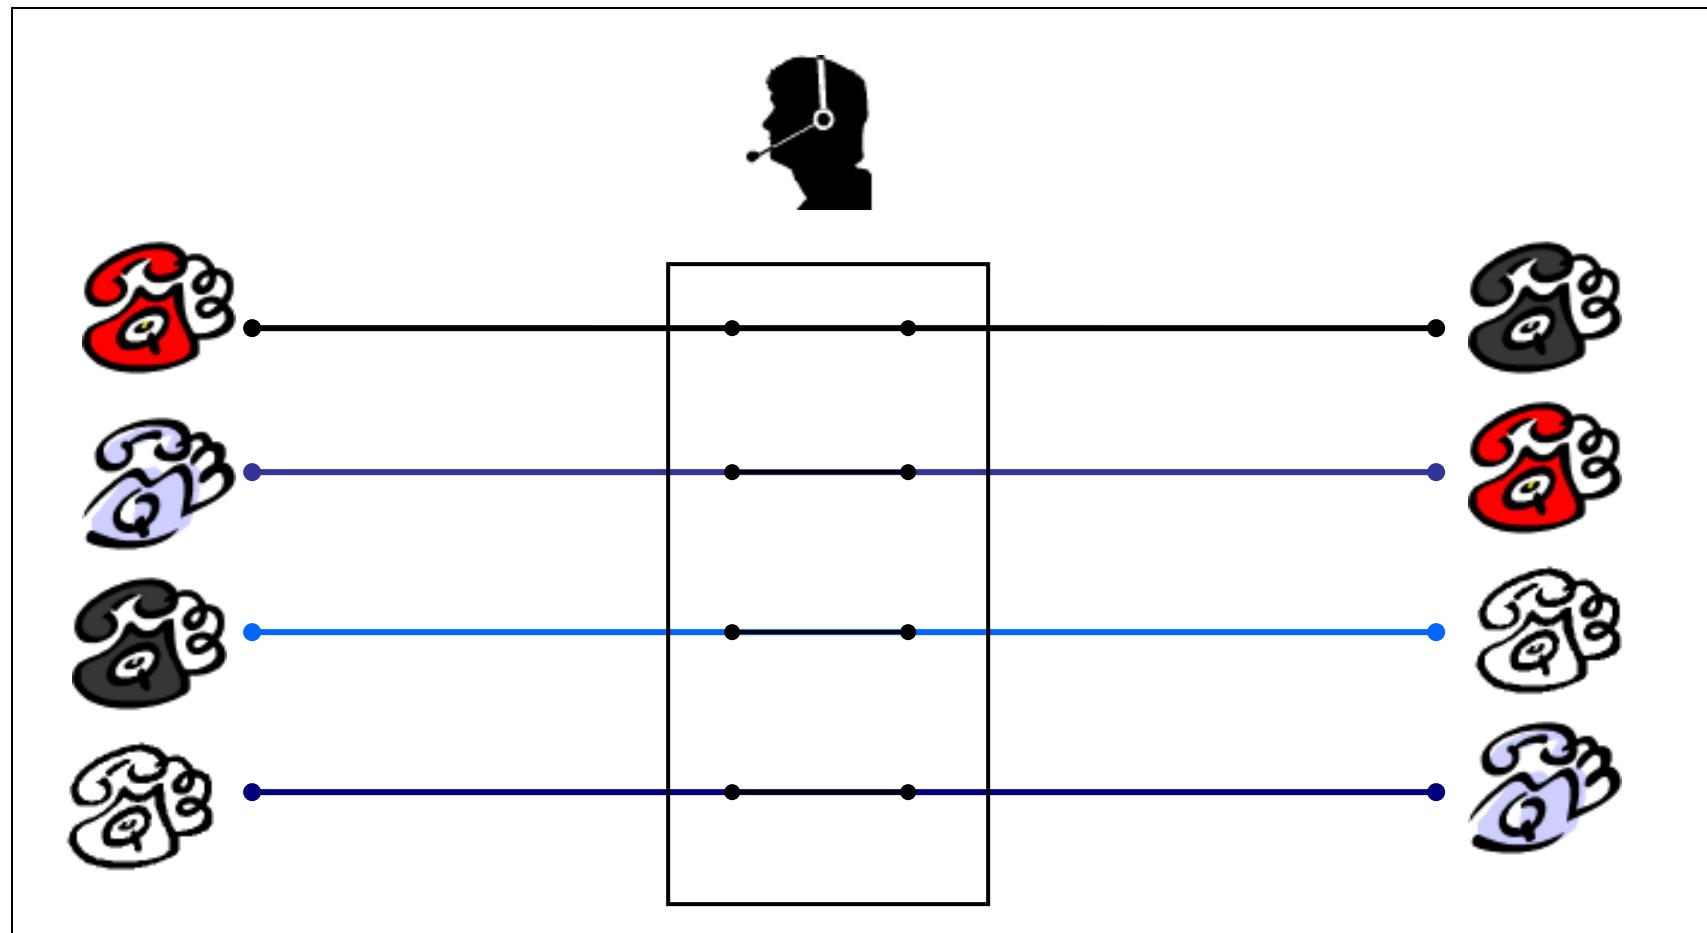

Computer network uses circuit switching


3 phases:

Circuit Establishment, Data Transfer, Circuit Release

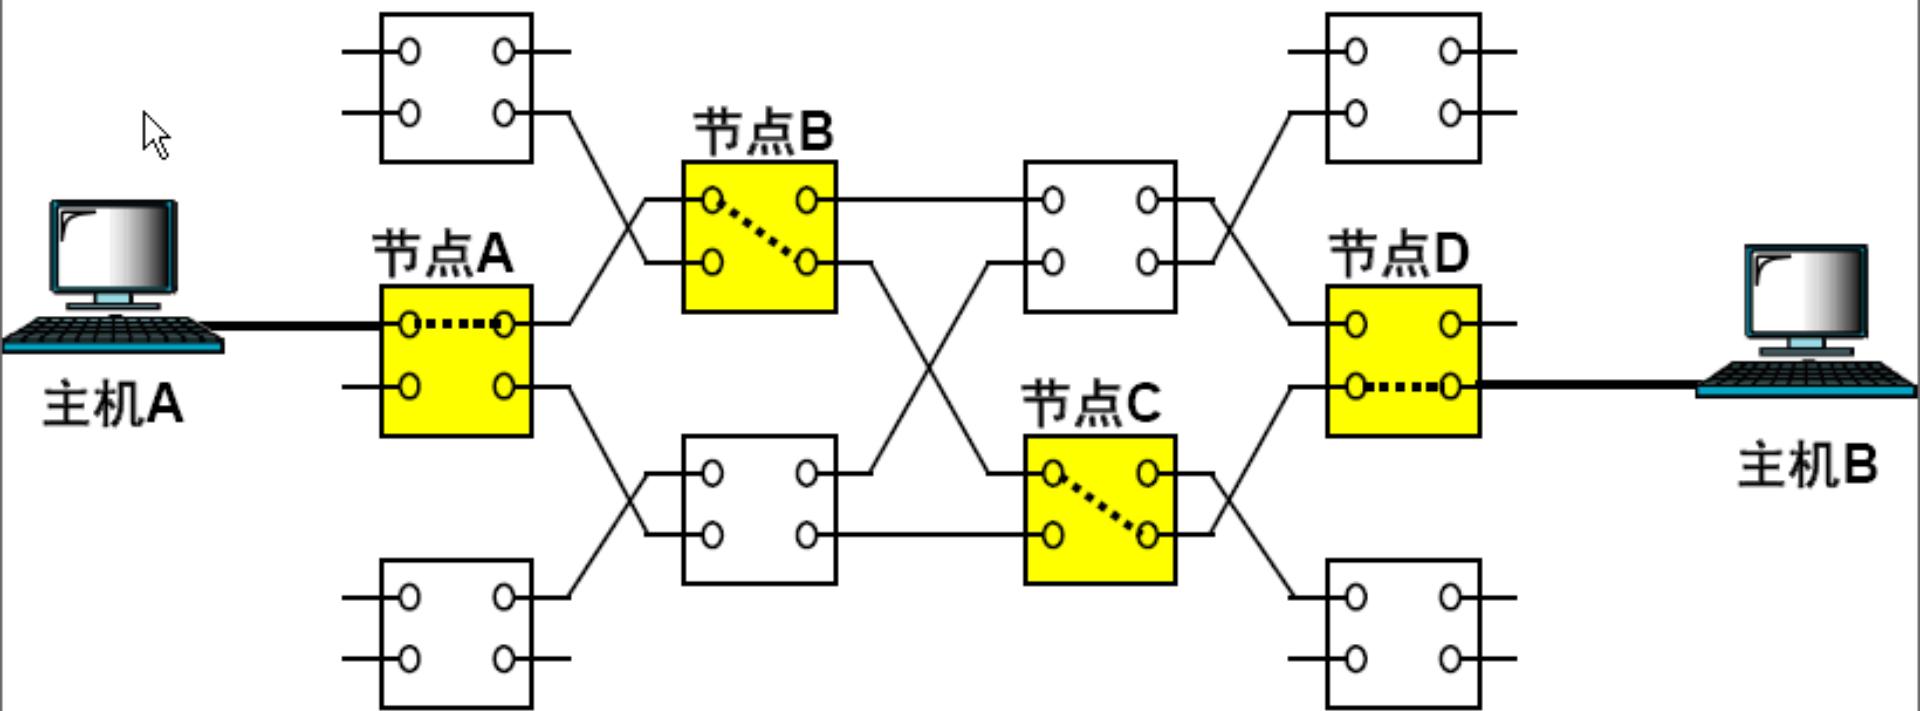


Computer network uses circuit switching



- **Establish:** source creates circuit to destination
 - Nodes along the path store connection info
 - And reserve resources for the connection
 - If circuit not available: “Busy signal”
- **Transfer:** source sends data over the circuit
 - No destination address, since nodes know path
 - Continual stream of data
- **Release:** source tears down circuit when done

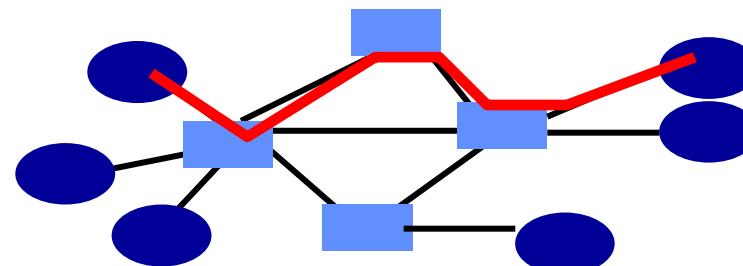



Timing in Circuit Switching

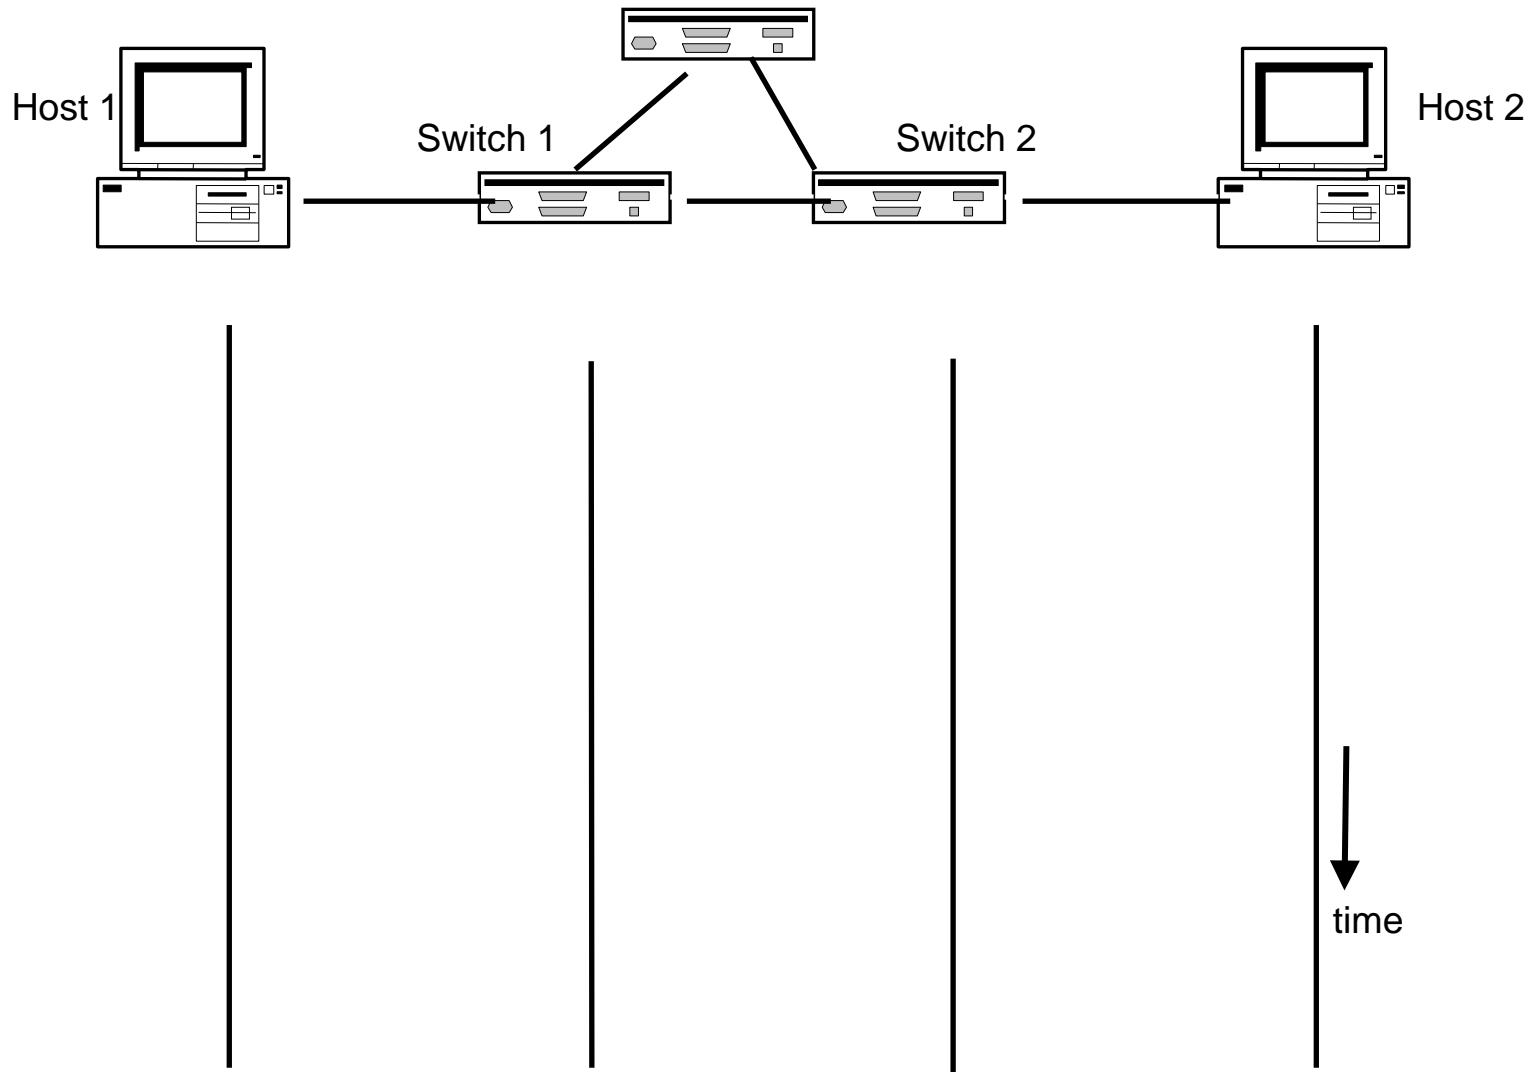



Timing in Circuit Switching

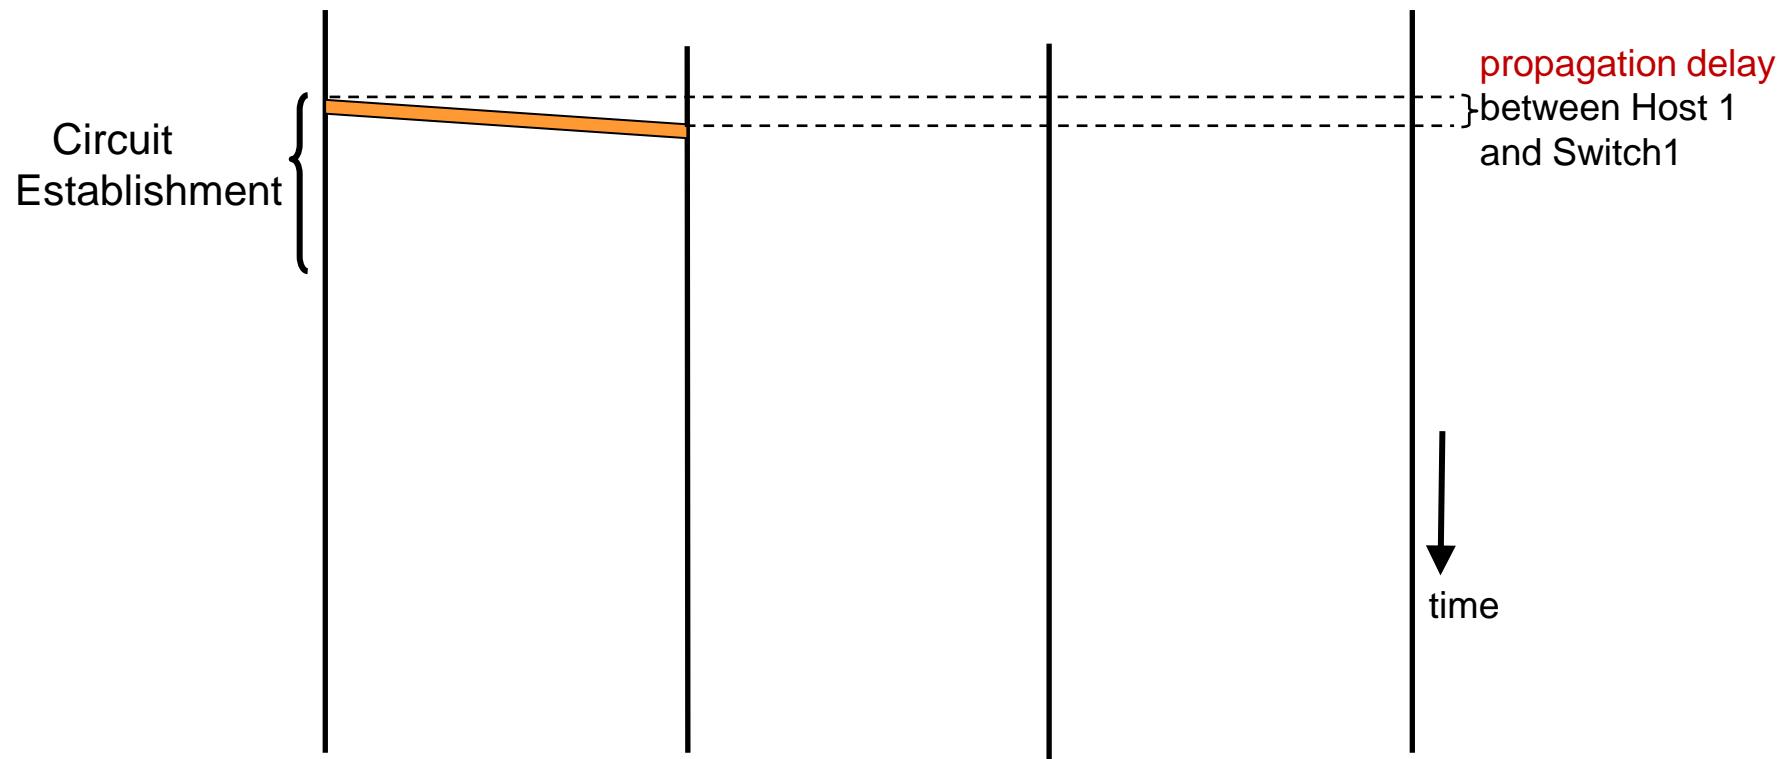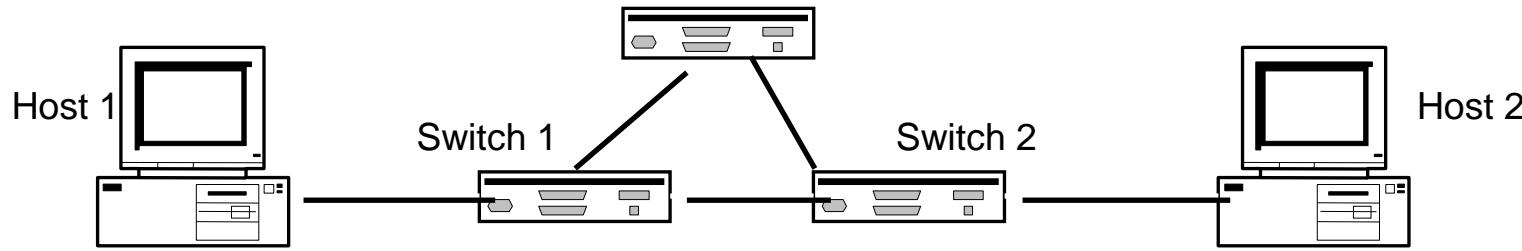



Timing in Circuit Switching

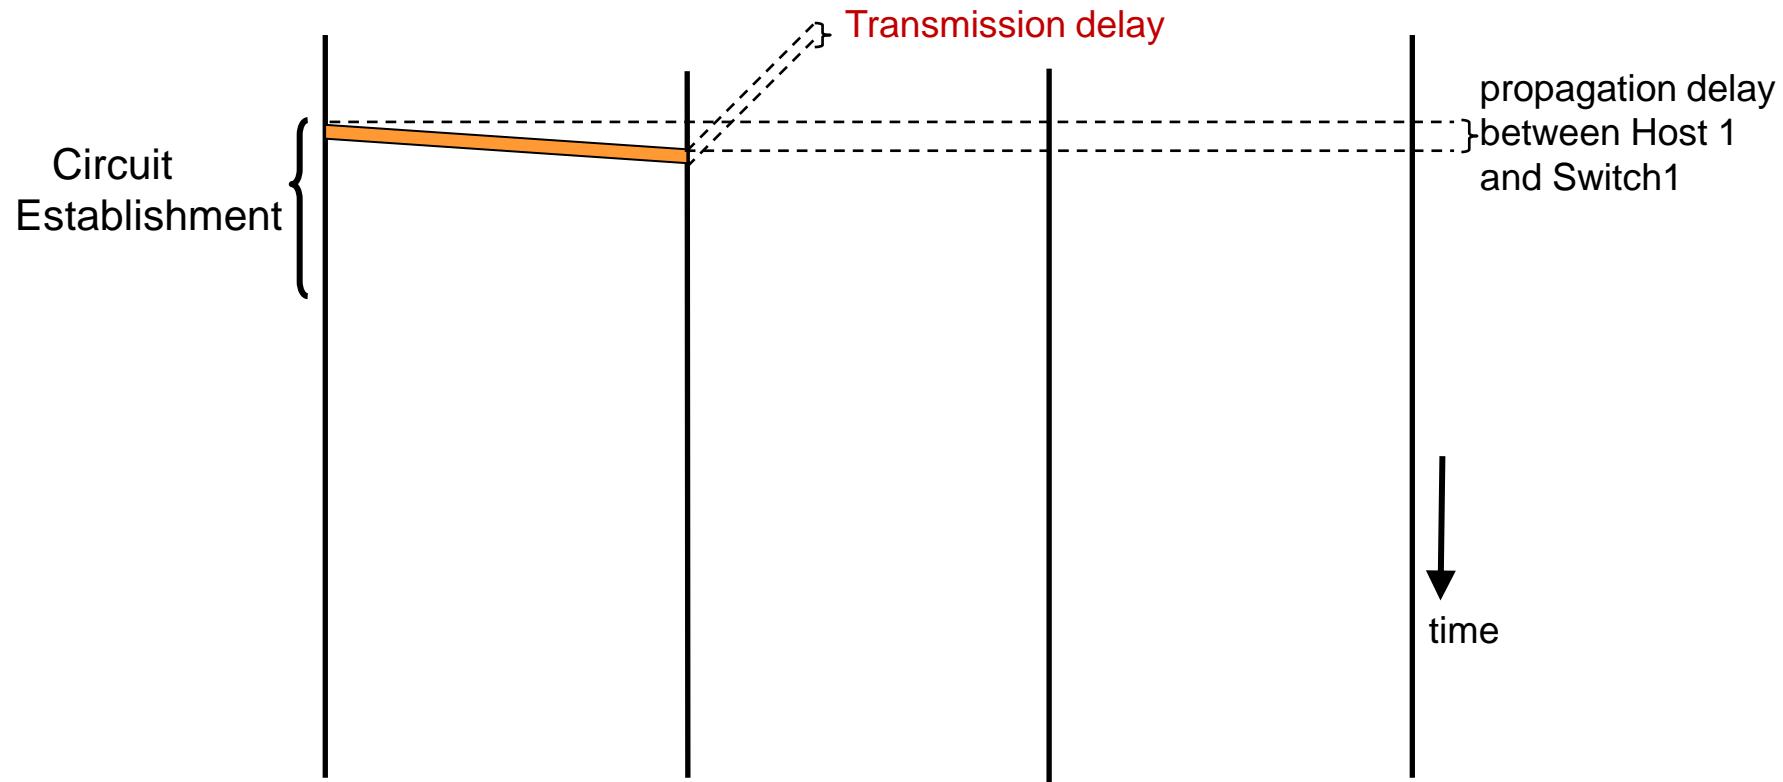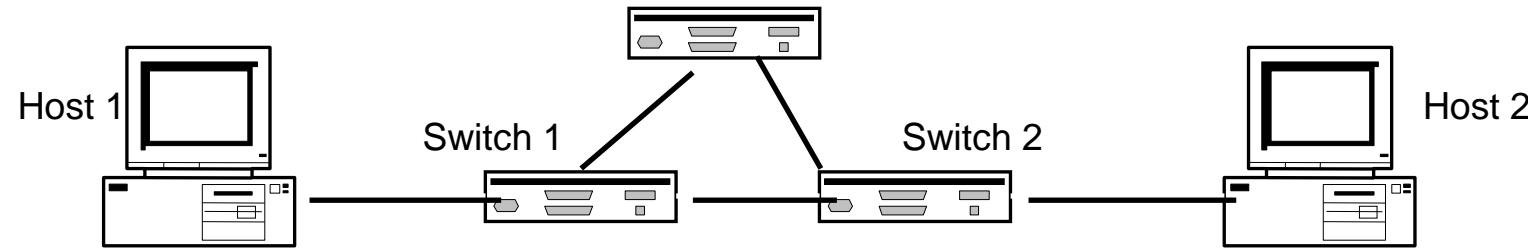



Timing in Circuit Switching

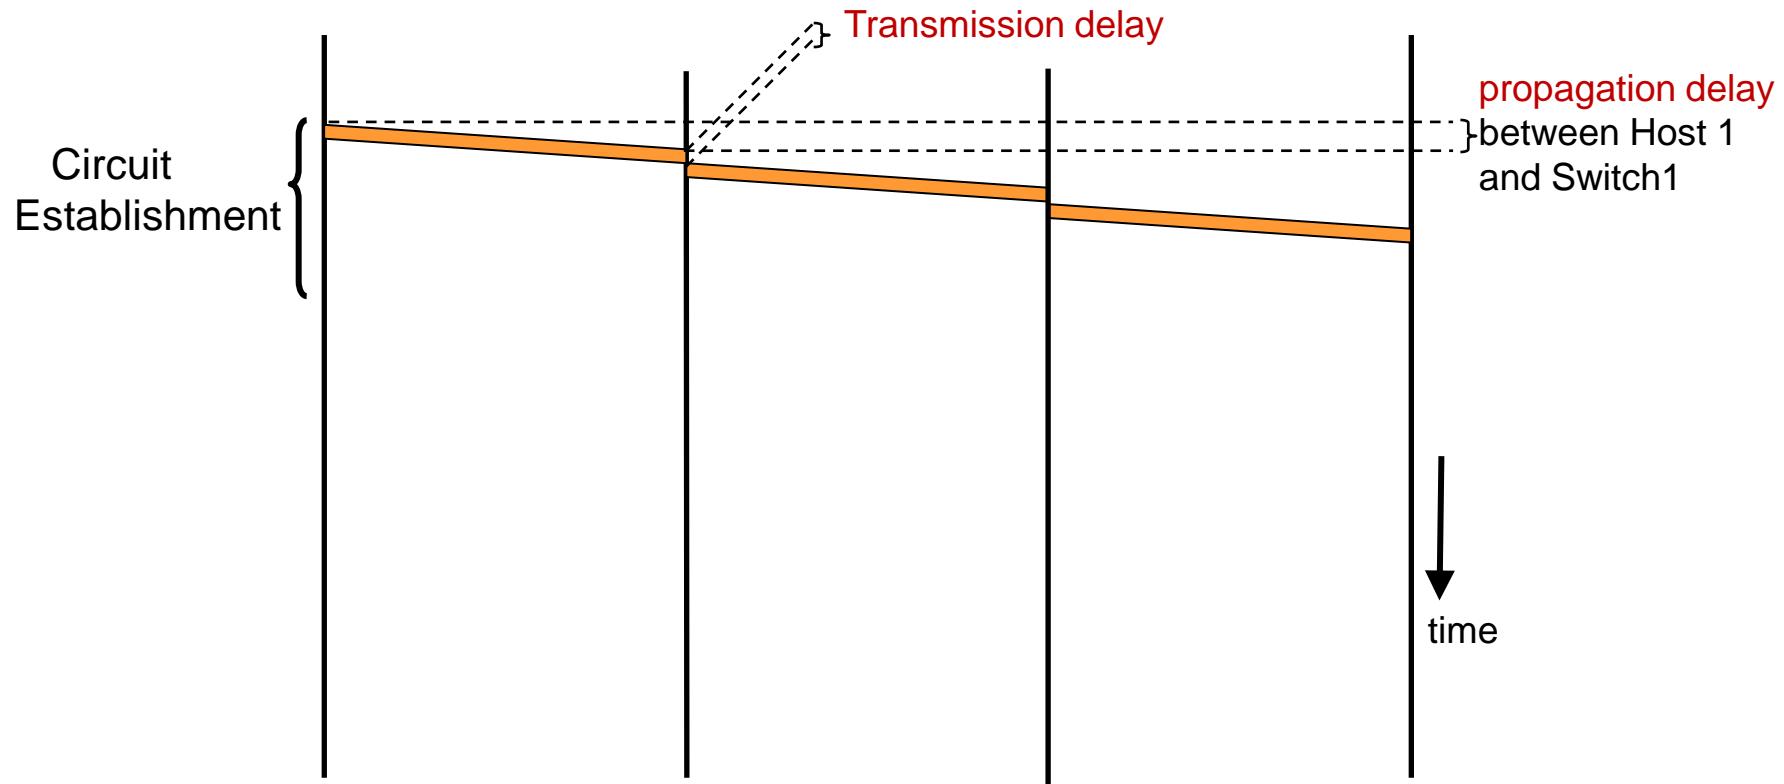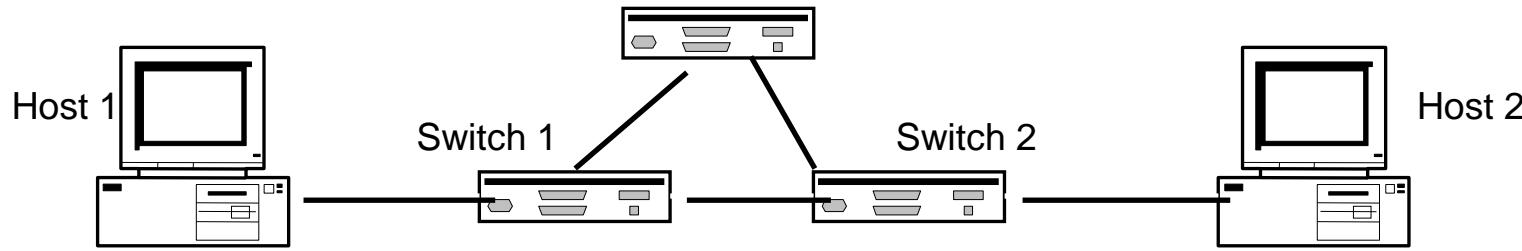



Timing in Circuit Switching

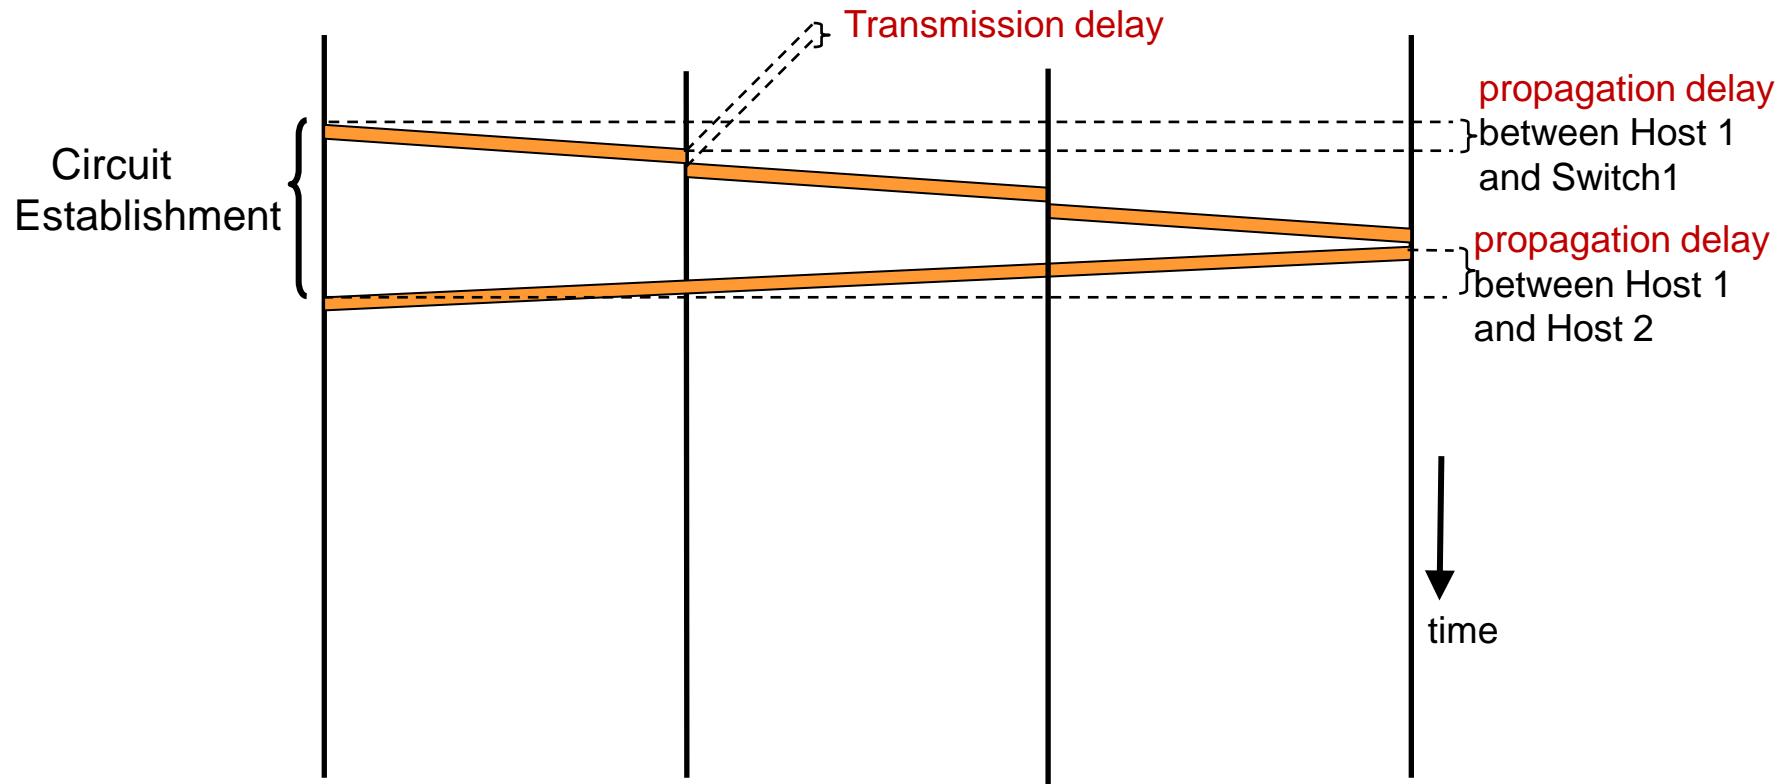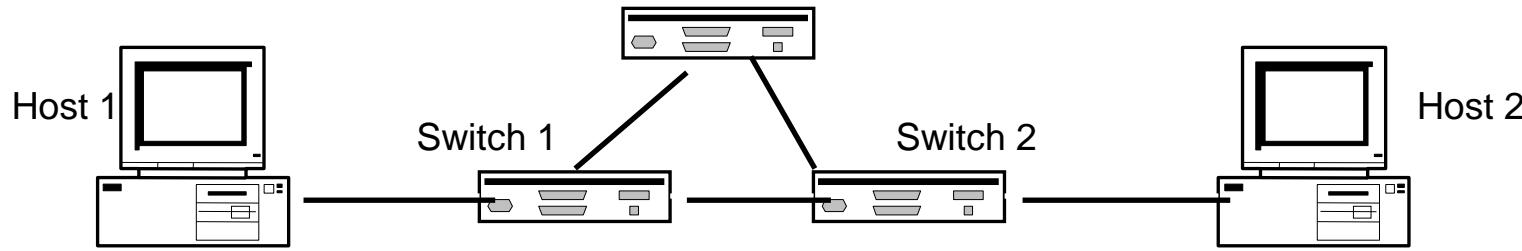


Timing in Circuit Switching

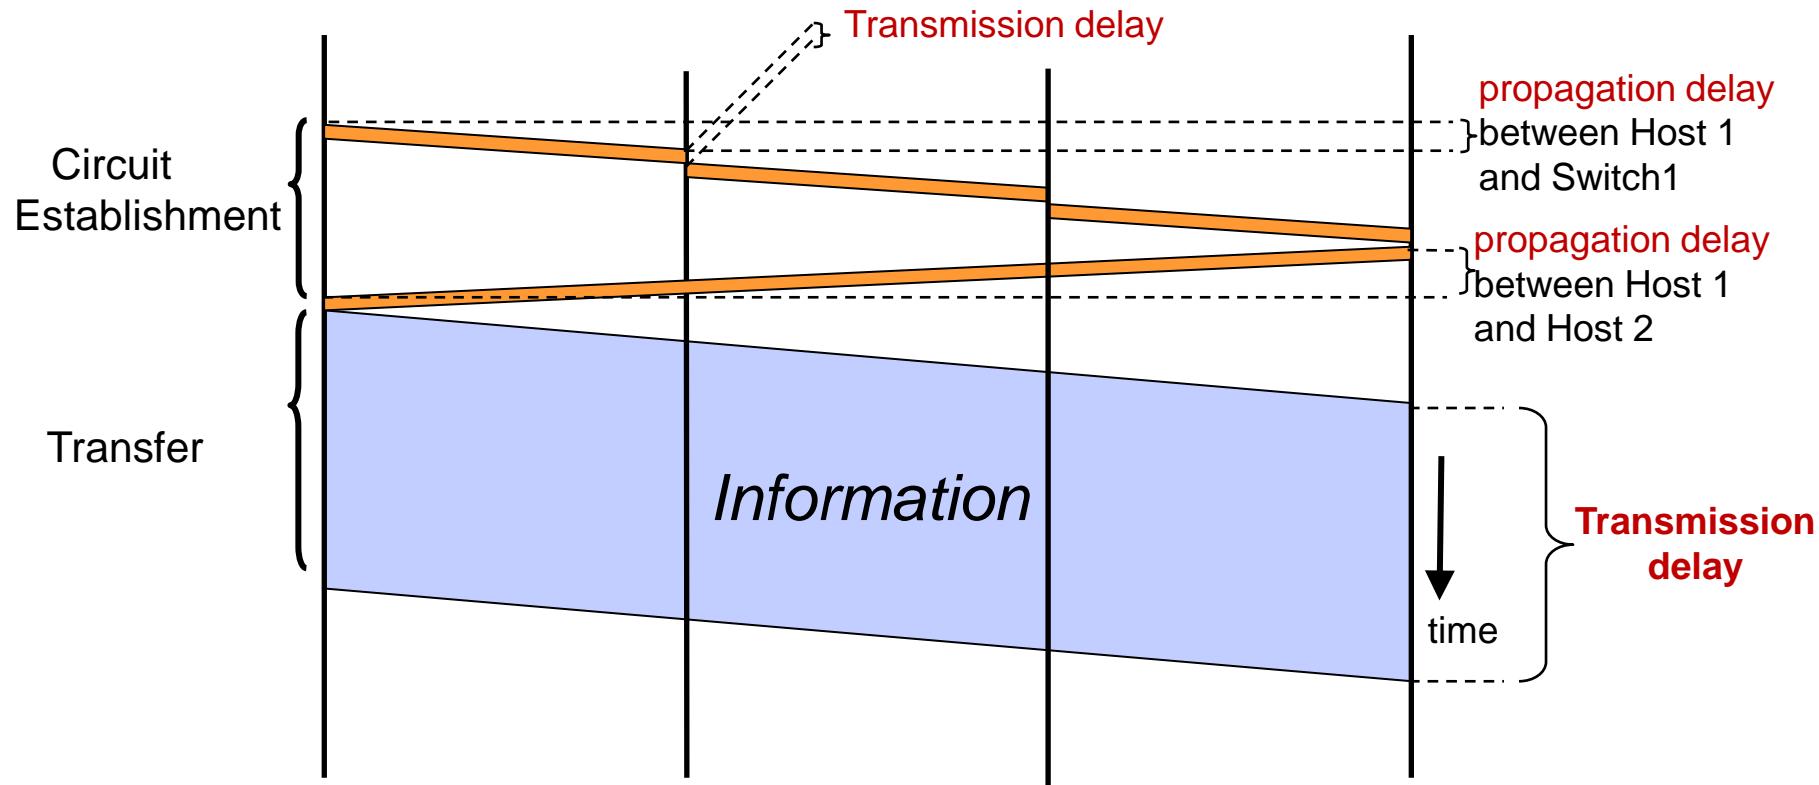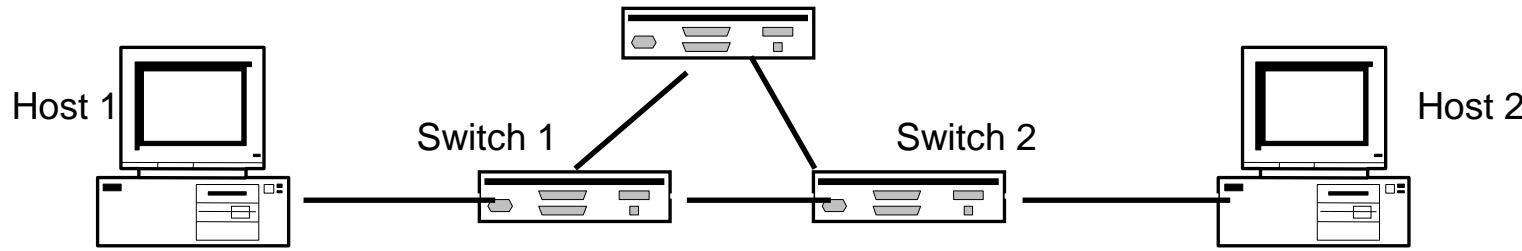

Timing in Circuit Switching

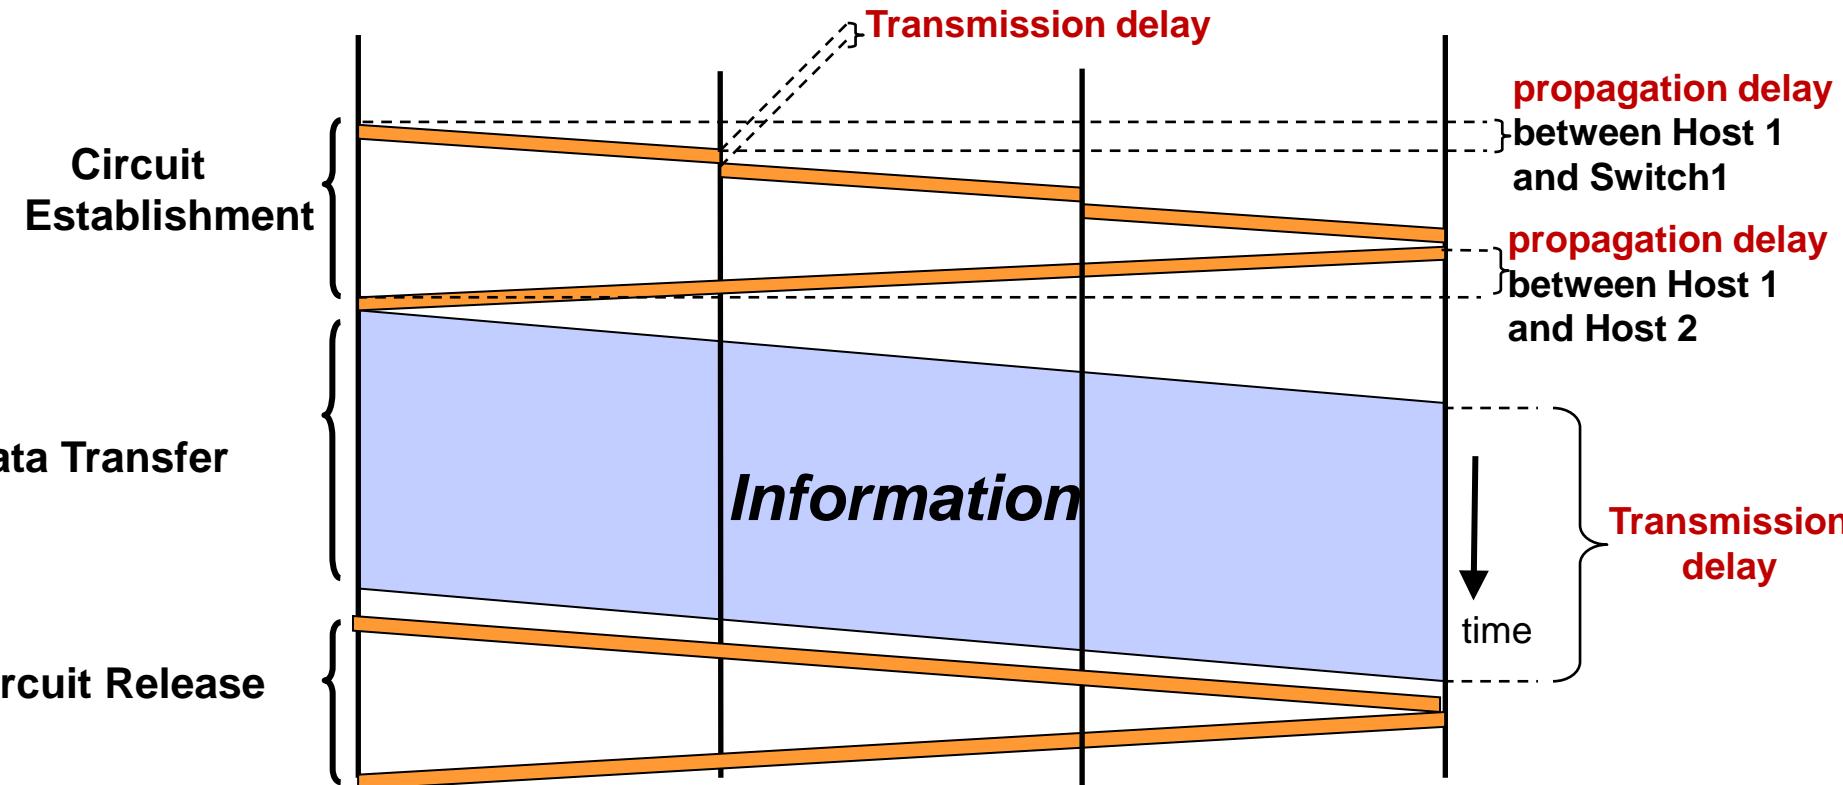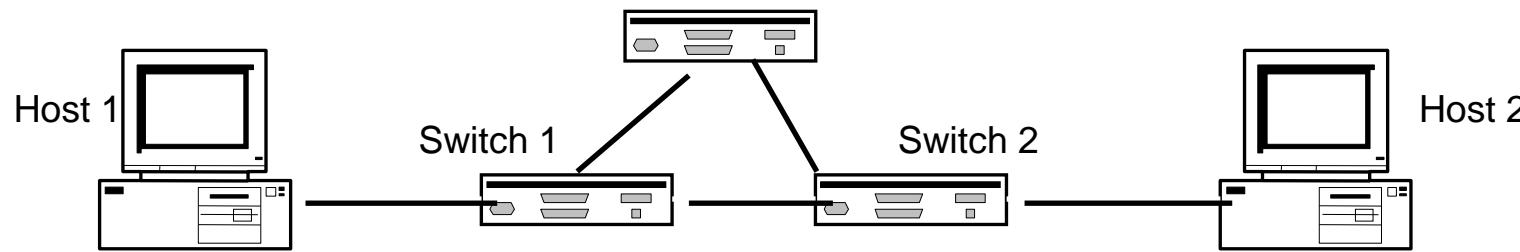

Circuit Switching: Sharing a link

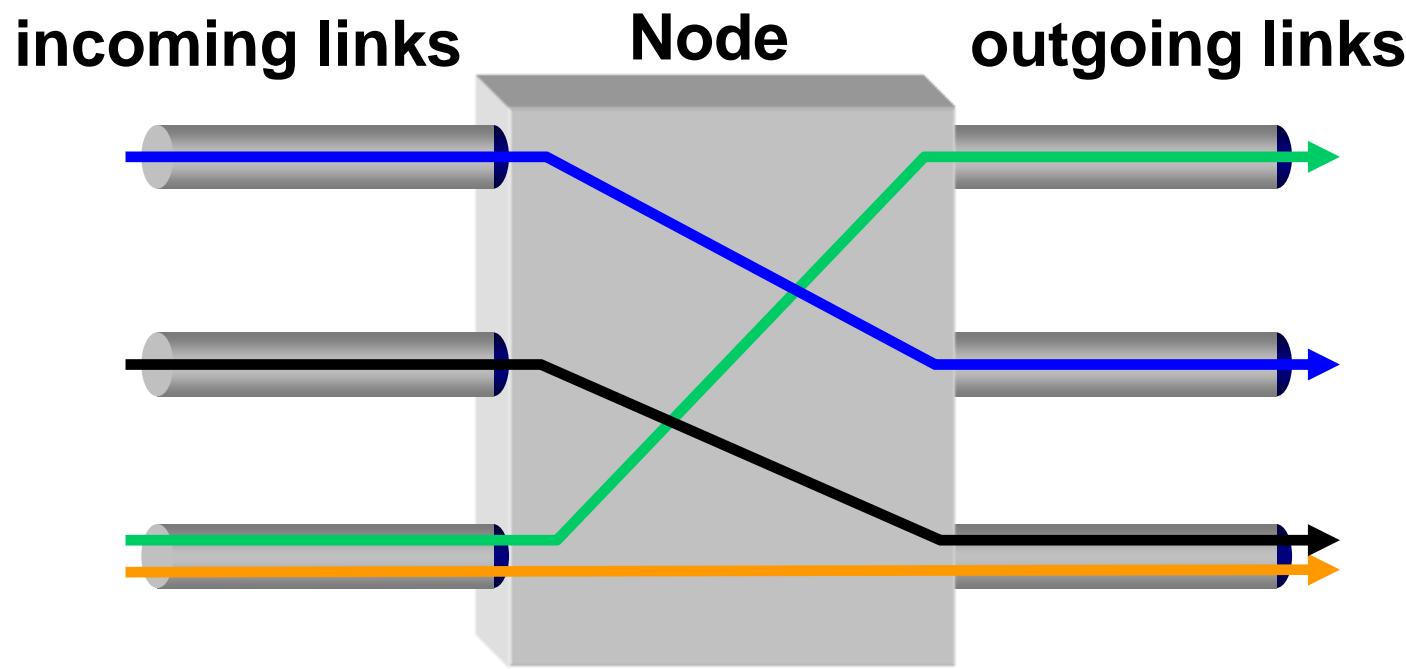

How do the black and orange circuits share the outgoing link?


Circuit Switching: Sharing a link

network resources


(e.g., bandwidth)

divided into “pieces”

- pieces allocated to calls
- resource piece *idle* if not used by owning call (*no sharing*)
- dividing link bandwidth into “pieces”
 - frequency division (FDM)
 - time division (TDM)
 - space division

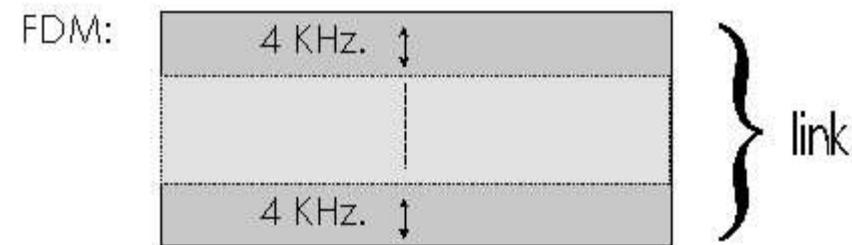

TDM:

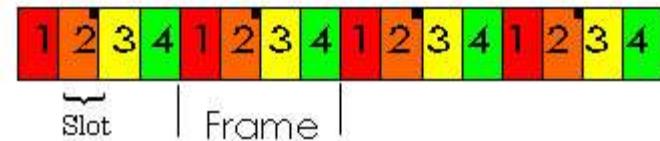

All slots labelled **2** are dedicated to a specific sender-receiver pair.

Circuit Switching: Sharing a link


FDM

Example:

4 users




frequency

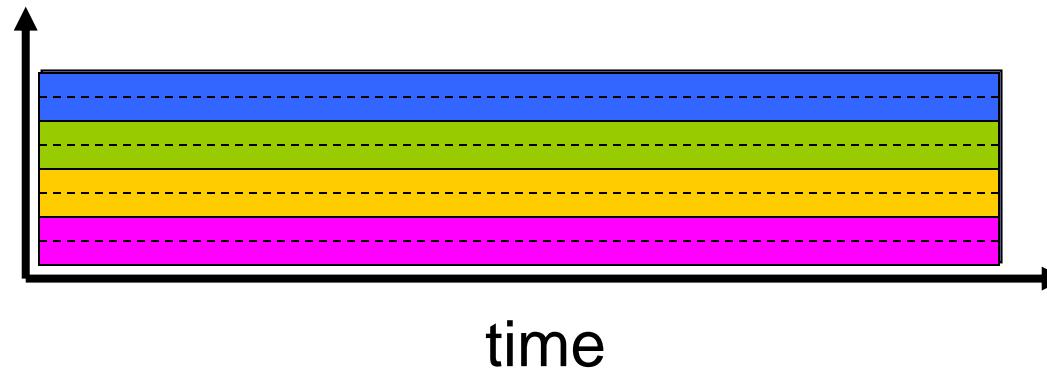

TDM

frequency

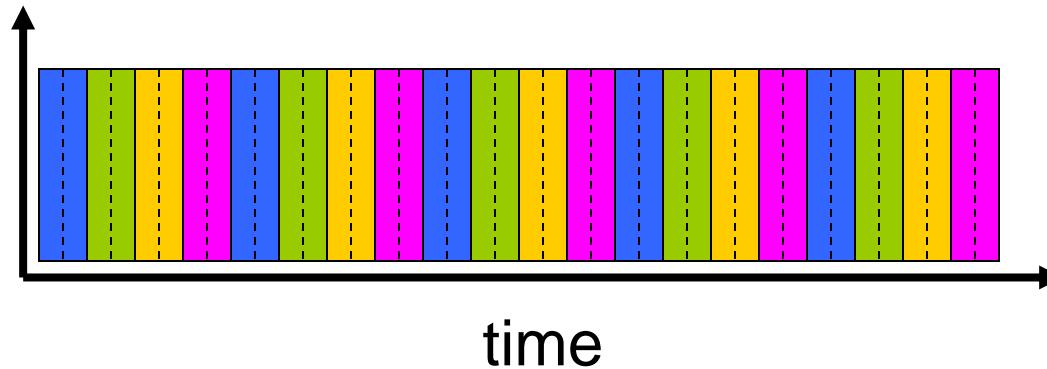

Network Core: Packet Switching

each end-end data stream divided into packets




Header and Trailer carry control information
(e.g., destination address, checksum)

- Each packet traverses the network from node to node along some path (**Routing**) based on header info.
- Usually, once a node receives the **entire** packet, it **stores** it (hopefully briefly) and then **forwards** it to the next node (**Store-and-Forward Networks**)

Build Packets

The **sender** first divides the message into shorter, fixed-length data segments


Then a header is added in front of each data segment to form a packet.

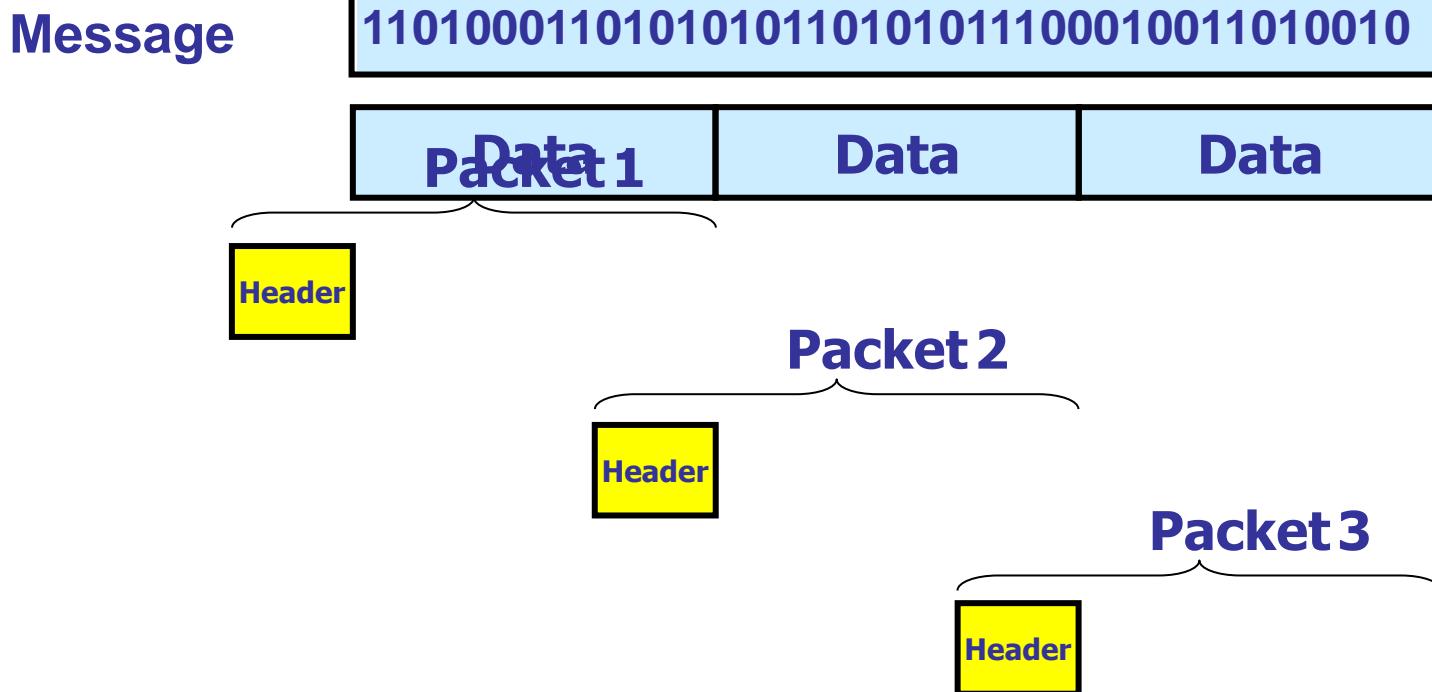

Send Packets

Send each packet to the receiver (assuming the receiver is on the left).

Packet-switched networks use "packets" as data transmission units.

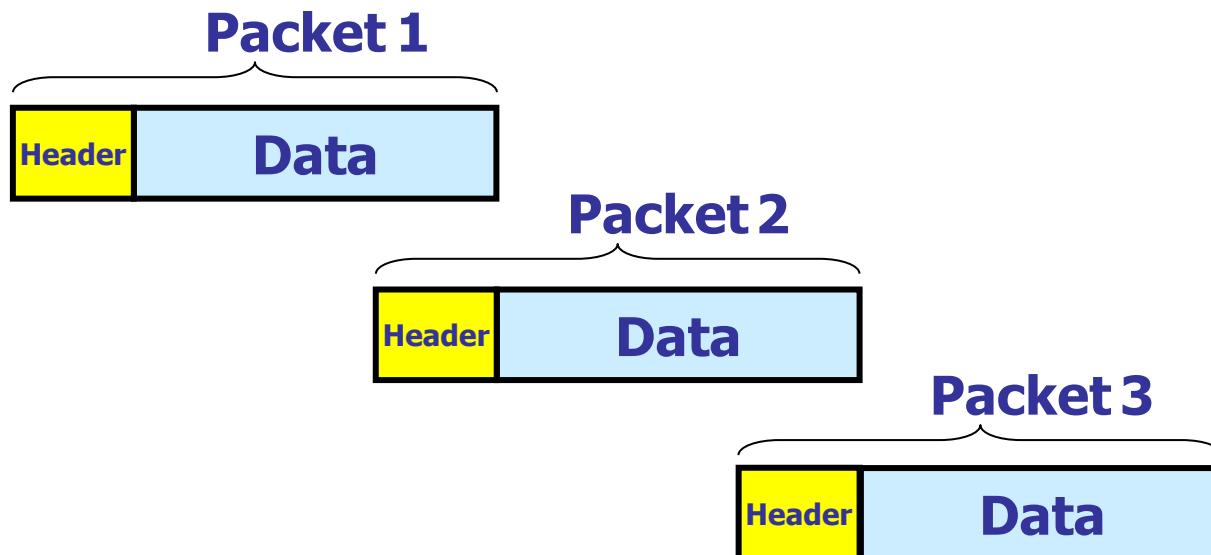


The header is very important

- Headers are used to **control** the flow of packets through the network or over the communication link.
- The header contains control information, such as:
 - Addresses: source and destination,
 - Sequence number,
 - Protocol version, total length, etc.
- The switch in the packet-switched network forwards the packet to the next switch based on the address information in the header of the received packet.

Restore to Message

After receiving the packet, the **receiver** strips off the header of the packet, and obtains the data, then restores data to a message.

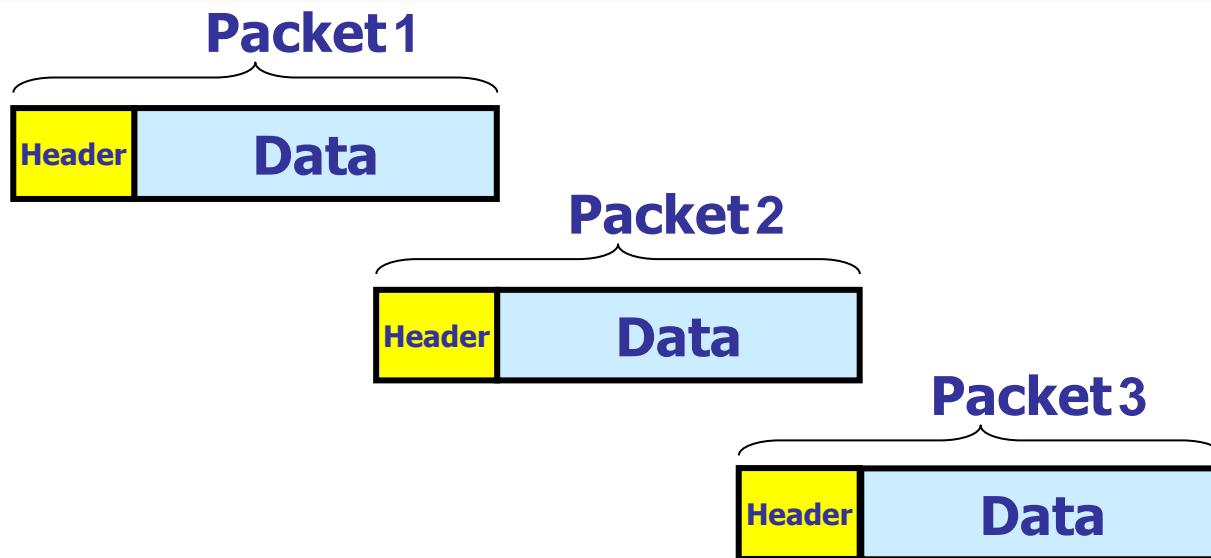


Data received

Message

11010001101010101101011100010011010010

Network Core: Packet Switching


■ Node in a packet switching network

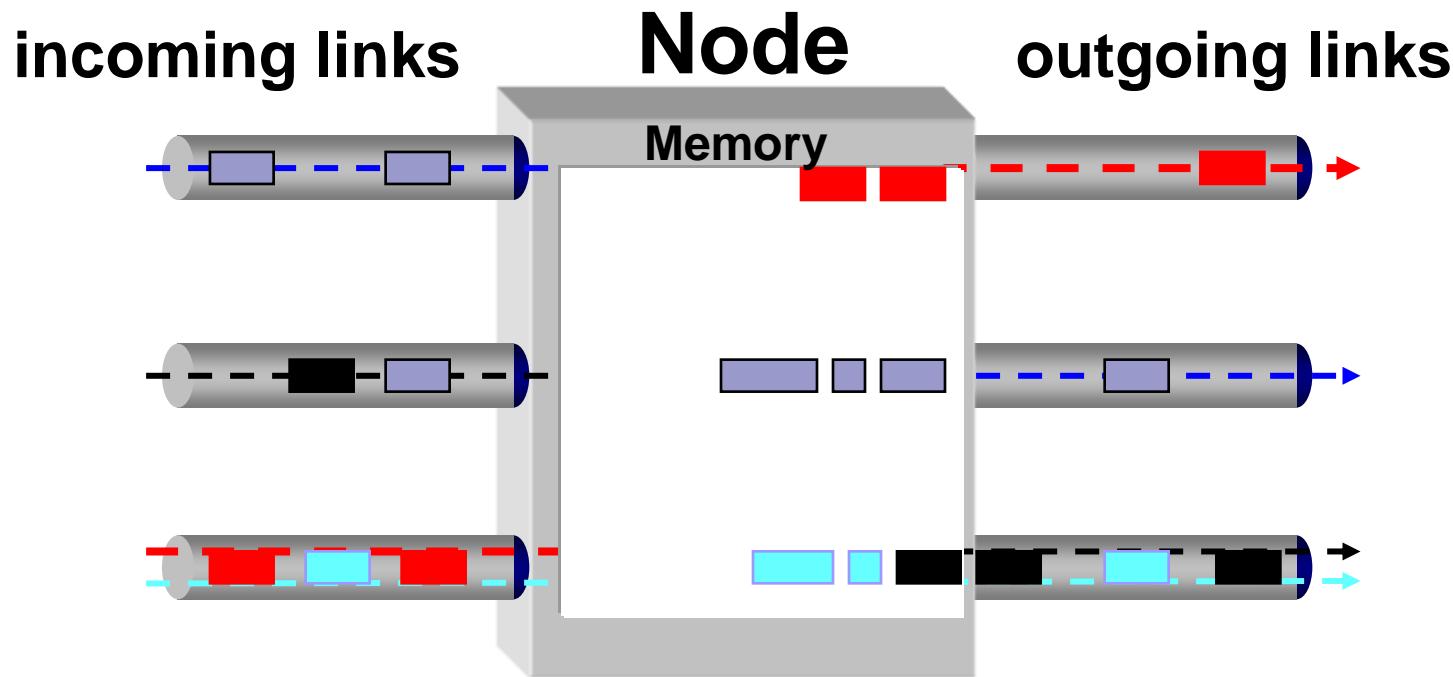


- user A, B packets *share* network resources
- each packet uses **full** link bandwidth
- resources used *as needed*

Network Core: Packet Switching

■ Node in a packet switching network

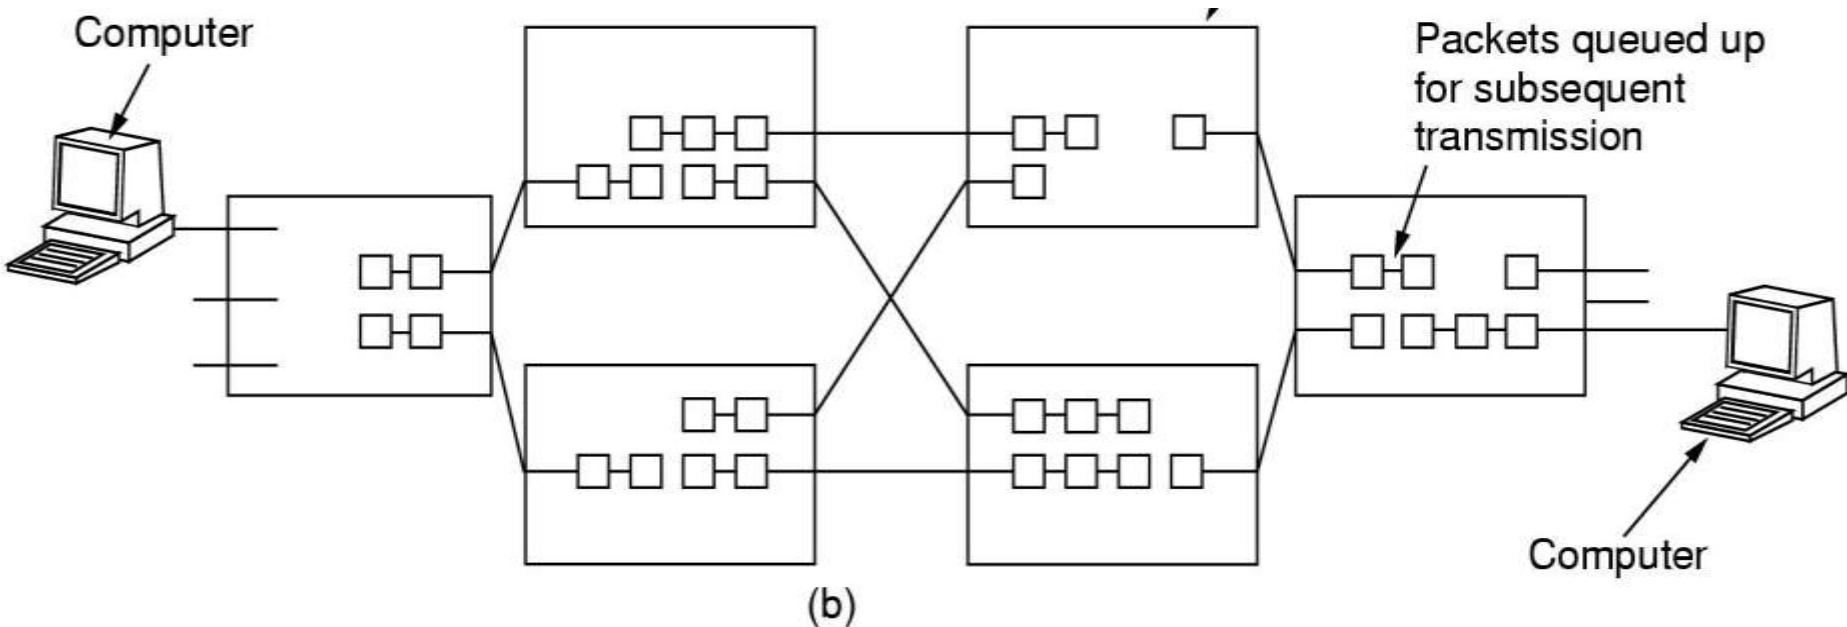


Packet Switching: Statistical Multiplexing

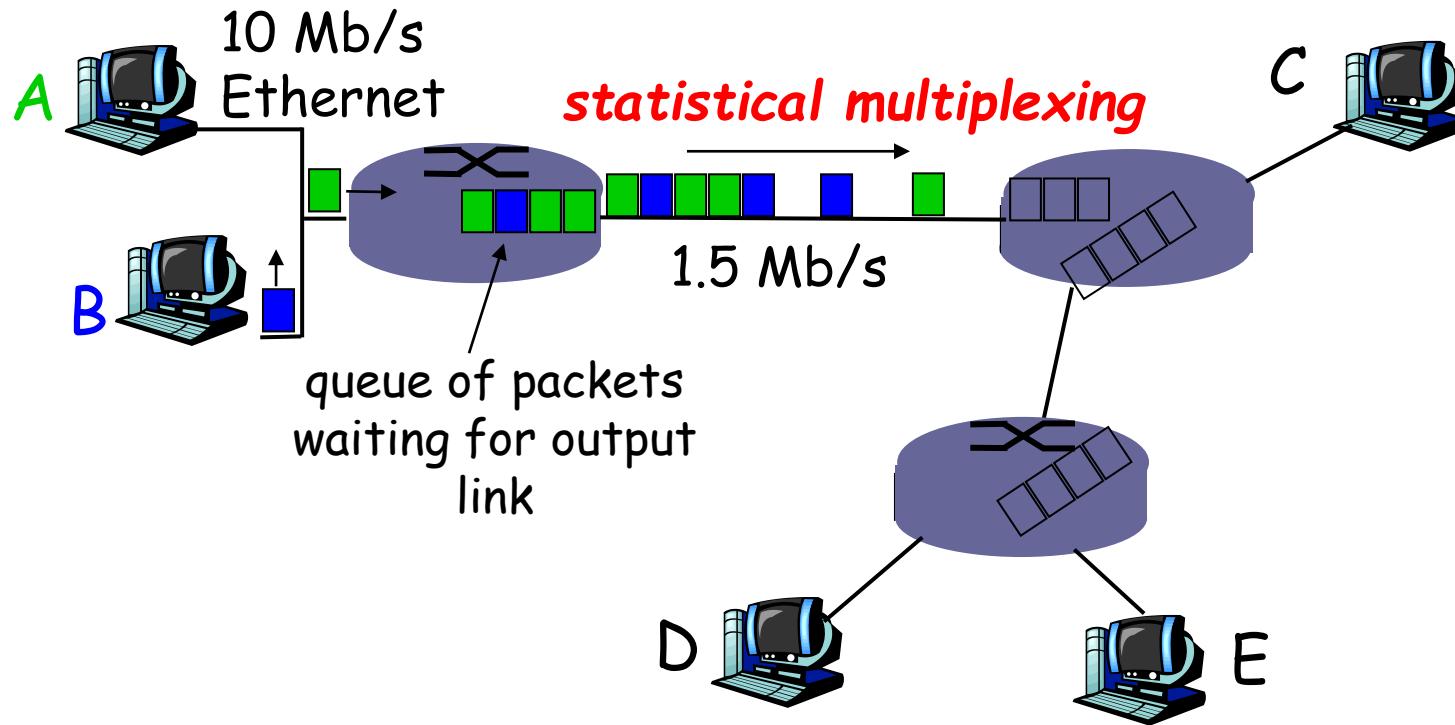

Sequence of A & B packets does not have fixed pattern
statistical multiplexing.

In TDM each host gets same slot in revolving TDM frame.

Packet-switching: store-and-forward

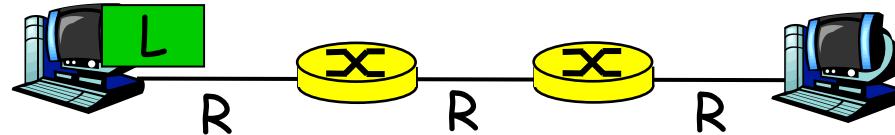


- Takes L/R seconds to transmit (push out) packet of L bits on to link or R b/s
- Entire packet must arrive at router before it can be transmitted on next link:
store and forward
- delay = $3*L/R$

Example:

- $L = 7.5$ Mbits
- $R = 1.5$ Mb/s
- delay = 15 sec

Packet Switching: Message Segmenting

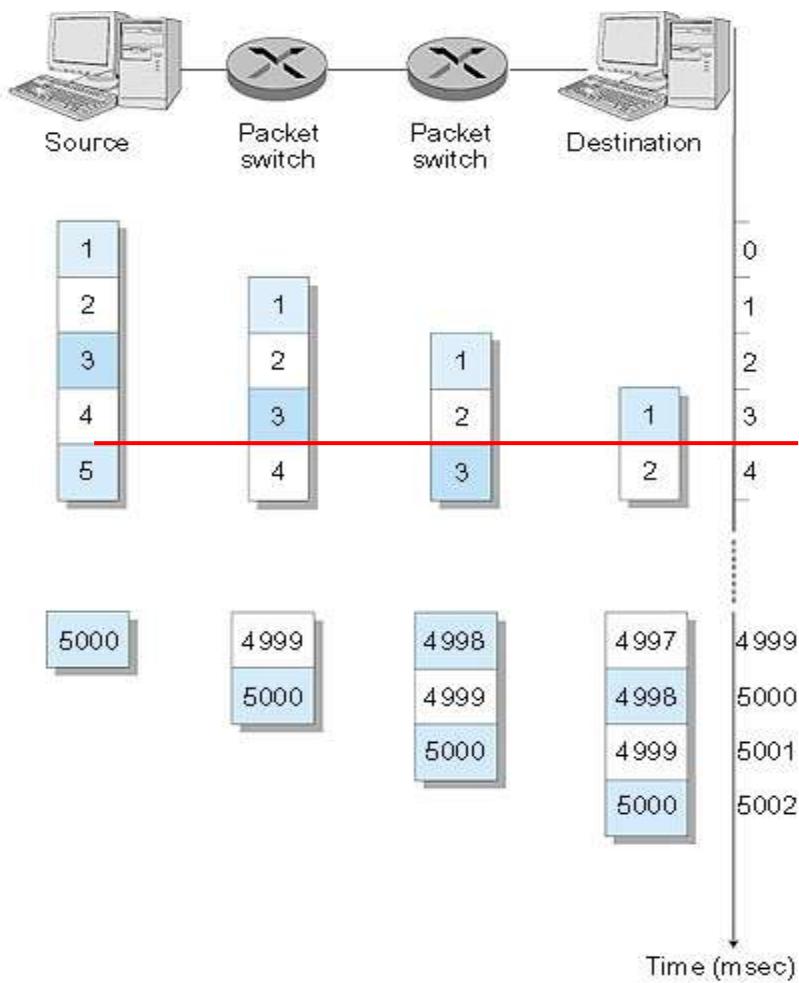

Now break up the message into 5000 packets

- **Each packet 1,500 bits**
- **1 msec to transmit packet on one link**
- ***pipelining*: each link works in parallel**
- **Delay reduced from 15 sec to 5.002 sec**

If you were building a network....

■ **Which would you choose?**

- Circuit switched?
- Packet-switched?

■ **Let's review the strengths and weaknesses**

Advantages of Circuit Switching

■ **Guaranteed bandwidth**

- Predictable communication performance
- Not “best-effort” delivery with no real guarantees

■ **Simple abstraction**

- Reliable communication channel between hosts
- No worries about lost or out-of-order packets

■ **Simple forwarding**

- Forwarding based on time slot or frequency
- No need to inspect a packet header

■ **Low per-packet overhead**

- Forwarding based on time slot or frequency
- No headers on each packet

Disadvantages of Circuit Switching

■ Wasted bandwidth

- Bursty traffic leads to idle connection during silent period
- Unable to achieve gains from “statistical multiplexing”

■ Blocked connections

- Connection refused when resources are not sufficient
- Unable to offer “okay” service to everybody

■ Network state

- Network nodes must store per-connection information
- Unable to avoid per-connection storage and state
- This makes failures more disruptive!

■ Connection set-up delay

- No communication until the connection is set up
- Unable to avoid extra latency for small data transfers

Packet-Switching vs. Circuit-Switching

- **Reliability advantage:** since routers don't know about individual conversations, when a router or link fails, it is easy to fail over to a different path
- **Efficiency advantage** of packet-switching over circuit switching: Exploitation of statistical multiplexing
- **Deployability advantage:** easier for different parties to link their networks together because they're not promising to reserve resources for one another
- **Disadvantage:** packet-switching must handle congestion
 - More complex routers (more buffering, sophisticated dropping)
 - Harder to provide good network services (e.g., delay and bandwidth guarantees)


Packet switching vs. circuit switching

Packet switching allows more users to use network!

- 1 Mb/s link

- each user:

- 100 kb/s when “active”
 - active 10% of time **N users**

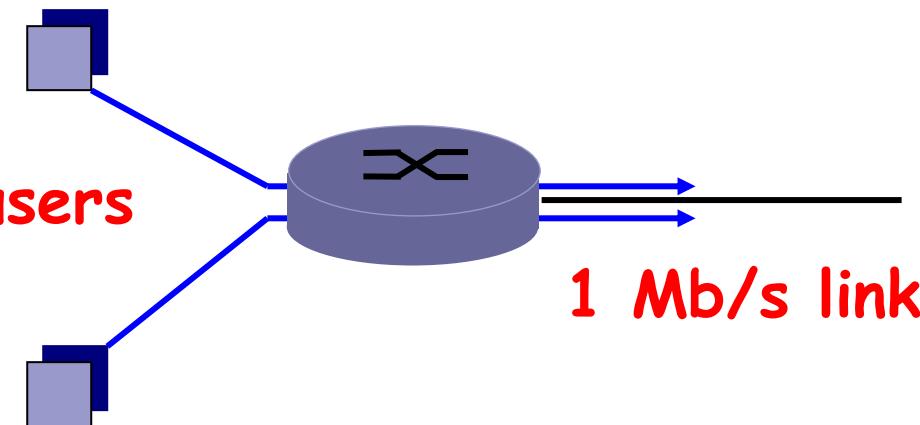

- circuit-switching:

- 10 users

- packet switching:

- with 35 users, probability > 10 active less than .004

Packet switching vs. circuit switching

	circuit switching	packet switching
resource	partitioned	not partitioned
when using resource	use a single partition bandwidth	use whole link bandwidth
reservation/setup	need reservation (setup delay)	no reservation
resource contention	busy signal (session loss)	congestion (long delay and packet losses)
service guarantee	yes	no
charging	time	packet
header	no header	per packet header
fast path processing	fast	per packet processing

Packet switching vs. circuit switching

Is packet switching a “slam dunk winner?”


- Great for bursty data
 - resource sharing - go as fast as you can and then get out of the way
 - simpler, no call setup
- Excessive congestion: packet delay and loss
 - protocols needed for reliable data transfer, congestion control
- Q: How to provide circuit-like behavior?
 - prioritization
 - bandwidth guarantees needed for audio/video apps still an unsolved problem

Q: human analogies of reserved resources (circuit switching) versus on-demand allocation (packet-switching)?

Packet-switched networks: routing & forwarding

- ***Goal:*** move packets among routers from source to destination
 - we'll study several path selection algorithms.
- **datagram network:**
 - ***destination address*** determines next hop
 - **routes may change during session**
 - analogy: driving, asking directions
- **virtual circuit network:**
 - each packet carries tag (virtual circuit ID), ***tag*** determines next hop
 - **fixed path** determined at *call setup time*, remains fixed thru call
 - **routers maintain per-call state**

Network Taxonomy

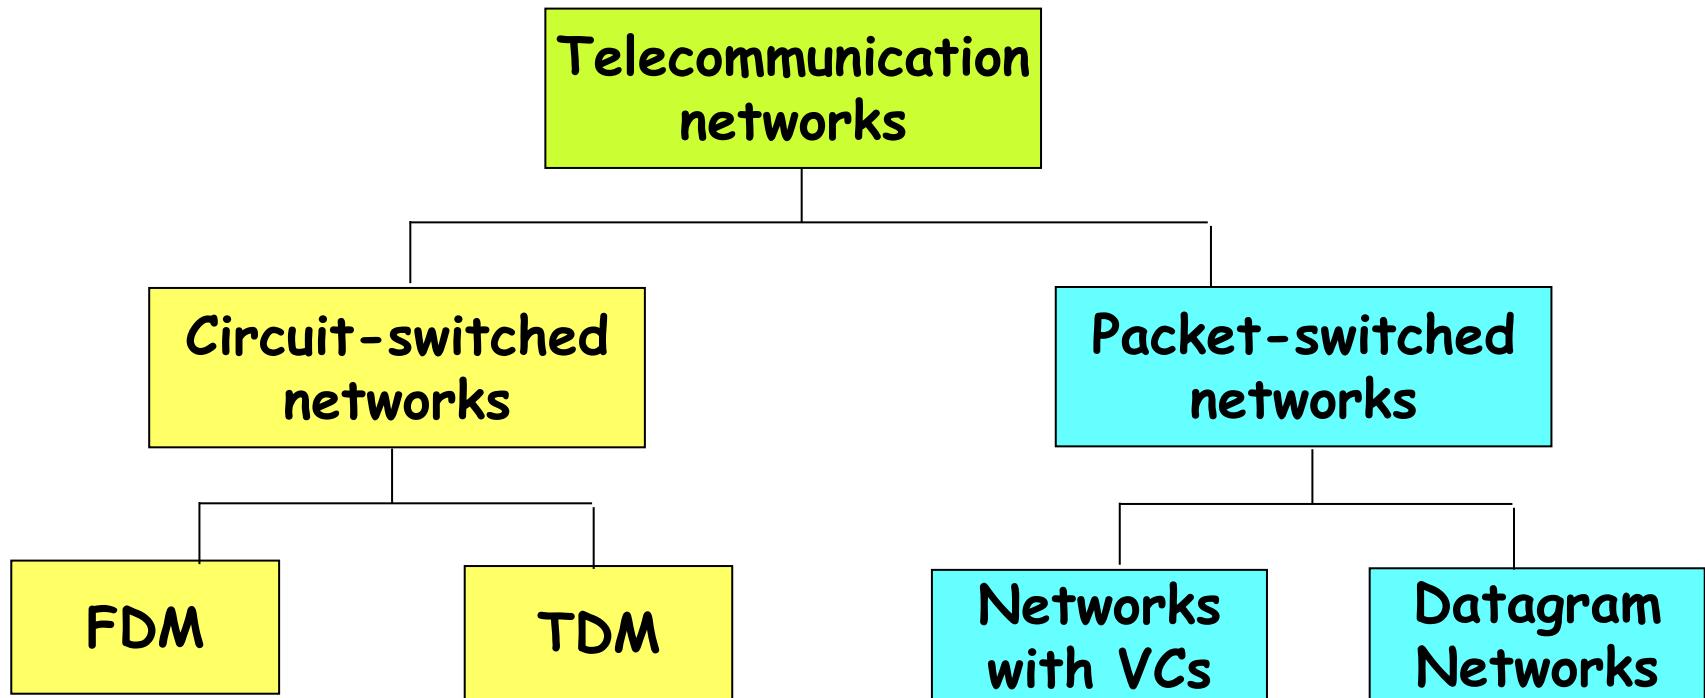

Datagram Packet Switching

- **Each packet is independently switched**


- Each packet header contains full destination address

- **No resources are pre-allocated (reserved) in advance**


- **Leverages “statistical multiplexing”**

- Gambling that packets from different conversations won't all arrive at the same time, so we don't need enough capacity for all of them at their peak transmission rate
 - *Assuming independence of traffic sources*, can compute **probability** that there is enough capacity


Timing of Datagram Packet Switching

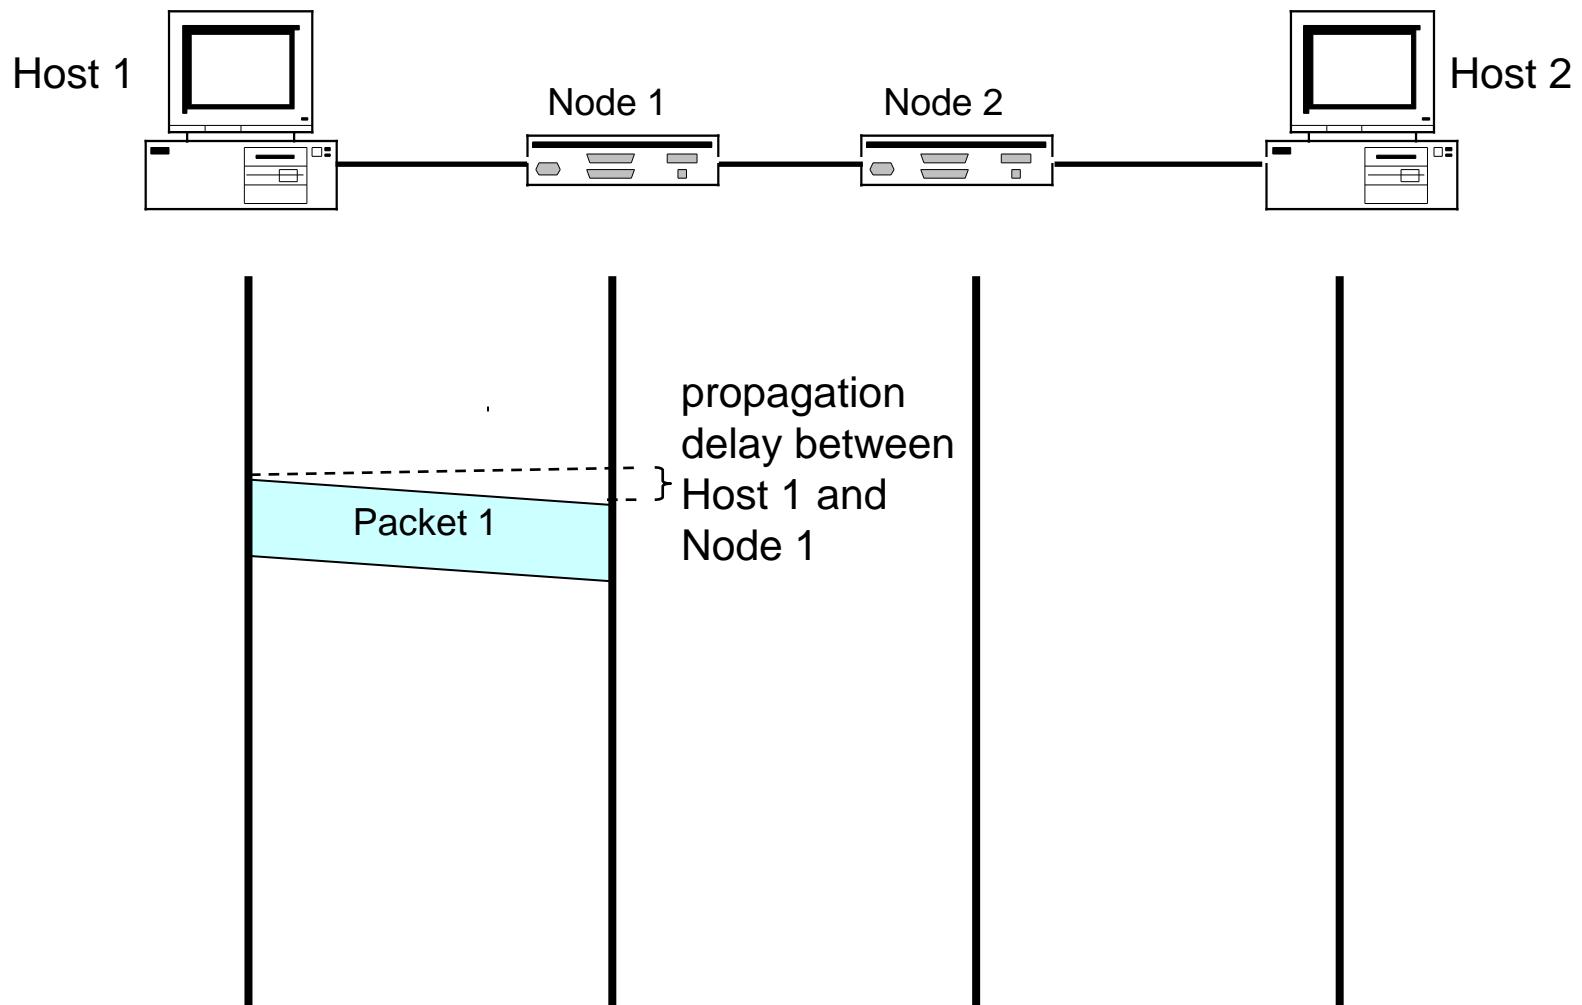


Timing of Datagram Packet Switching

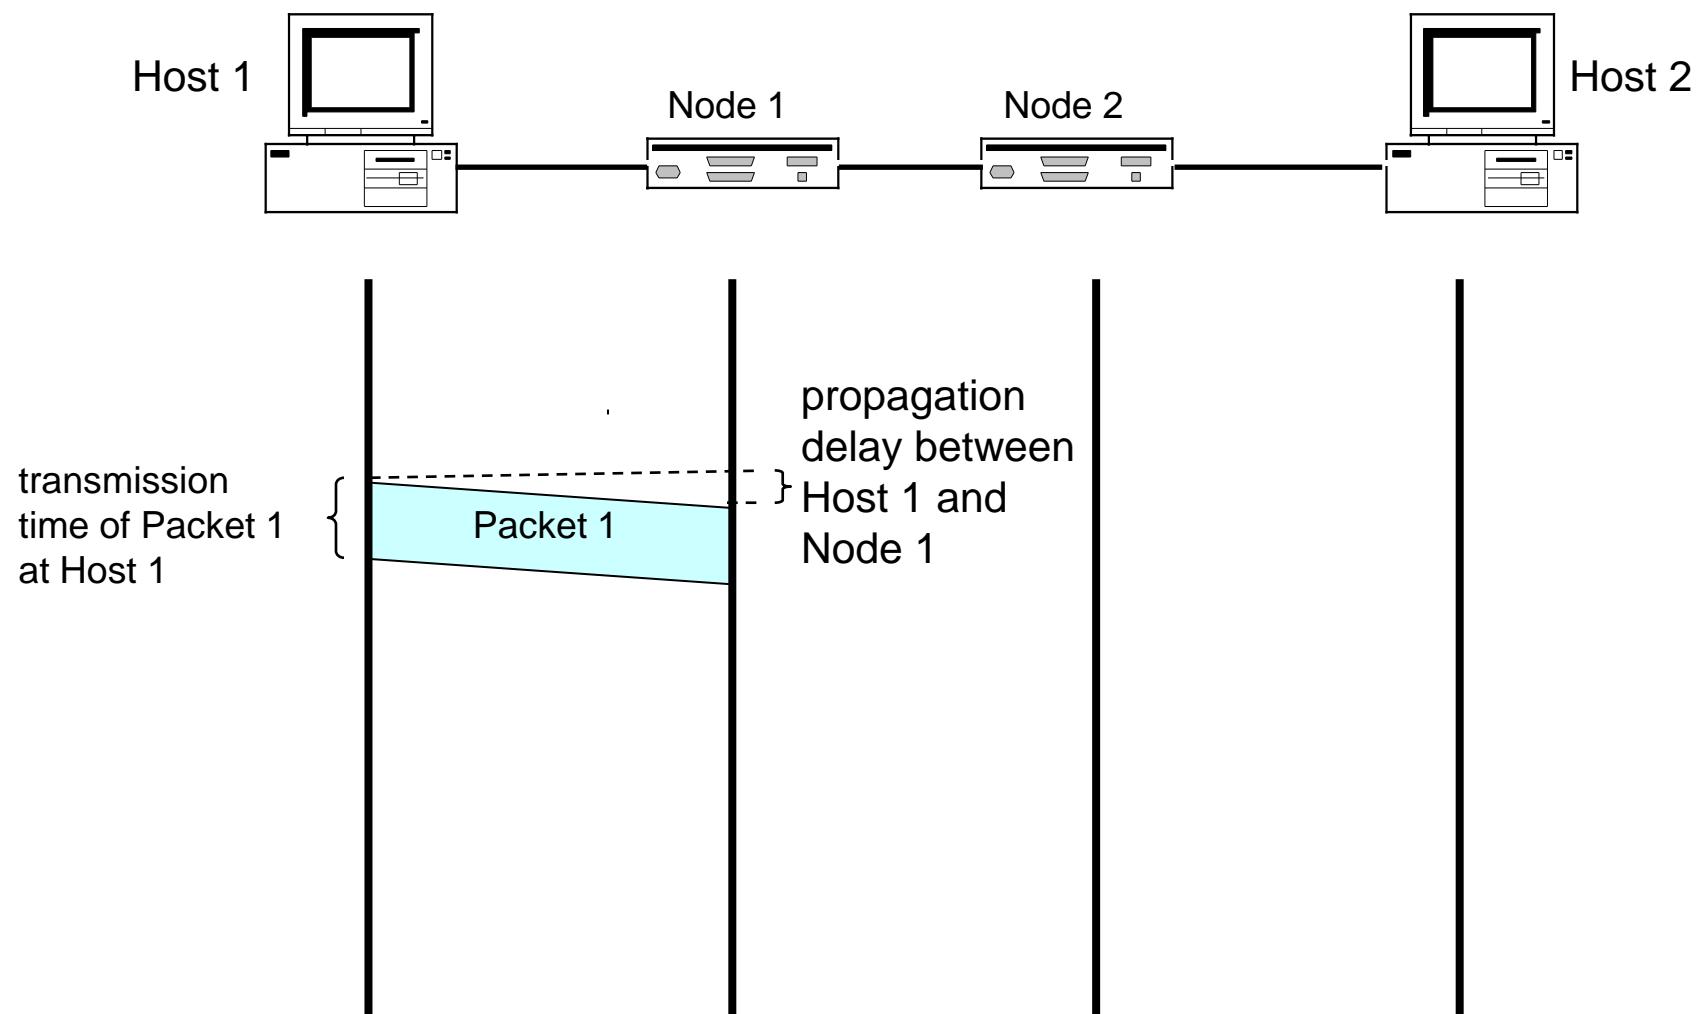


Timing of Datagram Packet Switching

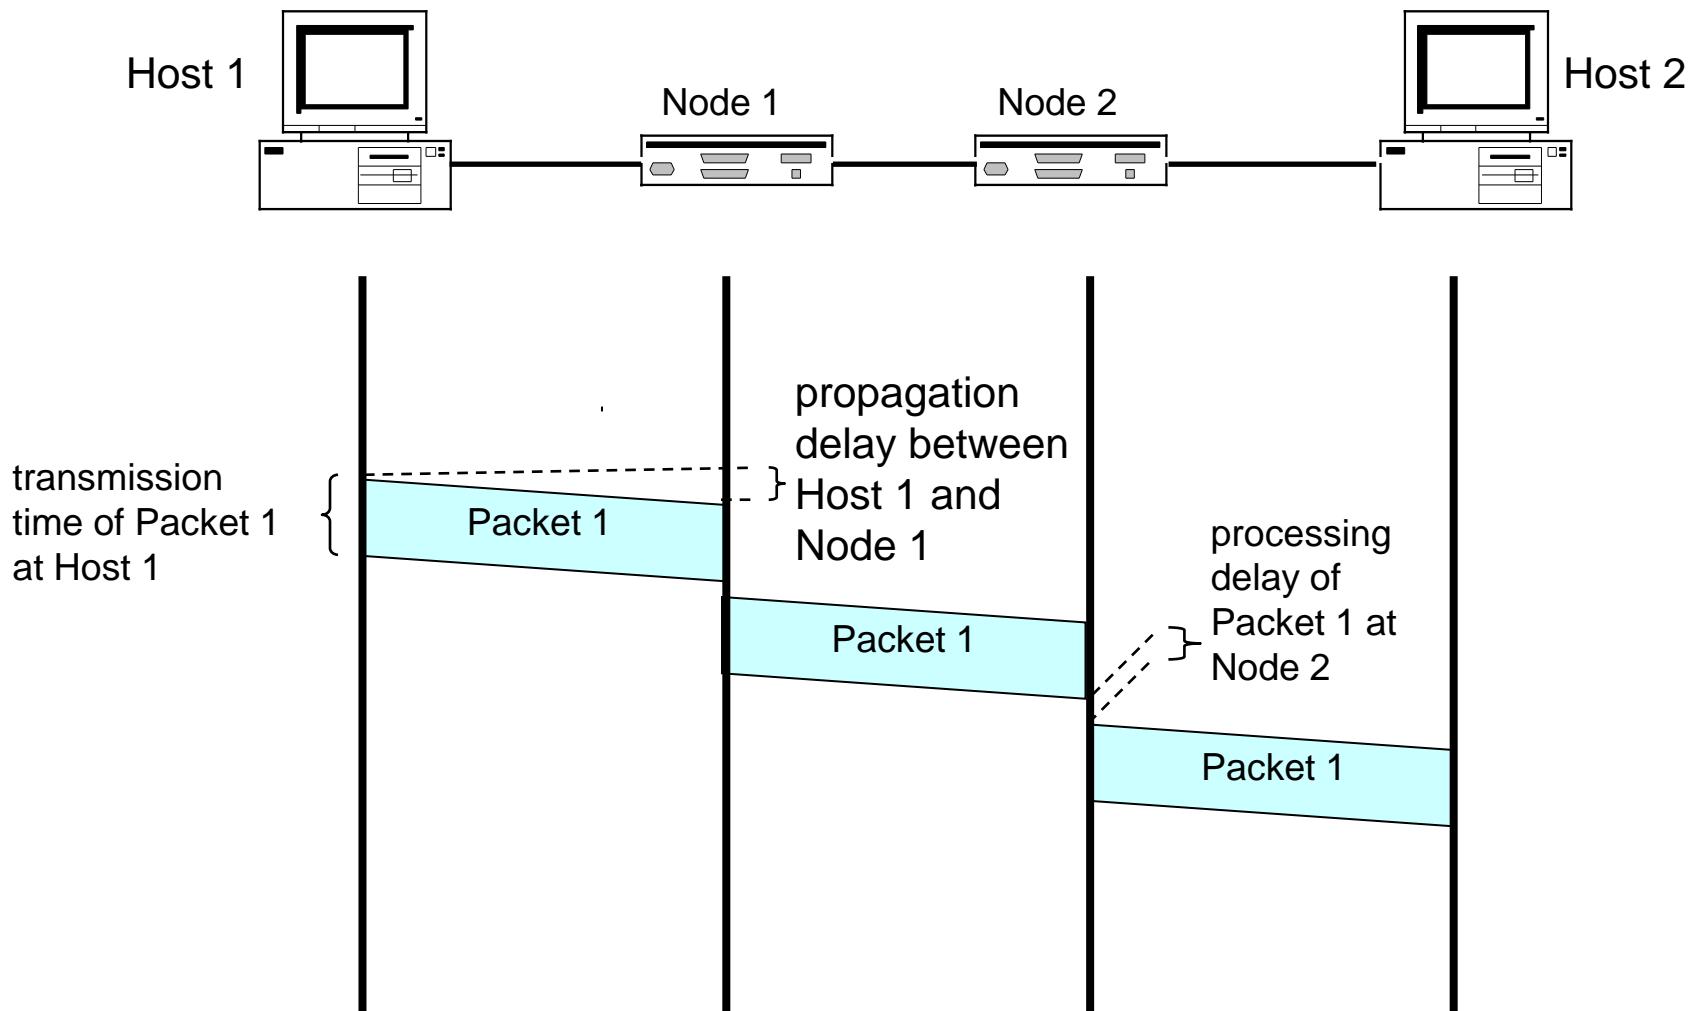


Timing of Datagram Packet Switching

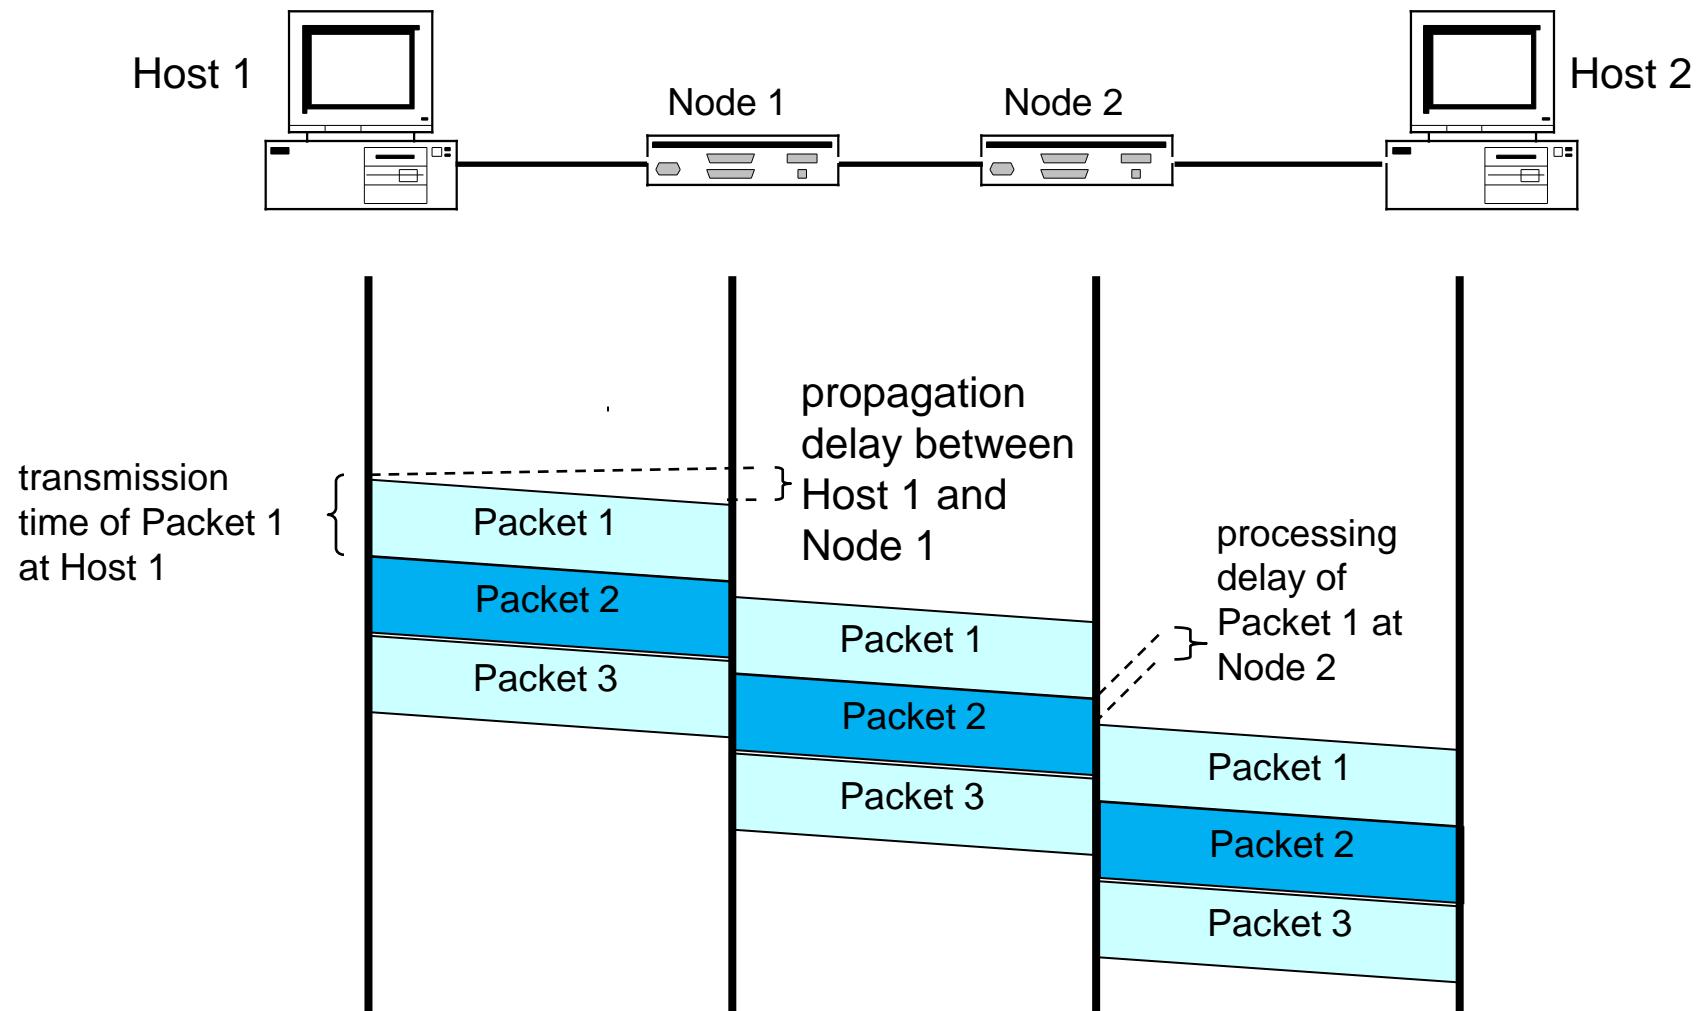

Datagram Packet Switching

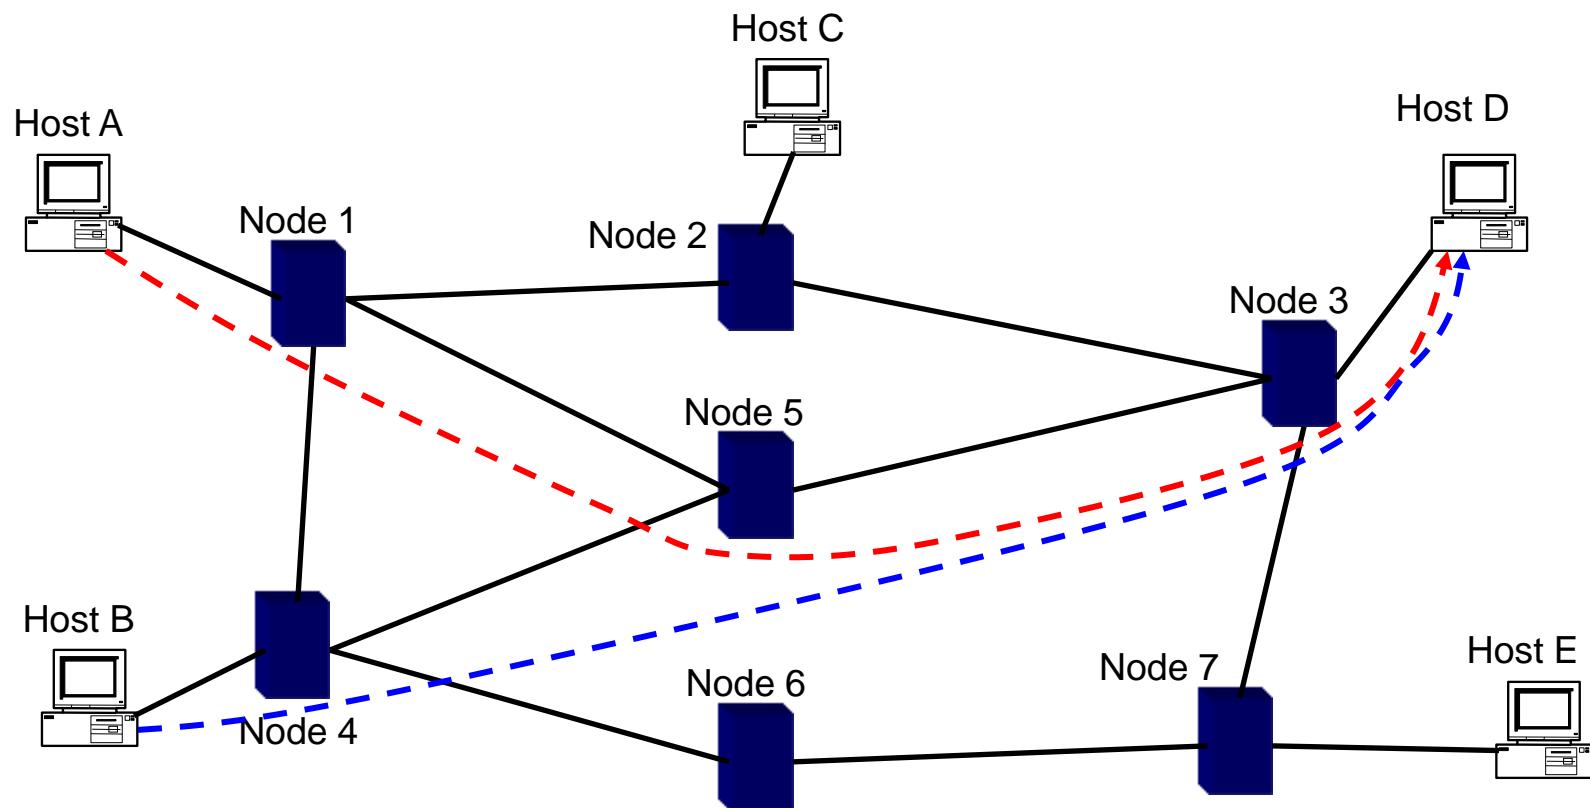


Datagram Packet Switching

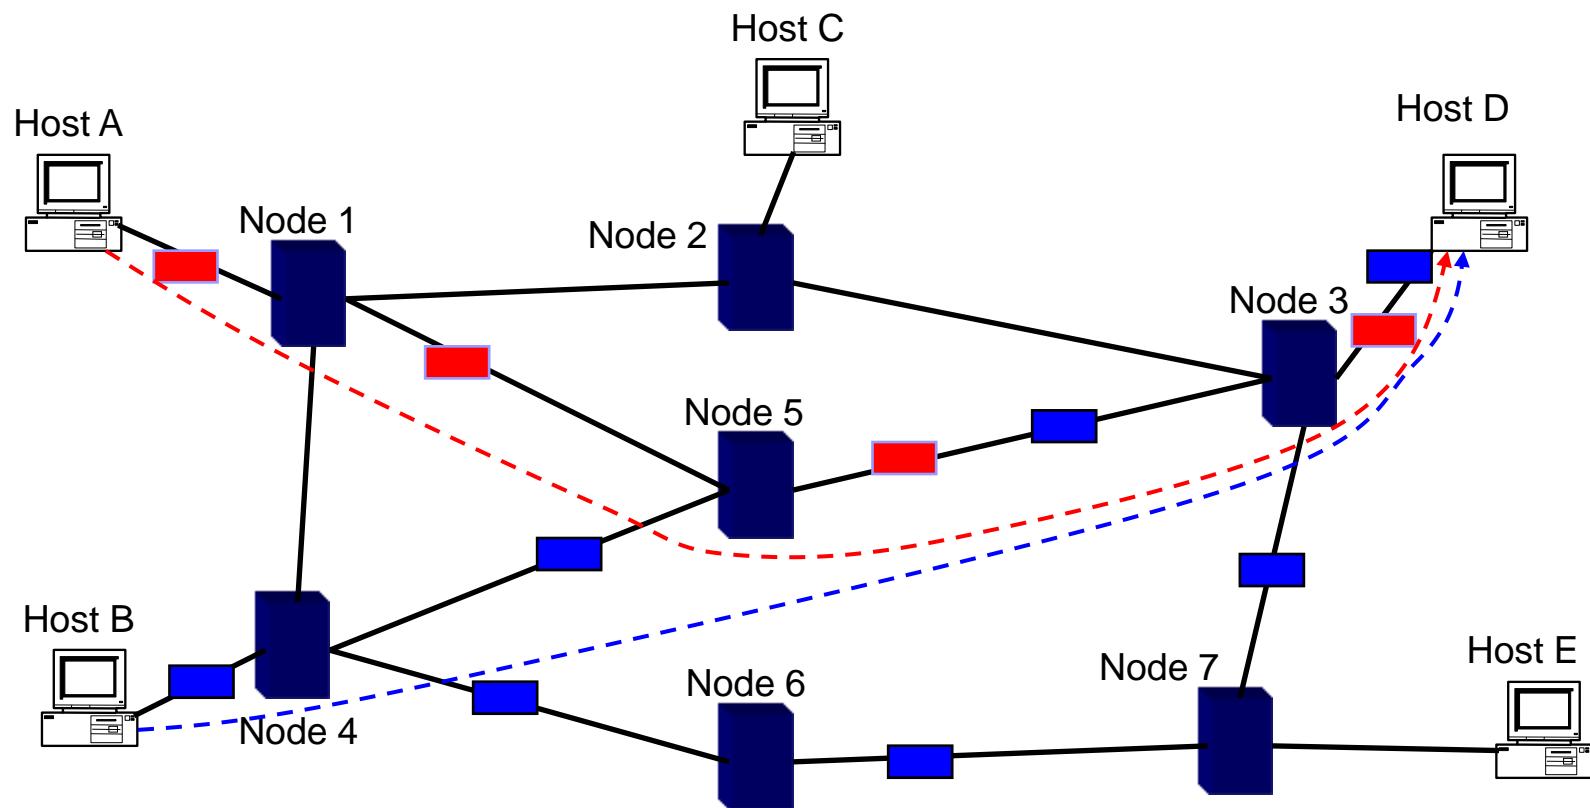


Virtual-Circuit Packet Switching

- **Fixed path determined at *call setup time*, remains fixed thru call**
- **Routers maintain per-call state**
- **3 phases:**
 - 1. VC establishment**
 - 2. Data transfer**
 - 3. VC disconnect**

Virtual-Circuit Packet Switching

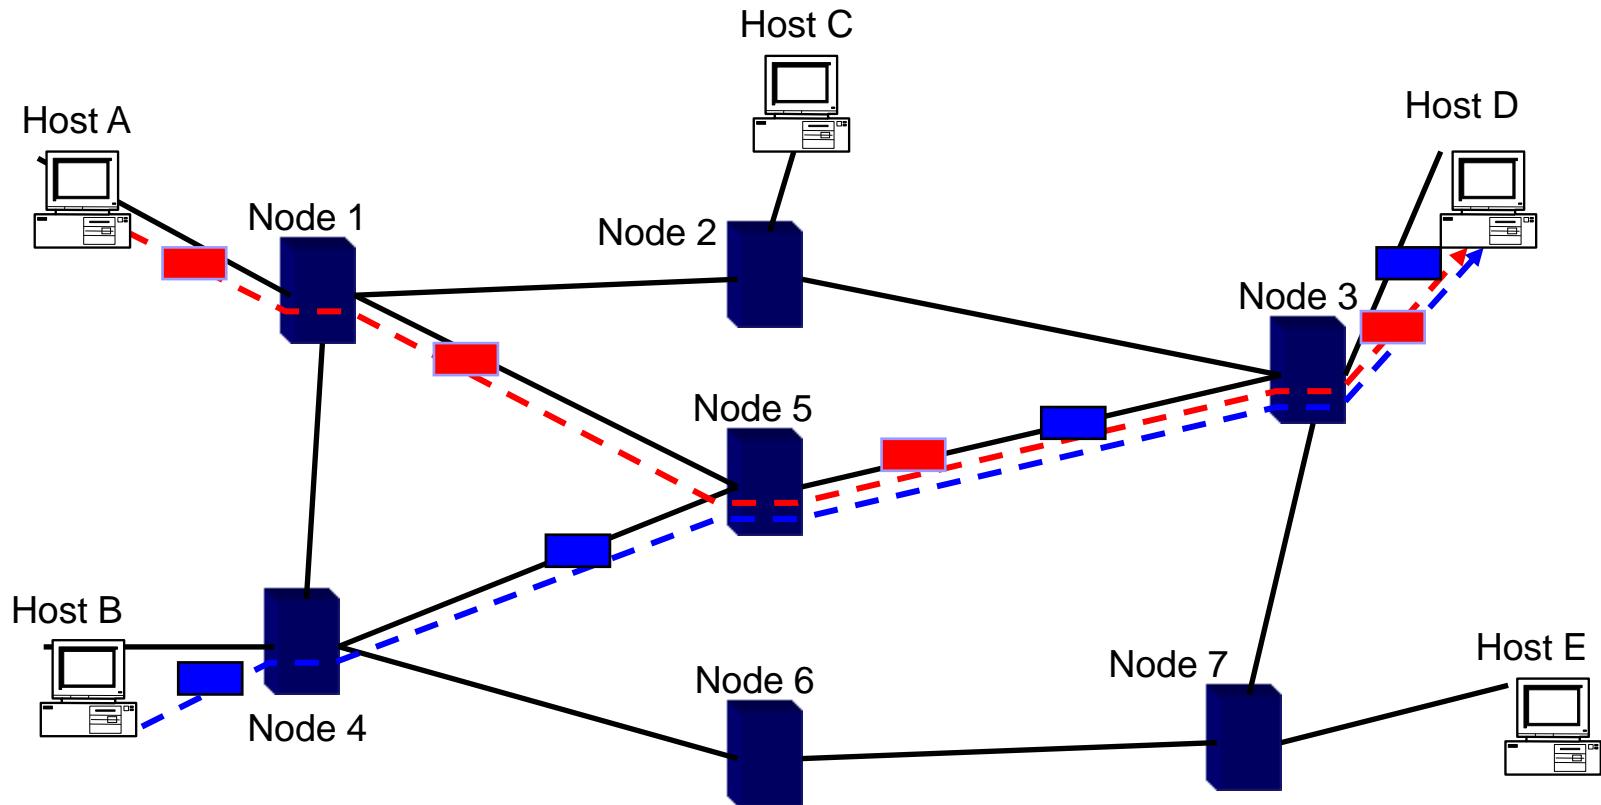

Timing Diagram of Virtual-Circuit Switching

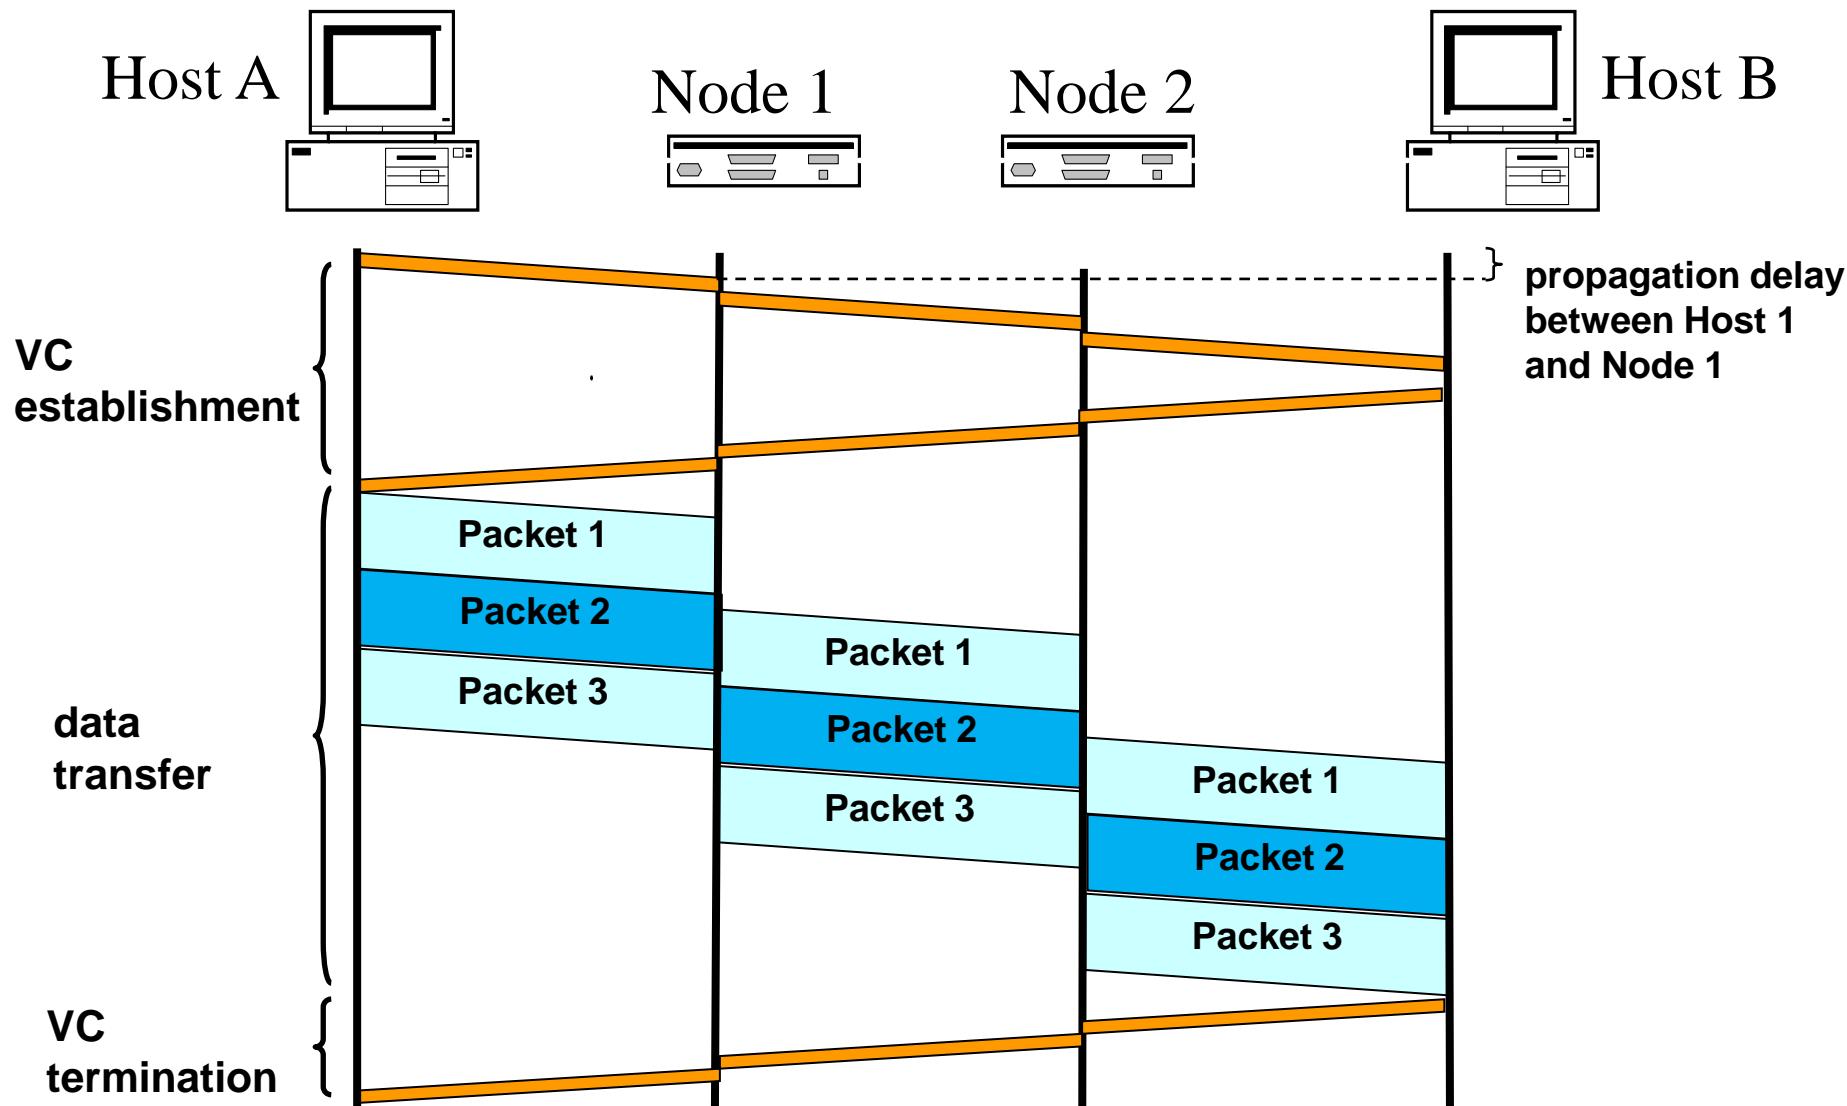


Chapter 1: Roadmap

- 1.1 Computer network and the Internet**
- 1.2 Network edge and core**
- 1.3 Network access and physical media**
- 1.4 Transmission Technology**
- 1.5 Type and Topology**
- 1.6 Network Performance**
- 1.7 Protocol layers, service models**
- 1.8 Architecture, OSI and TCP/IP Models**
- 1.9 Internet History**

Access networks and physical media

Q: How to connect end systems to edge router?


- residential access nets
- institutional access networks (school, company)
- mobile access networks

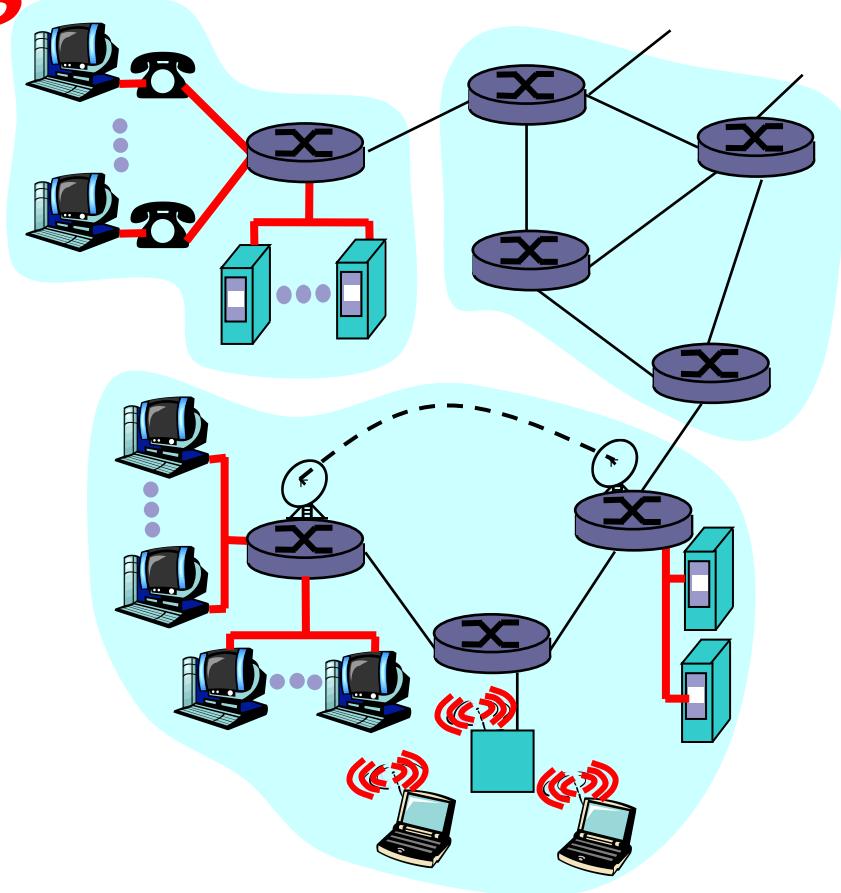

Internet Physical Infrastructure

Residential access

- Cable
- Fiber
- DSL
- Wireless

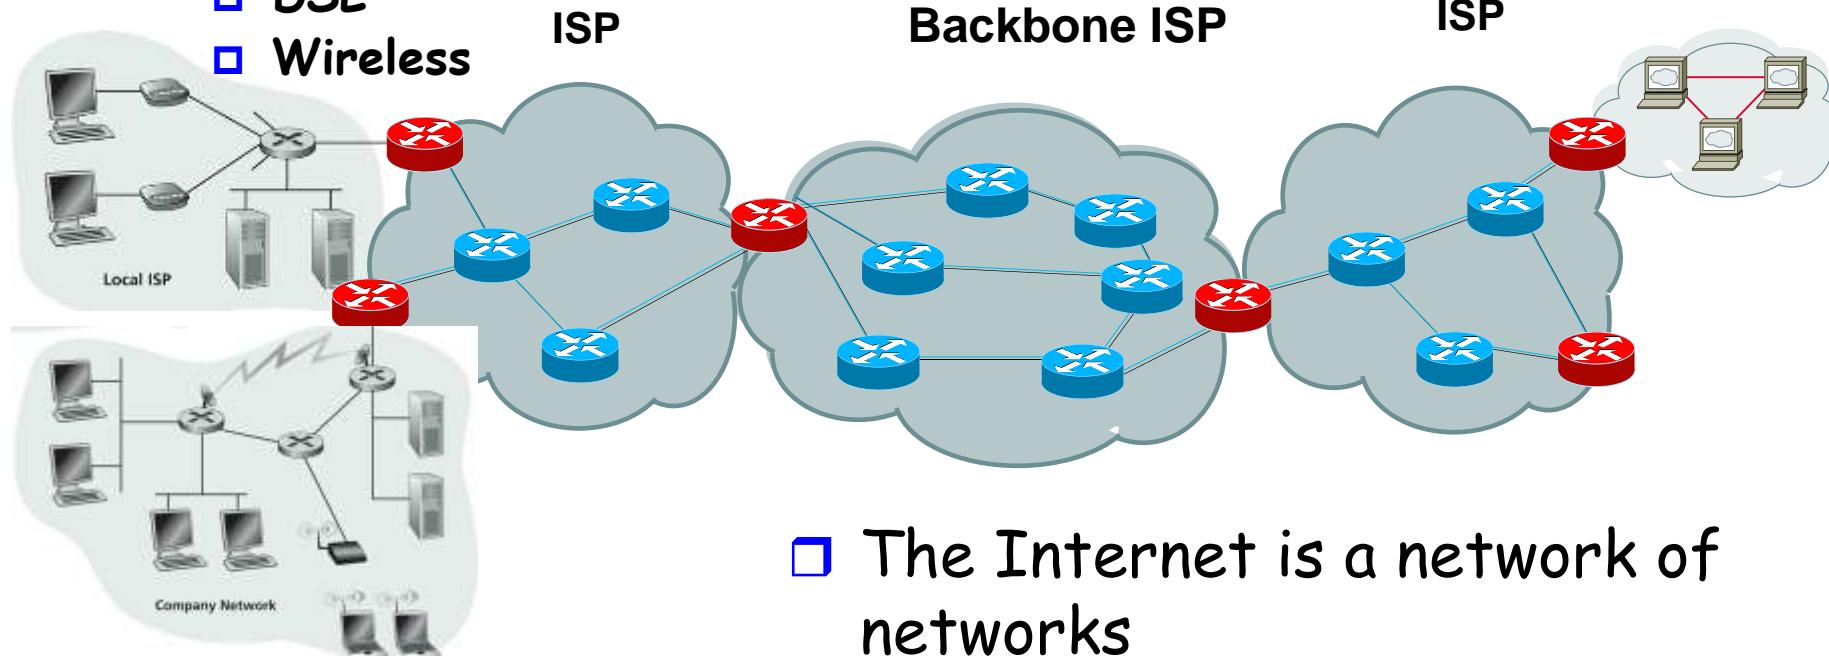


Campus access, e.g.,

- Ethernet
- Wireless

- The Internet is a network of networks
- Each individually administrated network is called an **Autonomous System (AS)**

Residential access: Point-to-Point access

- Dialup via modem
 - up to 56Kbps direct access to router (often less)
 - Can't surf and phone at same time: can't be "always on"
- ADSL: asymmetric digital subscriber line
 - up to 1 Mb/s upstream (today typically < 256 kb/s)
 - up to 8 Mb/s downstream (today typically < 1 Mb/s)
 - FDM: 50 kHz - 1 MHz for downstream
 - 4 kHz - 50 kHz for upstream
 - 0 kHz - 4 kHz for ordinary telephone

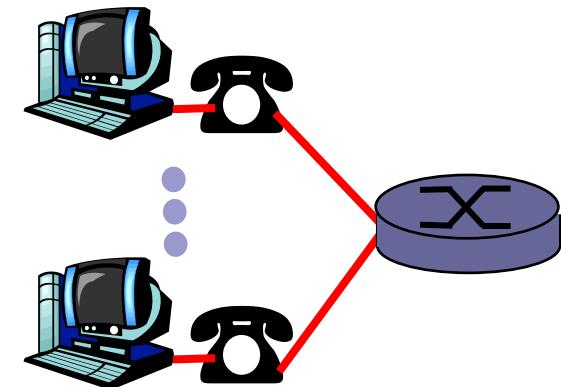

Residential access: **Cable modems**


- **HFC: hybrid fiber coax**

- **asymmetric:** up to 30Mbps downstream, 2 Mbps upstream


- network of cable and fiber attaches homes to ISP router

- **shared access to router among home**
 - **issues:** congestion, dimensioning

- **Deployment:** available via cable companies

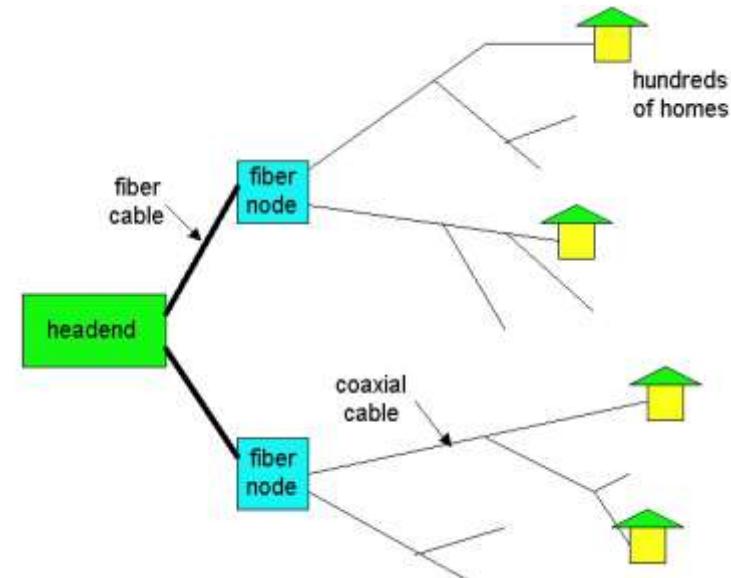


Residential access: **Cable modems**

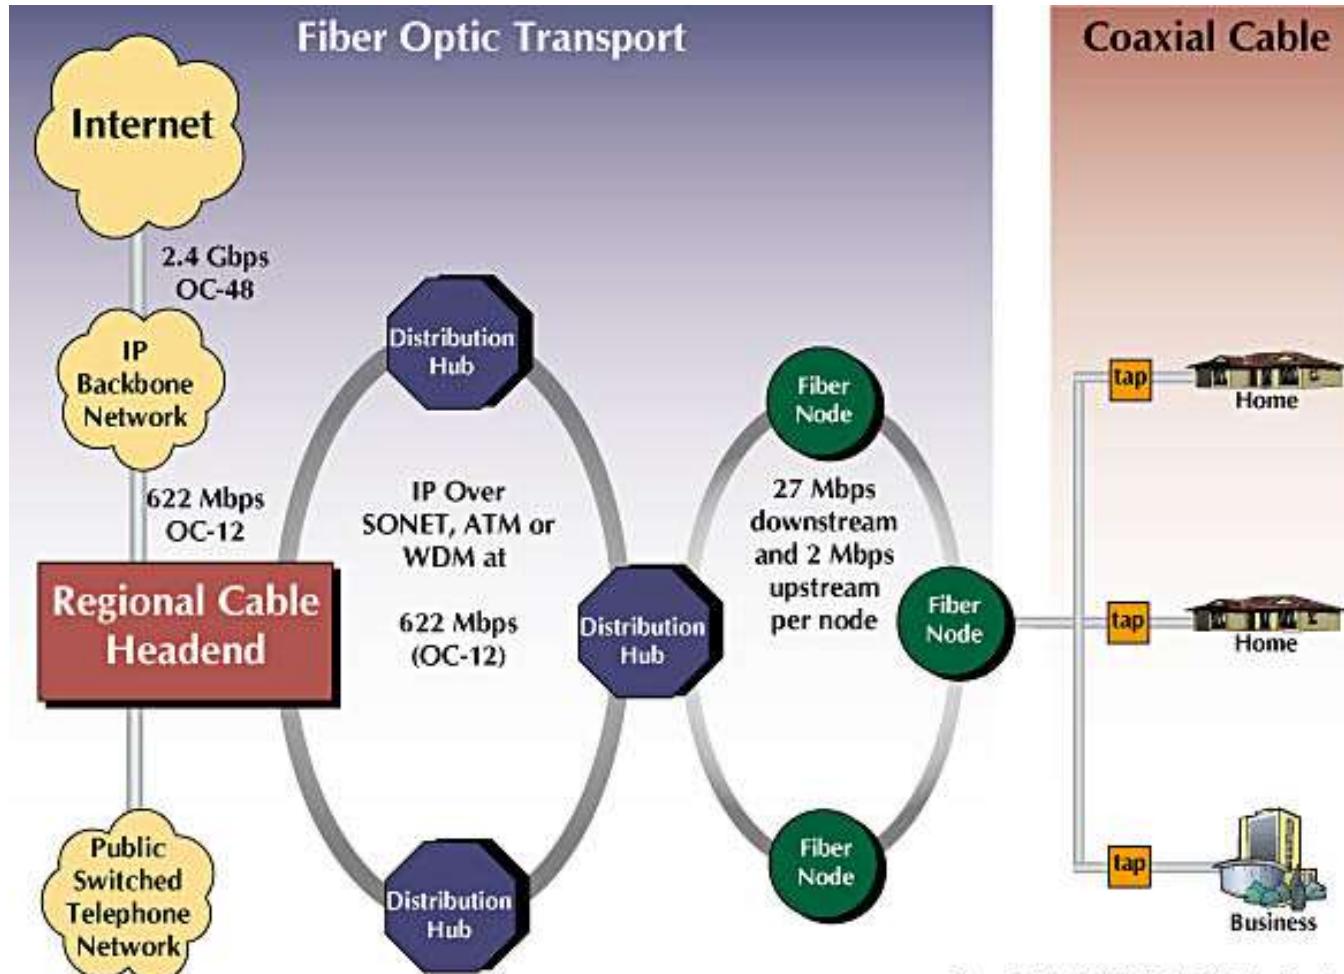


- **Fiber node: 500 - 1K homes**
- **Distribution hub: 20K - 40 K homes**
- **Regional headend: 200 K - 400 K homes**

Cable Network Architecture: Overview


Typically 500 to 5,000 homes

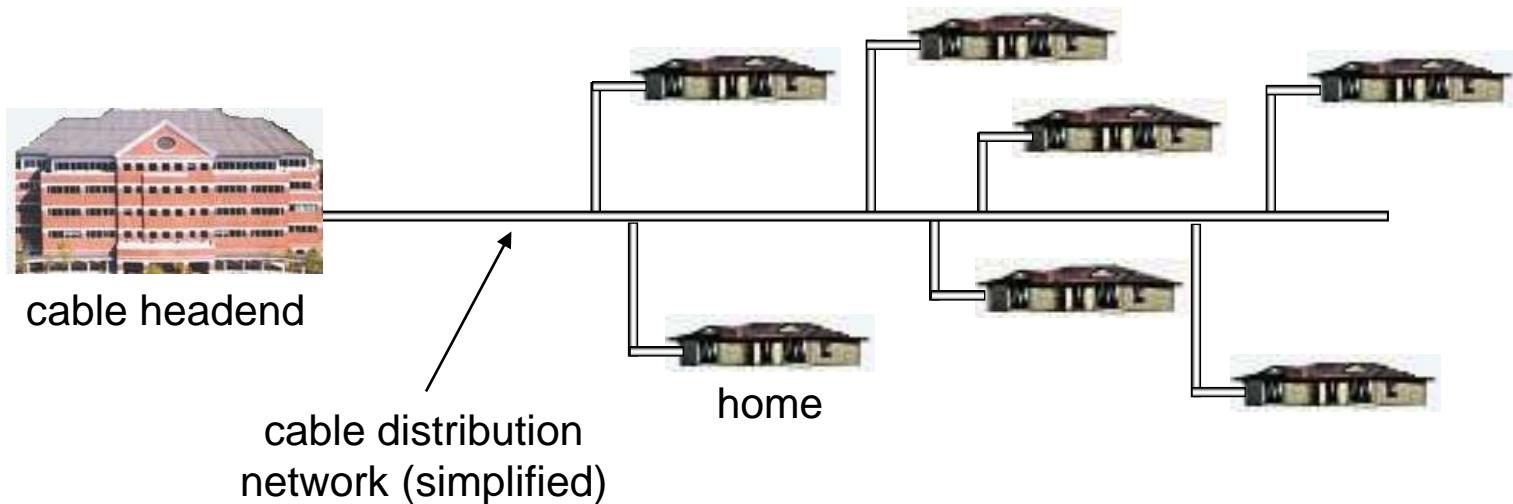


Cable Network Architecture: Overview

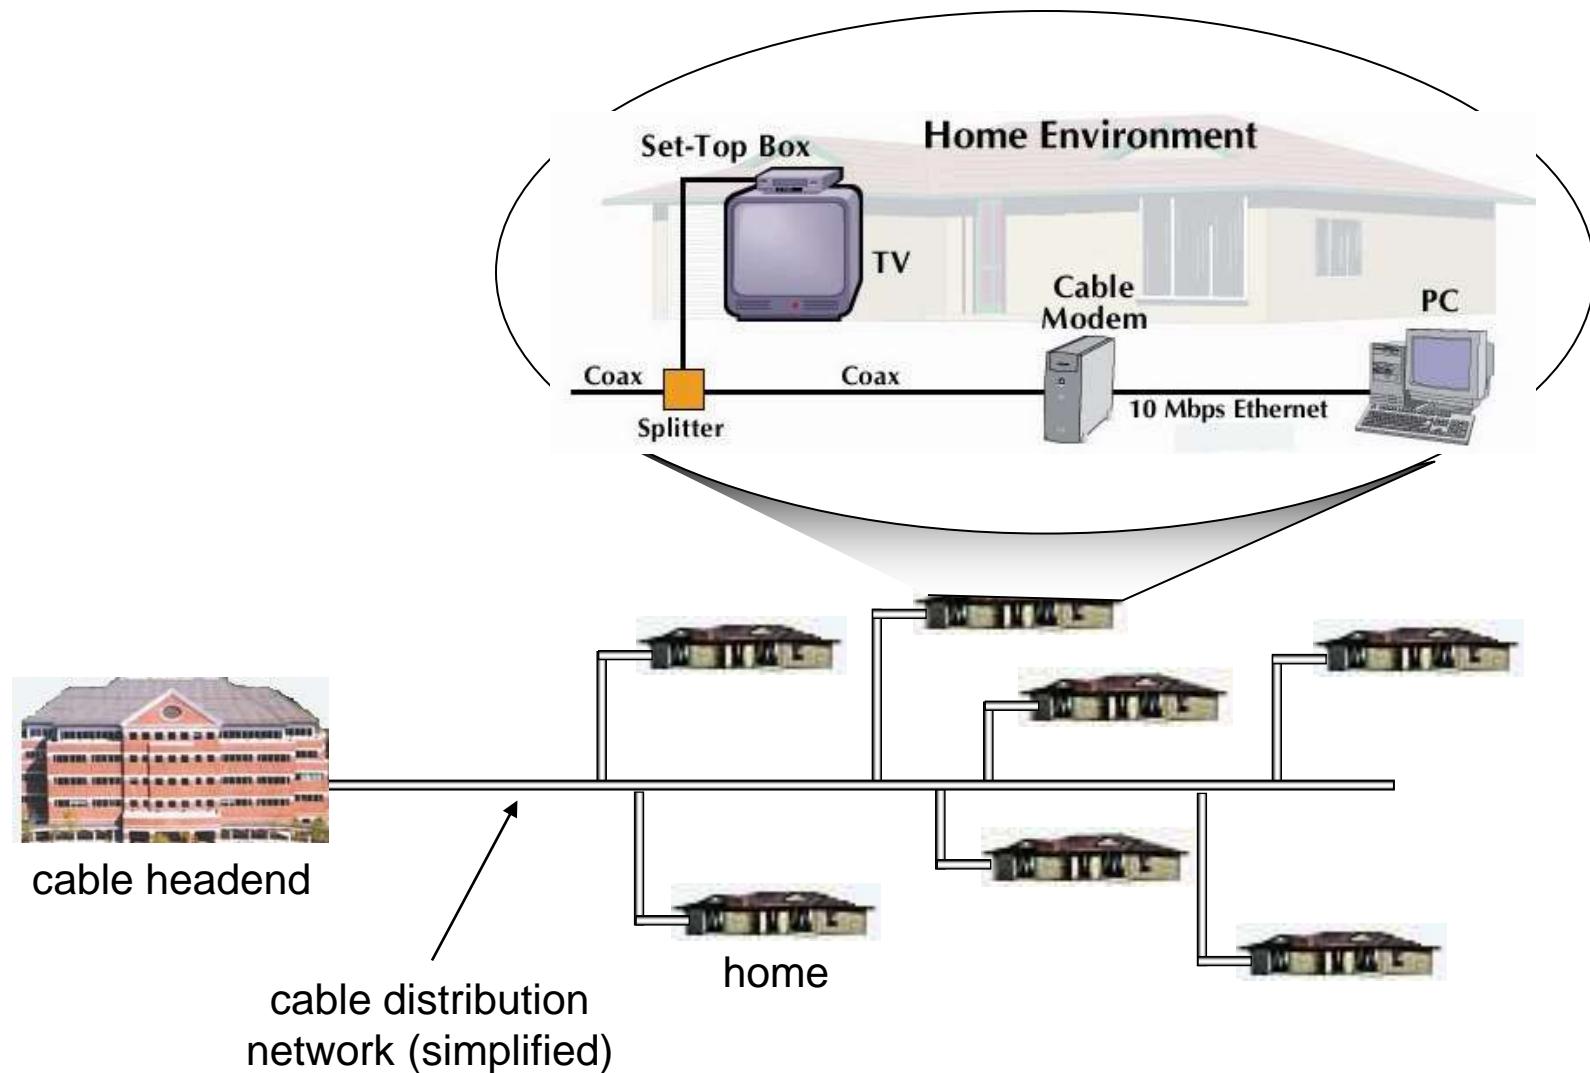

Cable Network Architecture: Overview

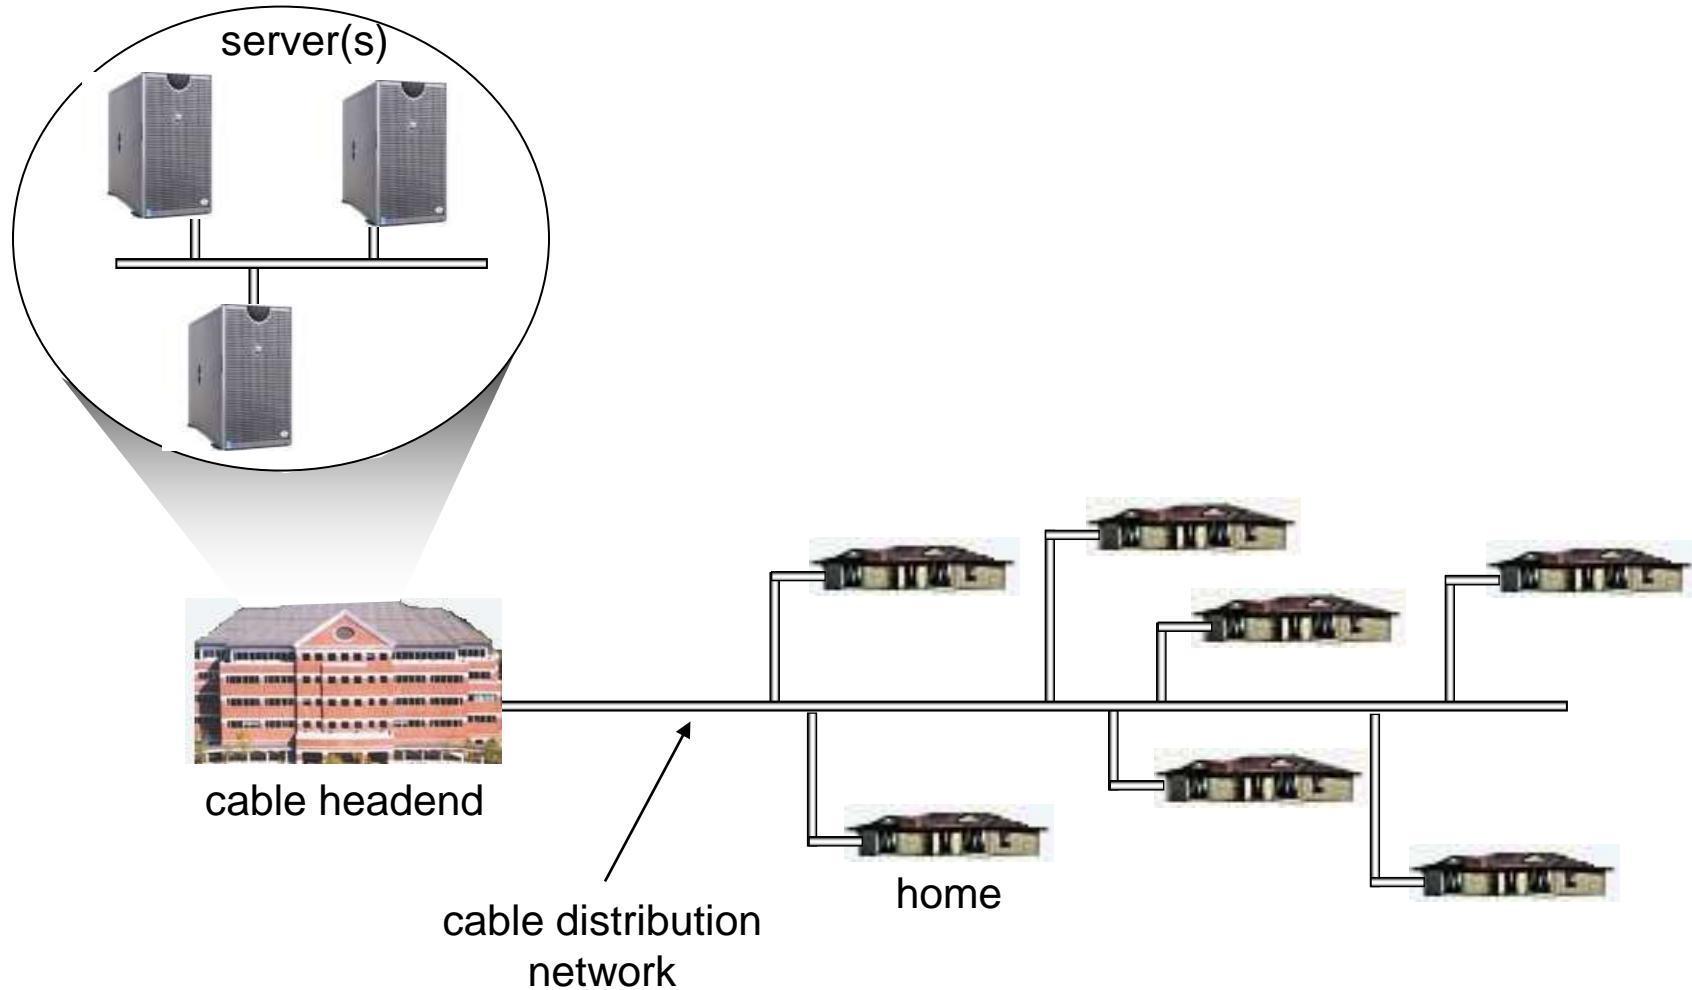

Cable Network Architecture: Overview

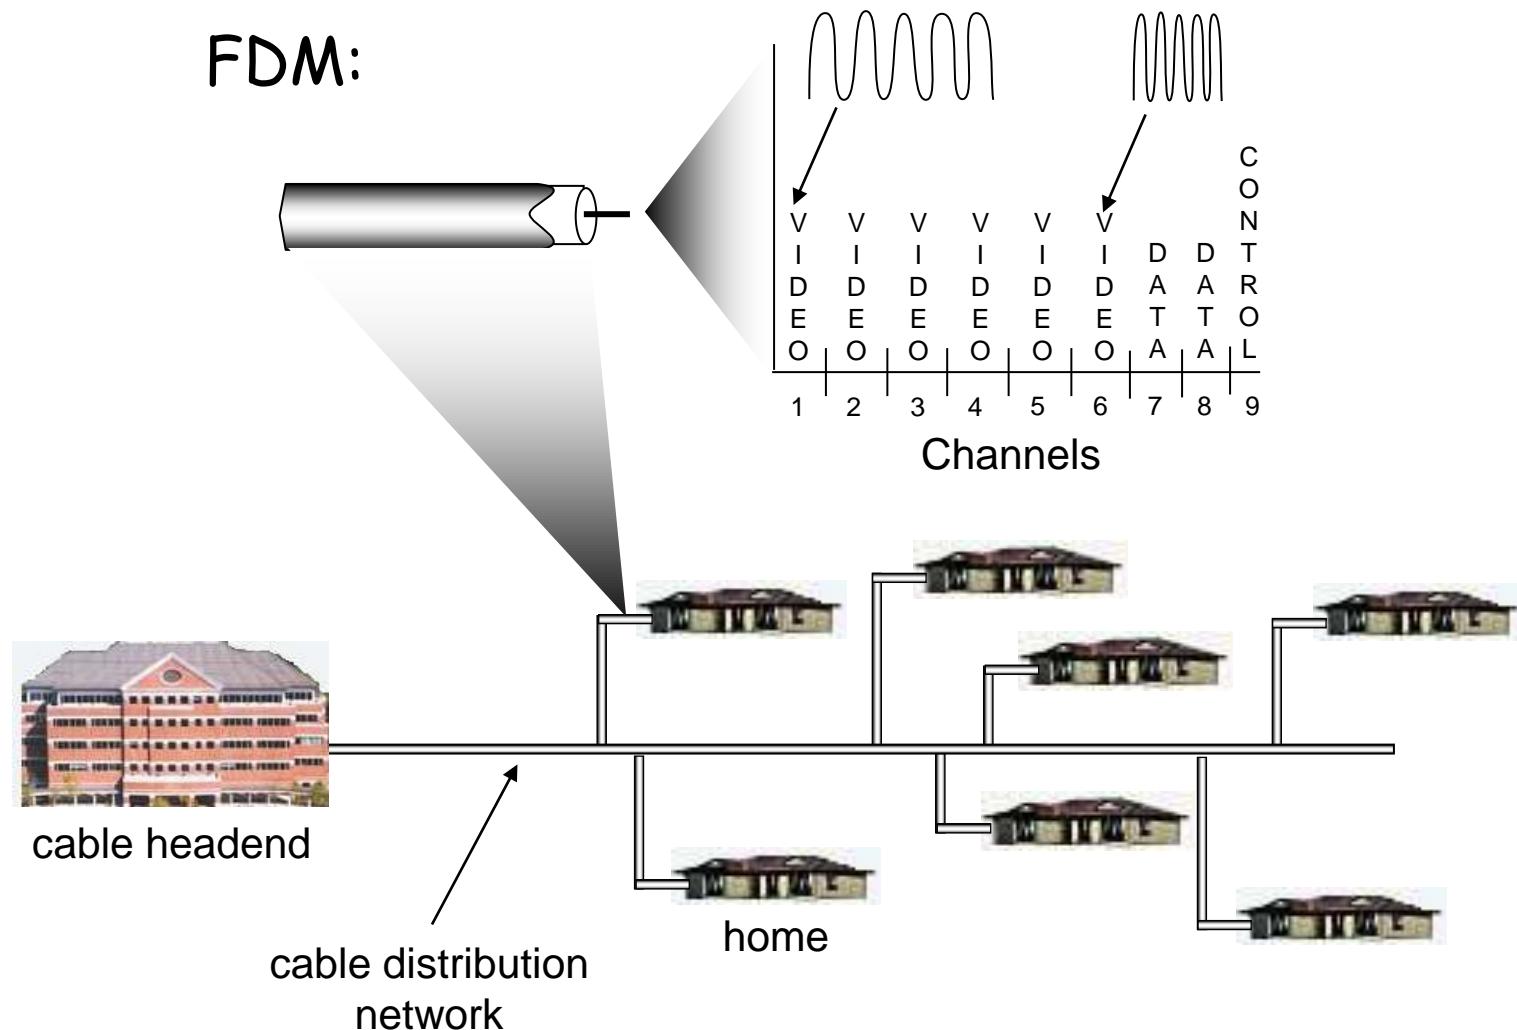


Residential Access: Fiber to the Premises (FTTP)

- Deployed by Verizon (all locations) and AT&T (new build areas)
- One of the largest comm. construction projects




FTTP Architecture

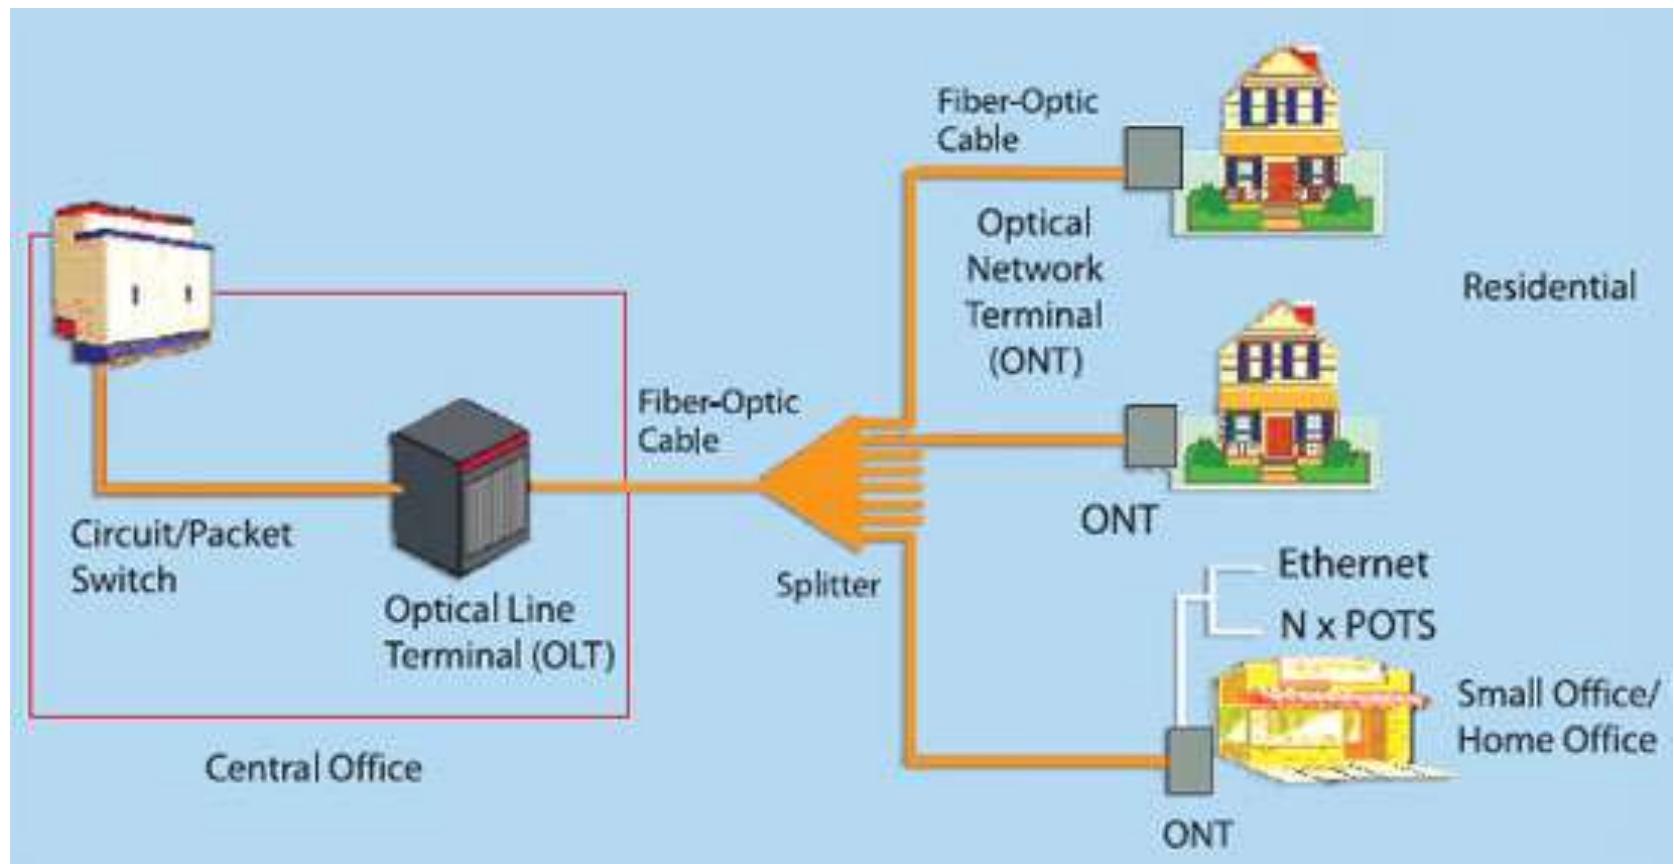

FTTP Architecture

- Optical Network Terminal box outside dwelling or business
- Fiber Distribution Terminal (FDT) in poles or pedestals
- Fiber Distribution Hub (FDH) at street cabinet
- Optical Line Terminal (OLT) at central office

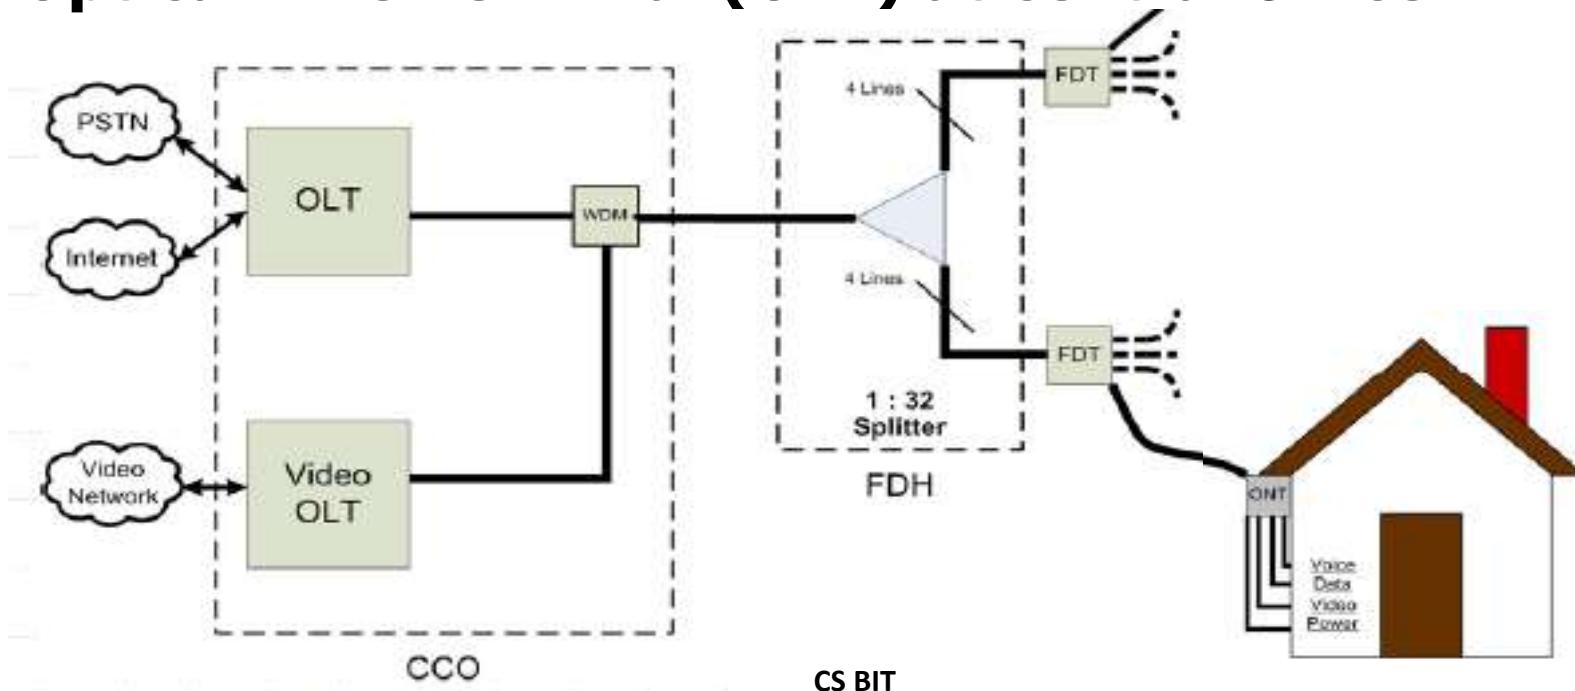


FTTP Architecture: Central to Fiber Distribution Hub (FDH)




- Backbone fiber ring on primary arterial streets (brown)
- Local distribution fiber plant (red) meets backbone at cabinet



FTTP Architecture: Fiber Distribution Terminal (FDT)

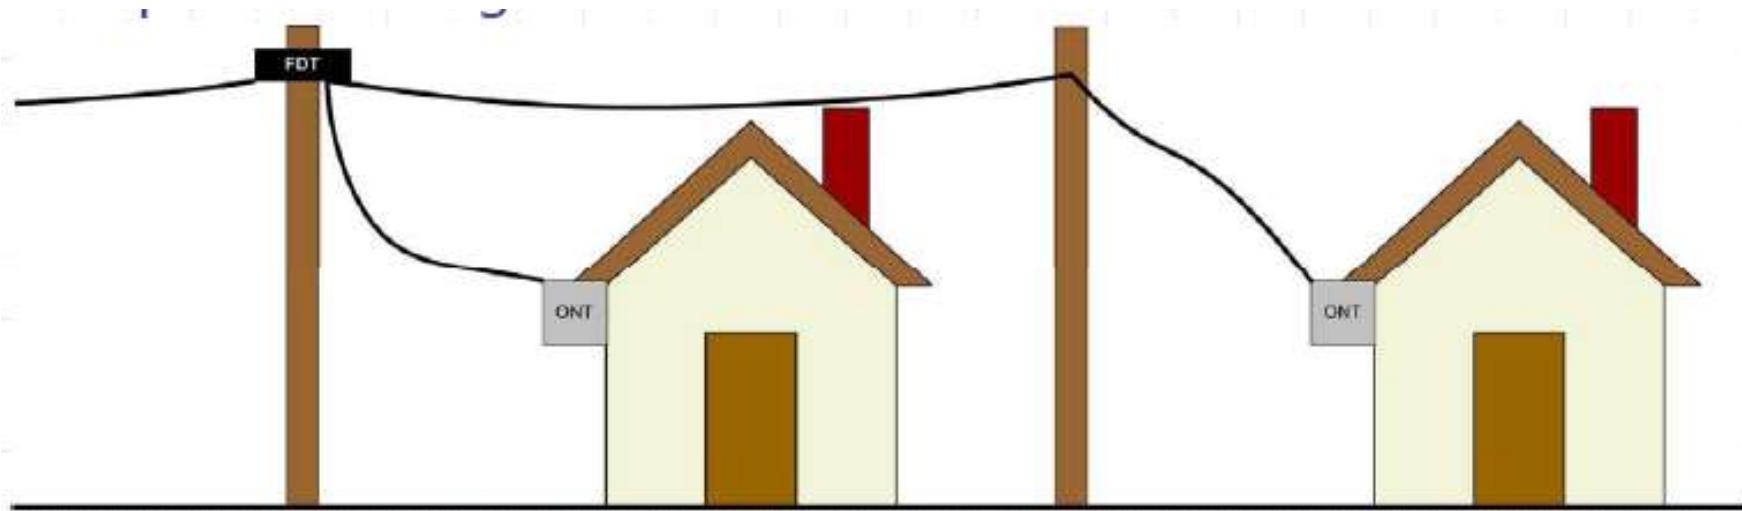

FTTP Architecture: To Home

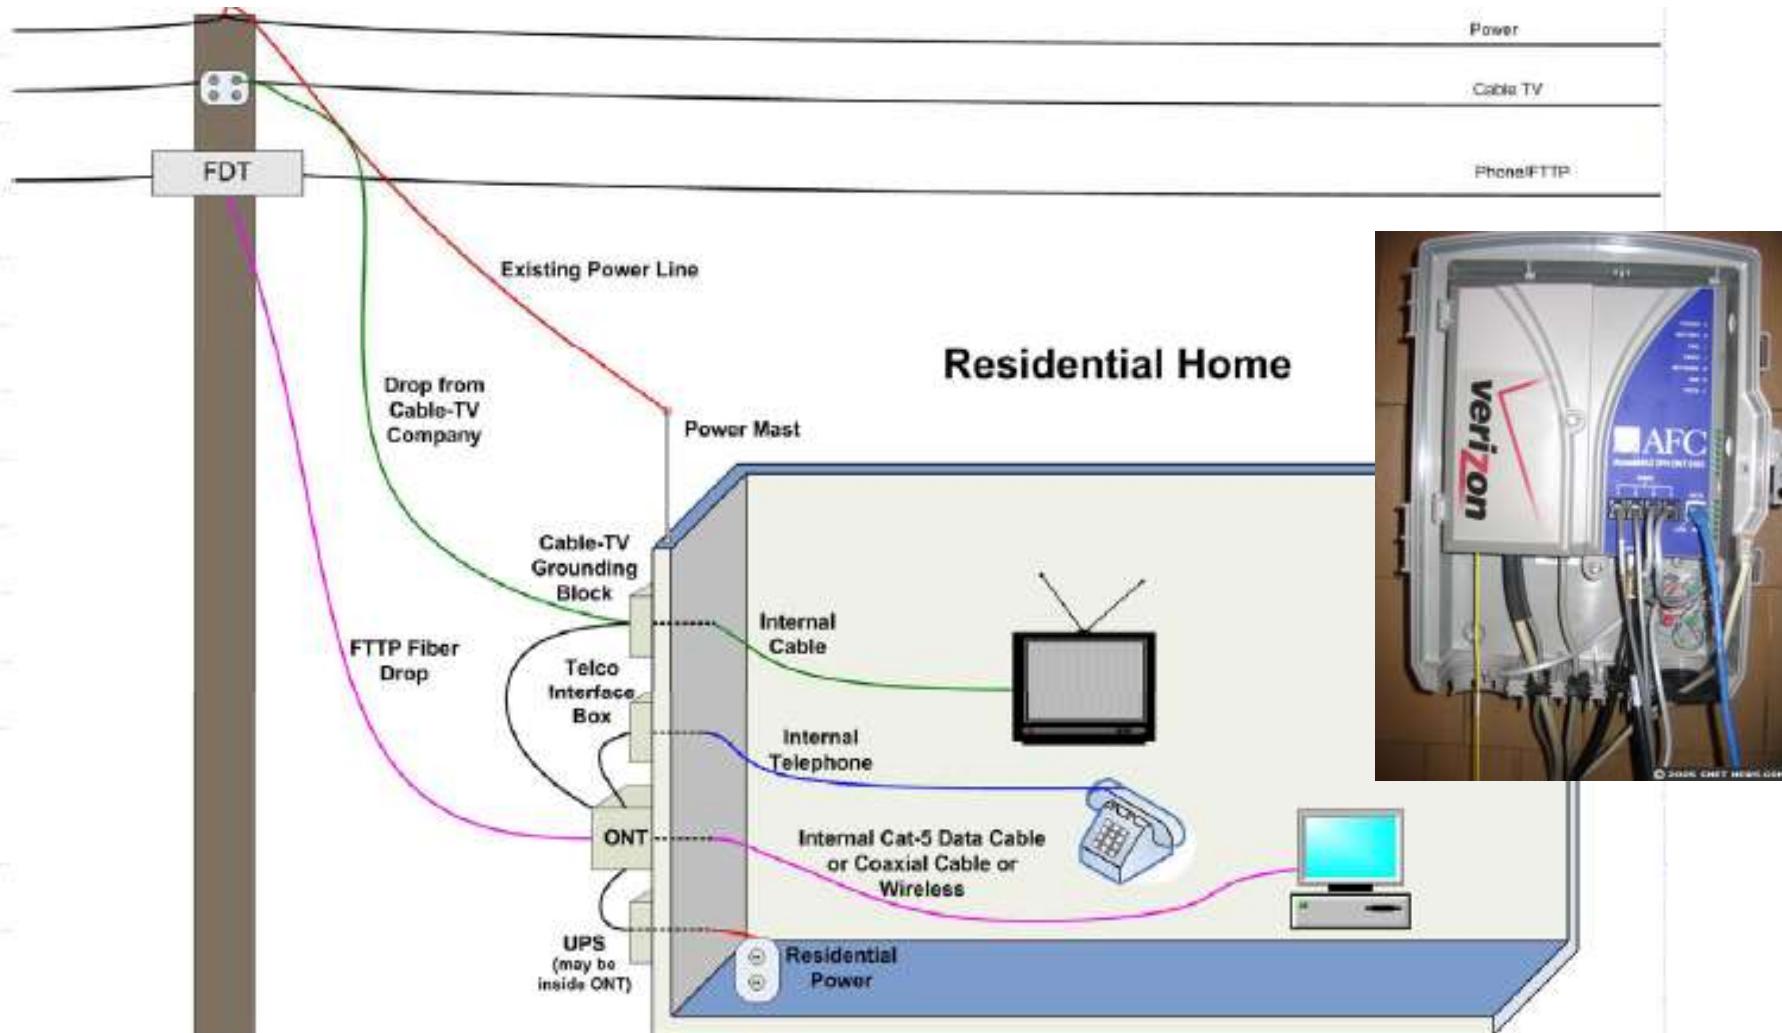

Residential Access: **Fiber to the Premises (FTTP)**

- **Highest theoretical capacity per user: 1 G bps**


- currently 5 to 30 Mbps downstream, 2 to 5 Mbps upstream

- **Services**

- analog and digital video
 - video viewable with and without set-top converter
 - voice
 - interfaces with existing phone, data, video cabling

Institutional access: Local Area Networks

- company/university **local area network (LAN)** connects end system to edge router
- **Ethernet:**
 - **shared or dedicated** cable connects end system and router
 - **10 Mb/s, 100 Mb/s** for PCs and enterprise networks
 - **Gigabit Ethernet (GigE)** for servers
 - **10 Gb/s** for servers and backbones
- **deployment:** institutions, home LANs
 - wide area emerging

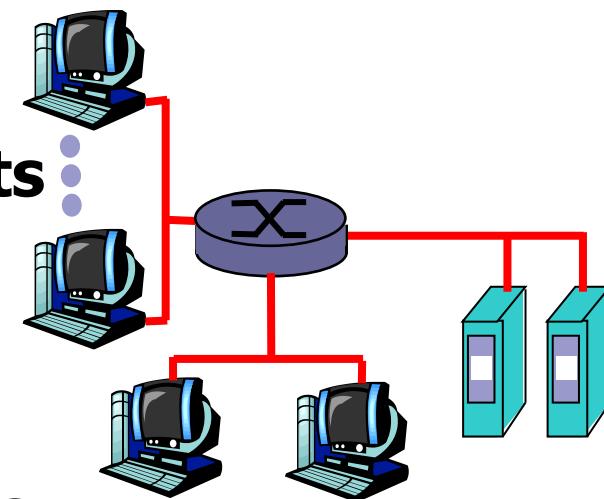

Wireless access networks


- **shared wireless access network connects end system to router**

- **wireless LANs:**

- radio spectrum replaces wire
 - e.g., 802.11 a/b/g/n
 - nominally, 1 to 100 Mb/s

- **wider-area wireless access**


- through cell phone network
 - **CDPD: old, slow wireless access to ISP router via cellular network (fill speech gaps) -- obsolete**
 - **EVDO, 1xRTT: emerging**
 - **3G/4G/5G**

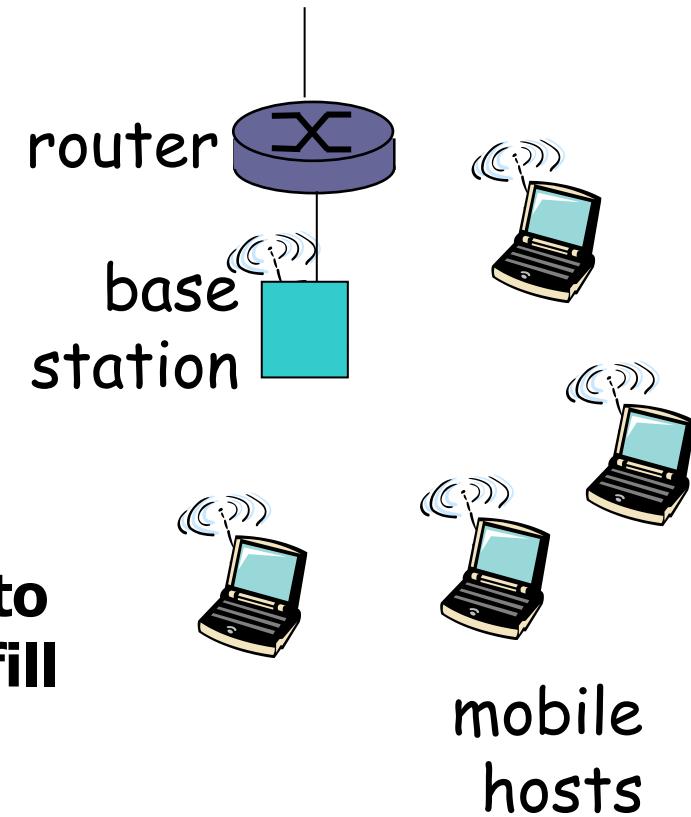

Home networks

Typical home network components:

- ADSL or cable modem
- router/firewall/NAT
- Ethernet
- wireless access point

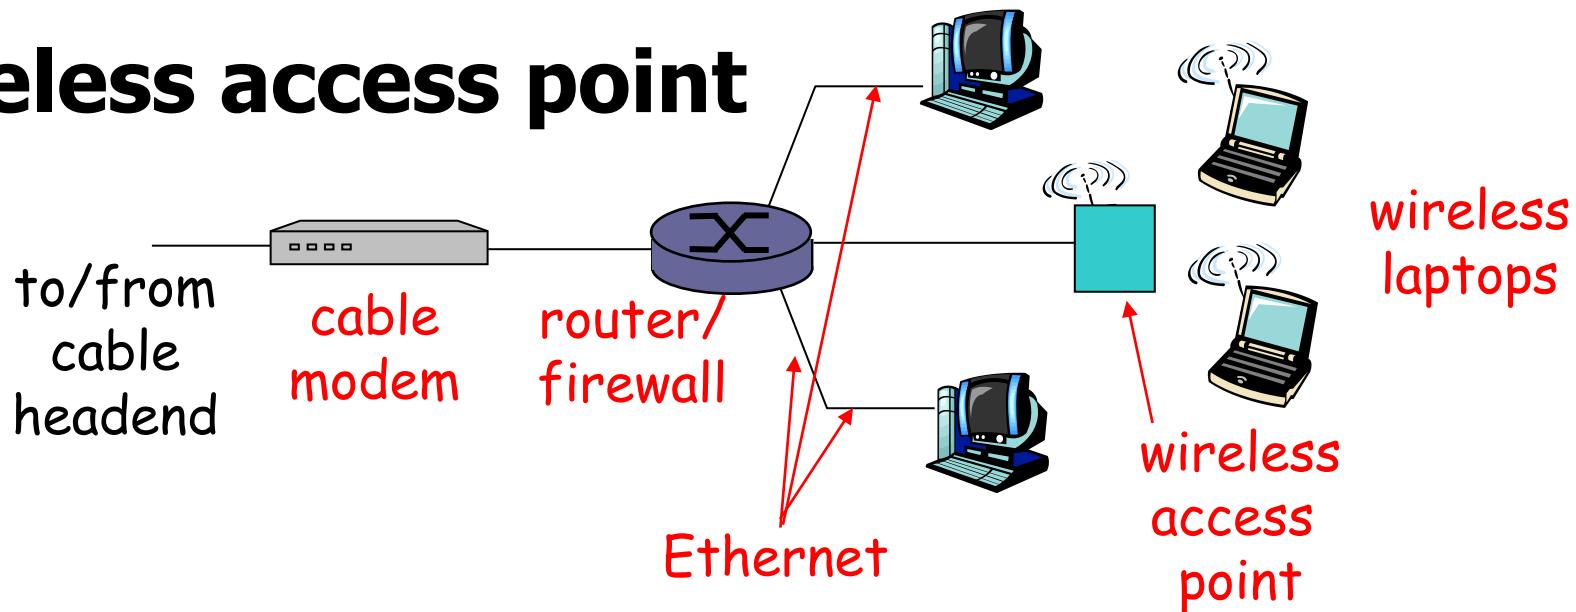


Access: DSL

- Compared with FTTP, **copper** from cabinet (DSLAM) to home



DSLAM

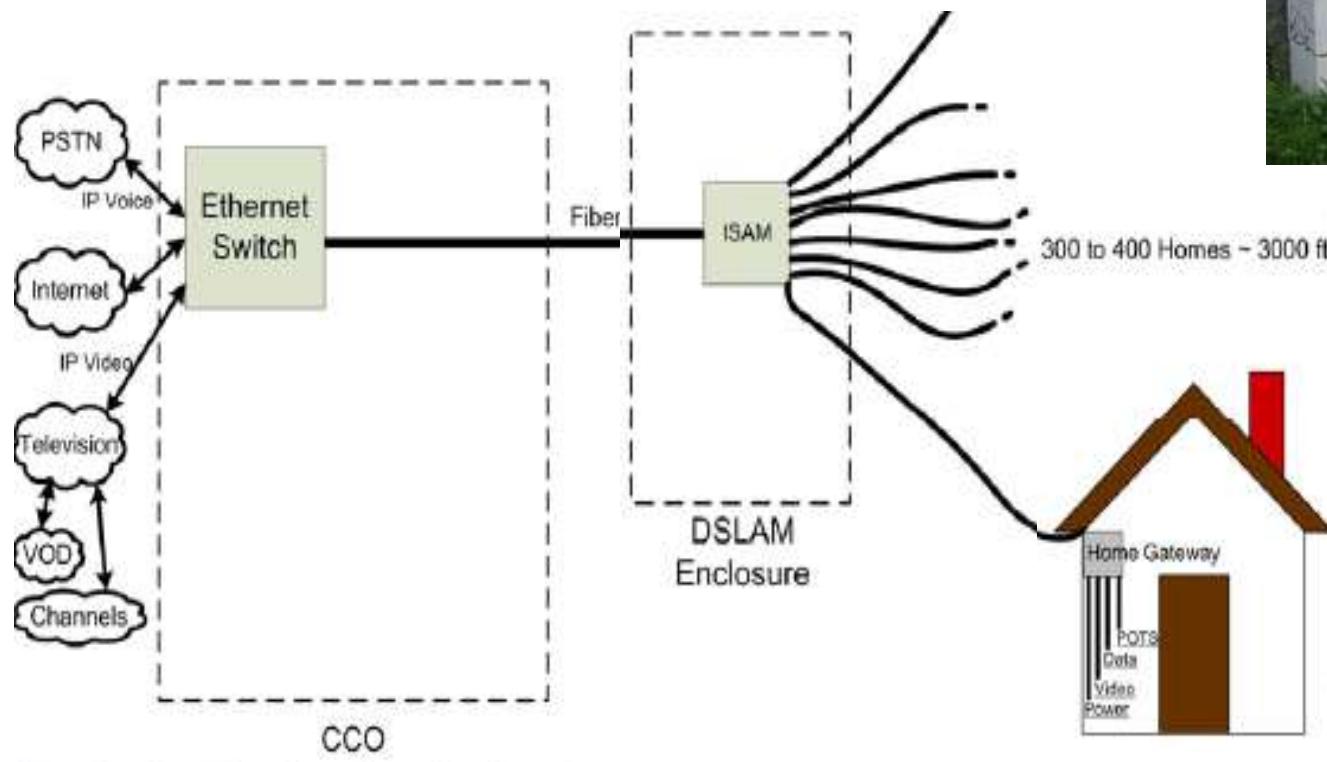

DSL Services to Customers

- Up to 25 Mbps per customer
- Currently a few Mbps downstream, and a few Mbps upstream
- Voice
 - converted to standard telephone signal at Home Gateway

Physical Media

- **physical link:**
transmitted data bit propagates across link
- **guided media:**
 - signals propagate in solid media: copper, fiber
- **unguided media:**
 - signals propagate freely, e.g., radio

Twisted Pair (TP)

- two insulated copper wires
 - **Category 3:** traditional phone wires, 10 Mb/s Ethernet
 - **Category 5 TP:** 100 Mb/s Ethernet
 - **Category 6 TP:**
 - 1 Gb/s Ethernet



Categories of Unshielded Twisted Pair

The EIA/TIA (Electronic Industry Association/Telecommunication Industry Association) has established standards of UTP.

<u>Type</u>	<u>Use</u>
Category 1	Voice Only (Telephone Wire)
Category 2	Data to 4 Mbps (LocalTalk)
Category 3	Data to 10 Mbps (Ethernet)
Category 4	Data to 20 Mbps (16 Mbps Token Ring)
Category 5	Data to 100 Mbps (Fast Ethernet)
Category 5e	Data to 100 Mbps (Fast Ethernet)
Category 6	Data to 250 MHz (Gigabit Ethernet?)
Category 7	Data to 600 MHz



(a)



(b)



Twisted Pair Cable

- **RJ45** is a standard type of connector for network cables.
- **RJ45 connectors** are most commonly seen with Ethernet cables and networks.



How Twisted-Pair Cables and Connectors Are Wired


- The most common standards are **T568A** and **T568B** with the second being of the most use.

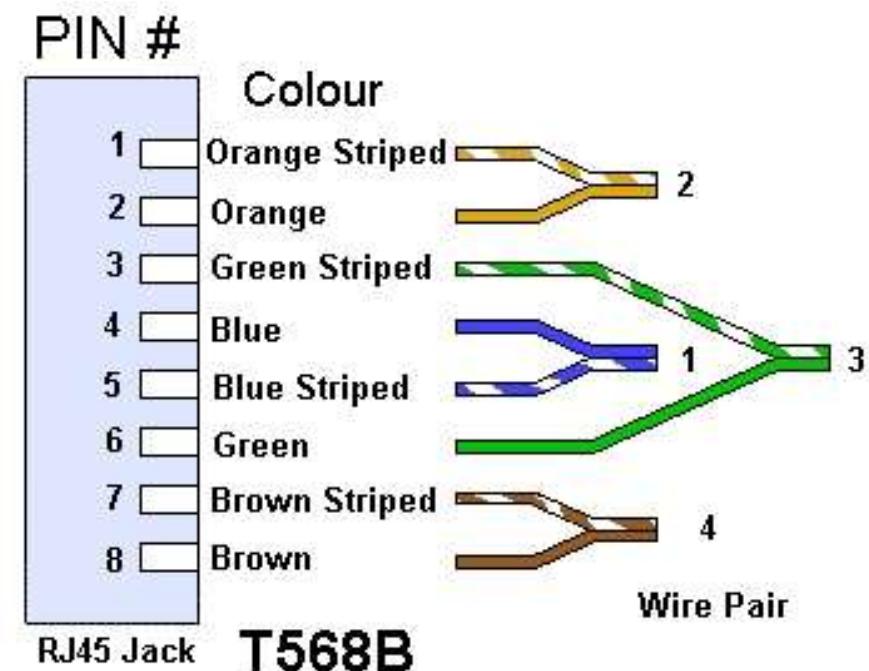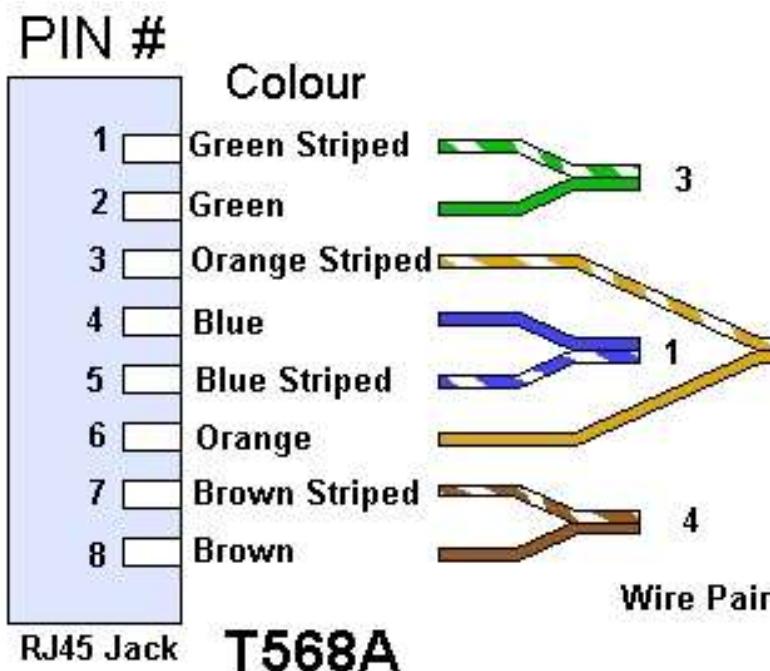

How Twisted-Pair Cables and Connectors Are Wired

Pin	100BaseT Purpose	T568A Wiring	T568B Wiring
1	Transmit+	Pair 3: White/green A horizontal line with three segments. The first segment is white, the second is green, and the third is white.	Pair 2: White/orange A horizontal line with three segments. The first segment is white, the second is orange, and the third is white.
2	Transmit-	Pair 3: Green A horizontal line with one green segment.	Pair 2: Orange A horizontal line with one orange segment.
3	Receive+	Pair 2: White/orange A horizontal line with two segments: orange on top and white on bottom.	Pair 3: White/green A horizontal line with two segments: white on top and green on bottom.
4	(Used only on Gigabit Ethernet)	Pair 1: Blue A horizontal line with one blue segment.	Pair 1: Blue A horizontal line with one blue segment.
5	(Used only on Gigabit Ethernet)	Pair 1: White/blue A horizontal line with two segments: blue on top and white on bottom.	Pair 1: White/blue A horizontal line with two segments: white on top and blue on bottom.
6	Receive-	Pair 2: Orange A horizontal line with one orange segment.	Pair 3: Green A horizontal line with one green segment.
7	(Used only on Gigabit Ethernet)	Pair 4: White/brown A horizontal line with two segments: brown on top and white on bottom.	Pair 4: White/brown A horizontal line with two segments: white on top and brown on bottom.
8	(Used only on Gigabit Ethernet)	Pair 4: Brown A horizontal line with one brown segment.	Pair 4: Brown A horizontal line with one brown segment.

How Twisted-Pair Cables and Connectors Are Wired

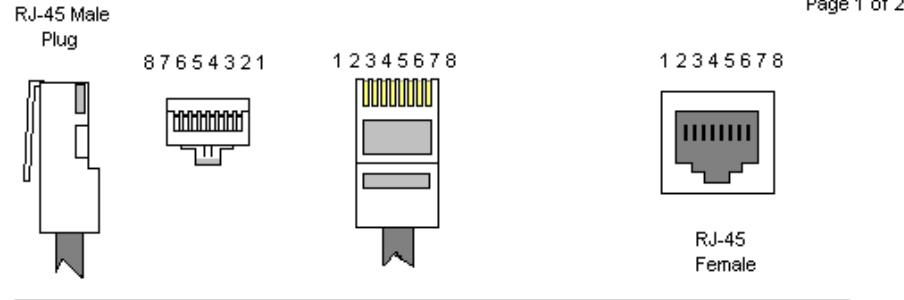

Color Standard EIA/TIA T568A		Ethernet Patch Cable	
	RJ45 Pin#	Pin#	RJ45
TX+	Green/White Tracer	1	Green/White Tracer
TX-	Green	2	Green
RX+	Orange/White Tracer	3	Orange/White Tracer
	Blue	4	Blue
RX-	Blue/White Tracer	5	Blue/White Tracer
	Orange	6	Orange
	Brown/White Tracer	7	Brown/White Tracer
	Brown	8	Brown


Color Standard EIA/TIA T568A		Ethernet Crossover Cable	
	RJ45 Pin#	Pin#	RJ45
	Green/White Tracer	1	Orange/White Tracer
	Green	2	Orange
	Orange/White Tracer	3	Green/White Tracer
	Blue	4	Brown/White Tracer
	Blue/White Tracer	5	Brown
	Orange	6	Green
	Brown/White Tracer	7	Blue
	Brown	8	Blue/White Tracer

"A" is earlier

Straight-through cable:
used to connect a computer to a switch or other network device.
Also called a **patch cable**.

Crossover cable:
used to connect two like devices such as a hub to a hub or a PC to a PC.
Transmit and receive lines are reversed

STP

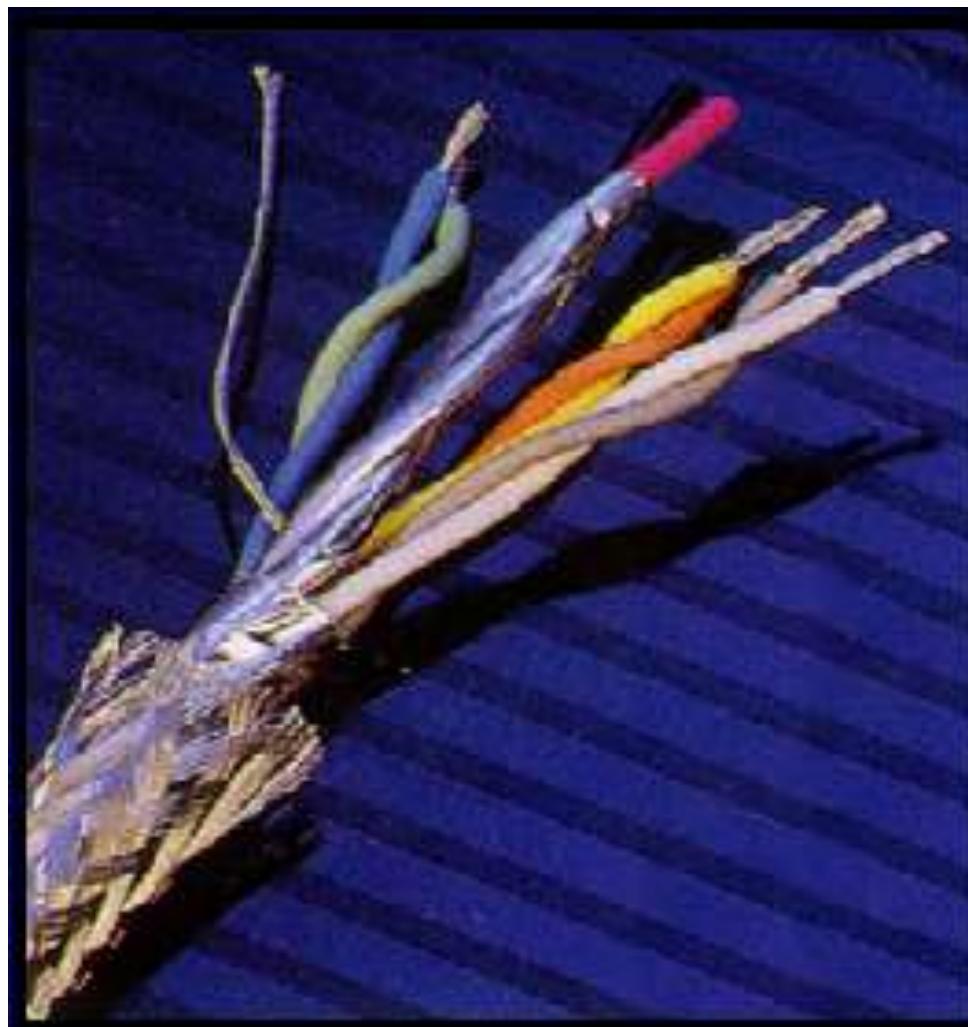

Physical Media: coax, fiber

Coaxial cable:

- **wire (signal carrier) within a wire (shield)**
 - baseband: single channel on cable
 - broadband: multiple channel on cable
- **bidirectional**
- **formerly common use in 10 Mb/s Ethernet**




Fiber optic cable:

- **glass fiber carrying light pulses**
- **typically dozens bundled into one cable**
- **high-speed operation:**
 - 100 Mb/s Ethernet
 - high-speed point-to-point transmission (e.g., 40 Gb/s)
- **low error rate: repeaters spaced far apart; immune to electromagnetic noise**



Coaxial Cable

- Exactly like the one you use for your TV Set:

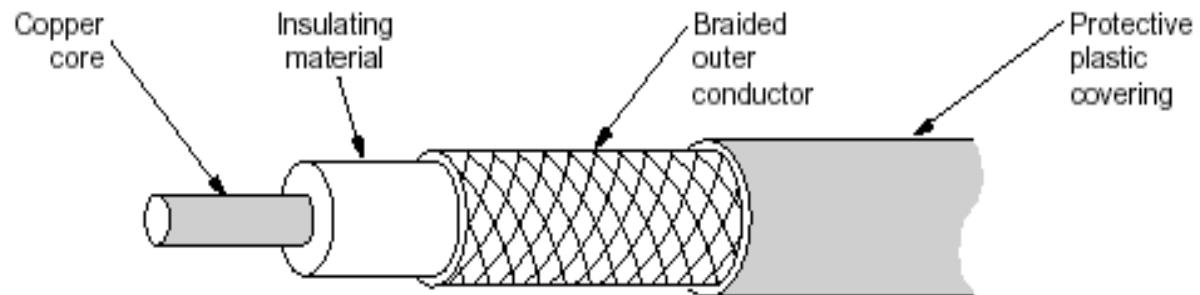

- **Baseband Coax**



- 50-ohm cable for digital transmission
 - 10Base-2, BNC, Thin-LAN, 185m/ per segment
 - 10Base-5, AUI, Thick-LAN, 500m/ per segment
 - At most 5 segments, up to 945m/2500m.

- **Broadband Coax**

- 75-ohm cable for analog transmission, like cable TV.





Fiber Optics

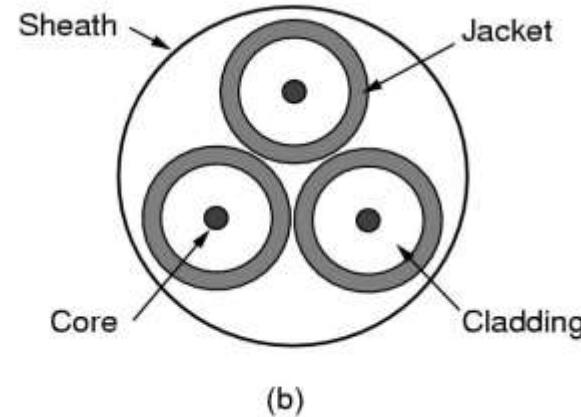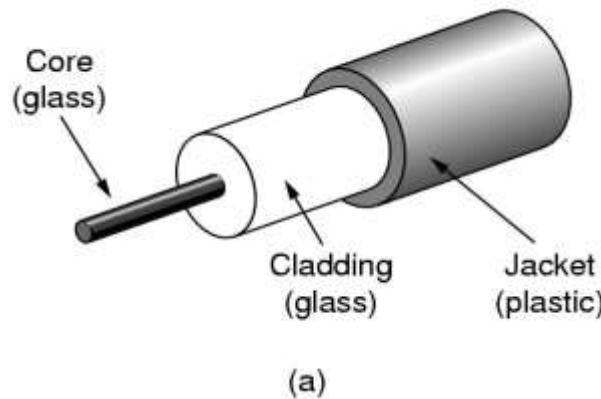

Item	LED	Semiconductor Laser
Data rate	Low	High
Mode	Multimode	Multimode or single mode
Distance	Short	Long
Lifetime	Long life	Short life
Temperature sensitivity	Minor	Substantial
Cost	Low cost	Expensive


Fiber Optics

高密度多芯光缆剖面结构

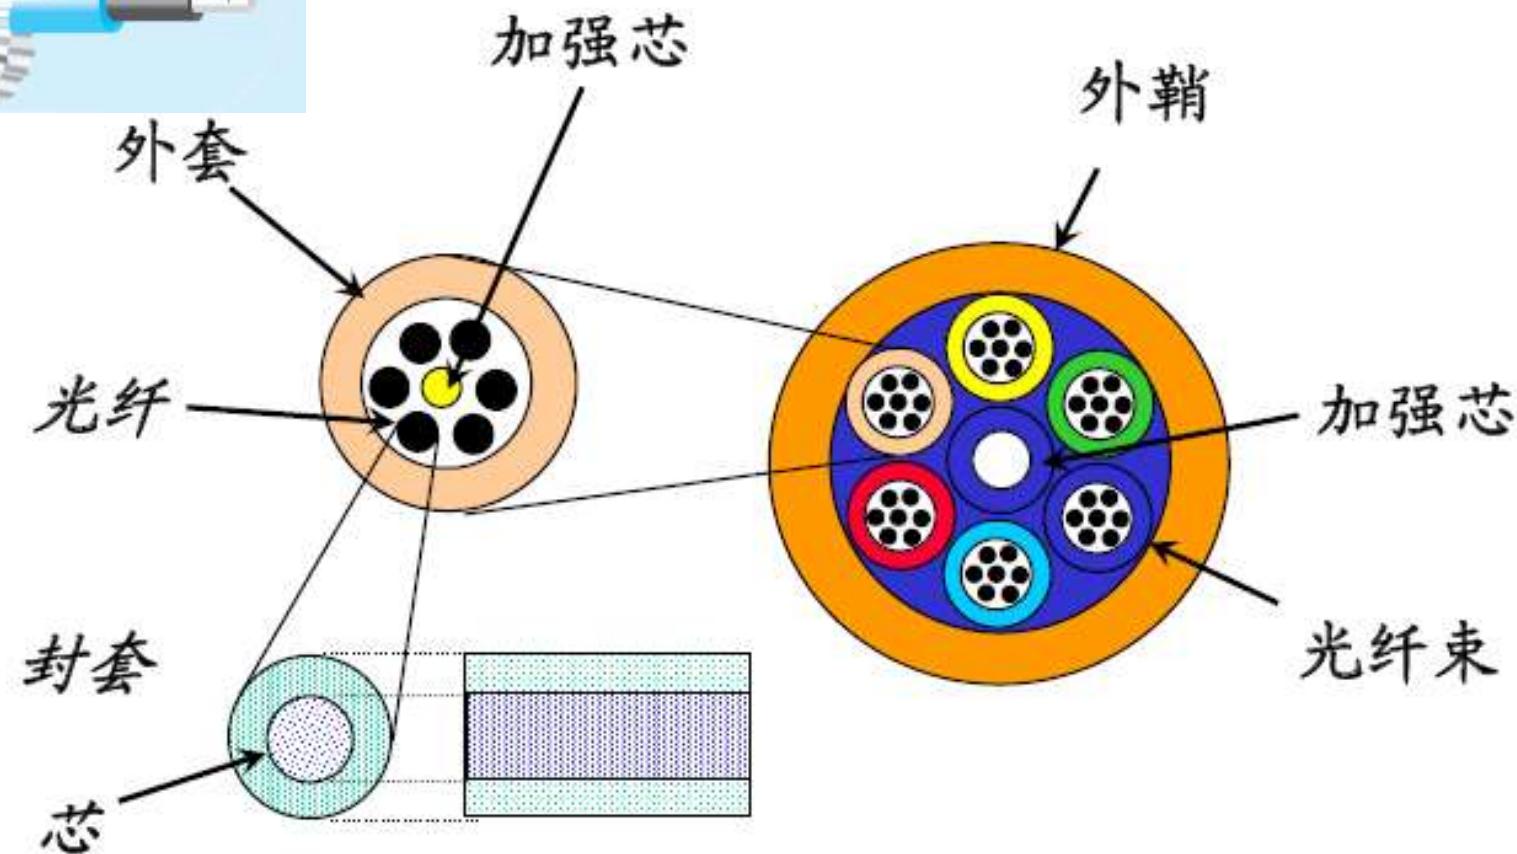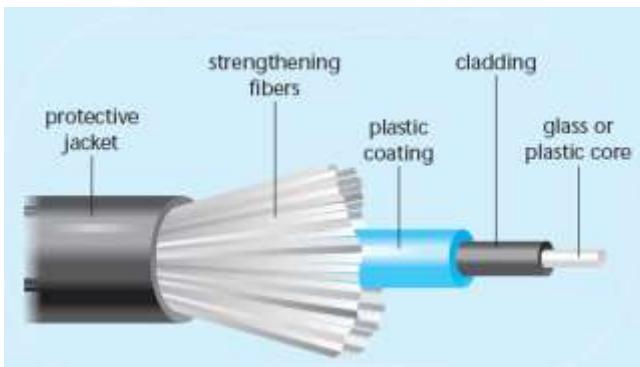

SC: 568A标准，方形，插入锁定


ST: 插入锁定

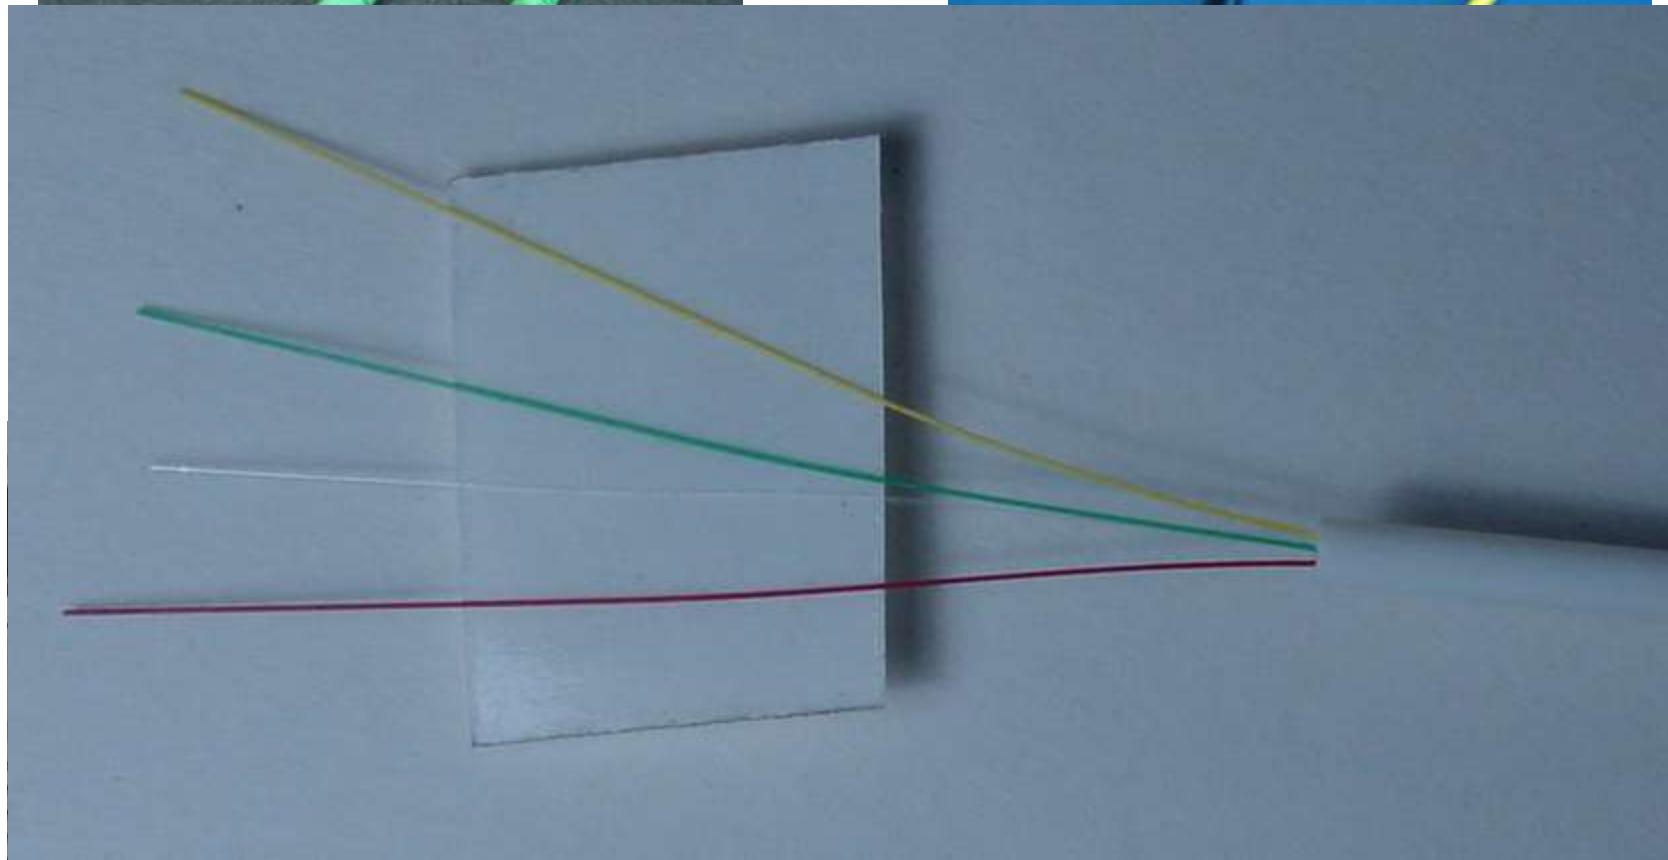

SC: 568A标准，方形，插入锁定



ST: 插入锁定

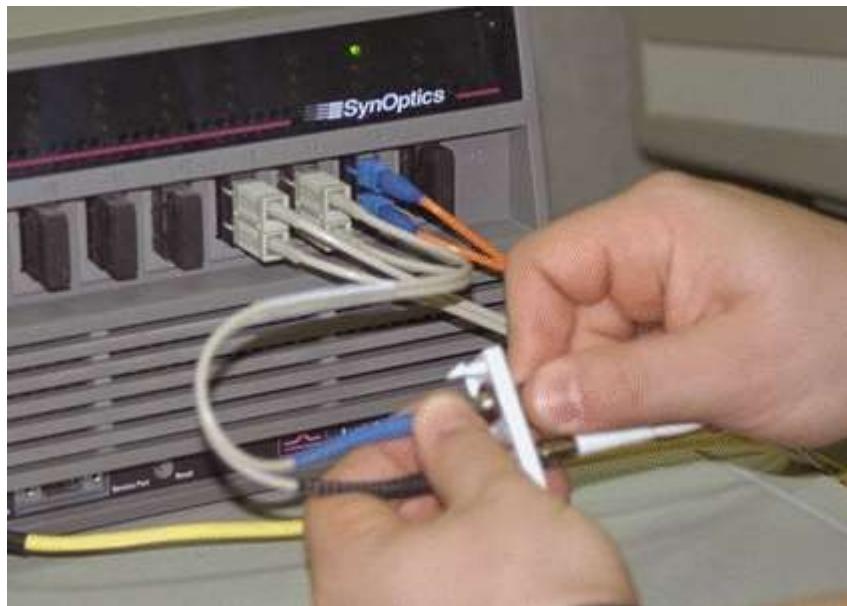

光耦合器 (ST)



- Attenuation in decibels =
 $10\log_{10}(\text{transmitted power}/\text{received power})$

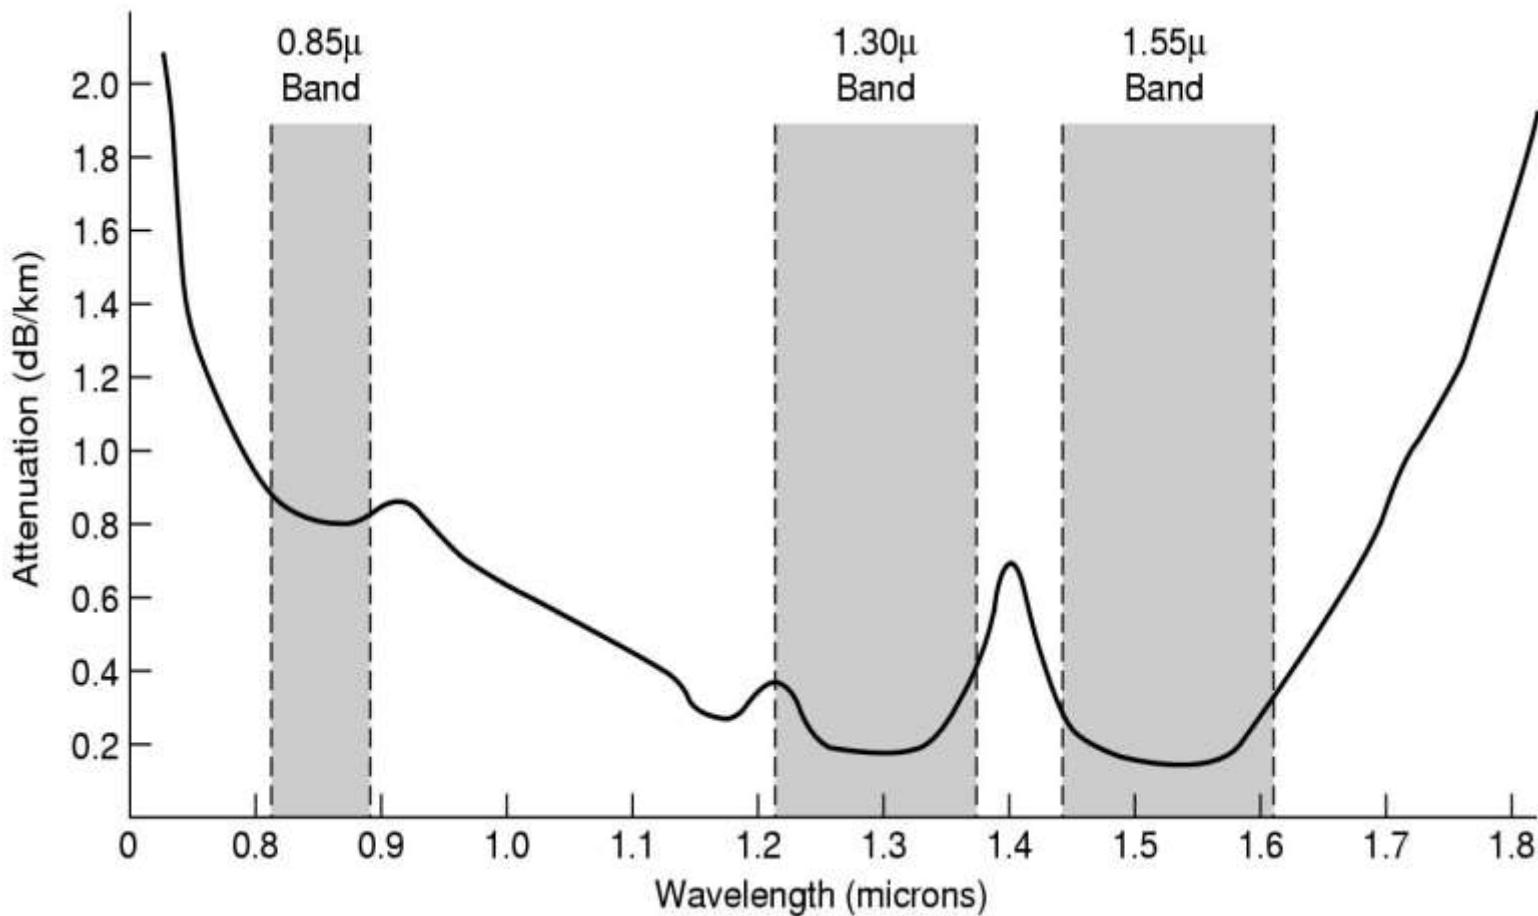


Fig. 2-6 Attenuation of light through fiber in the infrared region.


Physical media: radio

- signal carried in electromagnetic spectrum
- no physical “wire”
- bidirectional
- propagation environment effects:
 - reflection
 - obstruction by objects
 - interference


- Radio link types:**
- **terrestrial microwave**
 - e.g. up to 45 Mb/s channels
 - **LAN (e.g., WiFi)**
 - 2Mbps, 11Mb/s, 54Mbps
 - **wide-area (e.g., cellular)**
 - e.g. 3G: hundreds of kb/s
 - **satellite**
 - up to 50 Mb/s channel (or multiple smaller channels)
 - 270 msec end-end delay
 - geosynchronous versus low altitude (Iridium)

Physical media: radio


无线电传播方式

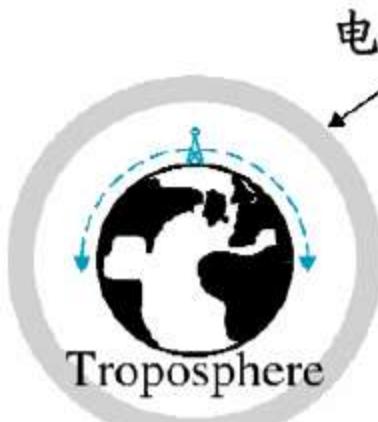


地表传播

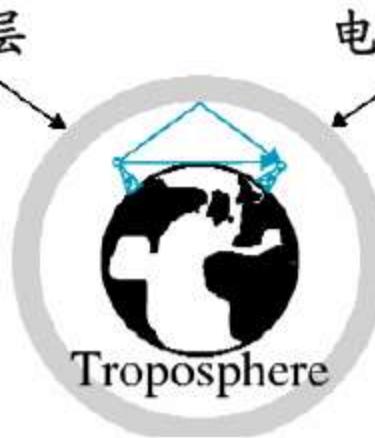


对流层传播

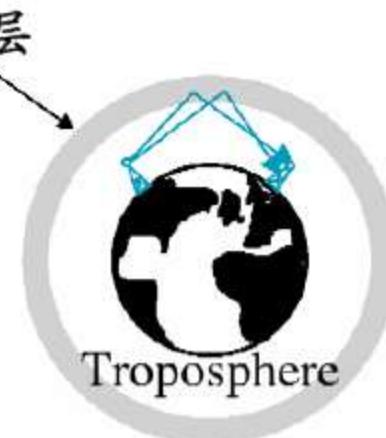

电离层传播

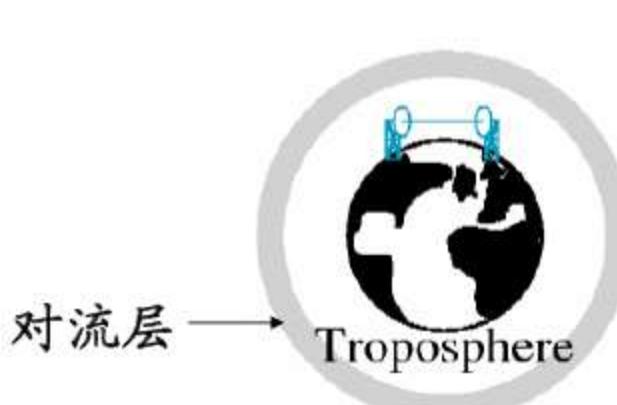

视线传播


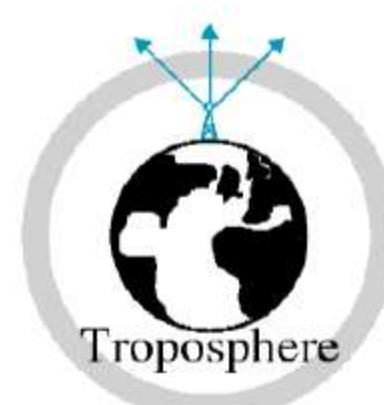


空间传播

Physical media: radio

微 波

直线传播，需中继转发（塔高100m，站距100km）；
频带宽，容量大，不易受到干扰，比电缆通信投资少。

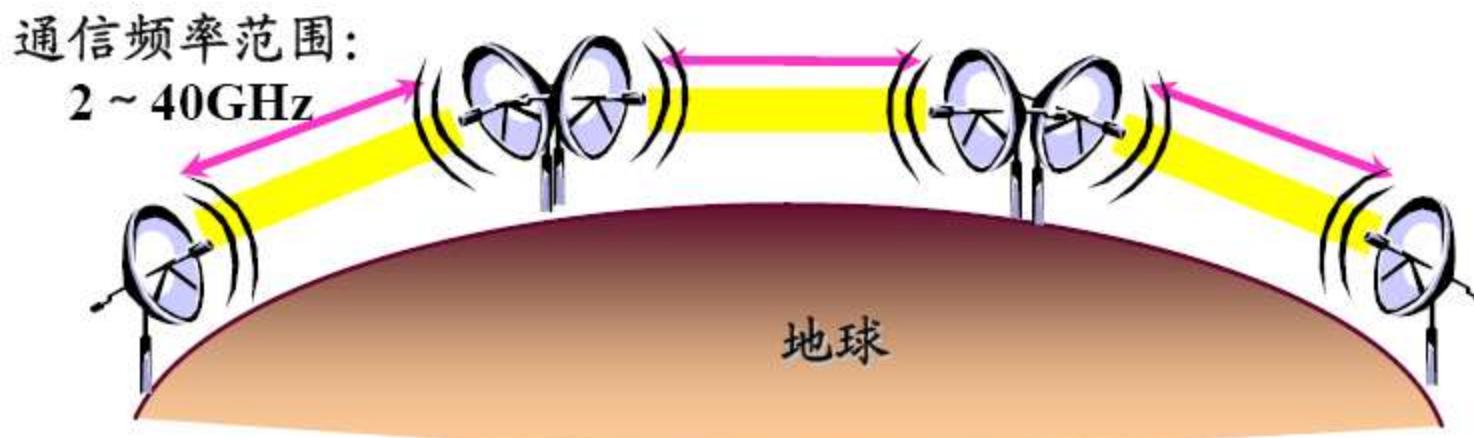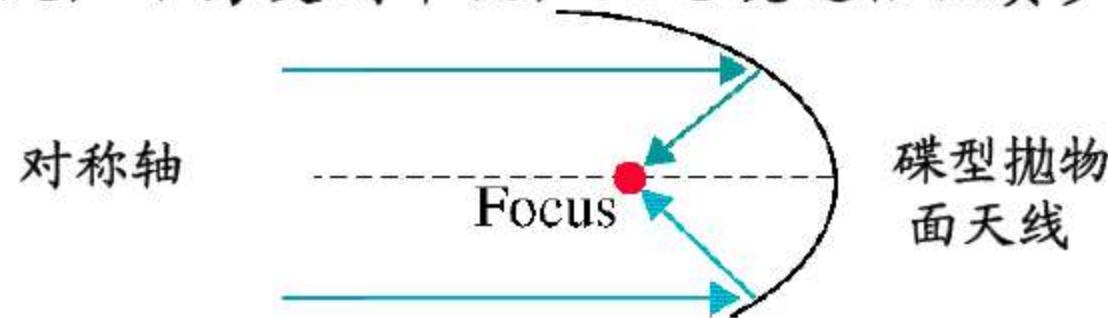


Physical media: radio


卫星通信

覆盖面广，适合于广播通信；
存在较大传播时延：
250ms

传送数据的总时延
=传播时延
+发送时延
+重发时延

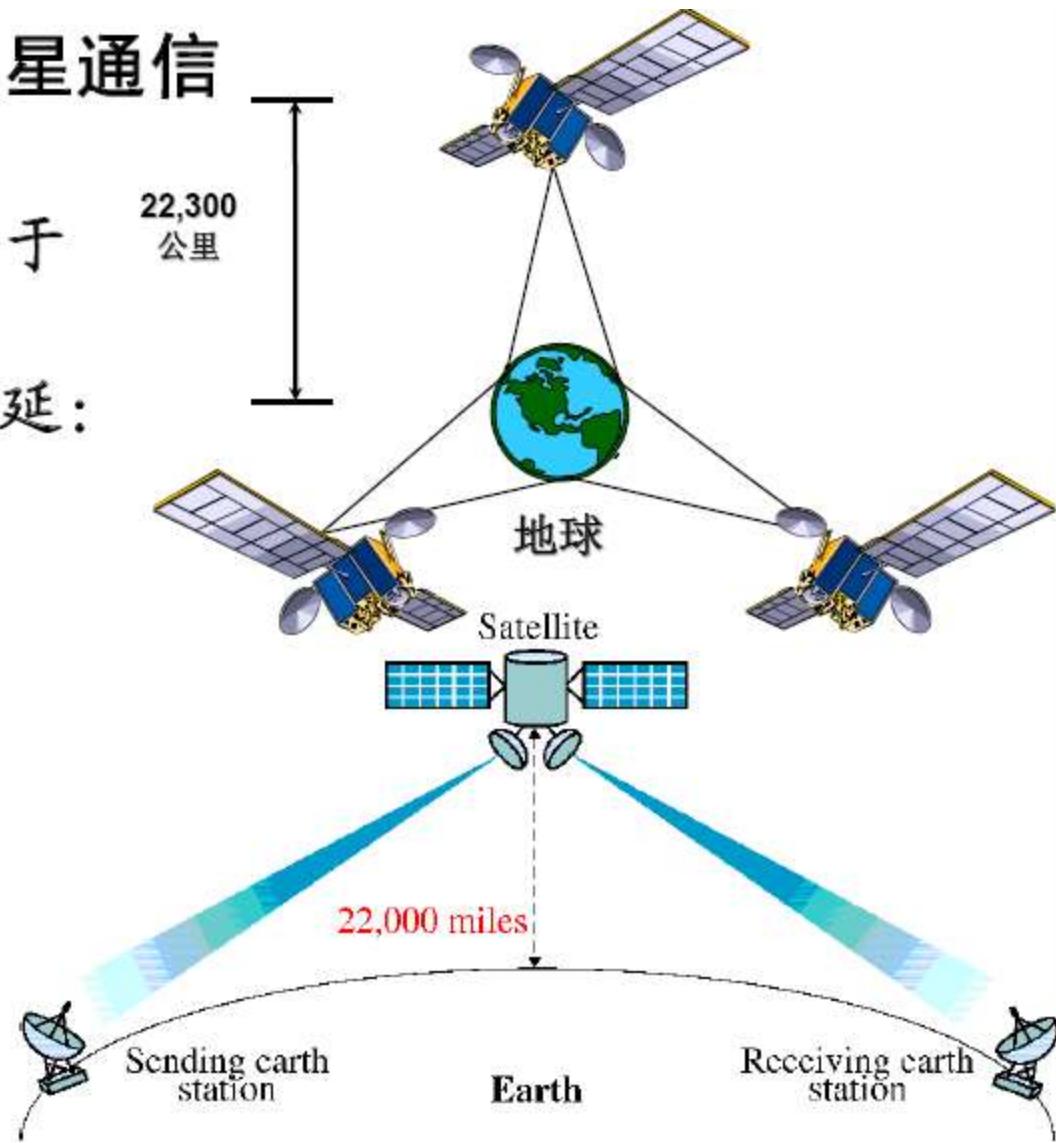


Physical media: radio

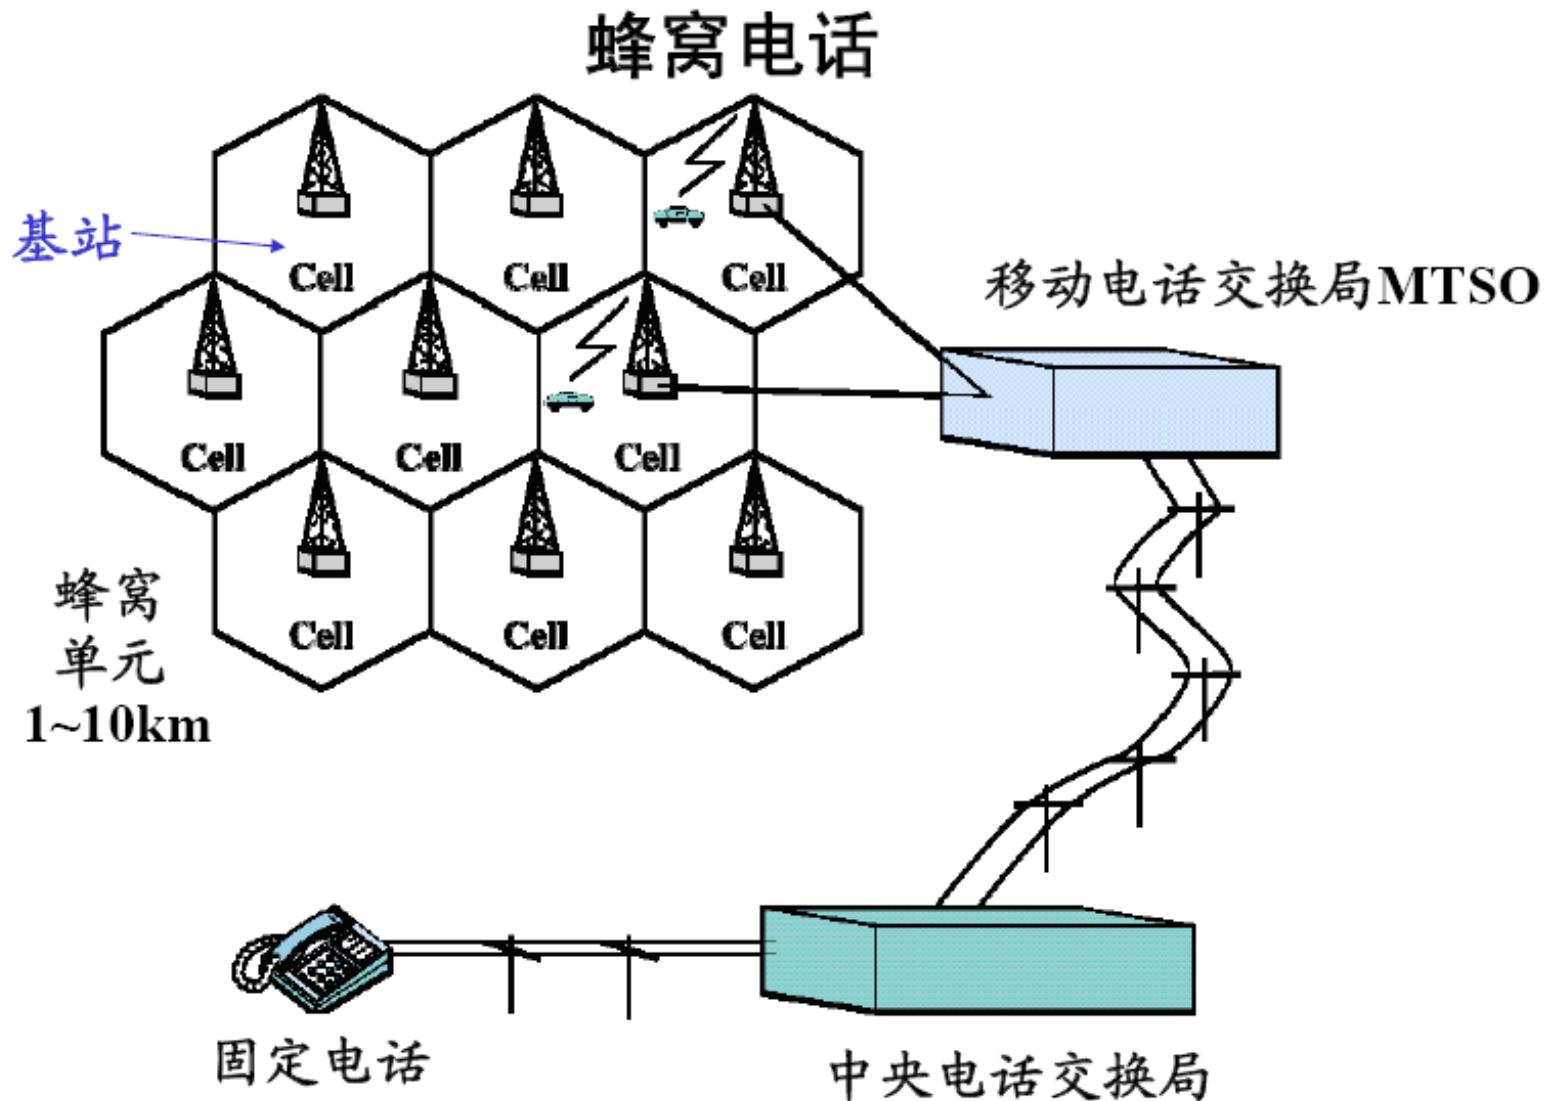

Physical media: radio

蜂窝电话

F1, F2, F3 = 使用的频率

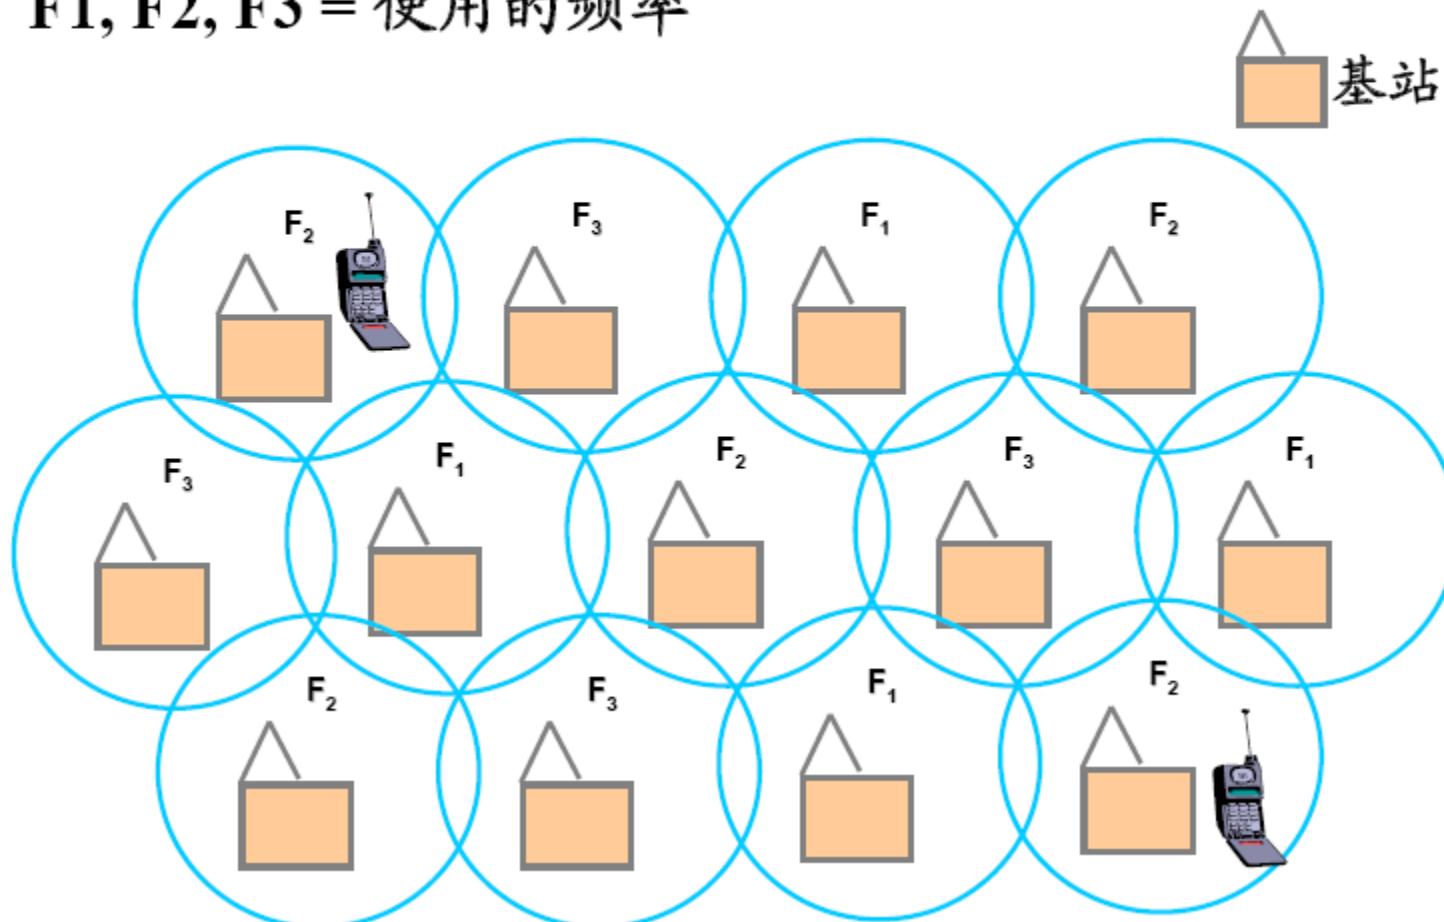

Other network media

- Power lines
- Home phone lines – bus vs. star
- Infrared (IR)
- BlueTooth – *piconet*
- Serial lines (RS232, RS485)
- Firewire (IEEE 1394)

Comparison

传输媒体	速率	传输距离	性能(抗干扰性)	价格	应用
双绞线	10-1000Mb/s	几十 kM	可以	低	模拟/数字传输
50Ω同轴电缆	10Mb/s	3kM 内	较好	略高于双绞线	基带数字信号
75Ω同轴电缆	300-450MHz	100kM	较好	较高	模拟传输电视、数据及音频
光纤	几十 Gbps	30kM up	很好	较高	远距离传输
短波	<50MHz	全球	较差	较低	远程低速通信
地面微波接力	4-6GHz	几百 kM	好	中等	远程通信
卫星	500MHz	18000kM	很好	与距离无关	远程通信

Physical media: capacity

- Capacity has theoretical limit
 - Shannon's Law: capacity limit given by
 - $C = B \log_2 (1 + S/N)$ with spectral bandwidth B
 - E.g., phone has $B = 3000$ Hz, $S/N = 35$ dB, $C = 34.8$ kb/s
 - $\text{dB} = 10 \log_{10} S / N$ (称为信噪比)
 - E.g., 25 dB $= 10^{2.5} = 316$
 - Radio: typically 1 b/s per Hz of bandwidth
- Speed has physical limits:
 c in free space, 0.66 c in fiber

Chapter 1: Roadmap

1.1 Computer network and the Internet

1.2 Network edge and core

1.3 Network access and physical media

1.4 Transmission Technology

1.5 Type and Topology

1.6 Network Performance

1.7 Protocol layers, service models


1.8 Architecture, OSI and TCP/IP Models

1.9 Internet History

Transmission Technology


- A message can be unicast, multicast, or broadcast.

Unicast

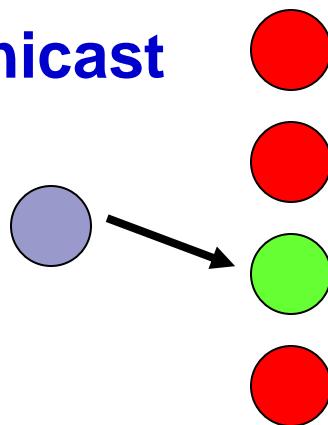


one source to one destination

Broadcast

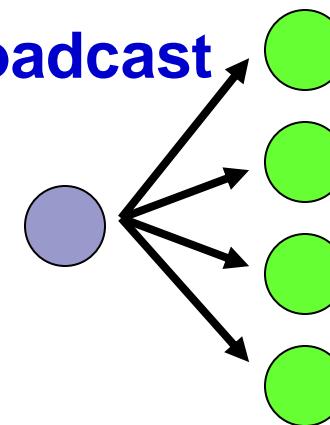

One source to all nodes on (small, local) network


Multicast

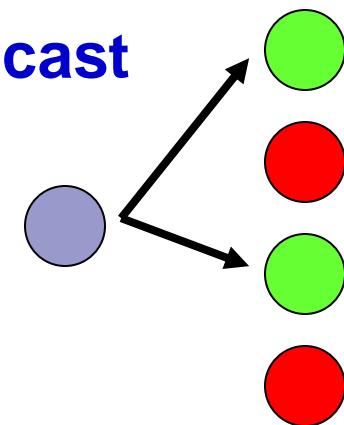

one source (potentially many sources) to many destinations


Broadcast

- A single communication channel is shared by all computers, that is, sending a message implies that all others receive it.

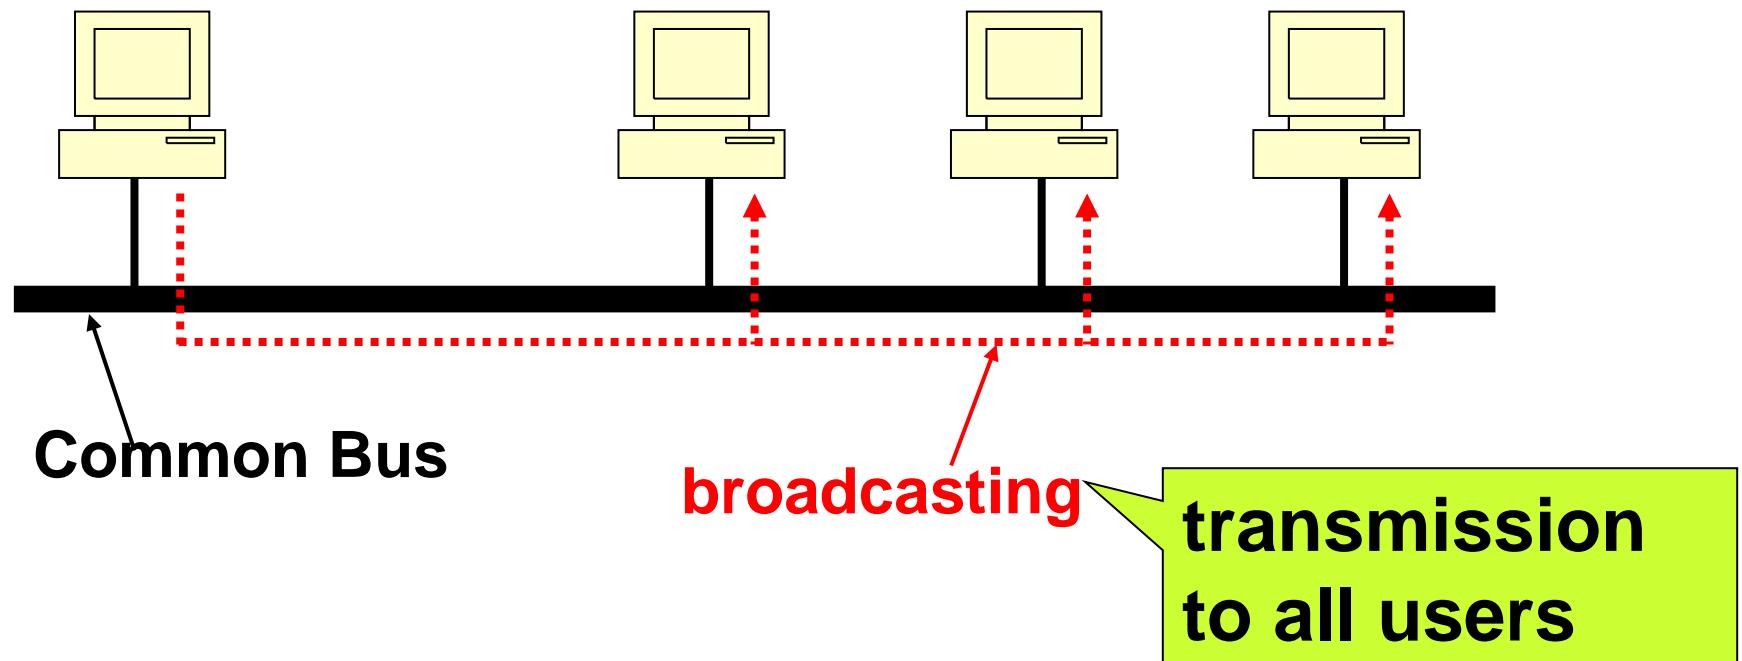

Unicast

- Computers are connected in pairs, that is, sending a packet goes strictly from the sender to the receiver (**unicasting**), possibly having to visit intermediate machines (*routing*).

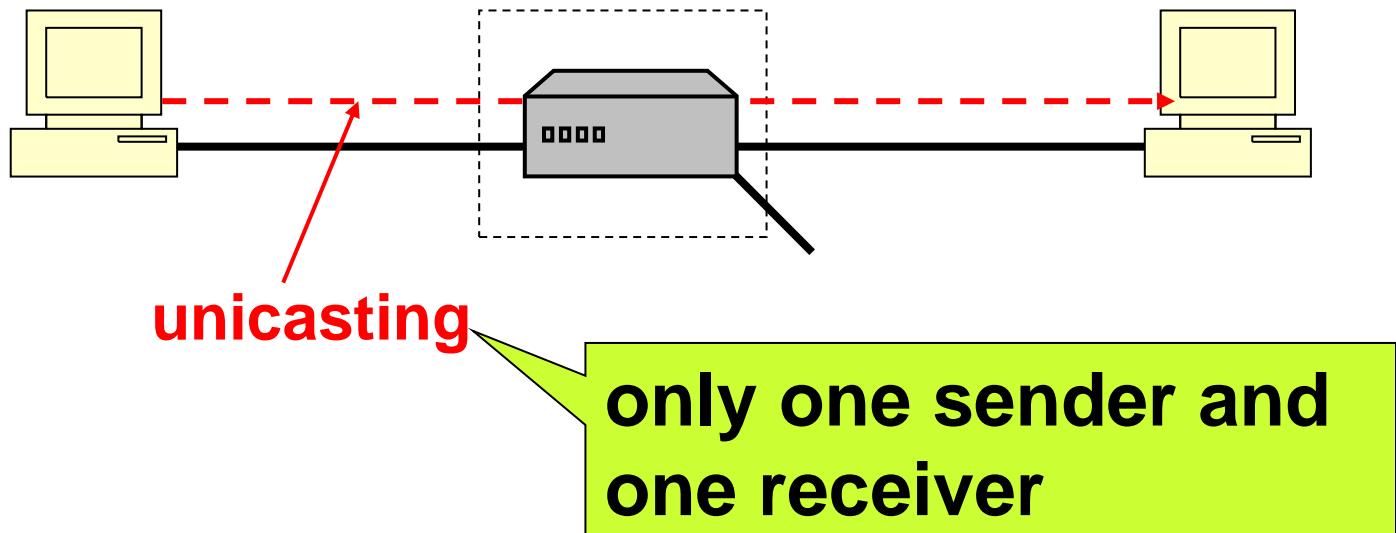

Chapter 1: Roadmap

- 1.1 Computer network and the Internet**
- 1.2 Network edge and core**
- 1.3 Network access and physical media**
- 1.4 Transmission Technology**
- 1.5 Type and Topology**
- 1.6 Network Performance**
- 1.7 Protocol layers, service models**
- 1.8 OSI and TCP/IP Architecture**
- 1.9 Internet History**

Types of Computer Networks

■ Geographical distance

□ Local Area Networks (LAN):

- Ethernet, Token ring, FDDI






□ Metropolitan Area Networks (MAN):


- DQDB, SMDS

□ Wide Area Networks (WAN):

- X.25, ATM, frame relay

■ **Caveat:** LAN, MAN, WAN may mean different things

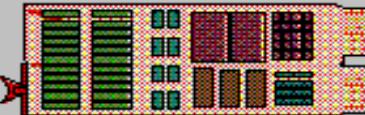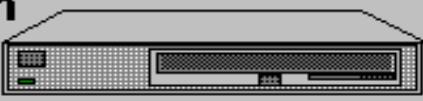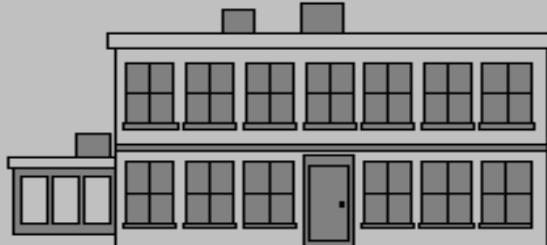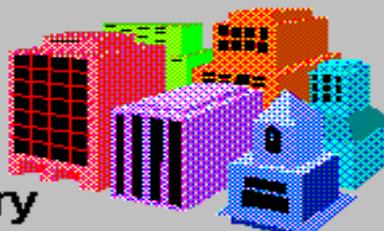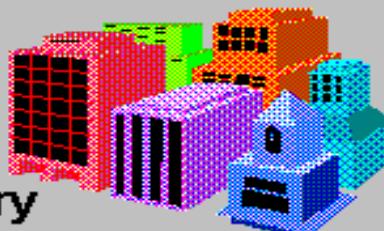
Distance	Processors located in same	Network Type
0.1 m	board 	Data Flow Machine
1 m	system 	Multiprocessor
10 m		
100 m		LAN
1 km	room, building, campus 	Local Area Network
10 km	city 	WAN
100 km	country 	Wide Area Network
1000 km	continent 	Interconnection of WANs
10000 km	planet	

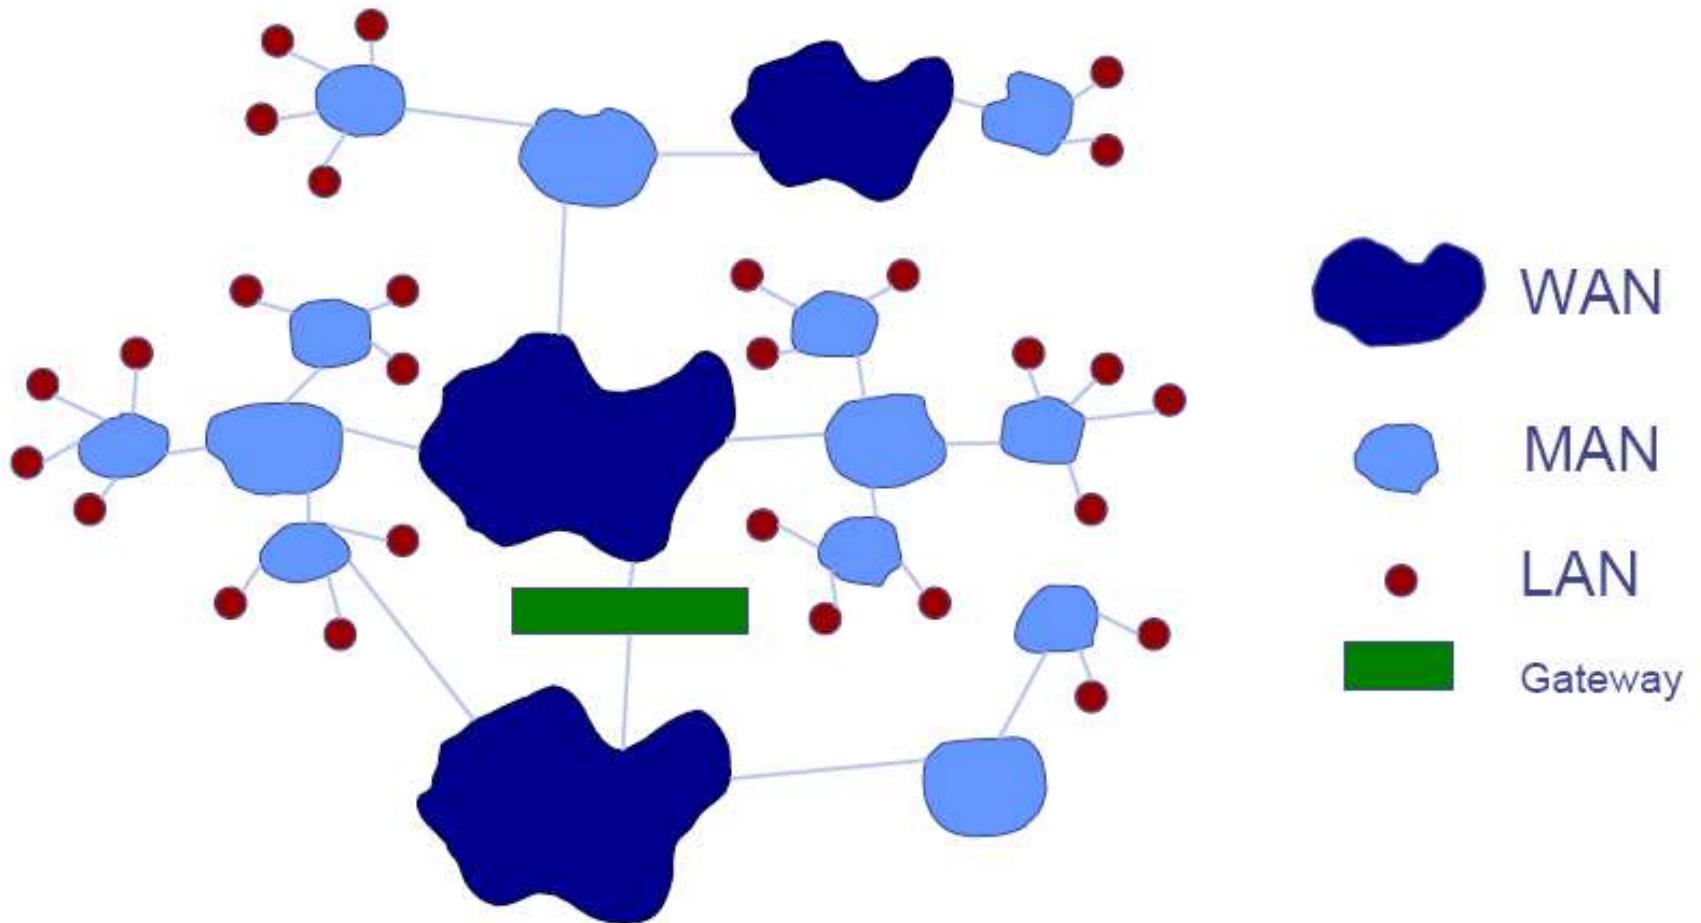


Internetwork of WAN, MAN and LAN

Local Area Networks (LAN)


- Apart from scale, LANs distinguish themselves from other networks by (generally) using **broadcast** technology, and having **simple topologies**:

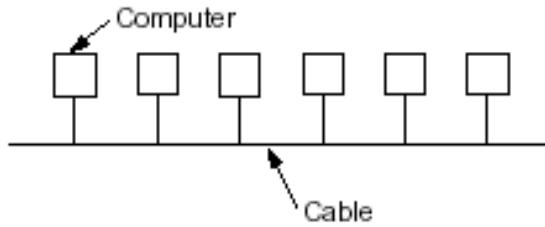

(a) Bus

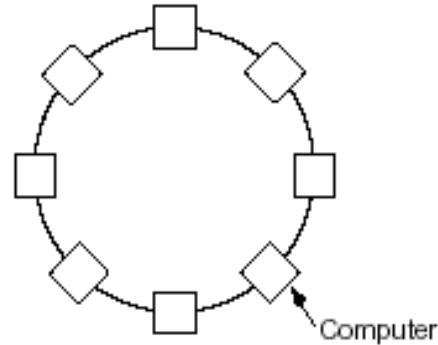

(b) Ring

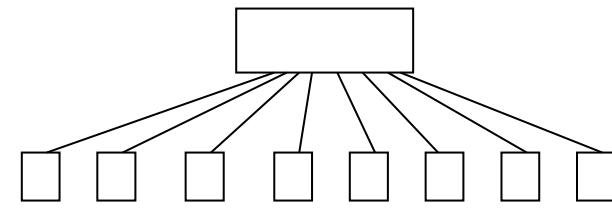

(c) Star

broadcast networks. (a) Bus. (b) Ring. (c) Star

Network Topology


- **Computer network topology** is the way various components of a network (like nodes, links, peripherals, etc.) are arranged.
- **Network topologies** define the layout, virtual shape or structure of network, not only physically but also logically.

Network Topology


■ 7 basic topologies:



Point-to-point

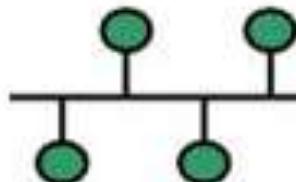


Bus

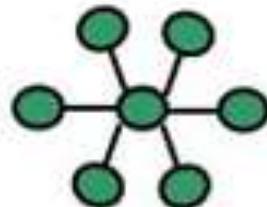


Star




Daisy Chain

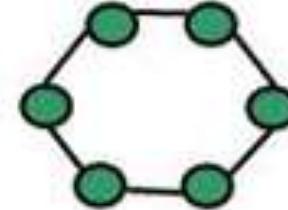


Ring

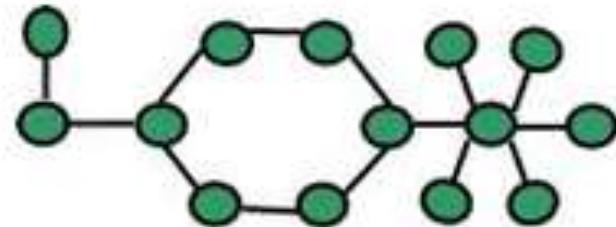

Hybrid


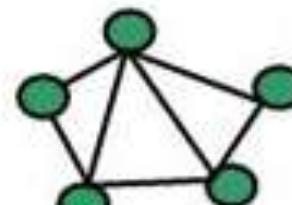


Mesh

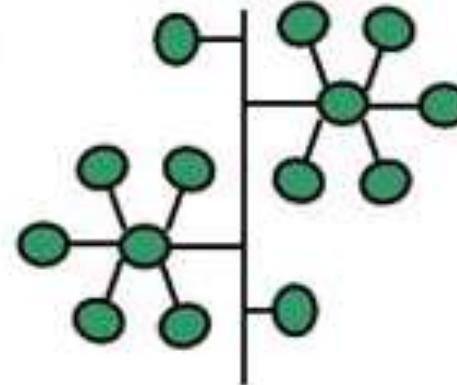


Tree

Local Area Networks (LAN)

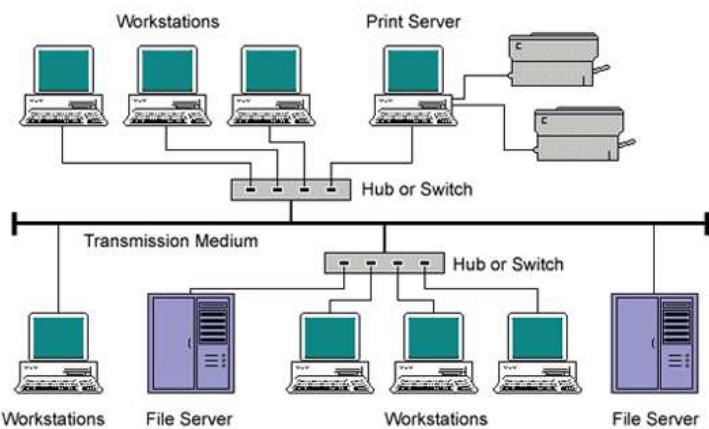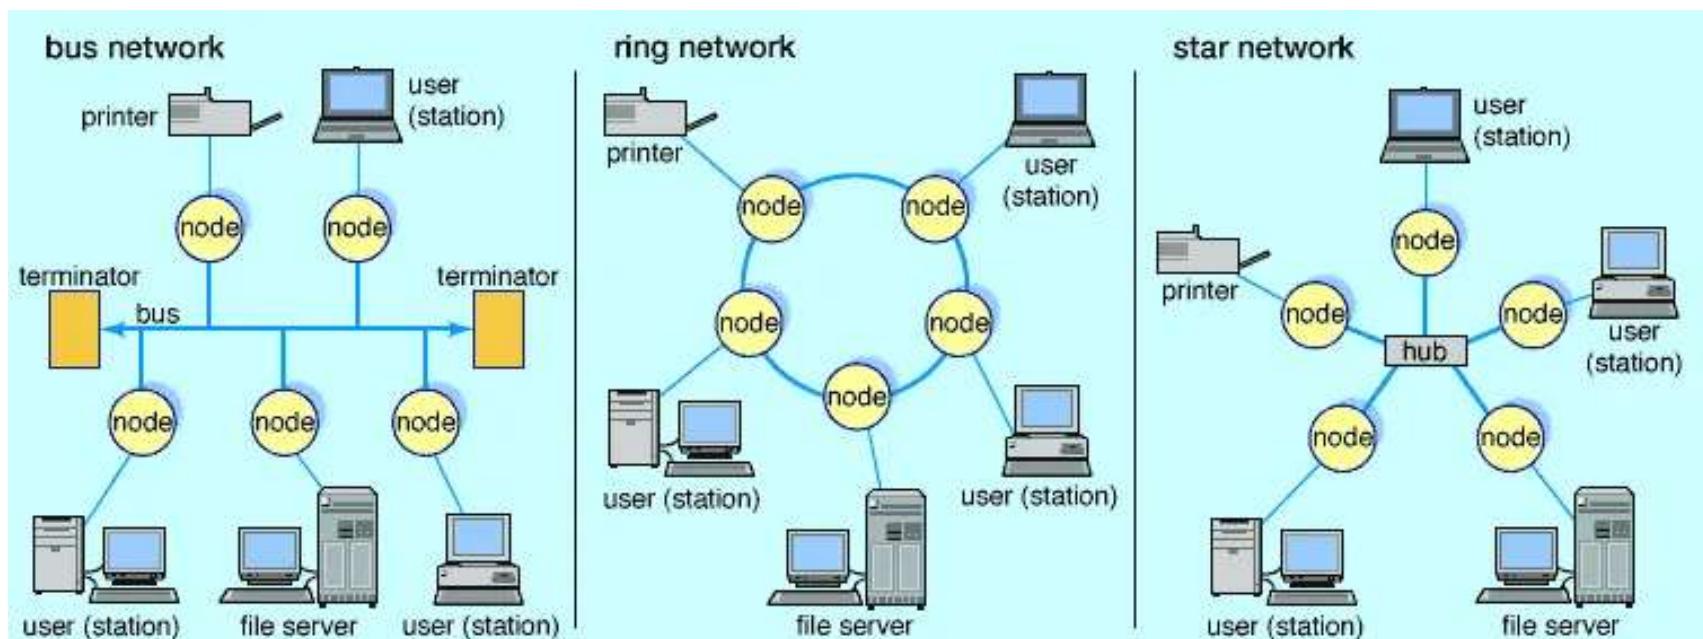


Bus Topology

- All network devices connected to a common cable in logical linear fashion.
- Transmissions are sent along the length of the bus segment.
- Adding hosts to the network requires breaking the network.
- Failure of one host can cause failure of network.

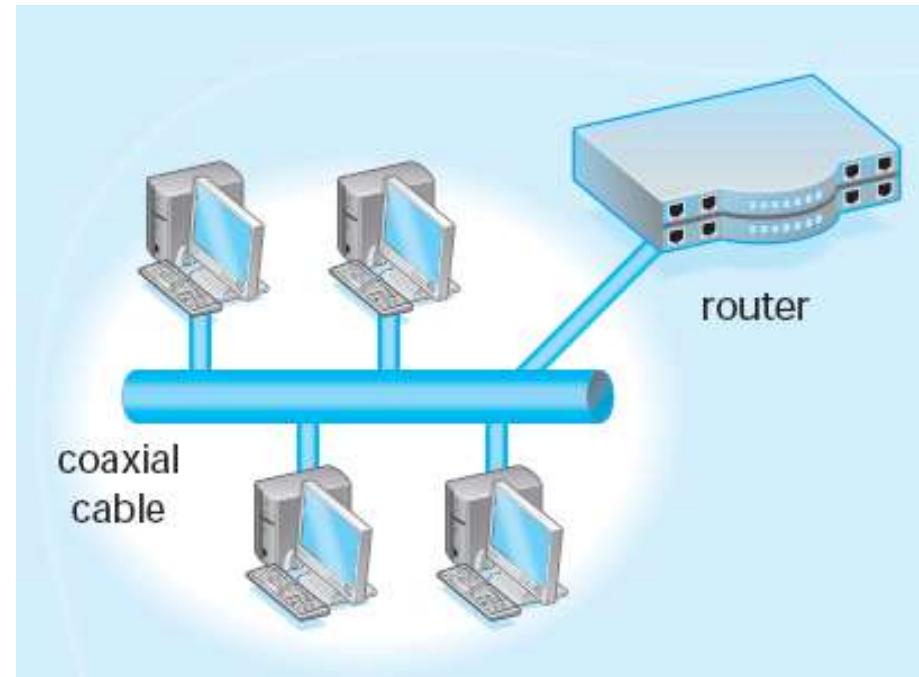


Star Topology

- Connection from each device to a central location, usually a switch.
- Most commonly used physical topology.
- Failure of one cable does not bring down network.

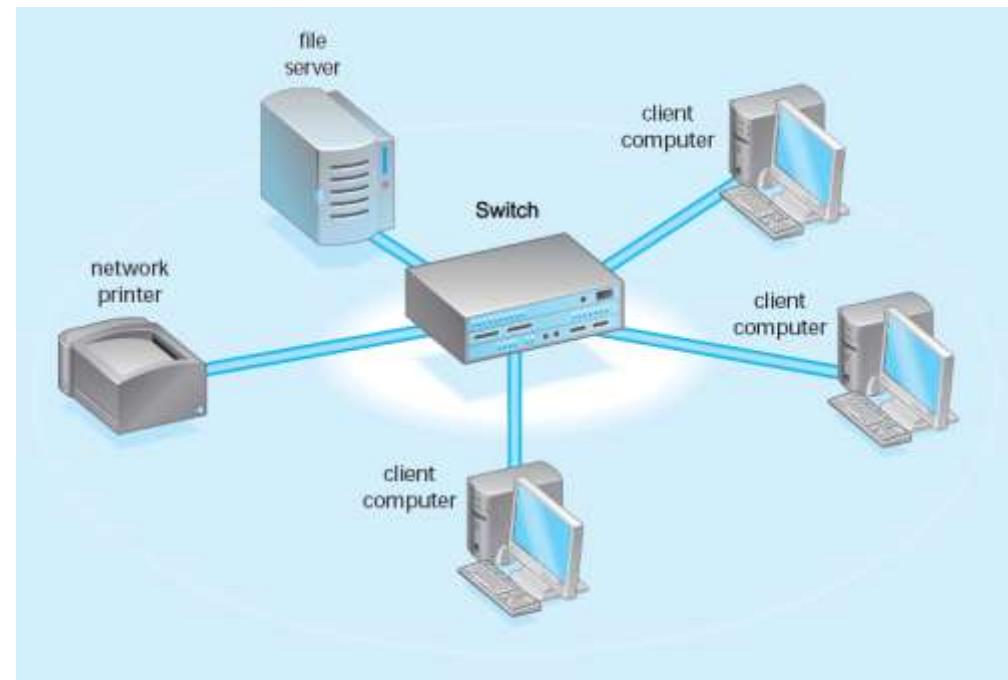


Ring Topology

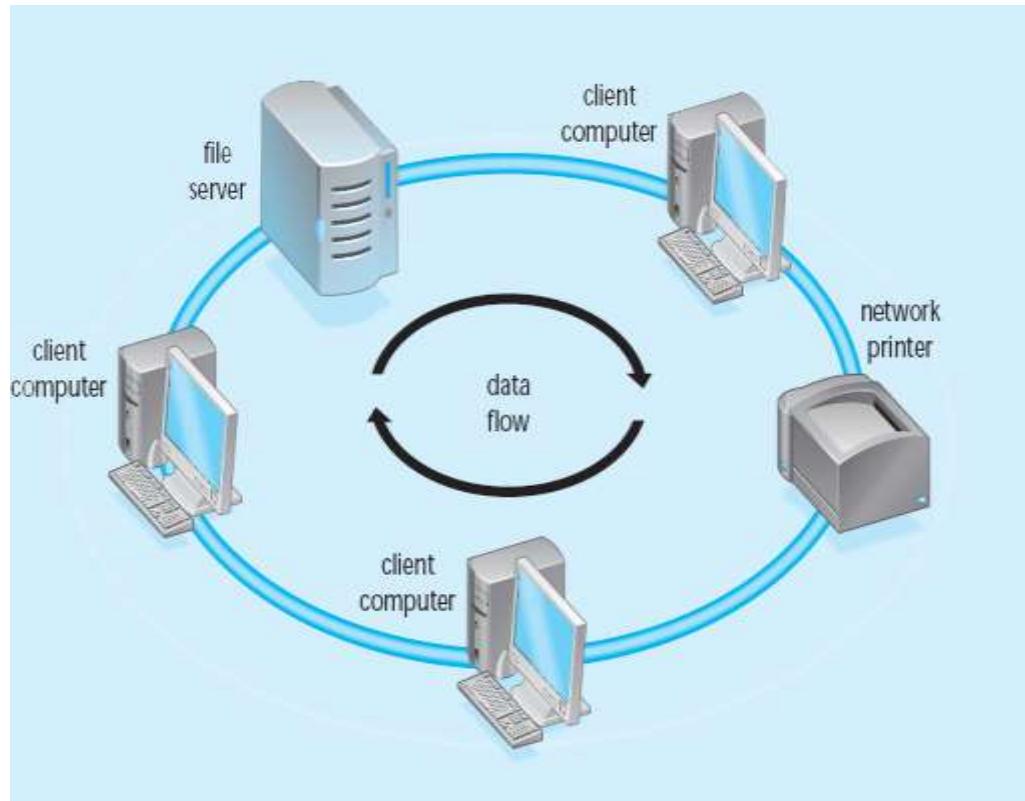


- Network is connected in an endless loop.
- No termination required.
- Uncommon topology today, more common in 1980s.

Tree Topology

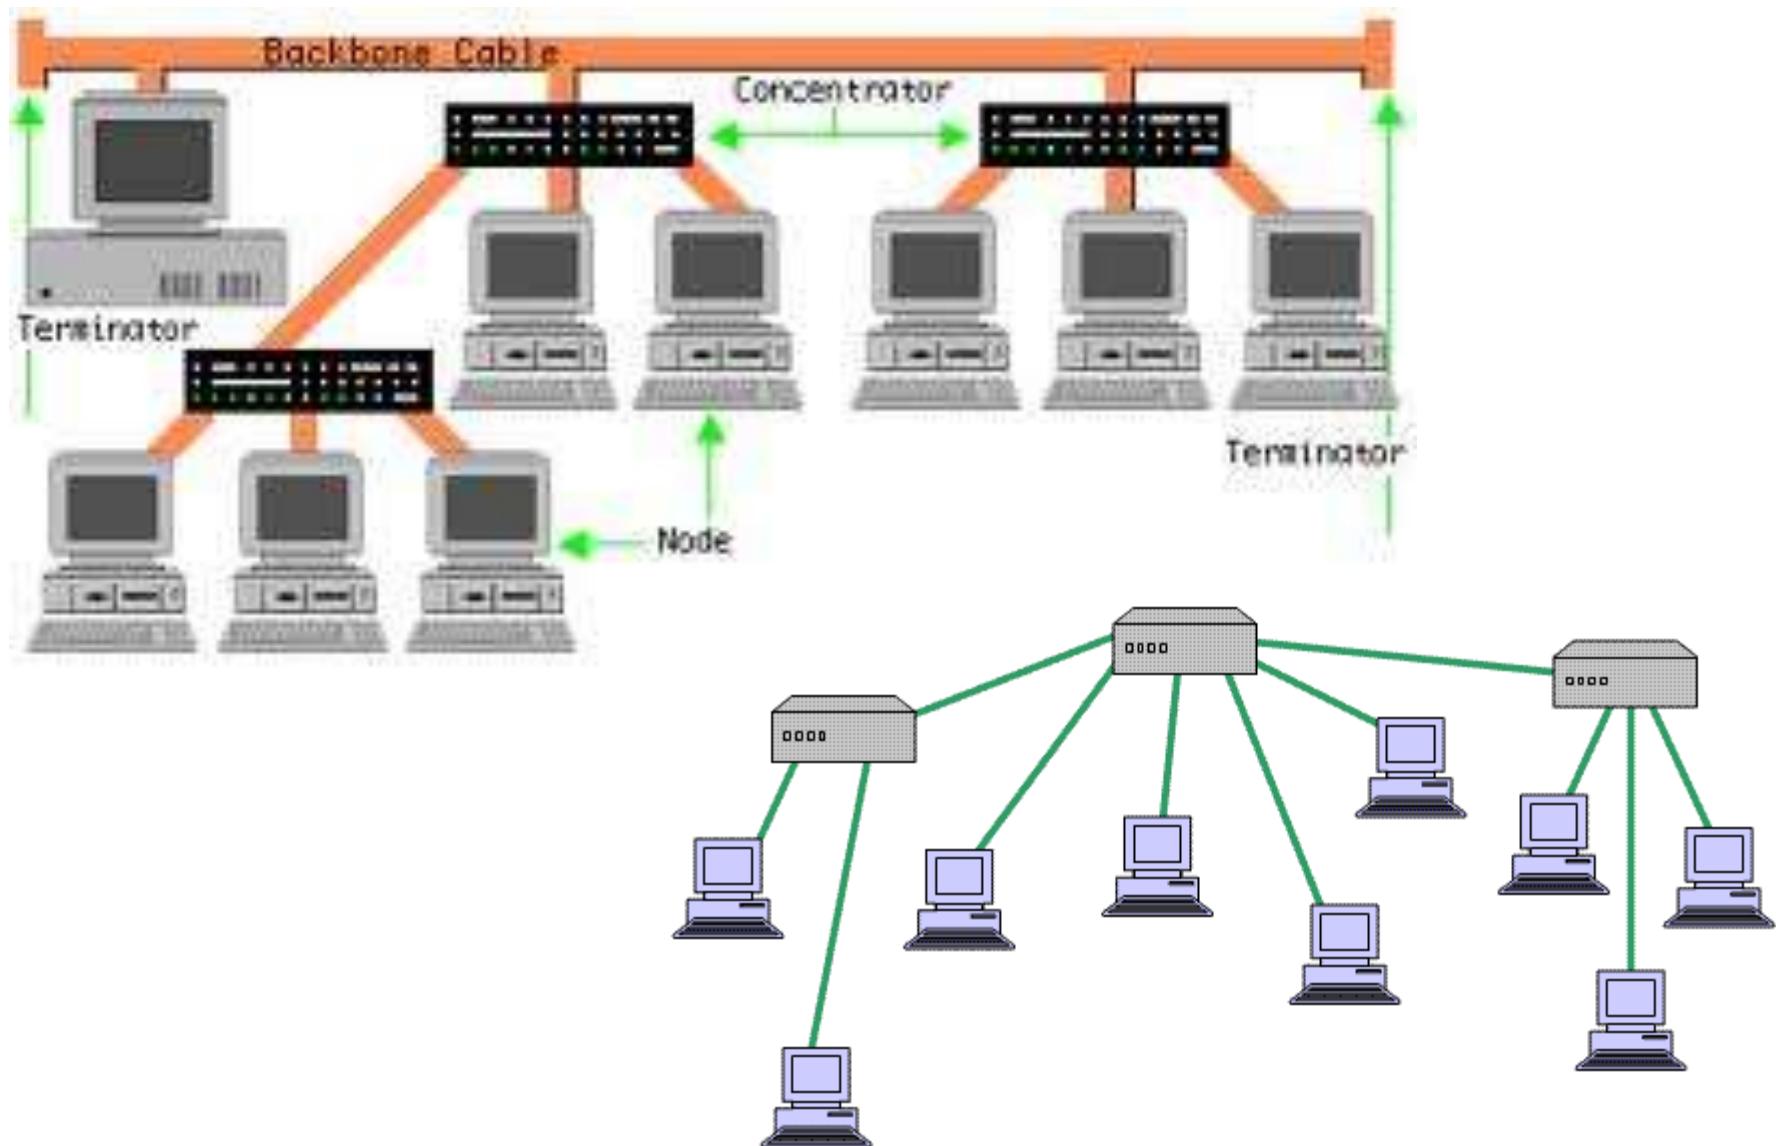


Metropolitan Area Networks (MAN)

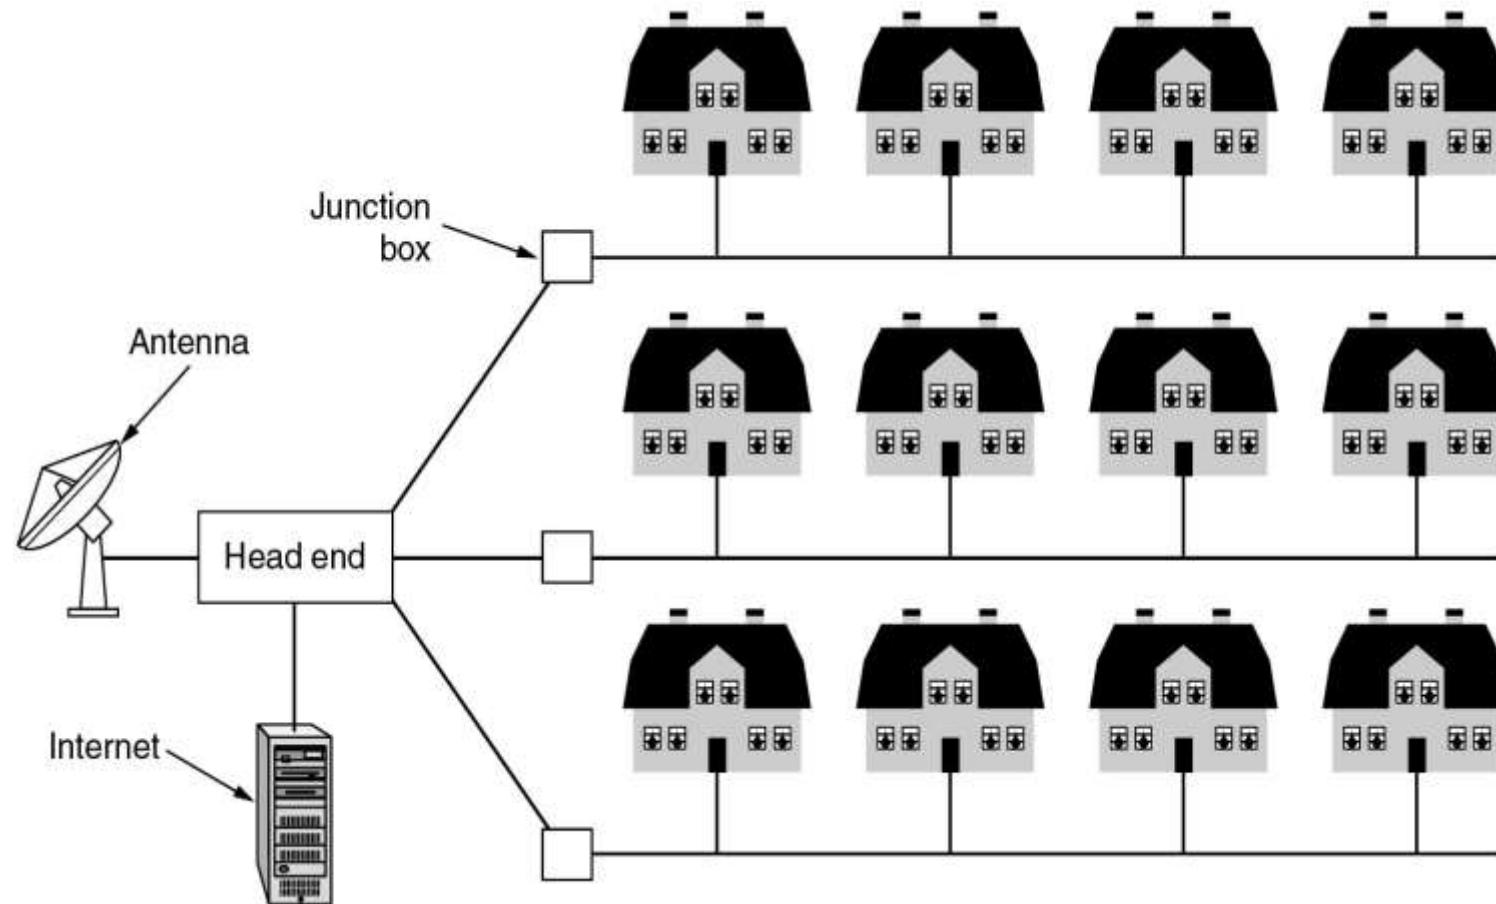

A metropolitan area network based on cable TV.


MAN: DQDB

- Basically, MANs are very similar to LANs in the sense that they also use **broadcasting** technology. **However**, to achieve scalability, a different mechanism is used: **Distributed Queue, Dual Bus**

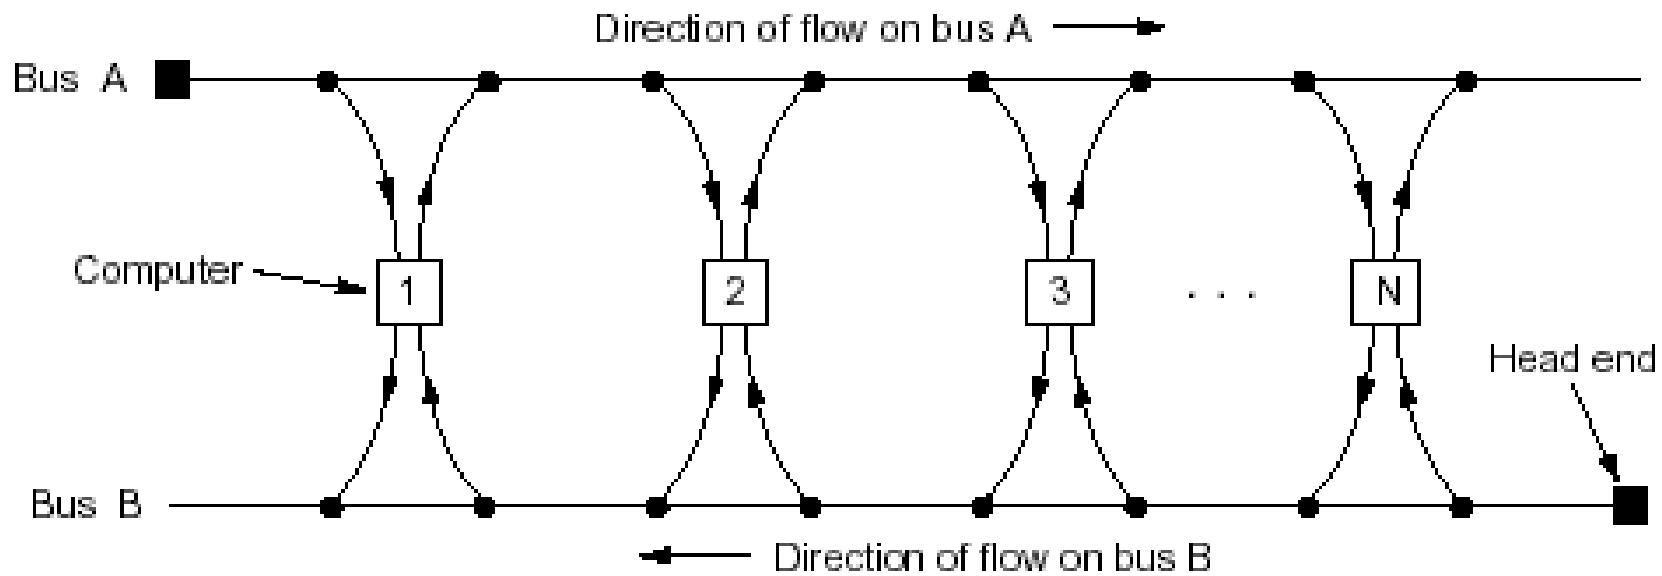

WAN Topologies


- In contrast to LANs and MANs, the organization of a WAN in terms which hosts are interconnected is important

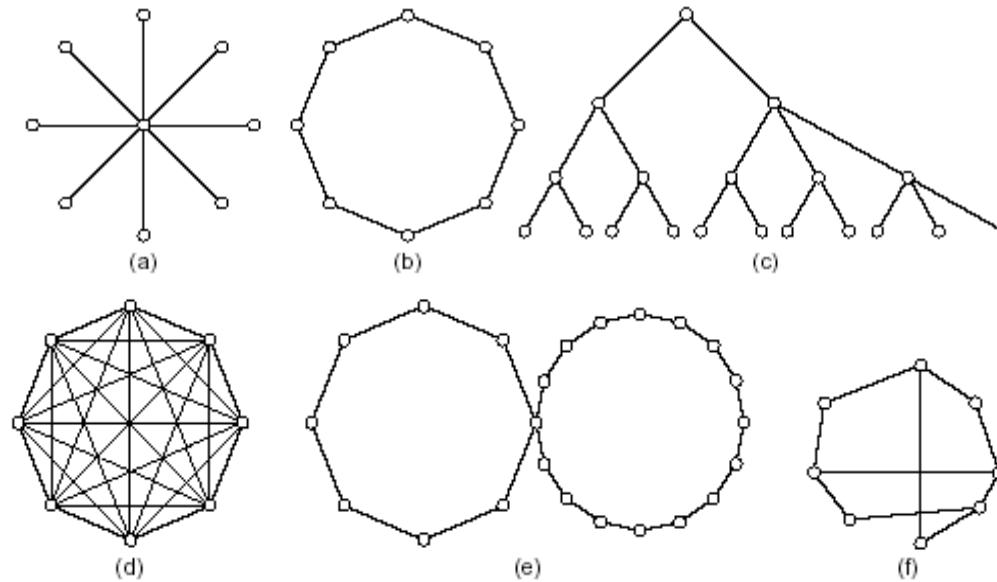

- Most often you'll see **arbitrary topologies**; the others are used in application-specific ways (mostly star, ring, and tree)


Wide Area Networks (WAN)

- In a WAN, hosts are connected to a **subnet**, which in turn consists of **routers** (switching elements) and **trunks**.
- Routers generally adhere to a **store-and-forward principle**

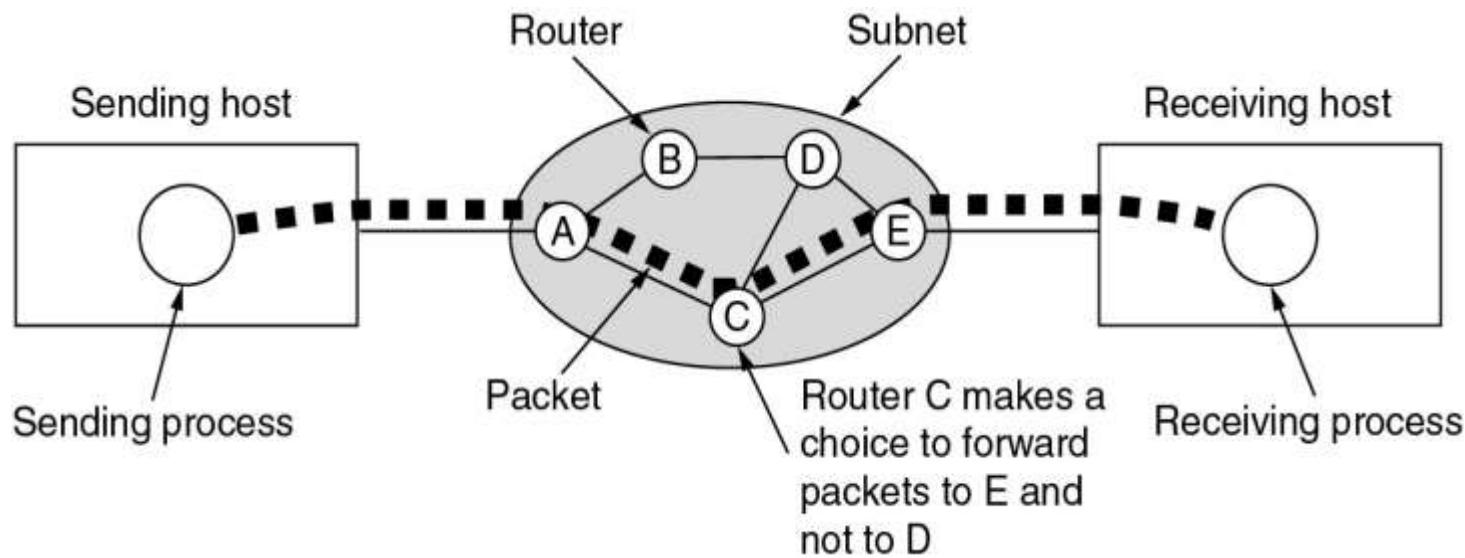

A stream of packets from sender to receiver.

Wide Area Networks (WAN)

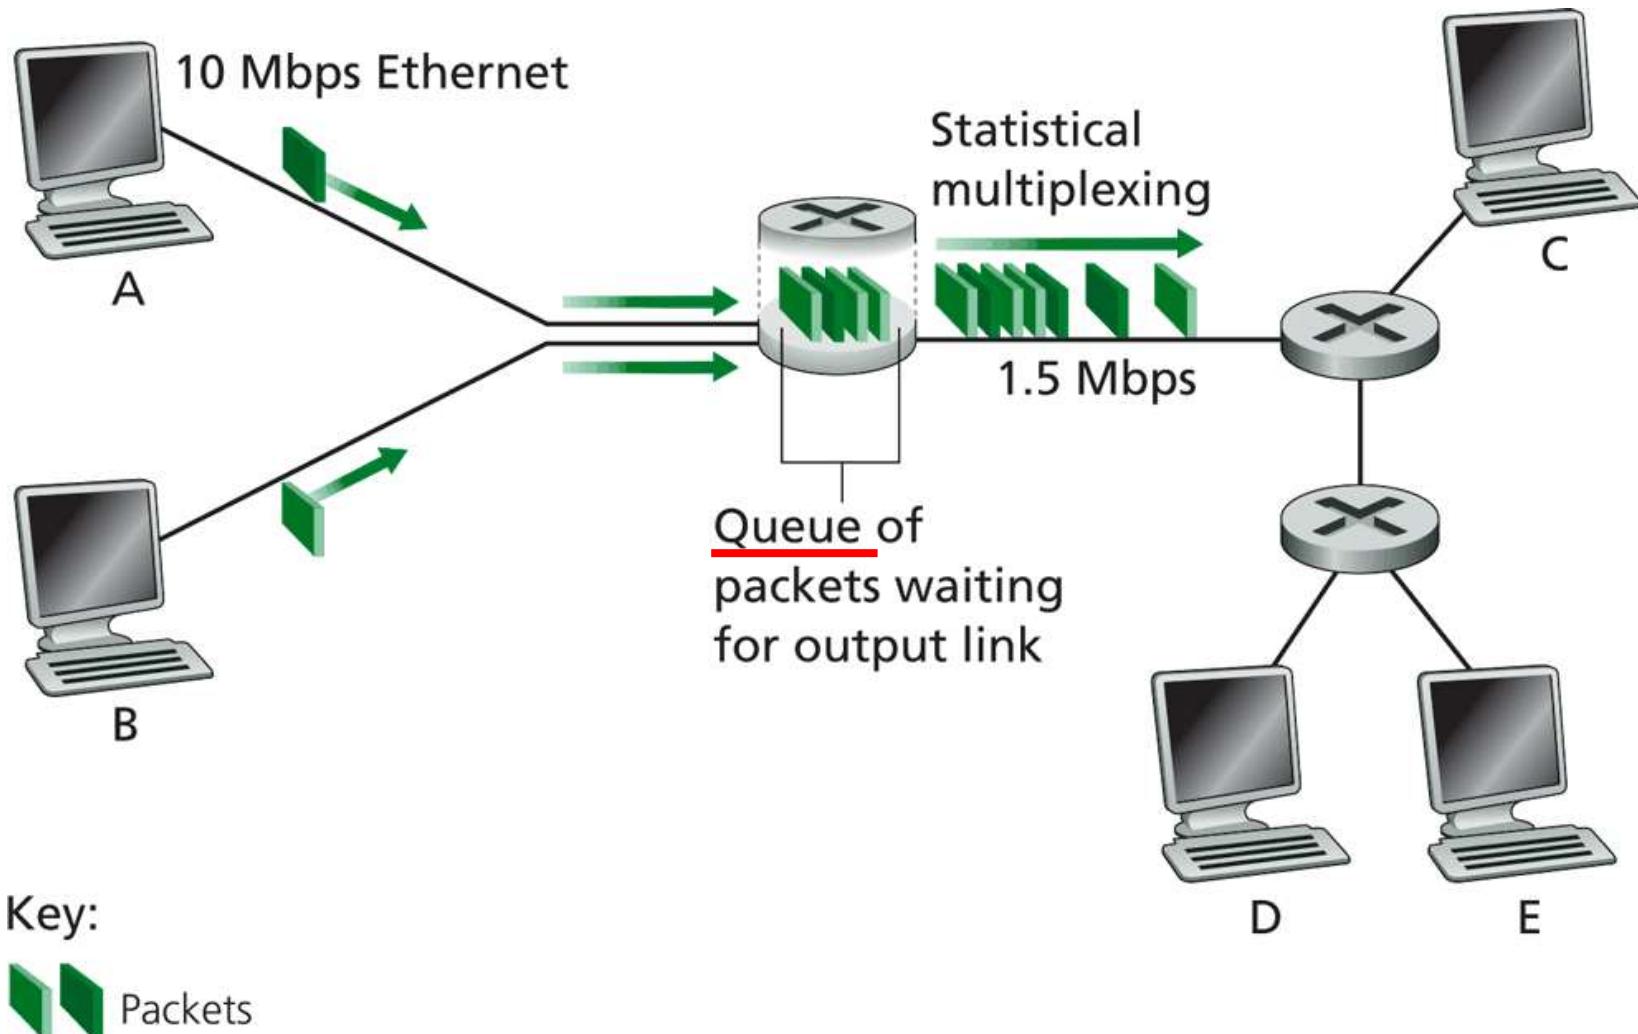


WAN consists of two subnets

■ Resource subnet

- ❑ Includes computers, terminals, programs, etc.
- ❑ Responsible for information processing


■ Communication subnet

- ❑ Includes transportation lines, switching elements (routers and switches, etc.)
- ❑ Responsible for information delivery and distribution

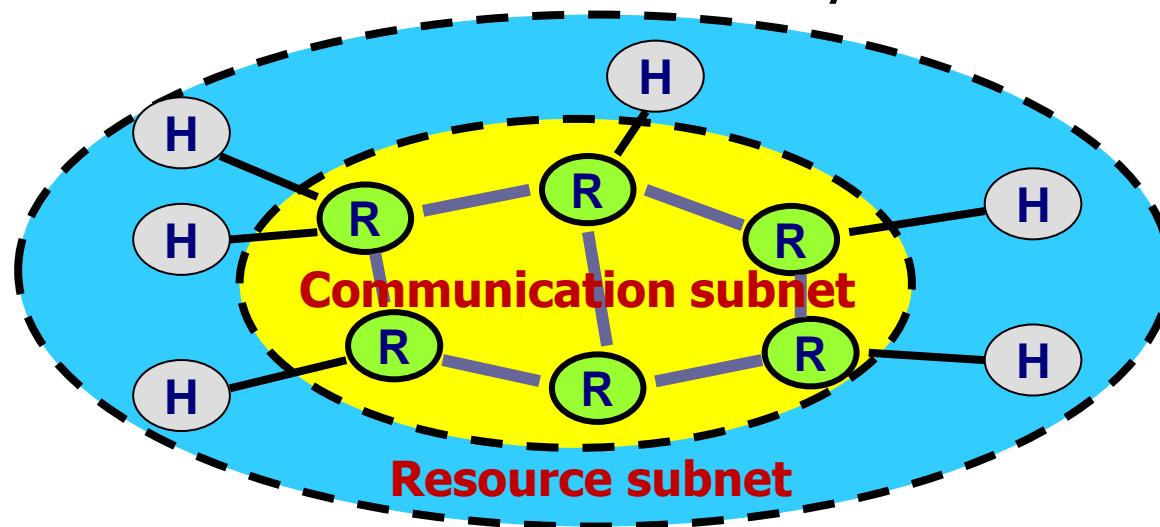


Internet topology: network of networks

- roughly hierarchical
- at center: “tier-1” ISPs (e.g., UUNet, BBN/Genuity, Sprint, AT&T), national/international coverage
 - treat each other as equals

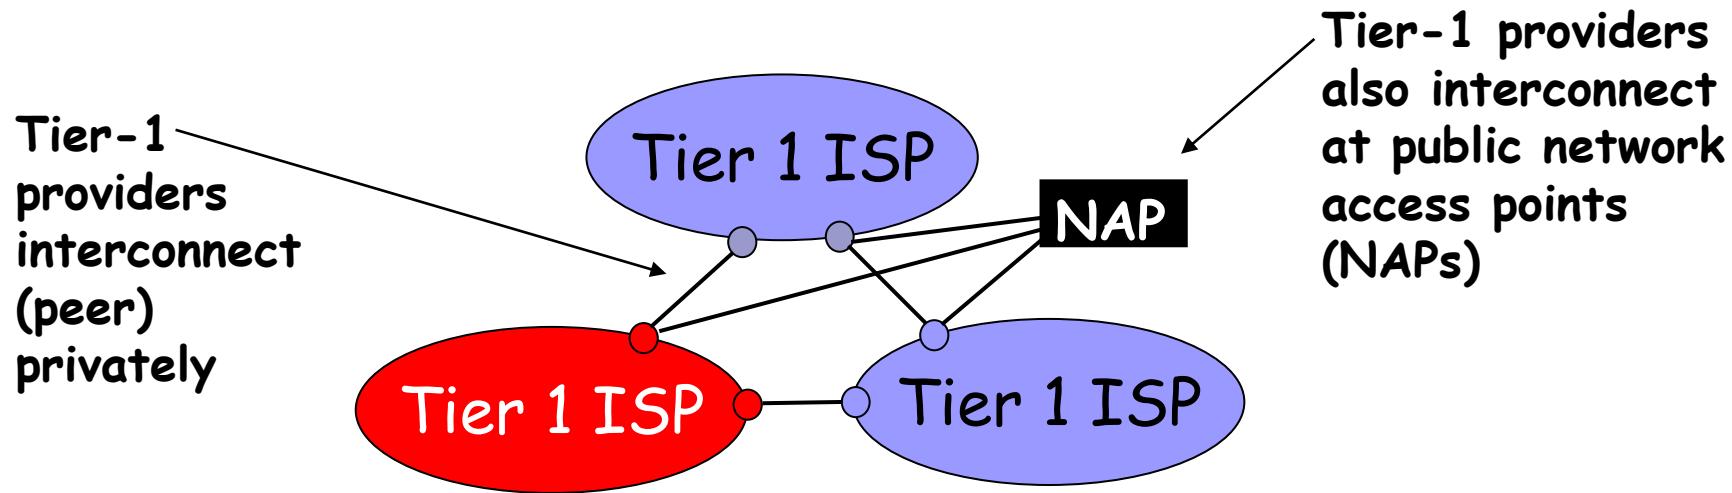


Tier-1 ISP: e.g., Sprint

Sprint US backbone network

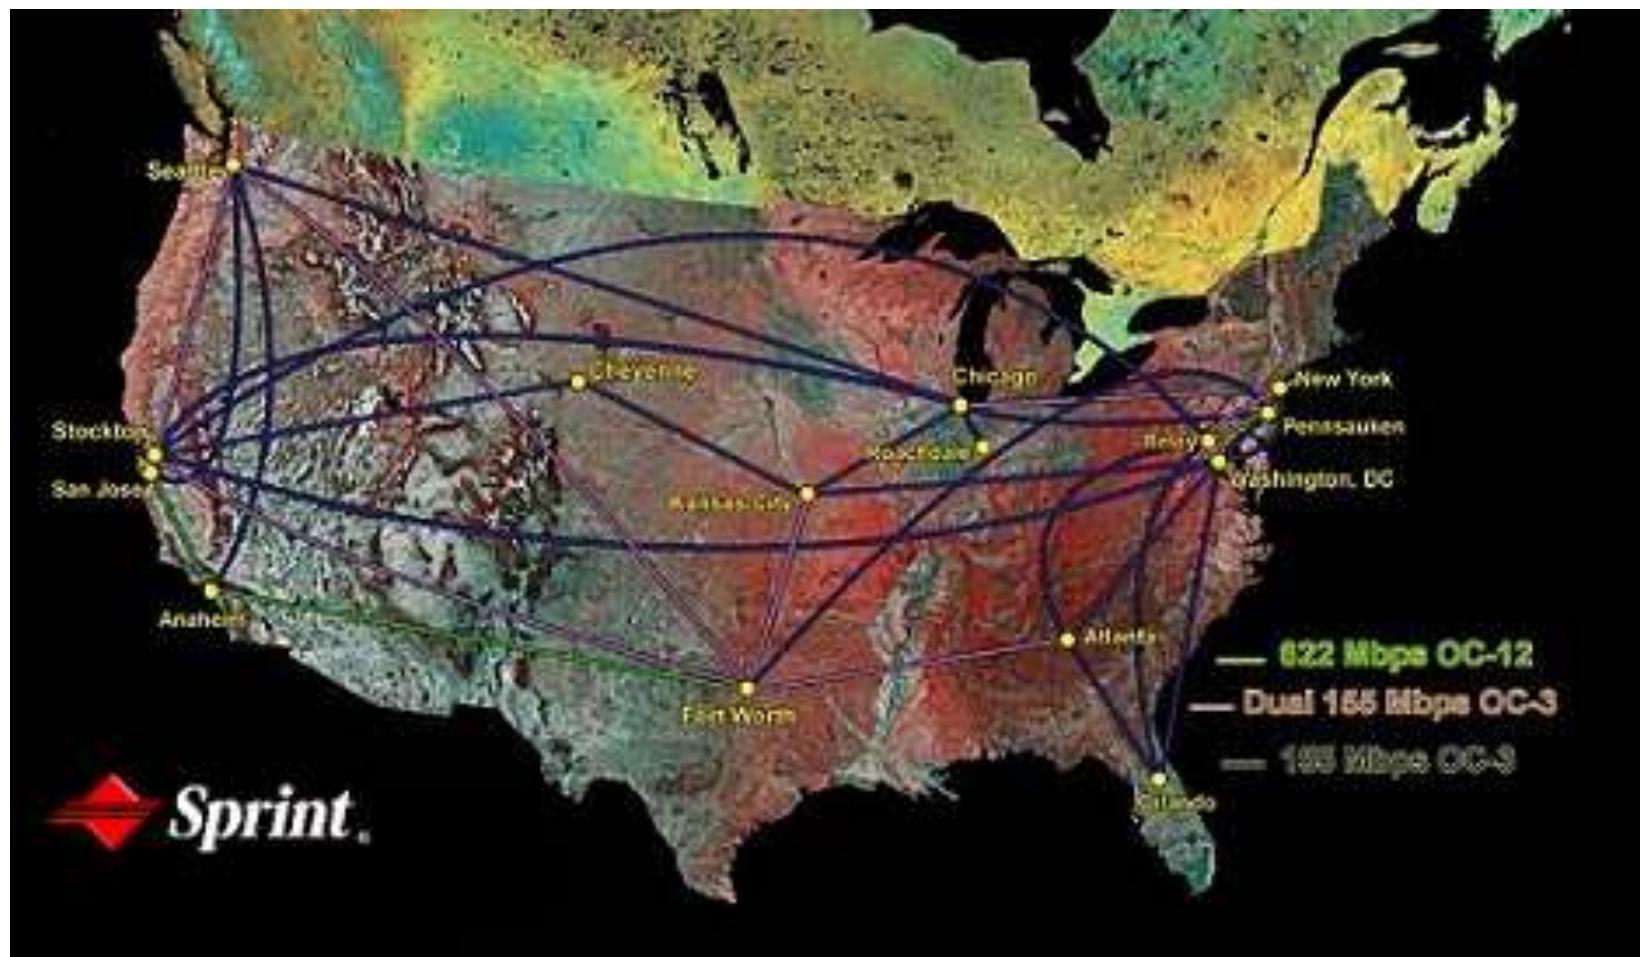


Tier-2 ISP: smaller ISP

- Connect to one or more tier-1 ISPs, possibly other tier-2 ISPs

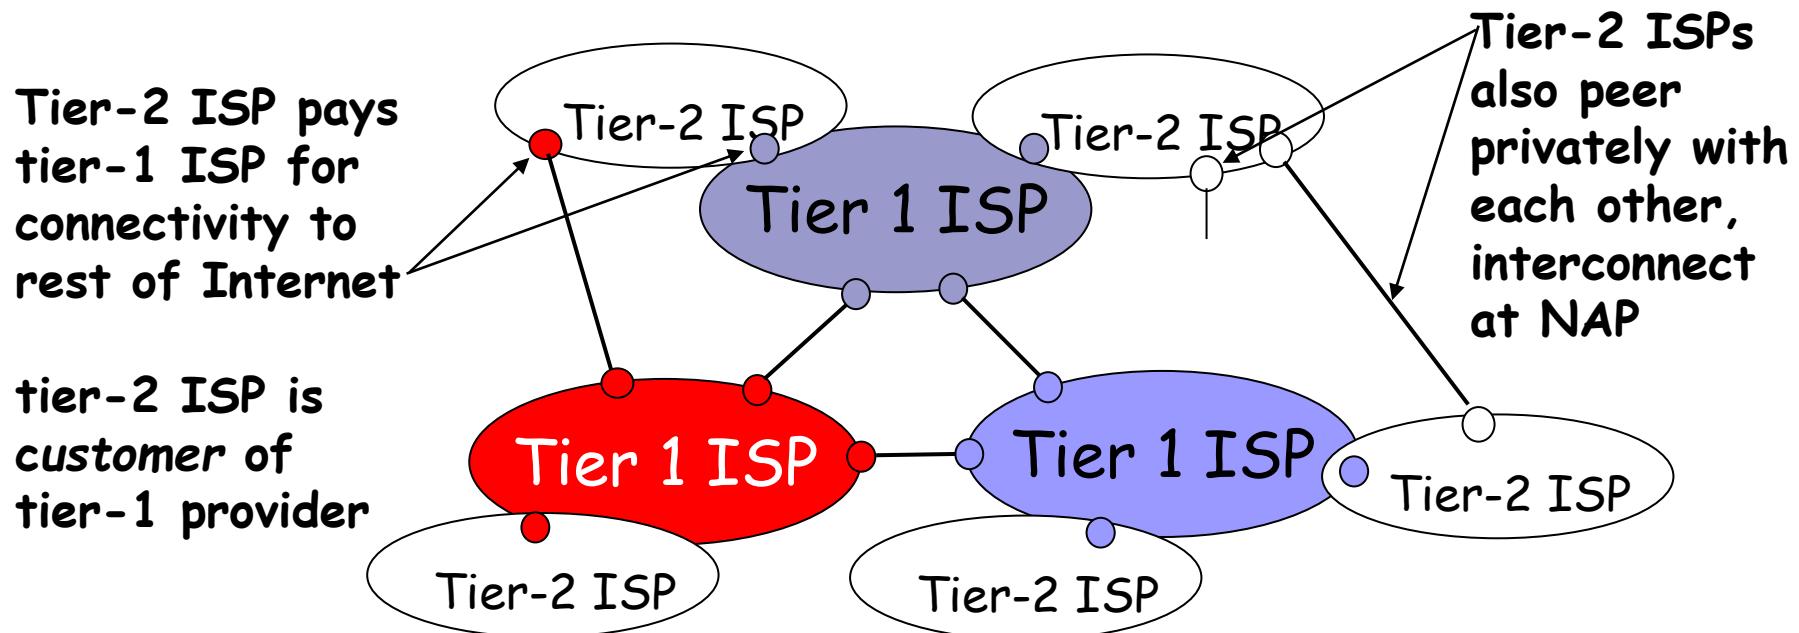


Tier-3 ISPs and local ISPs


- last hop (“access”) network (closest to end systems)

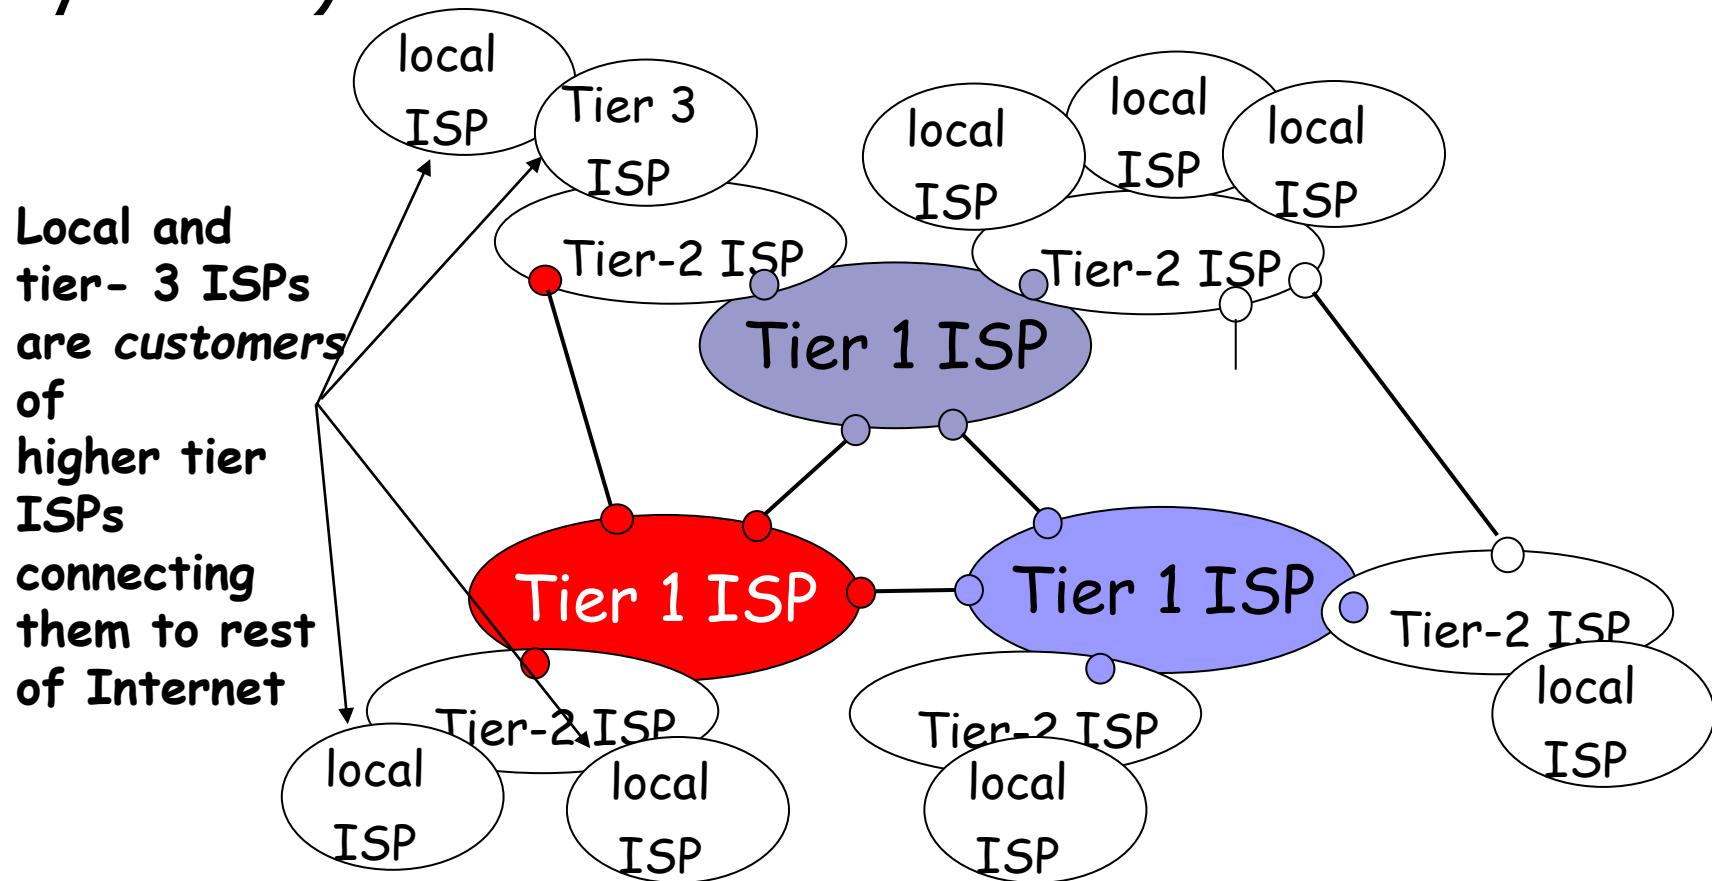

Internet topology: network of networks

- a packet passes through many networks!

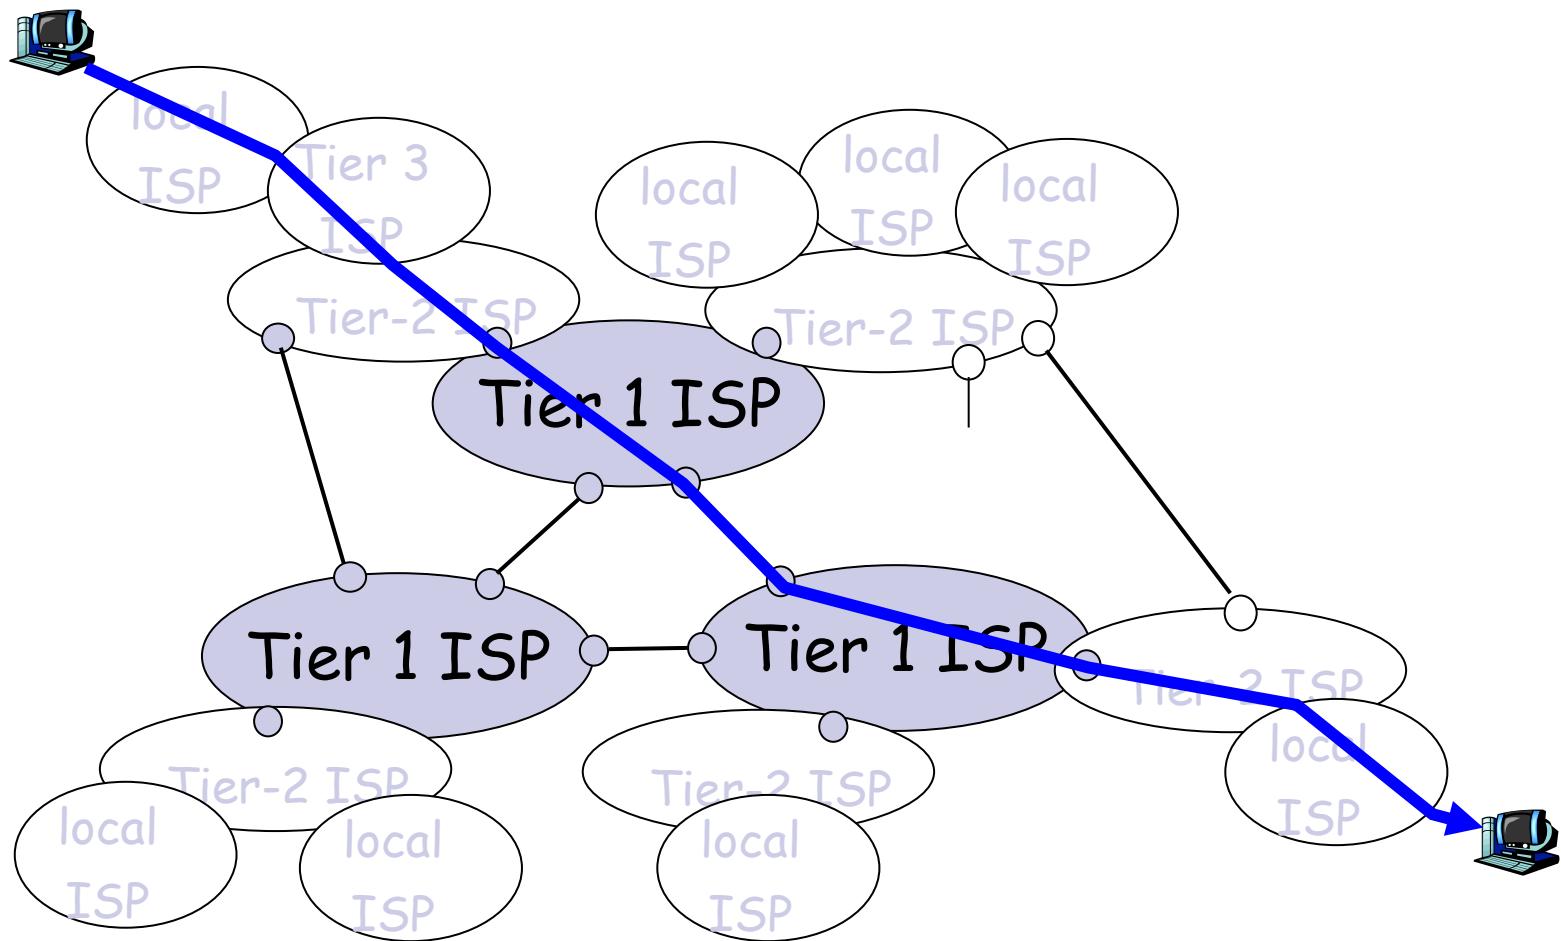

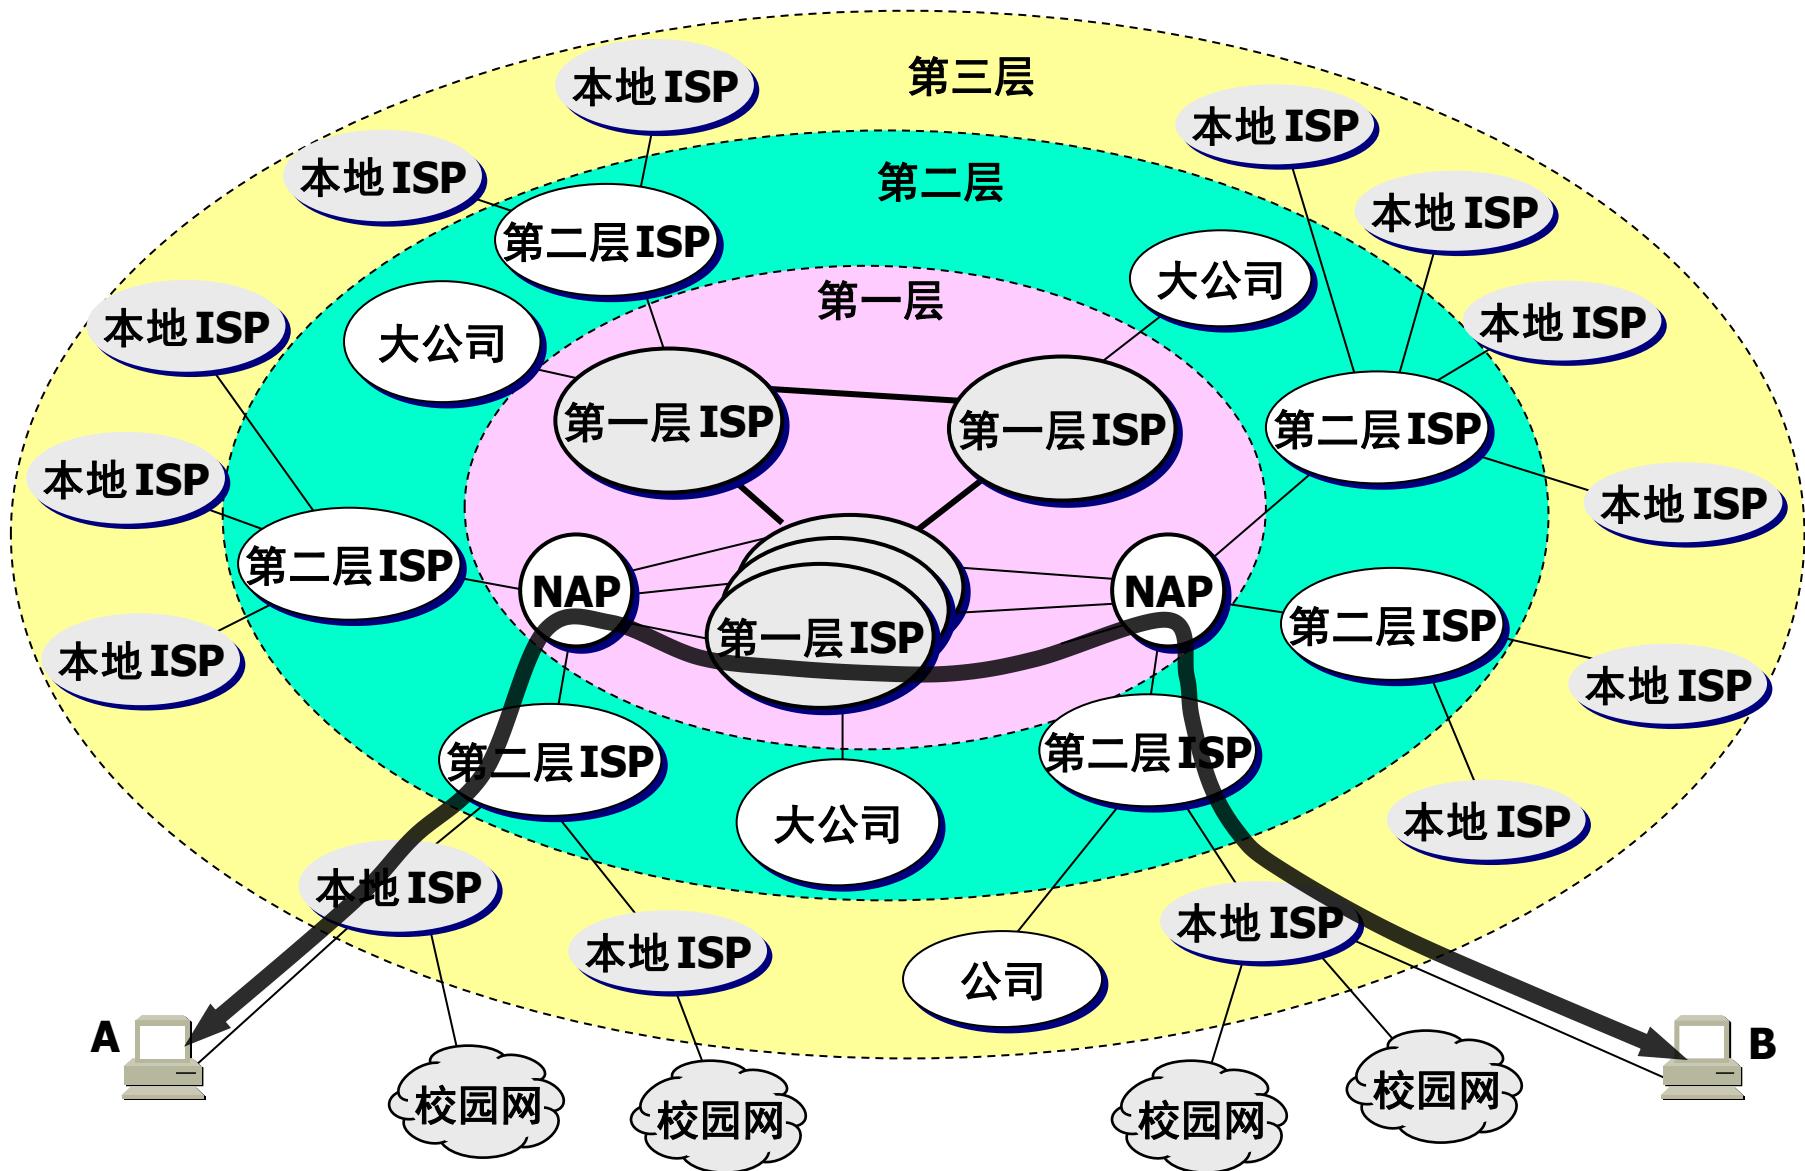


主机A → 本地 ISP → 第二层 ISP → NAP → 第一层 ISP → NAP → 第二层 ISP → 本地 ISP → 主机B

Chapter 1: Roadmap

- 1.1 Computer network and the Internet**
- 1.2 Network edge and core**
- 1.3 Network access and physical media**
- 1.4 Transmission Technology**
- 1.5 Type and Topology**
- 1.6 Network Performance**
- 1.7 Protocol layers, service models**
- 1.8 Architecture, OSI and TCP/IP Models**
- 1.9 Internet History**

Nodes and Links

- **Link:** transmission technology
 - Twisted pair, optical, radio, whatever
- **Node:** computational devices on end of links
 - **Host:** general-purpose computer
 - **Network node:** switch or router

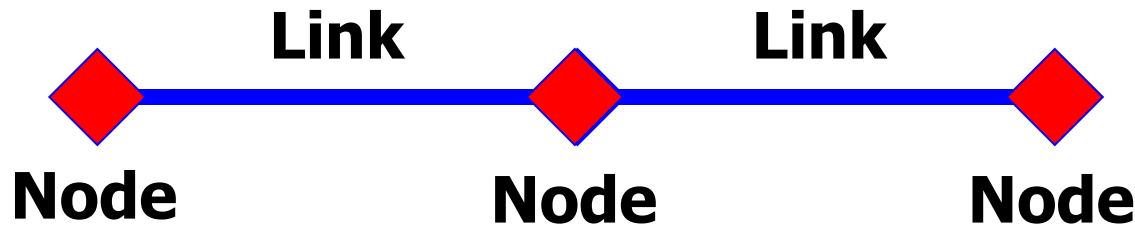

Properties of Links

■ Latency (delay)

- Time for data sent along the link
- Corresponds to the “length” of the link

■ Bandwidth (capacity)

- Amount of data sent (or received) per unit time
- Corresponds to the “width” of the link

■ Bandwidth-delay product: (BDP)

- Amount of data that can be “in flight” at any time
- Propagation delay \times bits/time = total bits in link

bandwidth [delay \times bandwidth]

latency

Examples of Bandwidth-Delay

■ Same city over slow link:

- Bandwidth: ~100mbps
- Latency: ~ 0.1msec
- BDP: ~ 10^4 bits / ~ 1.25 MBytes

■ Cross-country over fast link:

- Bandwidth: ~10Gbps
- Latency: ~ 10msec
- BDP: ~ 10^8 bits / ~ 12.5 GBytes

■ Another example where the Internet has to be prepared for a wide range of conditions!

Utilization

- Fraction of time link is busy transmitting
 - Often denoted by ρ
- Ratio of arrival rate to bandwidth
 - Arrival: A bits/sec on average
 - Bandwidth: B bits/sec
 - Utilization $\rho = A/B$

Packet Switching

Packet




■ Header

- Instructions to the network for how to handle packet
- Think of the header as an interface!


■ Payload (Body)

- Data being transferred

The Lifecycle of Packets

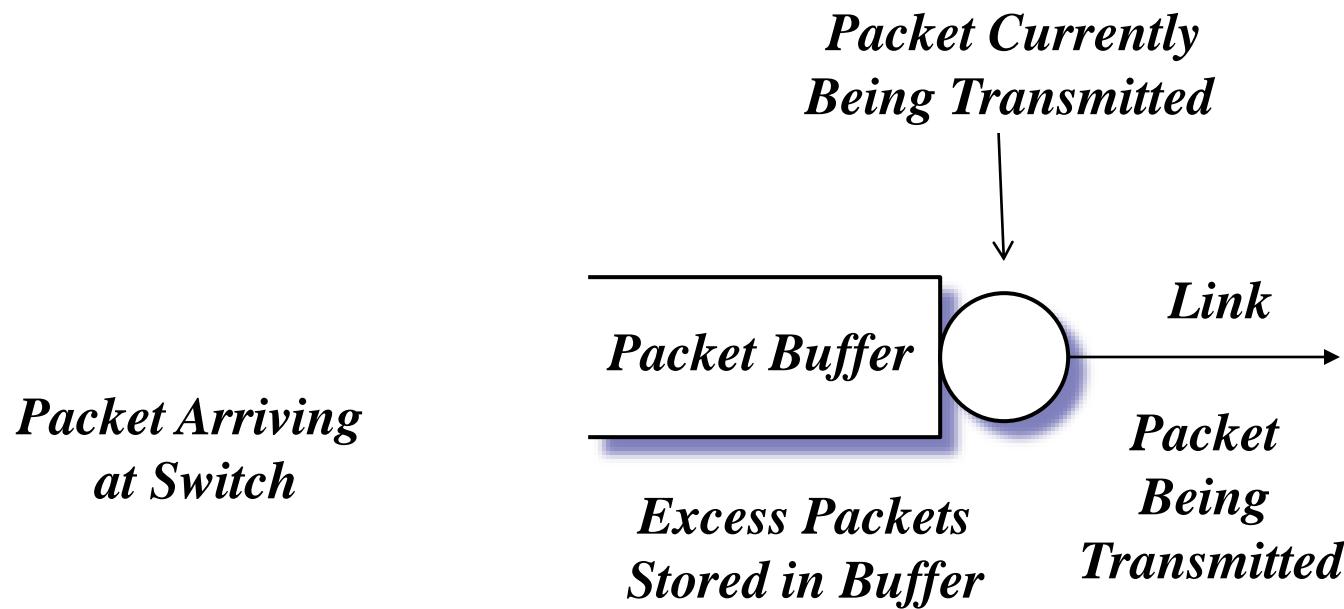

The Delays of Their Lives

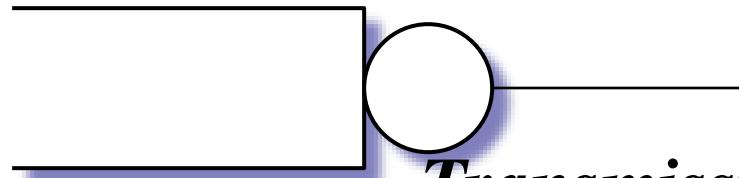

Transmission

Queueing Delay


Round-Trip Time (RTT) is the time it takes

Propagation Delay to destination and back to source
to retransmit upon receiving a negative acknowledgement

How do loss and delay occur?

packets *queue* in router buffers

- packet arrival rate to link exceeds output link capacity
- packets queue, wait for turn

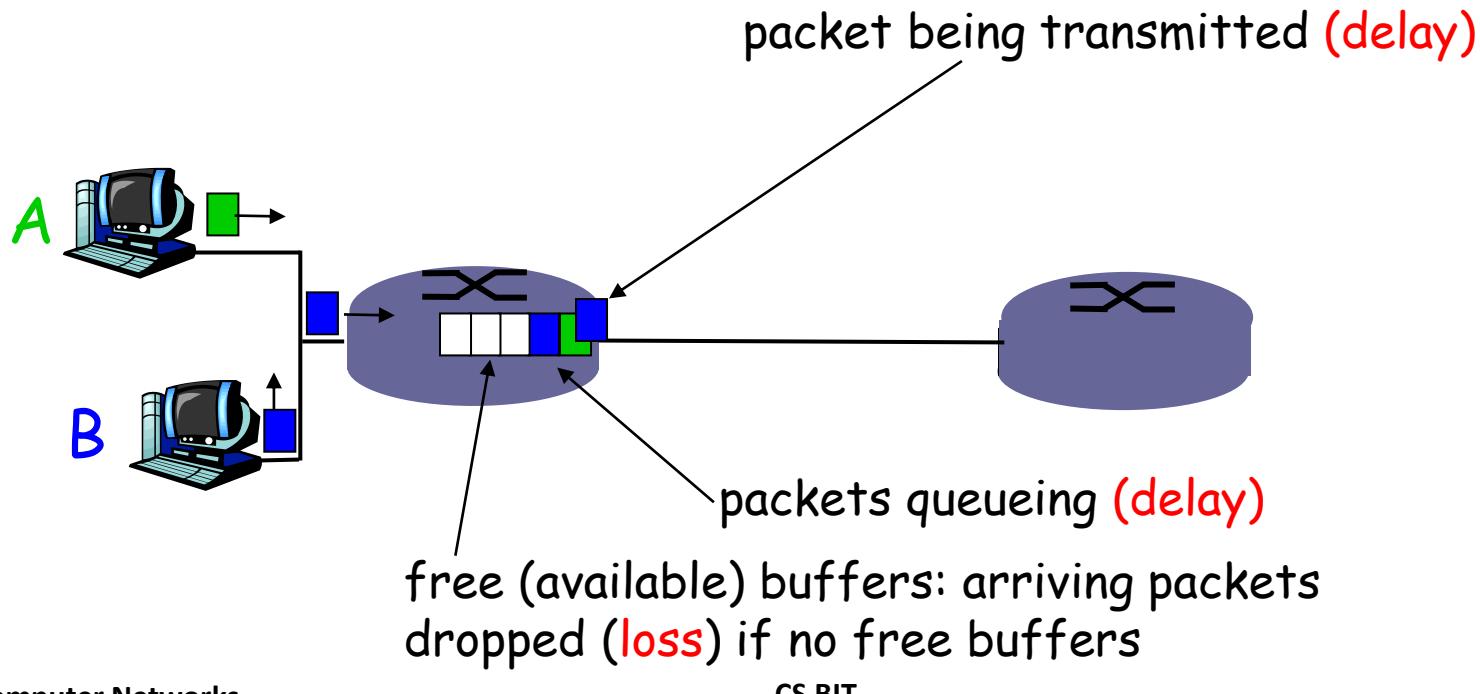


Four sources of packet delay

■ 1. nodal processing:

- check bit errors
- determine output link

■ 2. queueing

- time waiting at output link for transmission
- depends on congestion level of router

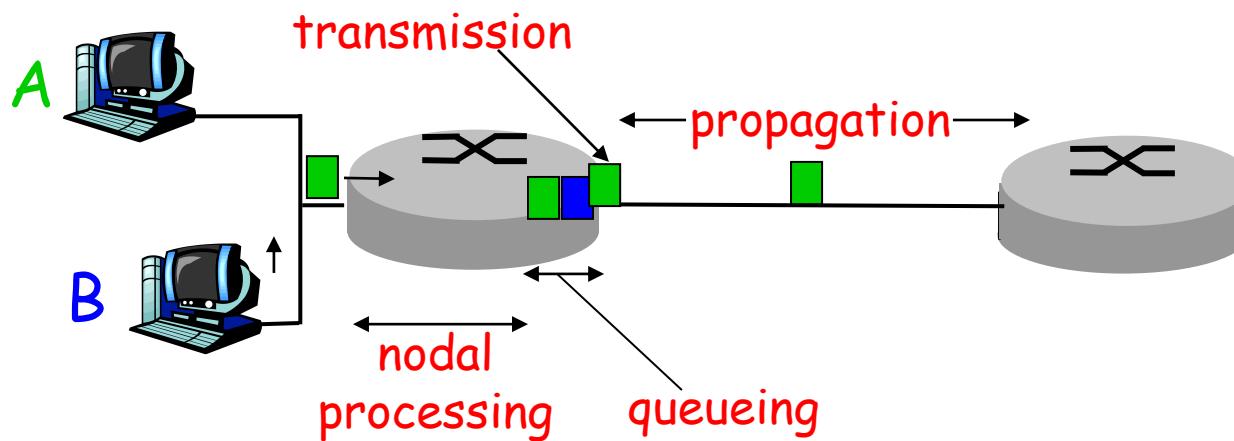


Delay in packet-switched networks

■ 3. Transmission:

- $R = \text{link bandwidth}$ (bps)
- $L = \text{packet length (bits)}$
- time to send bits into link = L/R

■ 4. Propagation:

- $d = \text{length of physical link}$
- $s = \text{propagation speed in medium}$ ($\sim 2 \times 10^8$ m/sec)
- propagation delay = d/s

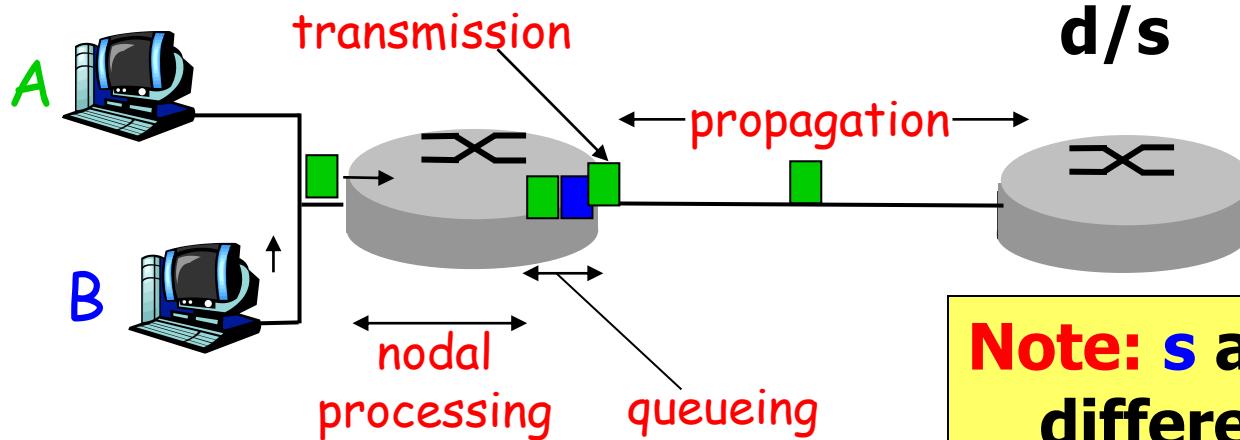

Note: s and R are very different quantities!


Nodal delay

$$d_{\text{nodal}} = d_{\text{proc}} + d_{\text{queue}} + d_{\text{trans}} + d_{\text{prop}}$$

- **d_{proc} = processing delay**
 - typically a few microseconds or less
- **d_{queue} = queuing delay**
 - depends on congestion
- **d_{trans} = transmission delay**
 - $= L/R$, significant for low-speed links
- **d_{prop} = propagation delay**
 - a few microsecs to hundreds of msecs

Queueing delay (revisited)

- R =link bandwidth (b/s)
- L =packet length (bits)
- a =average packet arrival rate

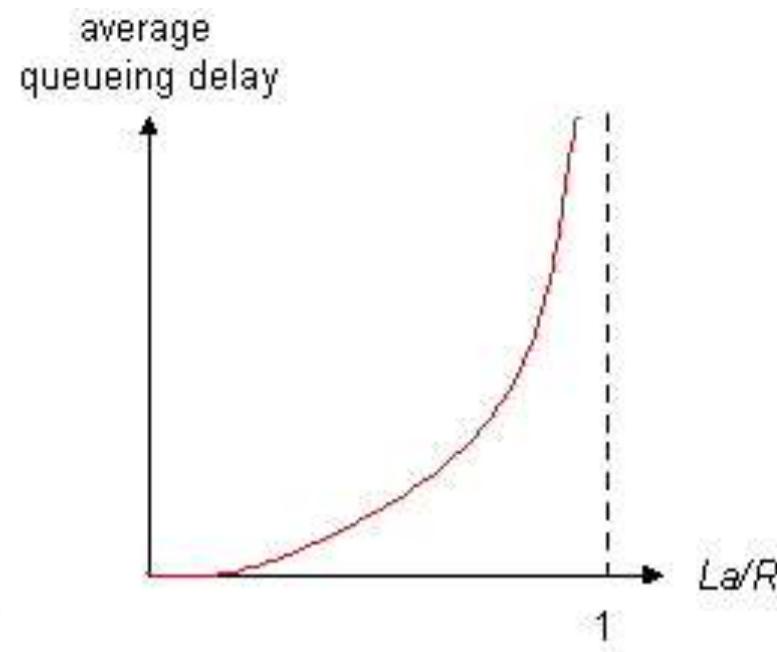

traffic intensity = La/R


- $La/R \sim 0$: average queueing delay small
- $La/R \rightarrow 1$: delays become large
- $La/R > 1$: more “work” arriving than can be serviced, average delay infinite!

“Real” Internet delays and routes

- **What do “real” Internet delay & loss look like?**
- **Traceroute program:** provides delay measurement from source to router along end-end Internet path towards destination.

For all i :

- sends three packets that will reach router i on path towards destination
- router i will return packets to sender
- sender times interval between transmission and reply.

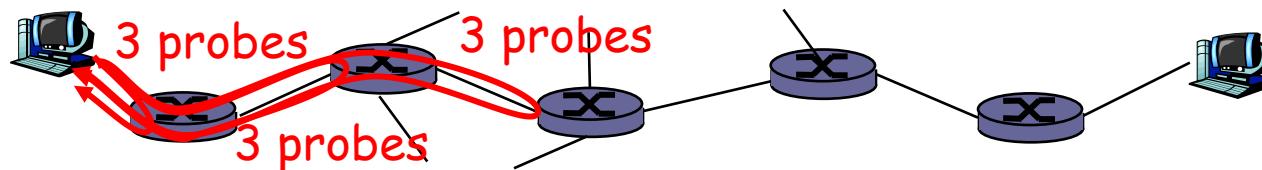

“Real” Internet delays and routes

traceroute: gaia.cs.umass.edu to www.eurecom.fr

Three delay measurements from gaia.cs.umass.edu to cs-gw.cs.umass.edu						
1	cs-gw (128.119.240.254)	1 ms	1 ms	2 ms		
2	border1-rt-fa5-1-0.gw.umass.edu (128.119.3.145)	1 ms	1 ms	2 ms		
3	cht-vbns.gw.umass.edu (128.119.3.130)	6 ms	5 ms	5 ms		
4	jn1-at1-0-0-19.wor.vbns.net (204.147.132.129)	16 ms	11 ms	13 ms		
5	jn1-so7-0-0-0.wae.vbns.net (204.147.136.136)	21 ms	18 ms	18 ms		
6	abilene-vbns.abilene.ucaid.edu (198.32.11.9)	22 ms	18 ms	22 ms		
7	nycm-wash.abilene.ucaid.edu (198.32.8.46)	22 ms	22 ms	22 ms		
8	62.40.103.253 (62.40.103.253)	104 ms	109 ms	106 ms		
9	de2-1.de1.de.geant.net (62.40.96.129)	109 ms	102 ms	104 ms		
10	de.fr1.fr.geant.net (62.40.96.50)	113 ms	121 ms	114 ms		
11	renater-gw.fr1.fr.geant.net (62.40.103.54)	112 ms	114 ms	112 ms		
12	nio-n2.cssi.renater.fr (193.51.206.13)	111 ms	114 ms	116 ms		
13	nice.cssi.renater.fr (195.220.98.102)	123 ms	125 ms	124 ms		
14	r3t2-nice.cssi.renater.fr (195.220.98.110)	126 ms	126 ms	124 ms		
15	eurecom-valbonne.r3t2.ft.net (193.48.50.54)	135 ms	128 ms	133 ms		
16	194.214.211.25 (194.214.211.25)	126 ms	128 ms	126 ms		
17	***					
18	***	* means no response (probe lost, router not replying)				
19	fantasia.eurecom.fr (193.55.113.142)	132 ms	128 ms	136 ms		

Packet loss

- queue (aka buffer) preceding link in buffer has finite capacity
- when packet arrives to full queue, packet is dropped (aka lost)
- lost packet may be retransmitted by previous node, by source end system, or not retransmitted at all

分析举例



- 结点 A 要将一个数据块通过 1000 km 的光纤链路发送给结点 B。假设忽略处理时延和排队时延。请分别计算下列情况时的总时延，并验证“数据的发送速率越高，其传送的总时延就越小”的说法是否正确。
 - ◆ (1) 数据块大小为 100 MB, 信道带宽为 1 Mbit/s
 - ◆ (2) 数据块大小为 100 MB, 信道带宽为 100 Mbit/s
 - ◆ (3) 数据块大小为 1 B, 信道带宽为 1 Mbit/s
 - ◆ (4) 数据块大小为 1 B, 信道带宽为 1 Gbit/s

分析举例

- 解：

传播时延 = $1000 \text{ km} / 2.0 \times 10^5 \text{ km/s} = 5 \text{ ms}$ 。

(1) 发送时延 = $100 \times 2^{20} \times 8 \div 10^6 = 838.9 \text{ s}$,

总时延 = $838.9 + 0.005 \approx 838.9 \text{ s}$ 。

(2) 发送时延 = $100 \times 2^{20} \times 8 \div 10^8 = 8.389 \text{ s}$

总时延 = $8.389 + 0.005 = 8.394 \text{ s}$ 。缩小到 (1) 的近 $1/100$ 。

(3) 发送时延 = $1 \times 8 \div 10^6 = 8 \times 10^{-6} \text{ s} = 8 \mu\text{s}$,

总时延 = $0.008 + 5 = 5.008 \text{ ms}$ 。

(4) 发送时延 = $1 \times 8 \div 10^9 = 8 \times 10^{-9} \text{ s} = 0.008 \mu\text{s}$


总时延 = $0.000008 + 5 = 5.000008 \text{ ms}$ 。与 (3) 相比没有明显减小。

不能笼统地认为：“数据的发送速率越高，其传送的总时延就越小”。

往返时间 RTT (Round-Trip Time)

- 表示从发送方发送完数据，到发送方收到来自接收方的确认总共经历的时间。

往返时间 RTT = 结点 A 到 B 的传播时延 t_p
+ 结点 B 处理和排队时延 t_{PQB}
+ 结点 B 发送时延 t_{TB}
+ 结点 B 到 A 的传播时延 t_p
= $2 \times$ 传播时延 t_p
+ 结点 B 处理和排队时延 t_{PQB}
+ 结点 B 发送时延 t_{TB}

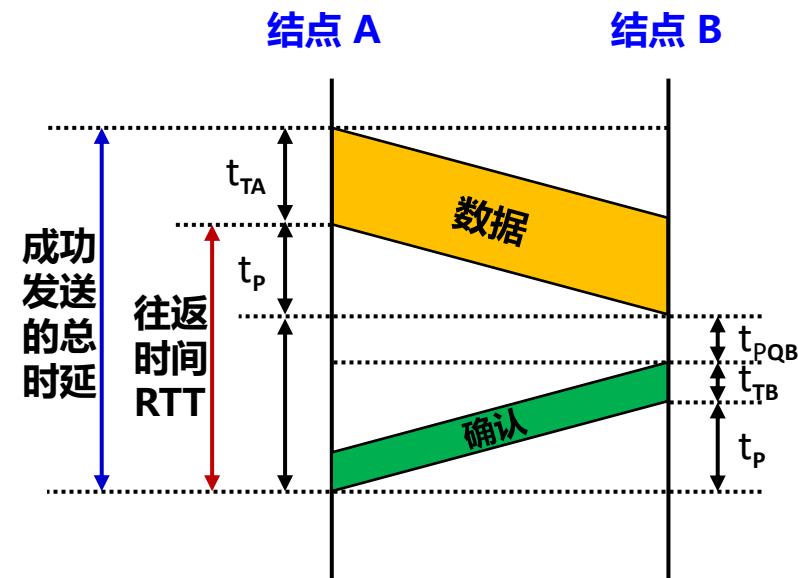

分析举例



- 结点 A 要将一个 100 MB 数据以 100 Mbit/s 的速率发送给结点 B，B 正确收完该数据后，就立即向 A 发送确认。假定 A 只有在收到 B 的确认信息后，才能继续向 B 发送数据，且确认信息很短。计算 A 向 B 发送数据的有效数据率。

分析举例



- 解：

$$\text{发送时延} = \frac{\text{数据长度}}{\text{发送速率}} = \frac{100 \times 2^{20} \times 8}{100 \times 10^6} \approx 8.39 \text{ s}$$


$$\text{有效数据率} = \frac{\text{数据长度}}{\text{发送时间} + \text{RTT}} = \frac{100 \times 2^{20} \times 8}{8.39 + 2} \approx 80.7 \text{ Mbit/s}$$

Chapter 1: Roadmap

- 1.1 Computer network and the Internet**
- 1.2 Network edge and core**
- 1.3 Network access and physical media**
- 1.4 Transmission Technology**
- 1.5 Type and Topology**
- 1.6 Network Performance**
- 1.7 Protocol layers, service models**
- 1.8 Architecture, OSI and TCP/IP Models**
- 1.9 Internet History**

Protocols

- **Protocol:** an agreement on how to communicate
 - To exchange data
 - To coordinate sharing of resources
- Protocols specifies *syntax* and *semantics*.
- **Syntax:** how protocol is structured
 - Format, order messages are sent and received
- **Semantics:** what these bits mean
 - How to respond to various messages, events, etc.

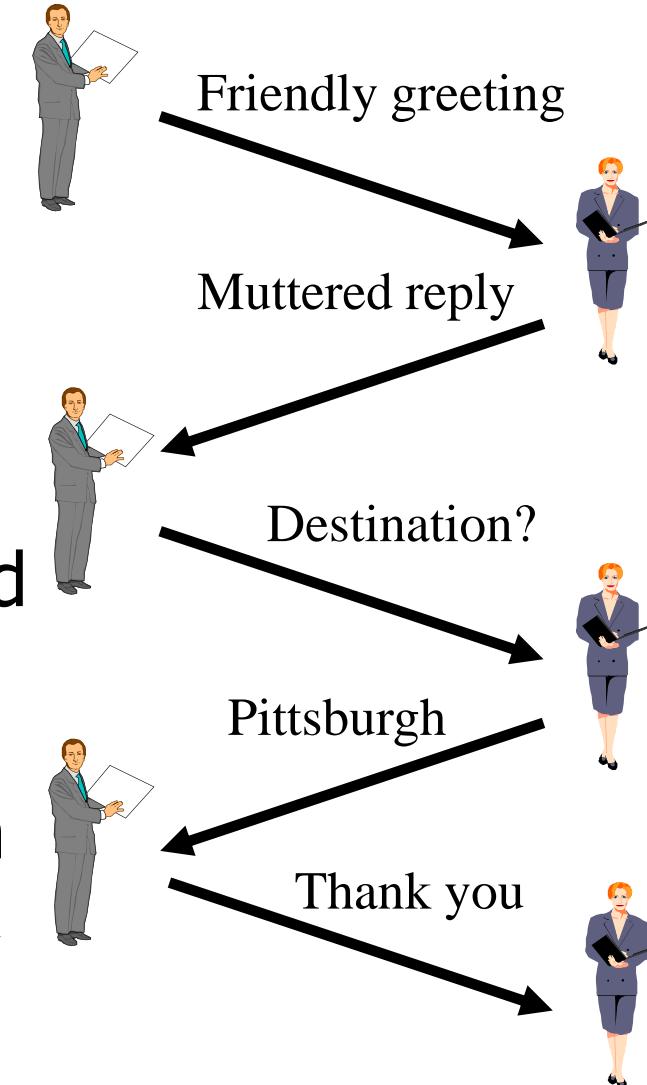

Protocol “Layers”

Networks are complex!


■ many “pieces”:

- hosts
- routers
- links of various media
- applications

What is Layering?

- A technique to organize a network system into a **succession** of logically distinct entities, such that the service provided by one entity is **solely** based on the service provided by the previous (lower level) entity


Why Layering?

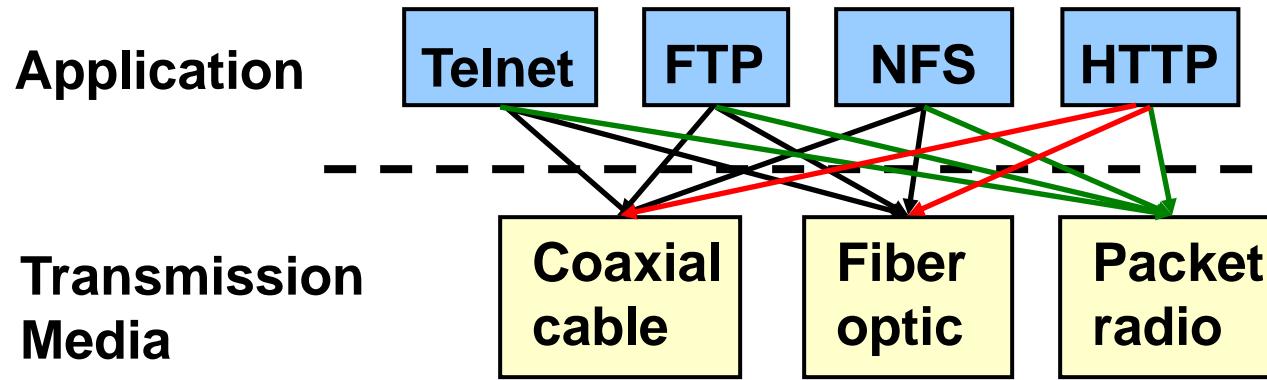

- **No layering: each new application has to be re-implemented for every network technology!**

Why Layering?

- **Solution:** introduce an **intermediate layer** that provides a **unique abstraction** for various network technologies

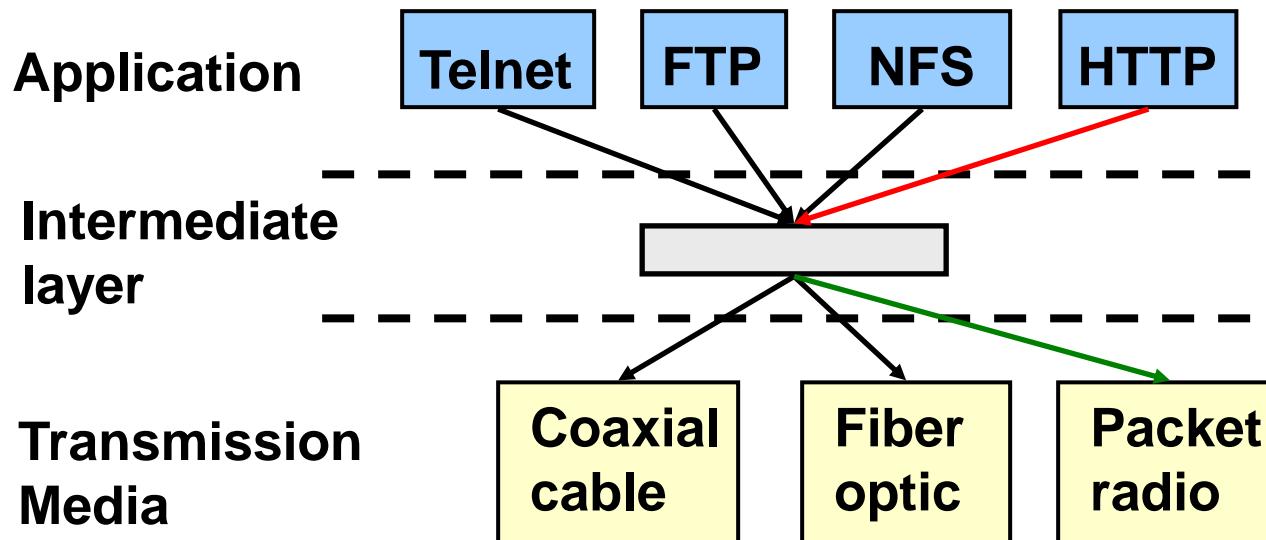

Avoids NxM Implementation Problem

Why layering?

Dealing with complex systems:

- explicit structure allows identification, relationship of complex system's pieces
 - layered **reference model** for discussion
- modularization eases maintenance, updating of system
 - change of implementation of layer's service transparent to rest of system
 - e.g., change in gate procedure doesn't affect rest of system
 - also found in operating systems and languages
- **Q: layering considered harmful?**

Why layering?


■ Advantages

- Modularity** – protocols easier to manage and maintain
- Abstract functionality** –lower layers can be changed **without** affecting the upper layers
- Reuse** – upper layers can reuse the functionality provided by lower layers

■ Disadvantages

- Information hiding** – inefficient implementations

Layered Protocol Architecture

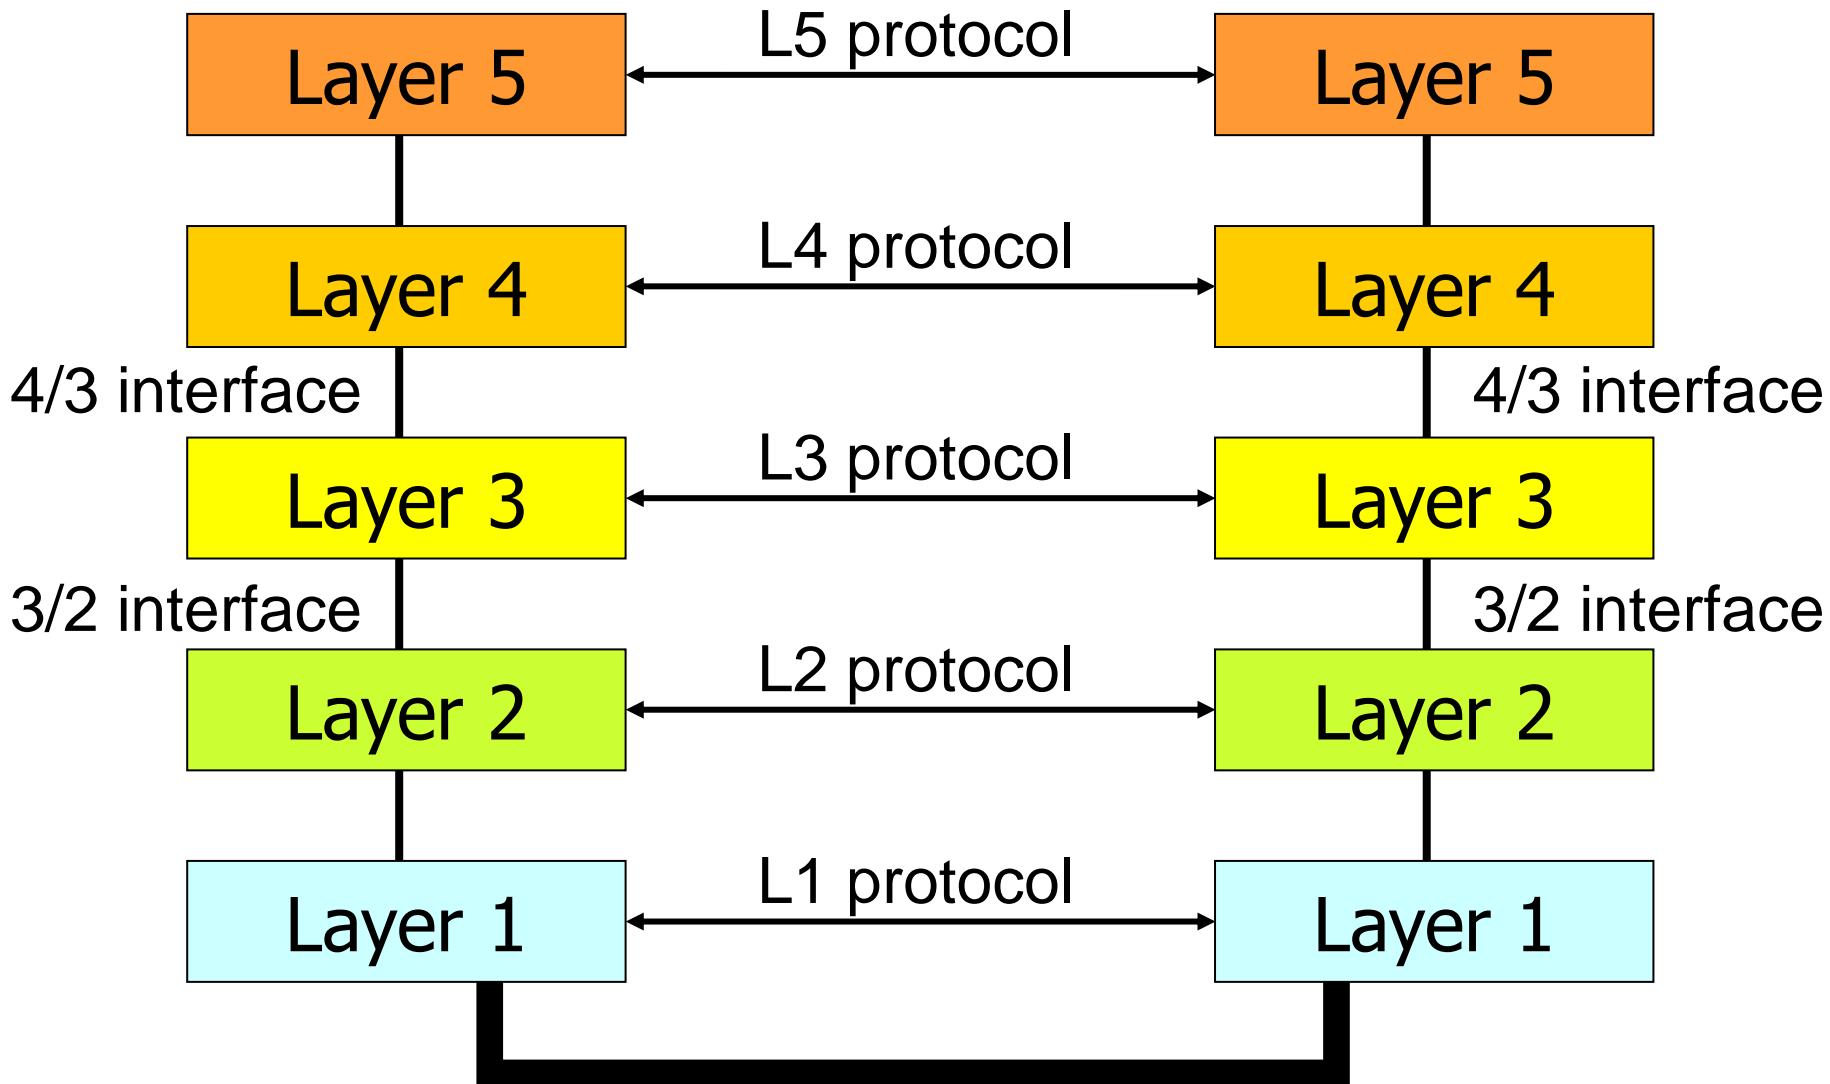


Layered Protocol Architecture

- To reduce design complexity, most networks are organized as a **series of layers**, each layer offers certain services to its upper layer.
- Layer ***n*** on one machine carries on a conversation with layer ***n*** on another machine.
- The rules and conventions used in this conversation are collectively known as the **layer *n* protocol**.



Characterizing the Layers

- **Service:** what a layer *does*
- **Service interface:** how to access the service
 - Interface for layer above
- **Protocol:** how peers communicate
 - Protocol interface: set of rules and formats that govern the communication between network elements
 - Determines how the peers achieve the service
 - Does not govern implementation on a single machine, but how the layer is implemented *between* machines
- **Peer:** the entities comprising the corresponding layers on different machines are called peers

Layer Encapsulation


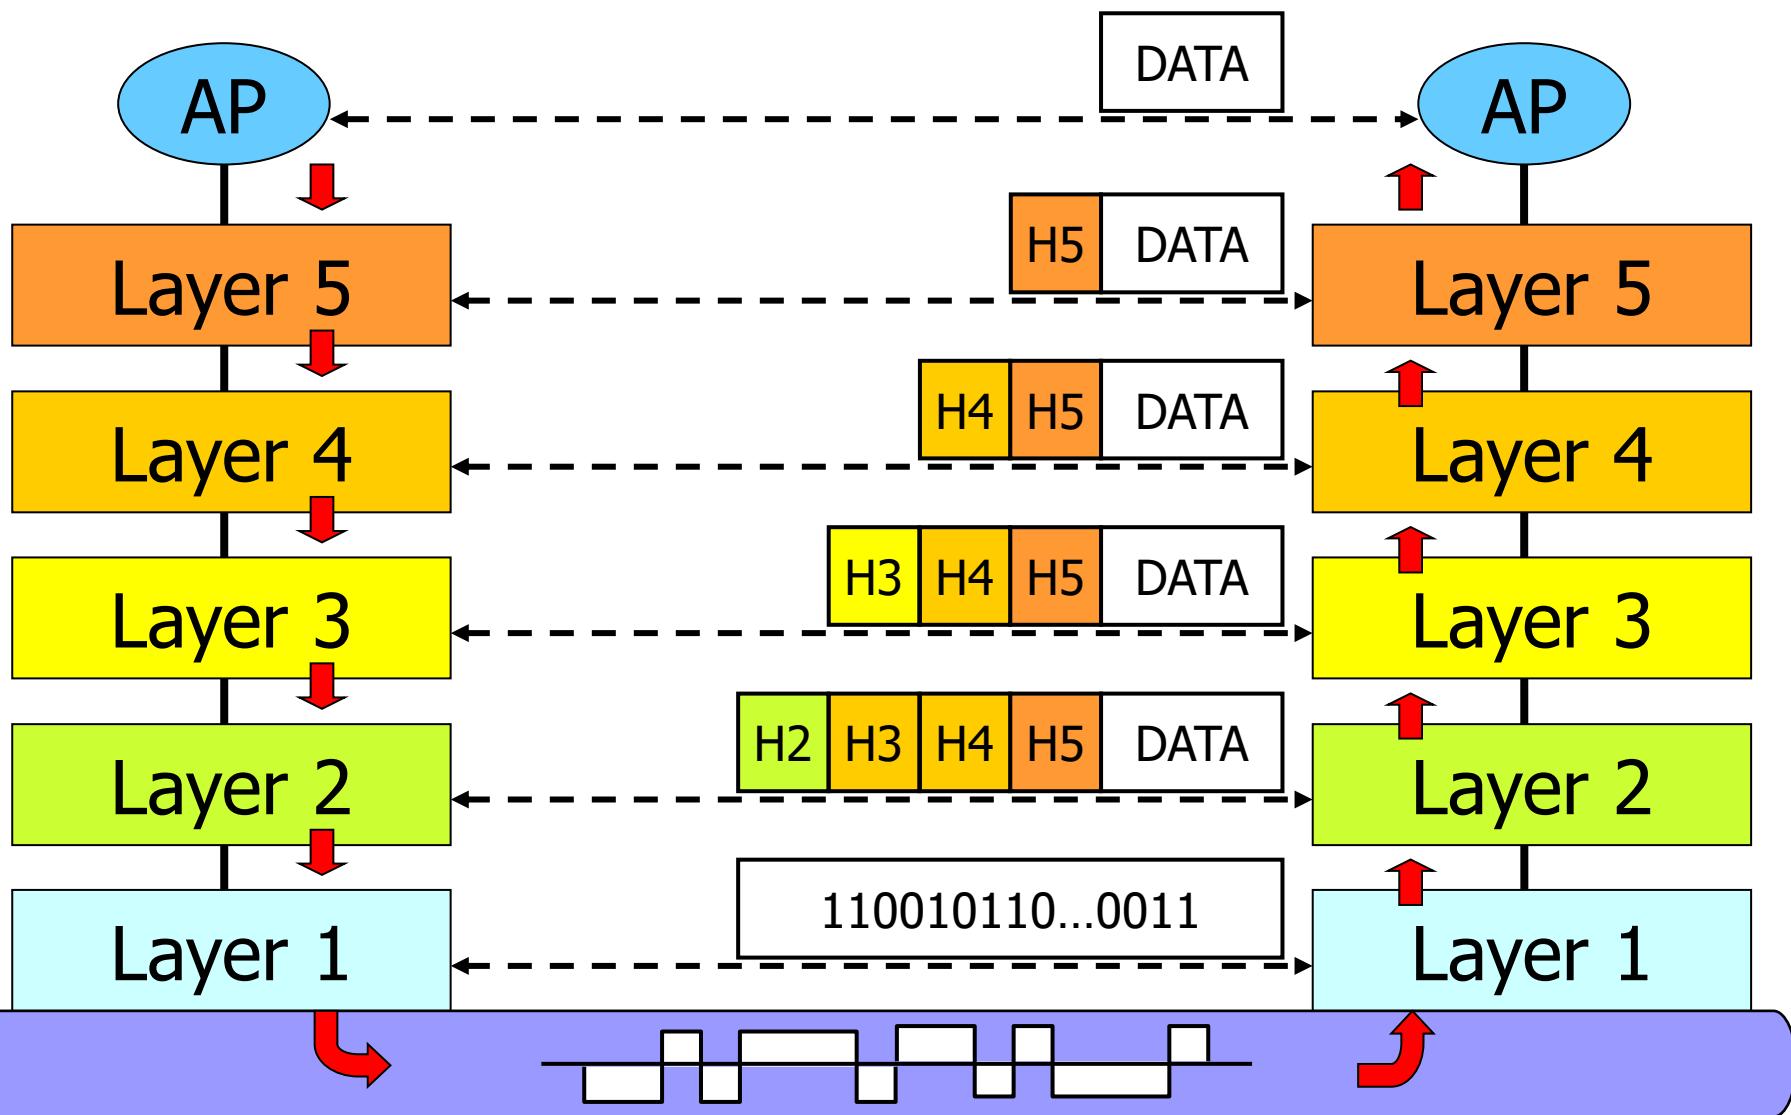


Layer Encapsulation

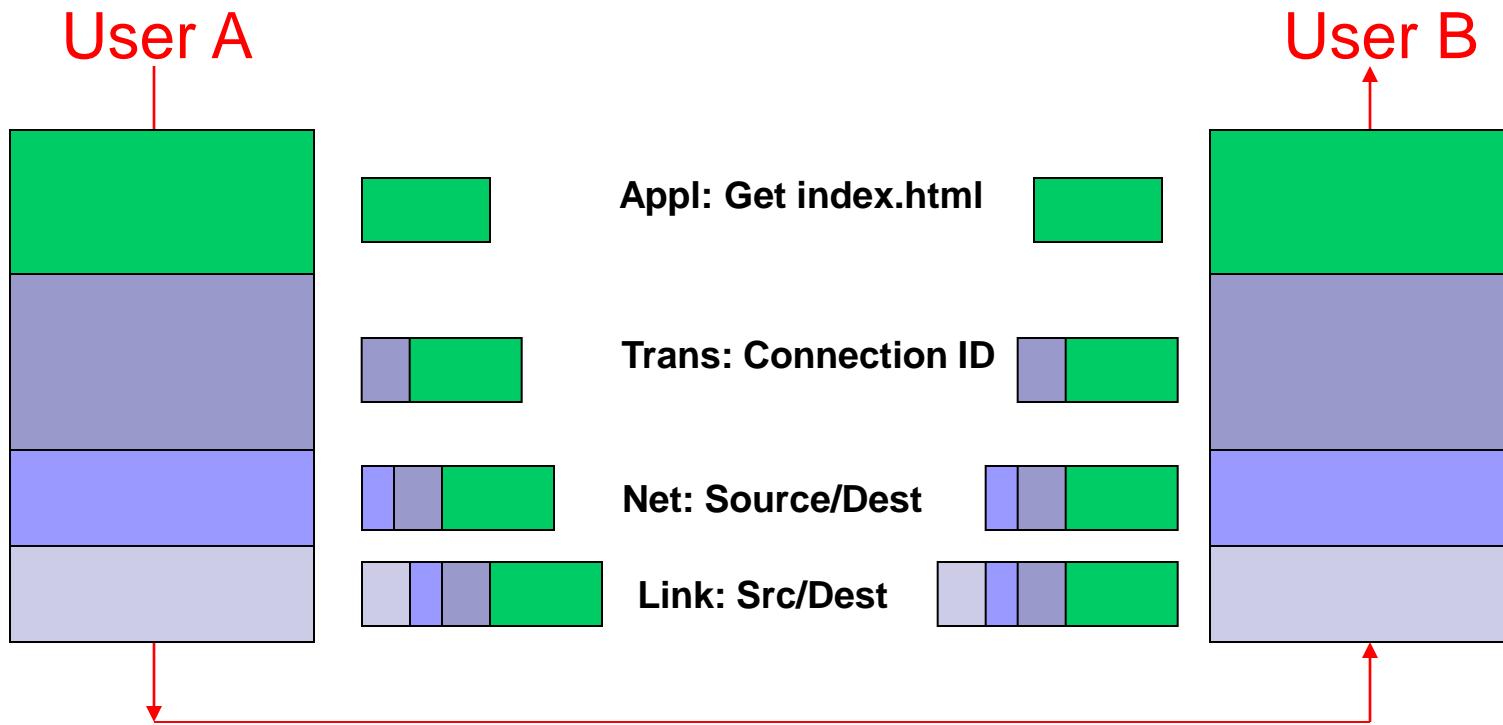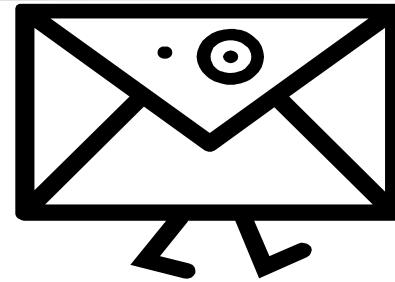

**Common case: 20 bytes TCP header + 20 bytes IP header
+ 14 bytes Ethernet header = 54 bytes overhead**

Layer Encapsulation

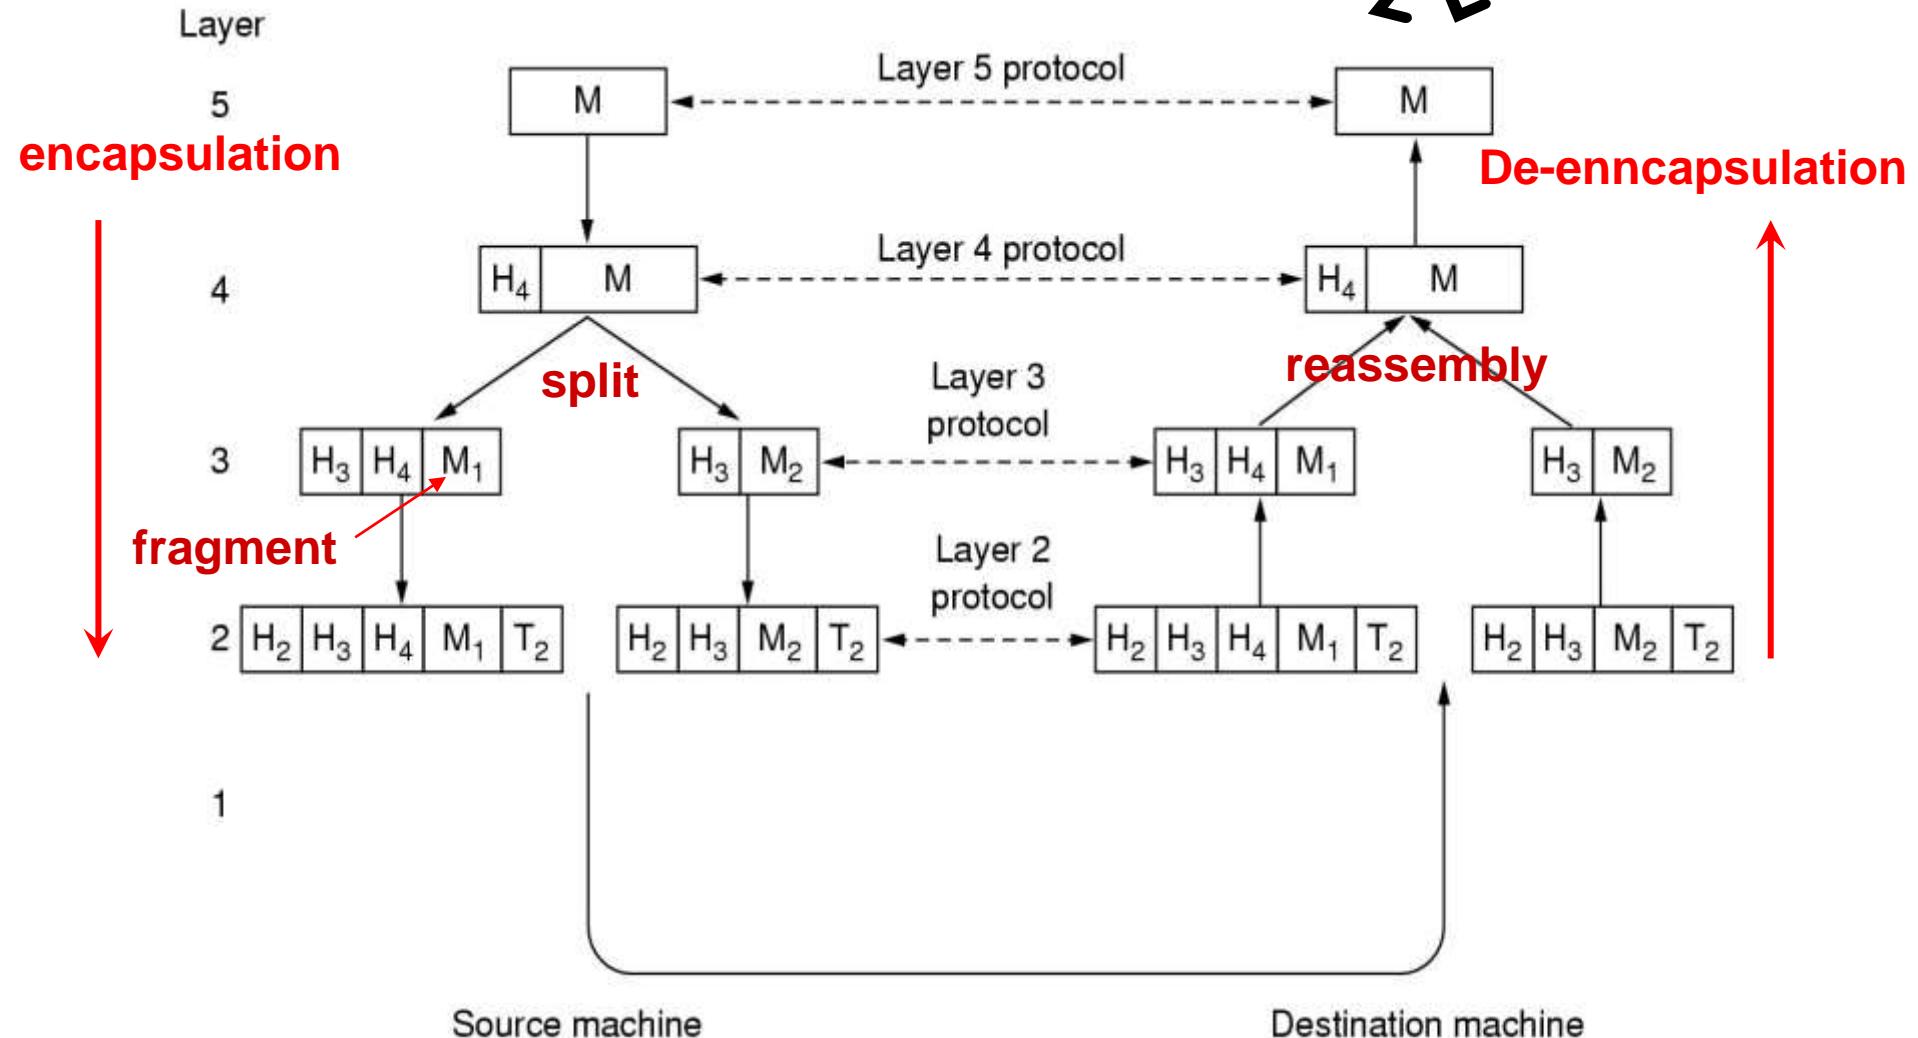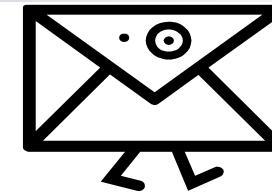


Information flow supporting virtual communication in layer 5

Fragmentation / Reassembly

- **Observation:** In a protocol stack, *Layer k* puts its entire packet as **data** into a *Layer k-1* packet, that is, the *k-1* packet **payload**; the latter may add a header and/or a trailer.
- **Note:** It may even occur that *Layer k* data has to be **split** across several *Layer k-1* packets, i.e., **fragmentation**. At the destination, **reassembly** is needed to recover *Layer k* data.

Fragmentation / Reassembly

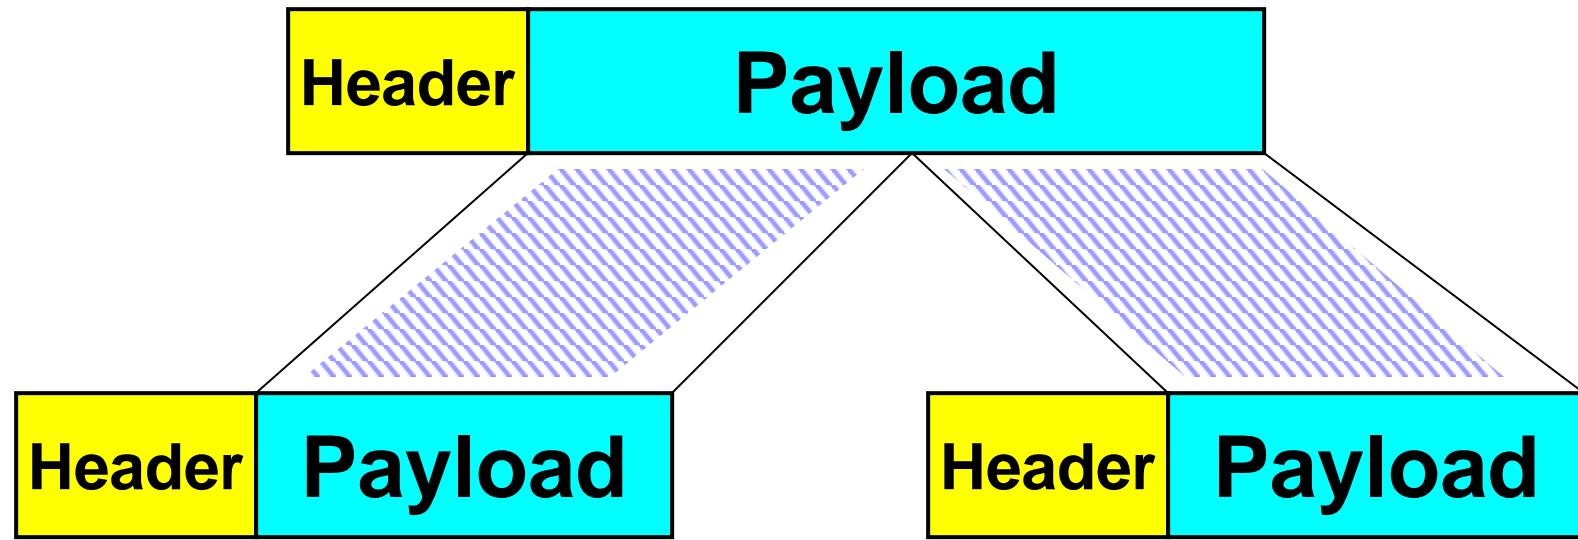

Services

■ **What is service?**

□ **A set of communication abilities and operations provided by lower layer to its higher layer.**

■ **Types**

□ **Connection-oriented Service**

□ **Connectionless Service**

Services

■ Connection-oriented Service

□ Like the telephone model: you first establish a connection, then do a lot communication, and finally release the connection. Three phases.

□ Circuit switching

□ Virtual Circuit packet switching

■ Connectionless Service

□ Like the postal model: your data is put into some kind of envelope called packet, on which the destination address has been written. The packet is independently routed in communication subnet, until gets to the destination, and that's it.

□ Datagram packet switching

Services

- Each service can provide some quality:
 - ***Is data delivered in the order it was sent?*** With connections, this is generally the case.
 - ***Is data transmission reliable?*** Generally offered with connections, but not always with connectionless services. Reliability requires sending acknowledgements, so that performance may degrade.

Six different types of service



	Service	Example
Connection-oriented	Reliable message stream	Sequence of pages
	Reliable byte stream	Remote login
	Unreliable connection	Digitized voice
Connection-less	Unreliable datagram	Electronic junk mail
	Acknowledged datagram	Registered mail
	Request-reply	Database query

Service Primitives

- Services are generally specified by a set of **primitives** (operations), which tell the service to perform some action or report on an action taken by a peer entity. Primitives are normally system calls.


Primitive	Meaning
LISTEN	Block waiting for an incoming connection
CONNECT	Establish a connection with a waiting peer
RECEIVE	Block waiting for an incoming message
SEND	Send a message to the peer
DISCONNECT	Terminate a connection

- CONNECT.request:** request for establishing a connection (*dial a phone number*).
- CONNECT.indication:** signal the callee (*phone rings*).
- CONNECT.response:** reaction by callee to indication (*pick up the phone*).
- CONNECT.confirm:** tell caller whether call was accepted (*caller hears ringing stop*).
- DATA.request:** request data to be sent (*say something*)
- DATA.indication:** signal arrival of data (*callee hears you*)
- DISCONNECT.request:** request release of connection (*caller hangs up*)
- DISCONNECT.indication:** signal release of connection (*callee hears busy tone*)

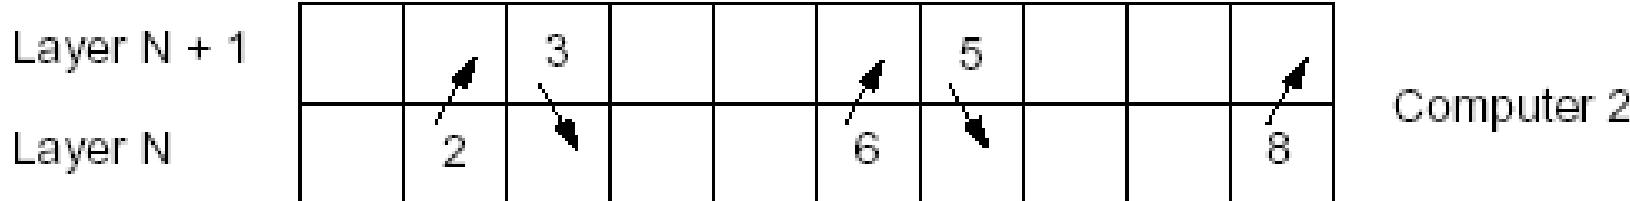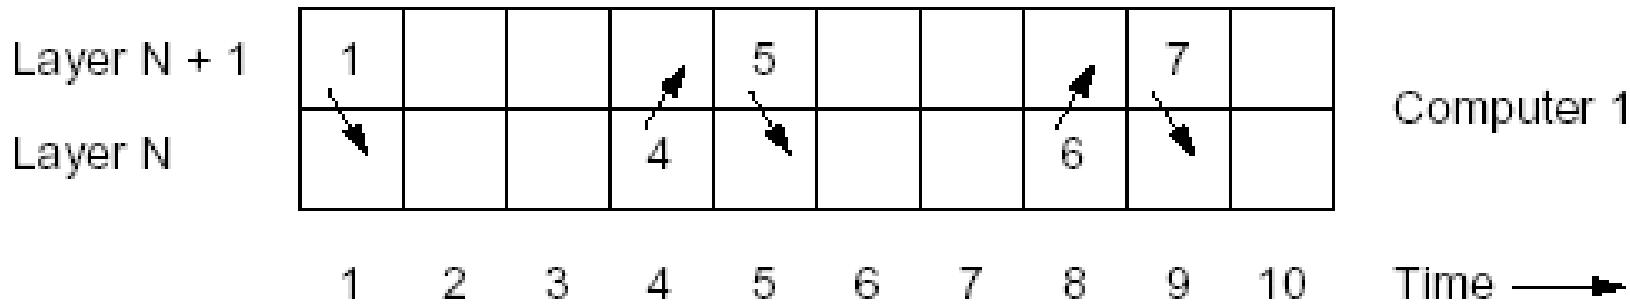


Service Primitives

- Packets sent in a simple client-server interaction on a connection-oriented network.

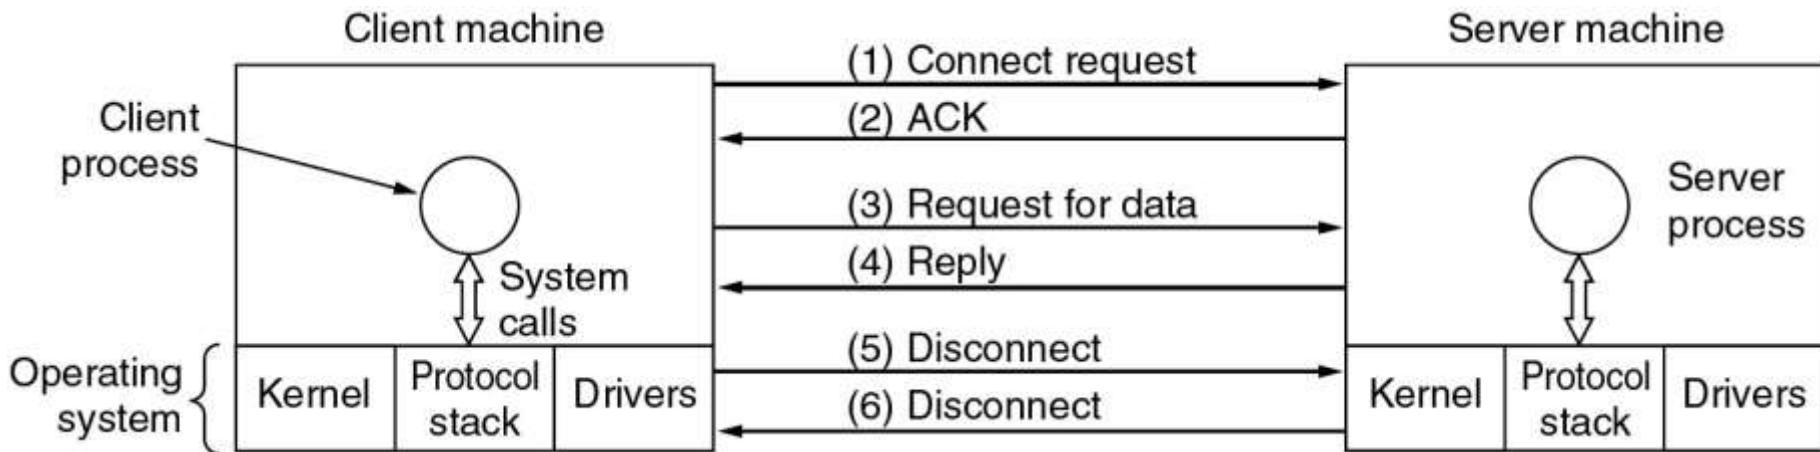

Interfaces and Services

Relation between layers at an interface

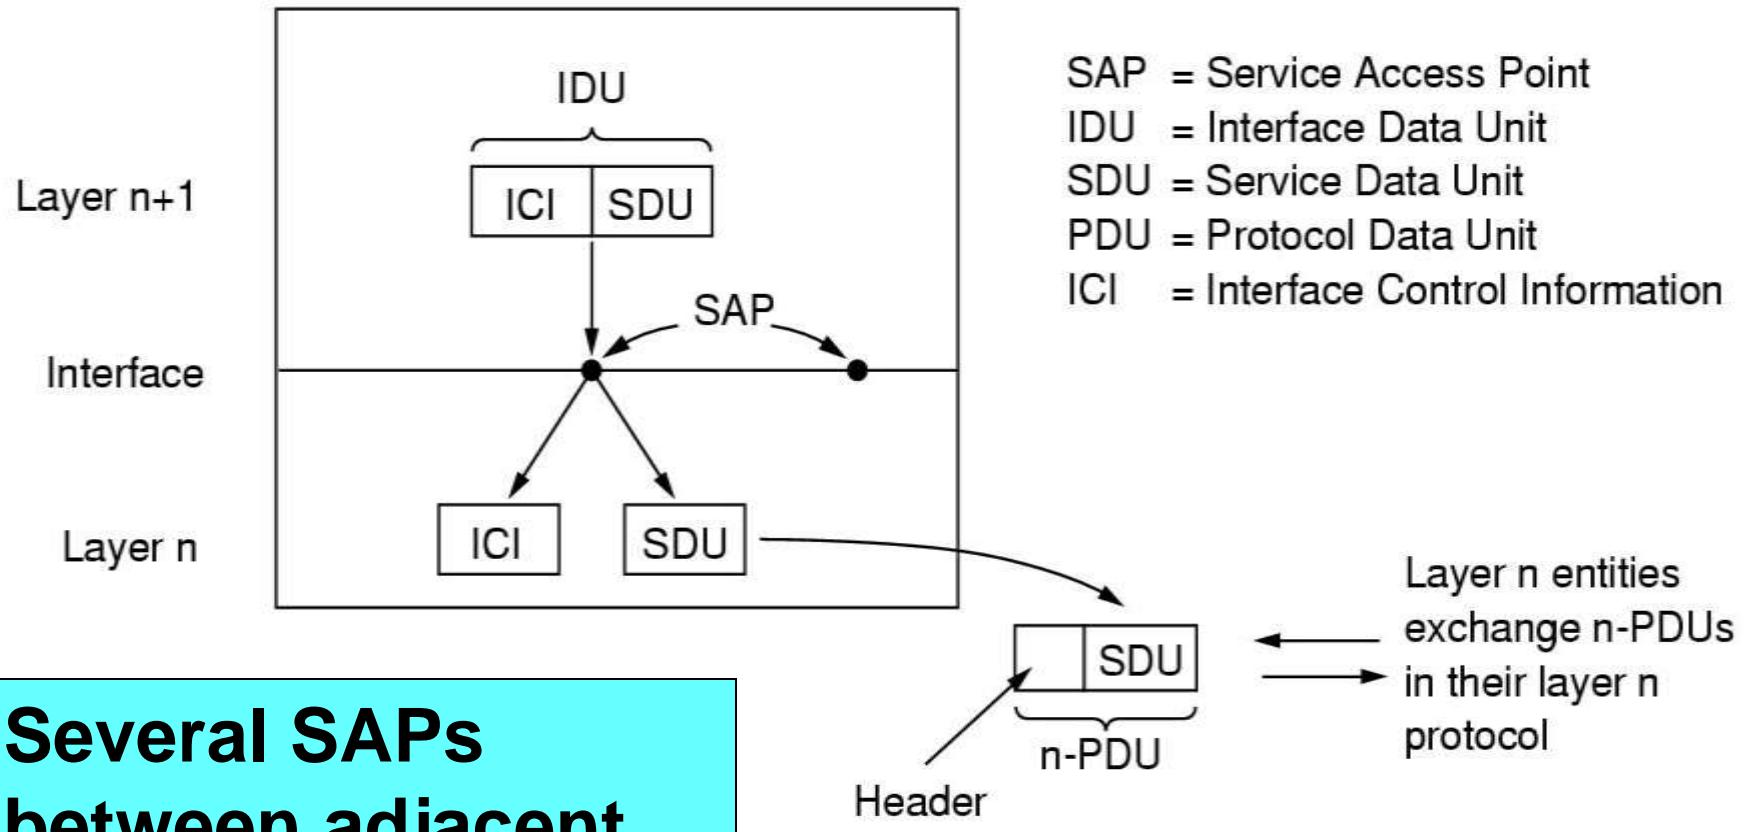

Interfaces and Services

- A **Service Access Point (SAP)** is identified by an address, and forms the interface to a set of services.
- The **Service Data Unit** contains the data you want to send.
- The **Interface Control Information** contains info needed to send the SDU, e.g. number of bytes.
- The **Protocol Data Unit** is the data that is sent across the network, containing your SDU as well as protocol-specific data.

Interfaces and Services

(N)PCI	(N) User Data (optional)
--------	--------------------------


(N)PCI: Protocol Control Information.
Header

a. (N)PDU Format

(N)ICI	(N+1) PDU
--------	-----------

(N)ICI: Interface Control Information.
Only useful for PDUs over the interface.

b. (N)IDU Format

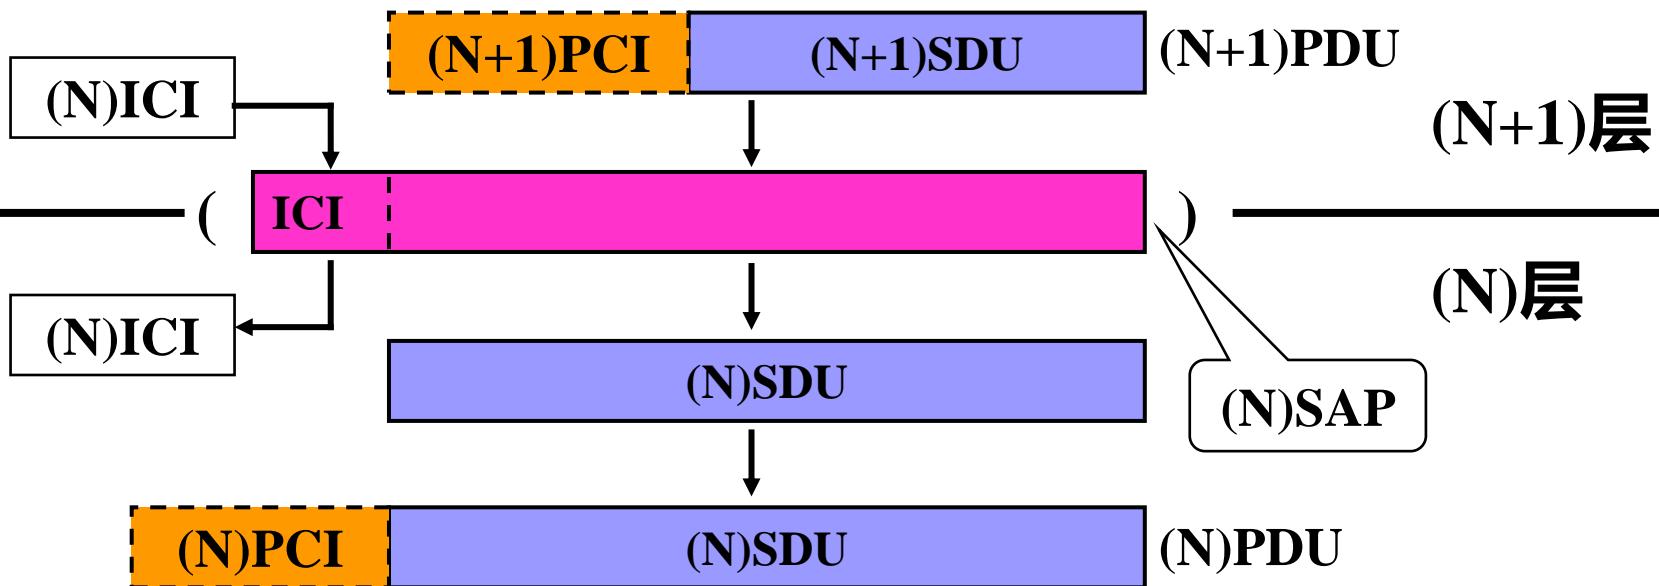

SAP and Data Units

The Relationship of Services to Protocols


■ Service

- is a set of primitives (operations) that a layer provides to the layer above it, defining what operations the layer is prepared to perform on behalf of its users, but nothing about how these operations are implemented.

■ Protocol


- is a set of rules governing the format and meaning of the packets, or messages that are exchanged by the peer entities within a layer. Entities use protocols to implement their service definitions.

The Relationship of Services to Protocols

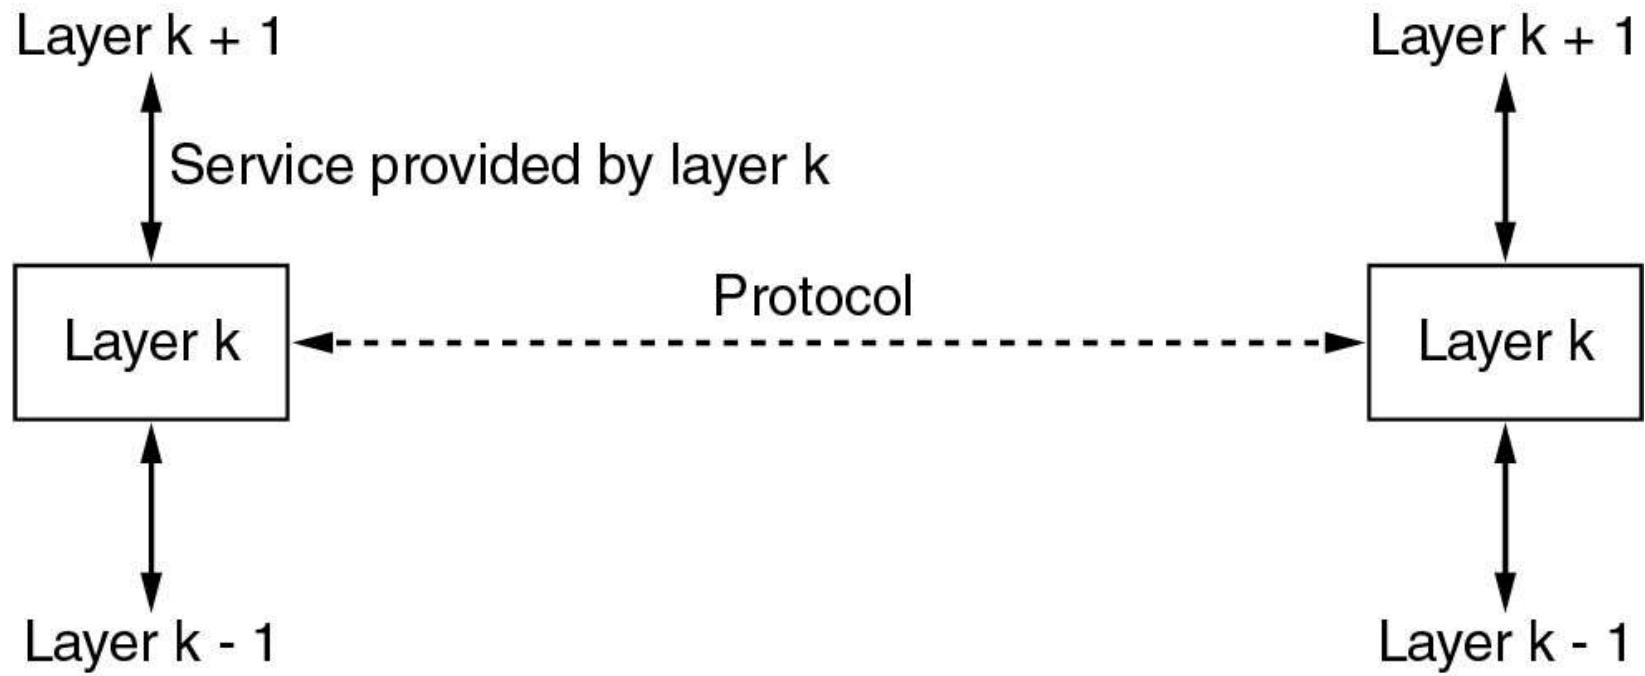

The relationship between a service and a protocol

Protocols, Layers, and Interfaces

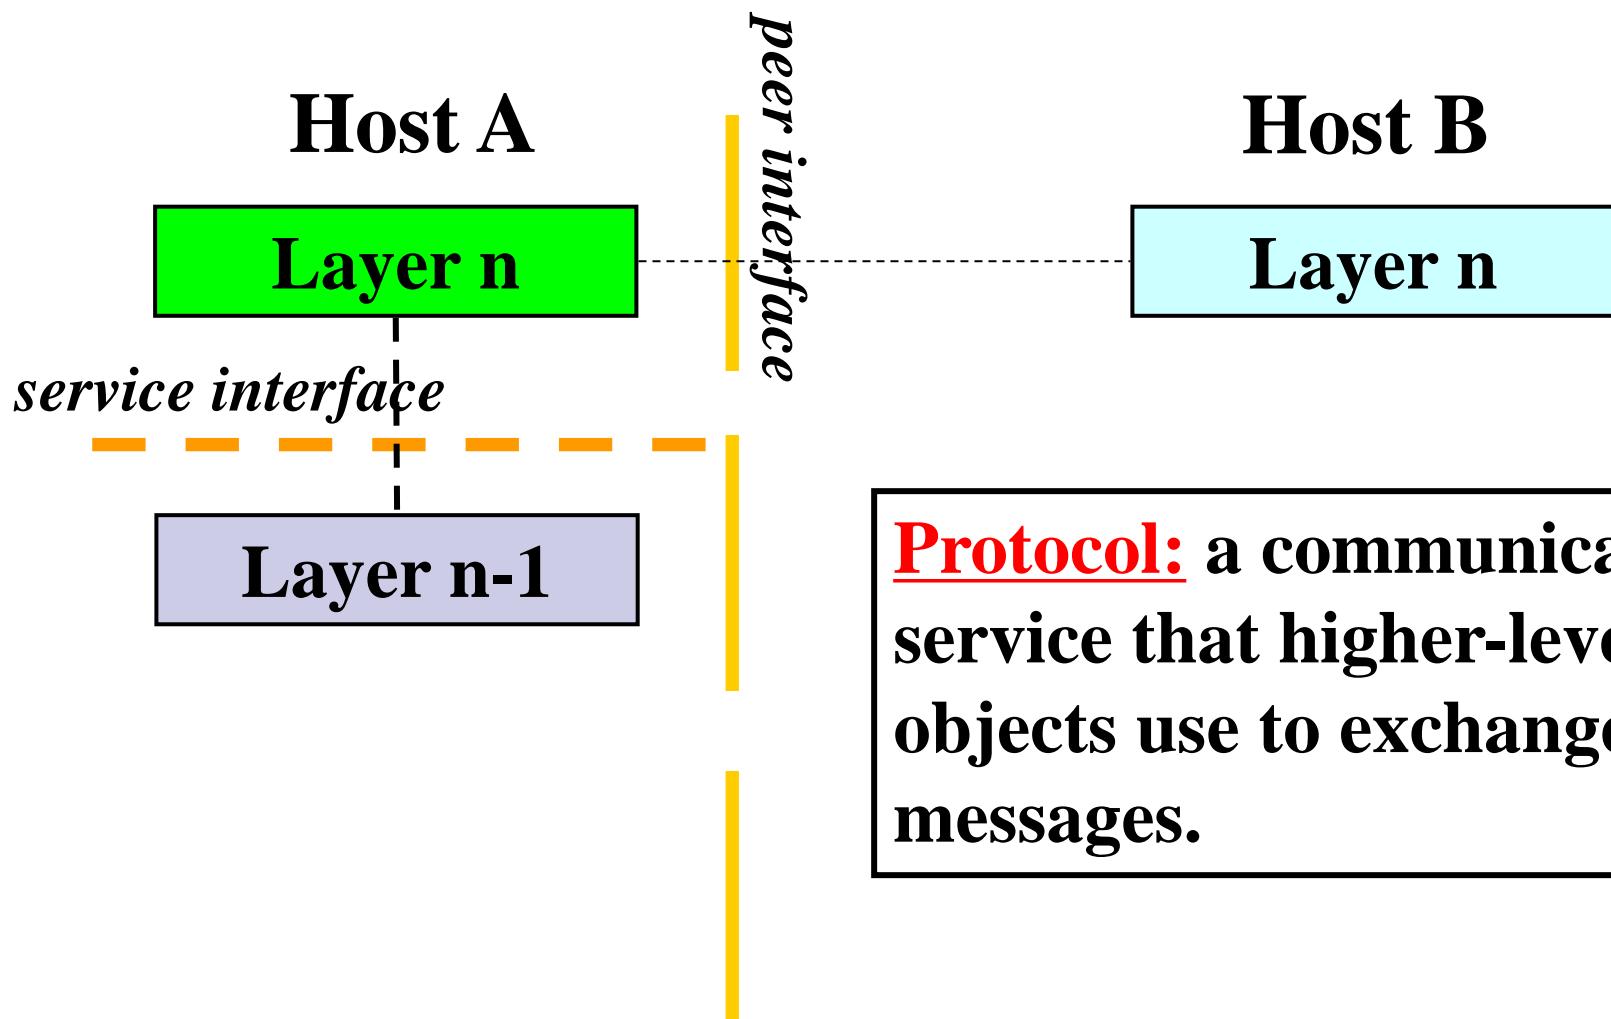


Communication Between Layers within a Host

It's important to specify the services offered to higher layers in the hierarchy.

What they are + how to use them = *interface*.

SAPs (service access points)

Note: This is ISO terminology.

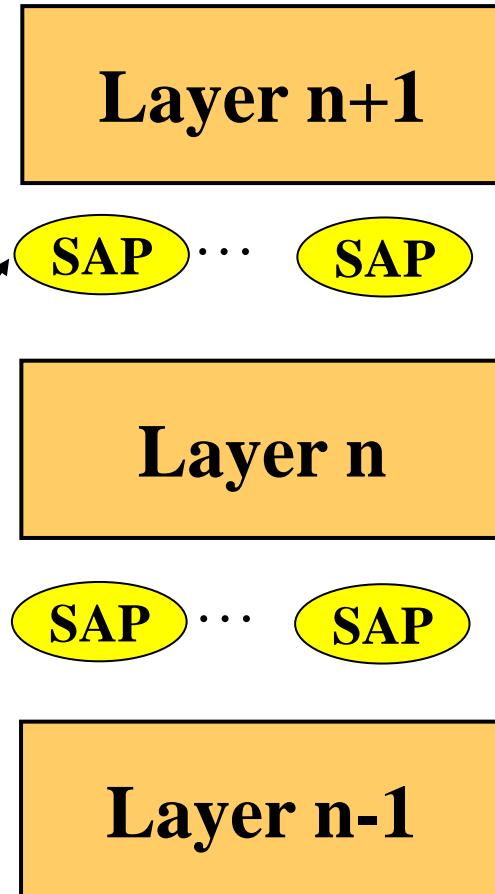

Chapter 1: Roadmap

1.1 Computer network and the Internet

1.2 Network edge and core

1.3 Network access and physical media

1.4 Transmission Technology

1.5 Type and Topology

1.6 Network Performance

1.7 Protocol layers, service models

1.8 Architecture, OSI and TCP/IP Models

1.9 Internet History

Some terminologies

■ Network Architecture

- A set of layers and protocols, together with interfaces between layers, is called Network Architecture.

■ protocol hierarchies

- Fundamental to ***all*** software that makes a computer network run, is the notion of **protocol hierarchies**: structuring the services that a network must offer in terms of layers.

■ Protocol stack

- A list of protocols used by a certain system, one protocol per layer, is called a protocol stack.

Back to Modularity

- **Modularity in programming:**

- **Set of abstractions**

- **Modularity in networking:**

- **Distributed nature of system requires deciding where abstractions are implemented**

Three Basic Architectural Decisions

- How to break system into modules?
- Where modules are implemented?
- Where state is stored?

Network Architectures

■ Network Architecture

- A set of layers and protocols, together with interfaces between layers, is called Network Architecture

- Describe how networks are organized

■ Reference Model = Architecture

■ 2 typical Reference Models

- ISO/OSI


- TCP/IP

ISO OSI Reference Model


- ISO – International Standard Organization
- **OSI – Open System Interconnection**
- Started to 1978; first standard 1979
 - ARPANET started in 1969; TCP/IP protocols ready by 1974
- **Goal:** a general **open** standard
 - Allow vendors to enter the market by using their own implementation and protocols

ISO OSI Reference Model

- Model consists of a **7-layer stack:**

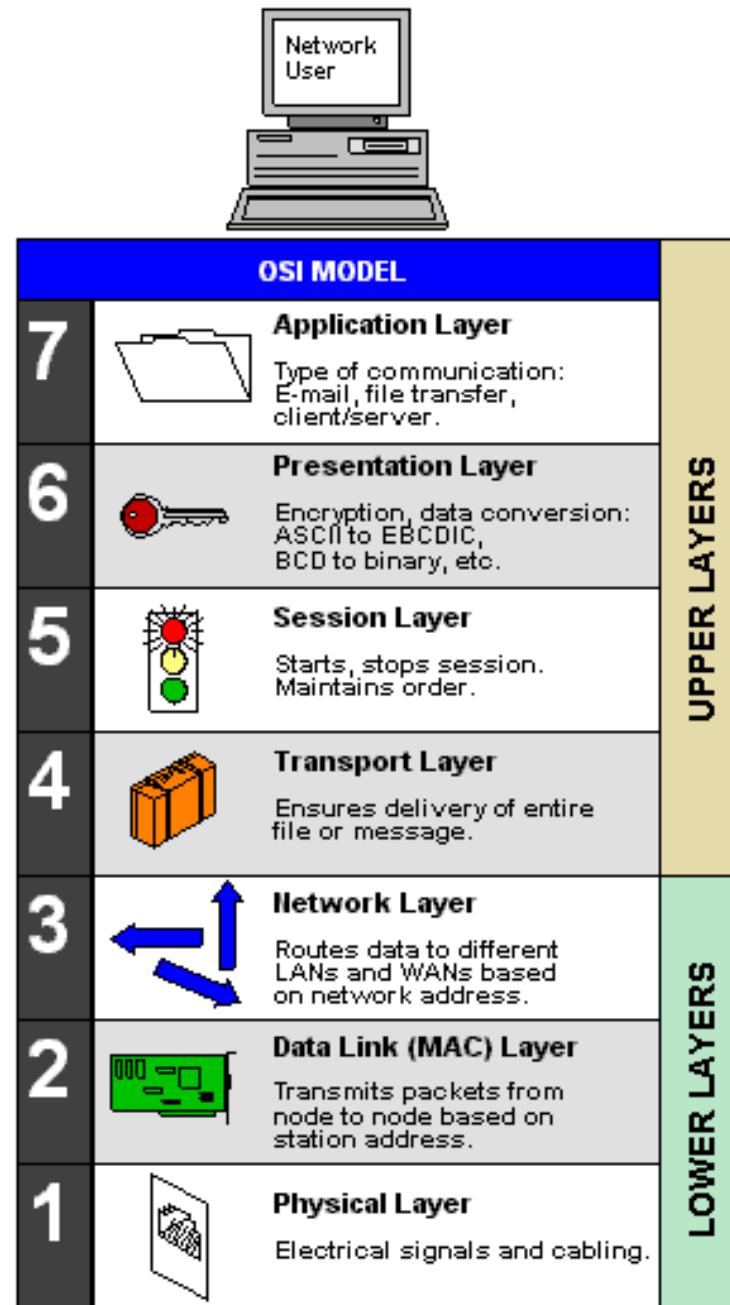

ISO OSI Reference Model

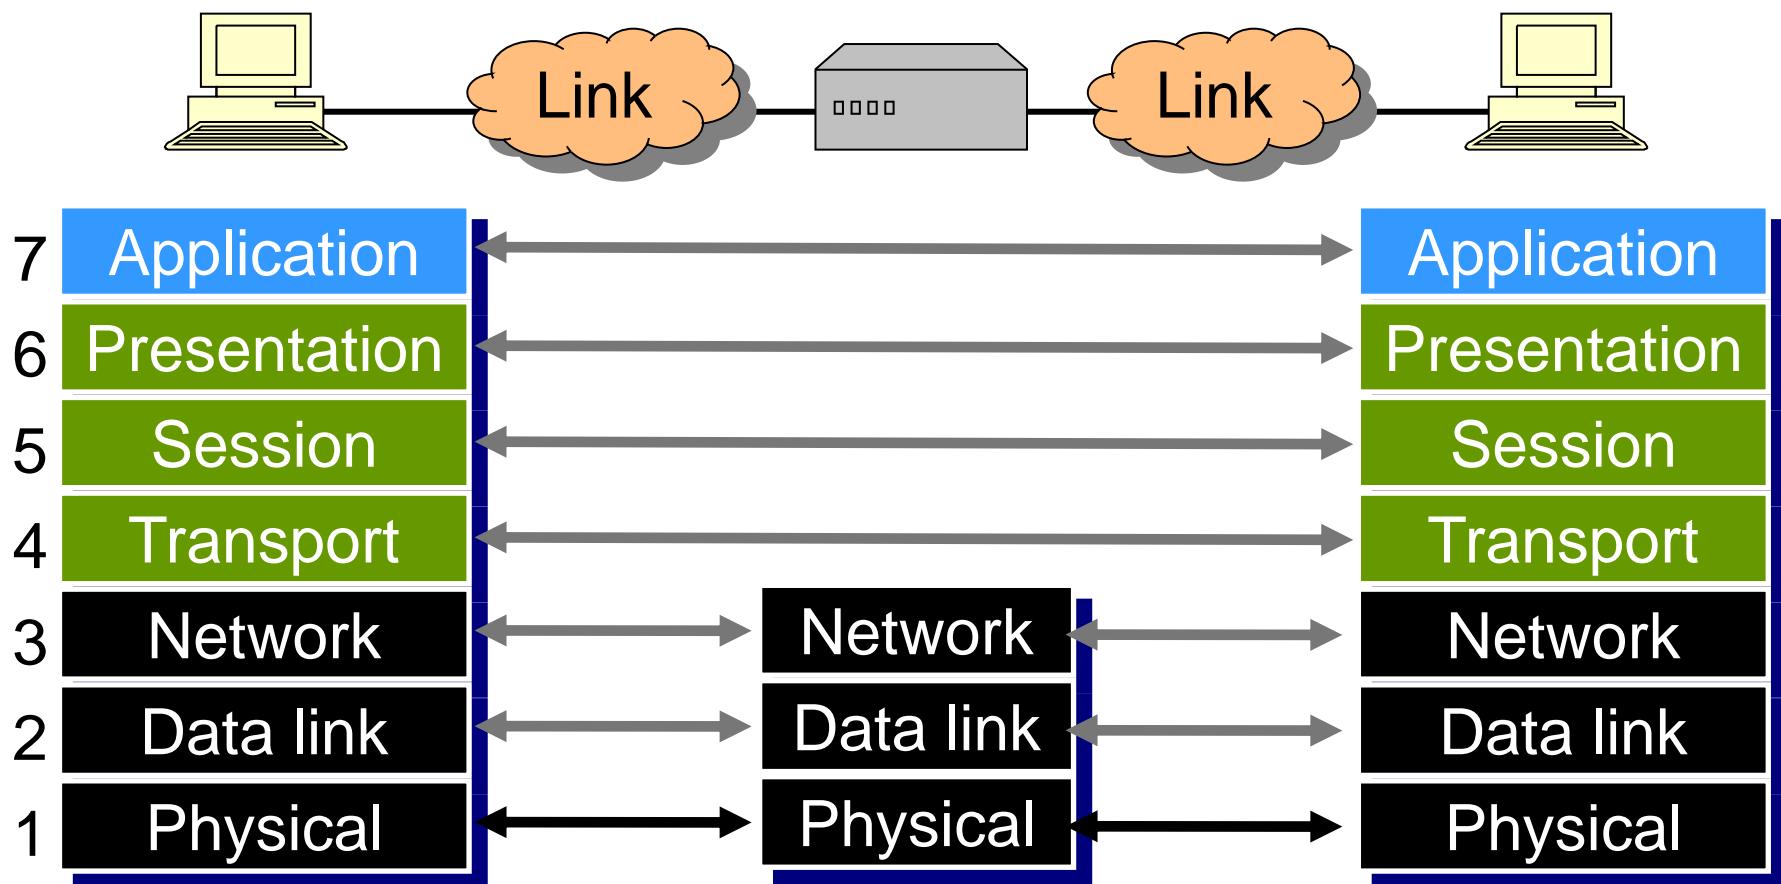

OSI Functions

- **(1) Physical:** transmission of a bit stream.
- **(2) Data link:** flow control, framing, error detection.
- **(3) Network:** switching and routing.
- **(4) Transport:** reliable end to end delivery.
- **(5) Session:** managing logical connections.
- **(6) Presentation:** data transformations.
- **(7) Application:** specific uses, e.g. mail, file transfer, telnet, network management.

Multiplexing takes place in multiple layers

Physical Layer (1)

- **Service:** move *bits* between two systems connected by a *single physical link*
- **Interface:** specifies how to send and receive *bits*
 - E.g., require quantities and timing
- **Protocols:** coding scheme used to represent *bits*, voltage levels, duration of a bit
- **Examples:** Optical, wireless, etc.

(Data) Link Layer (2)

- **Service:** Enable hosts to exchange **messages**
 - Using abstract (but local) addresses
 - Not just direct physical connections
- **Interface:** send messages (frames) to other end hosts; receive messages addressed to end host
- **Protocols:**
 - Routing
 - Media Access Control (MAC)
- **Examples:**
 - **Ethernet, 802.11, Frame Relay, ATM**

(Inter) Network Layer (3)

- **Service:** Deliver **packets** to specified destination
 - Using abstract global addresses
 - Inter-network = across multiple layer-2 networks
 - E.g., from Ethernet to 802.11 to Frame Relay to ATM
- **Interface:** send packets to specified internetwork destinations; receive packets destined for end host
- **Protocols:** construct routing tables
- **Examples:** IP
 - Why no other examples?


Transport Layer (4)

- **Service:** Communication between **processes**
 - Demultiplexing of communication between hosts
 - Perhaps: reliable transport, rate adaptation
- **Interface:**
 - send message to specific process at given destination
 - local process receives messages sent to it
- **Protocols:** reliability, flow control, packetization of large messages, framing
- **Examples:** **TCP and UDP**
 - SCTP, T/TCP, DCCP,


Application Layer (7)

- **Service:** any service provided to the end user
- **Interface:** depends on the application
- **Protocols:** depends on the application
- **Examples:** Skype, SMTP (email), HTTP (Web), Halo, BitTorrent ...

Data Transmission in the OSI Model

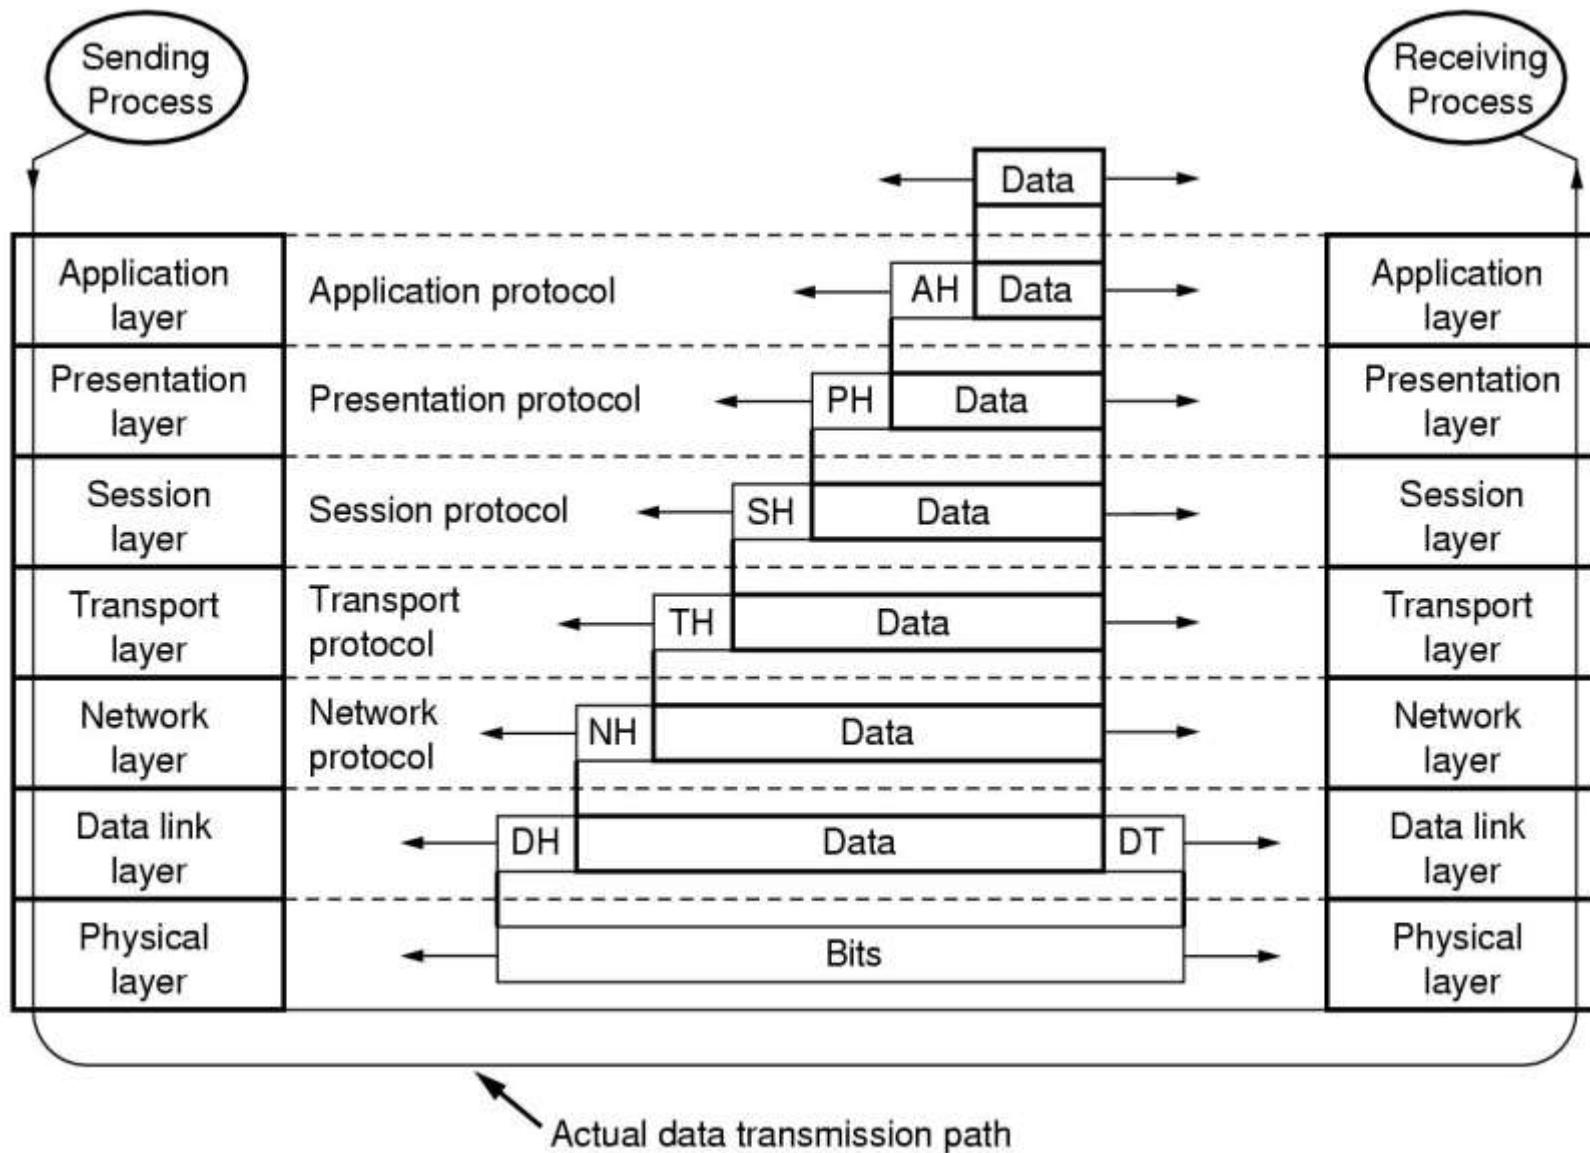


ISO OSI Reference Model

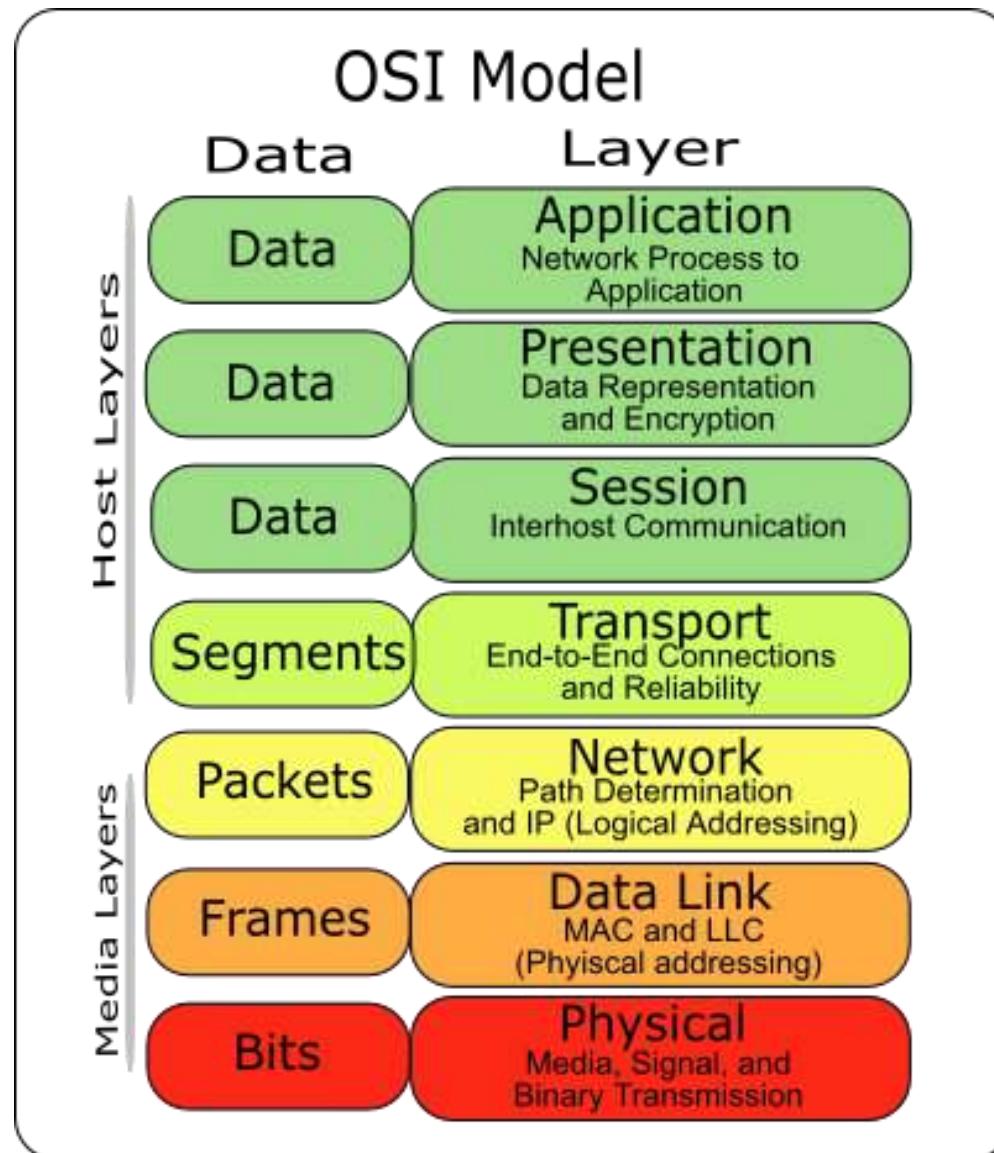


The TCP/IP Reference Model

- TCP/IP is a result of protocol research and development conducted on the experimental packet switched network, ARPANET, funded by the **Defense Advanced Research Projects Agency (DARPA)**, and is generally referred to as the TCP/IP protocol suite.
- This protocol suite consists of a large collection of protocols that have been issued as Internet standards by the Internet Activities Board (IAB).


The TCP/IP Reference Model

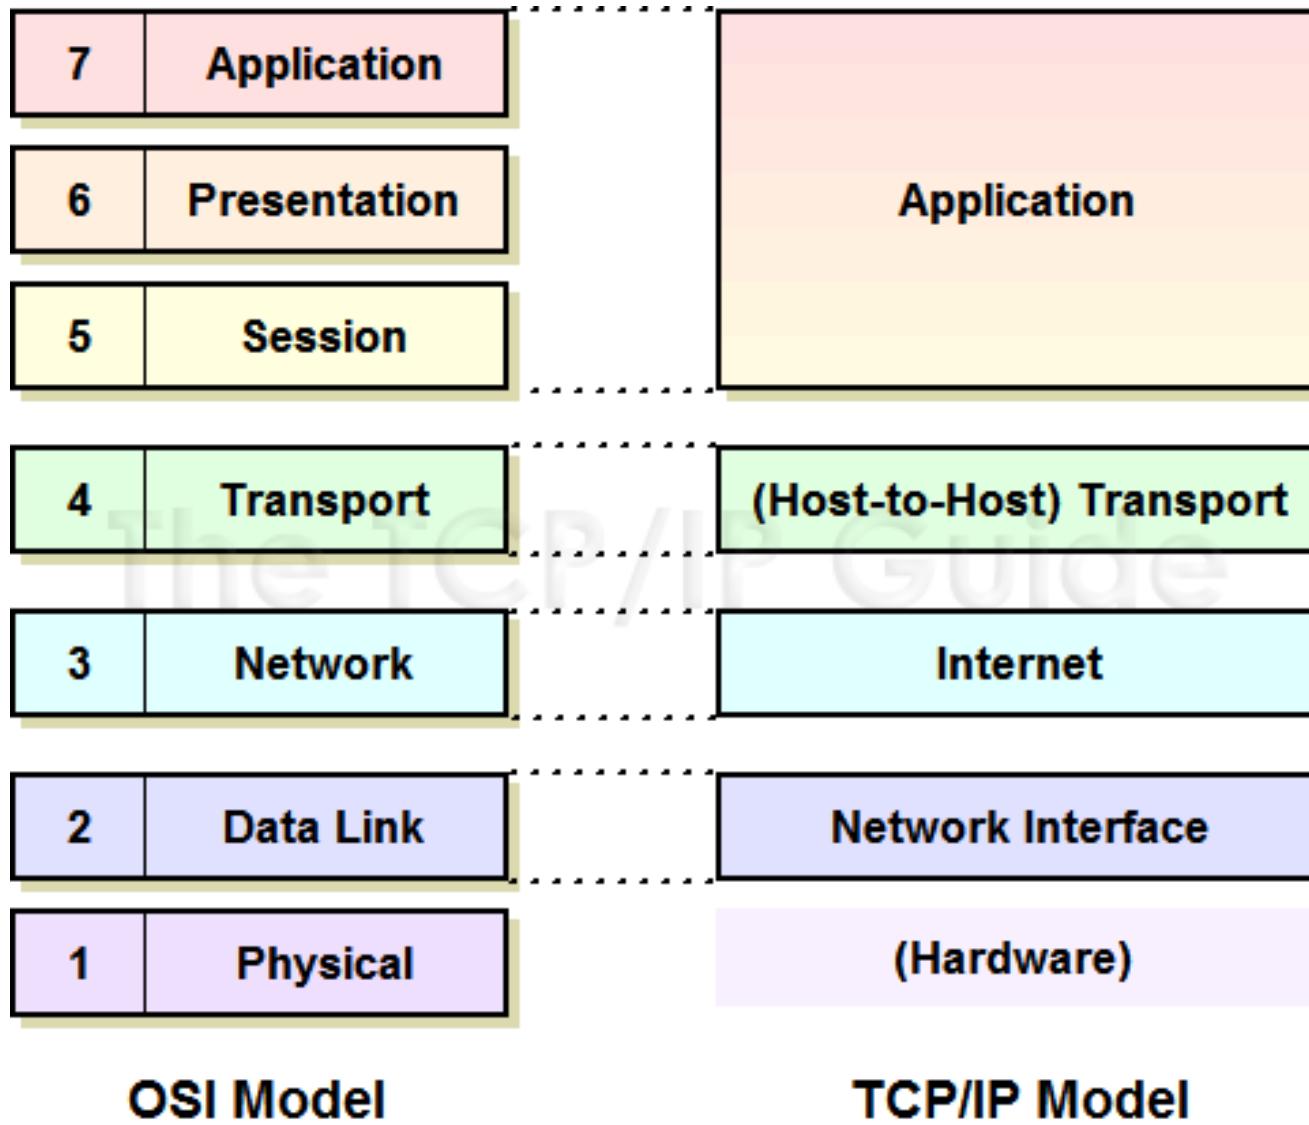

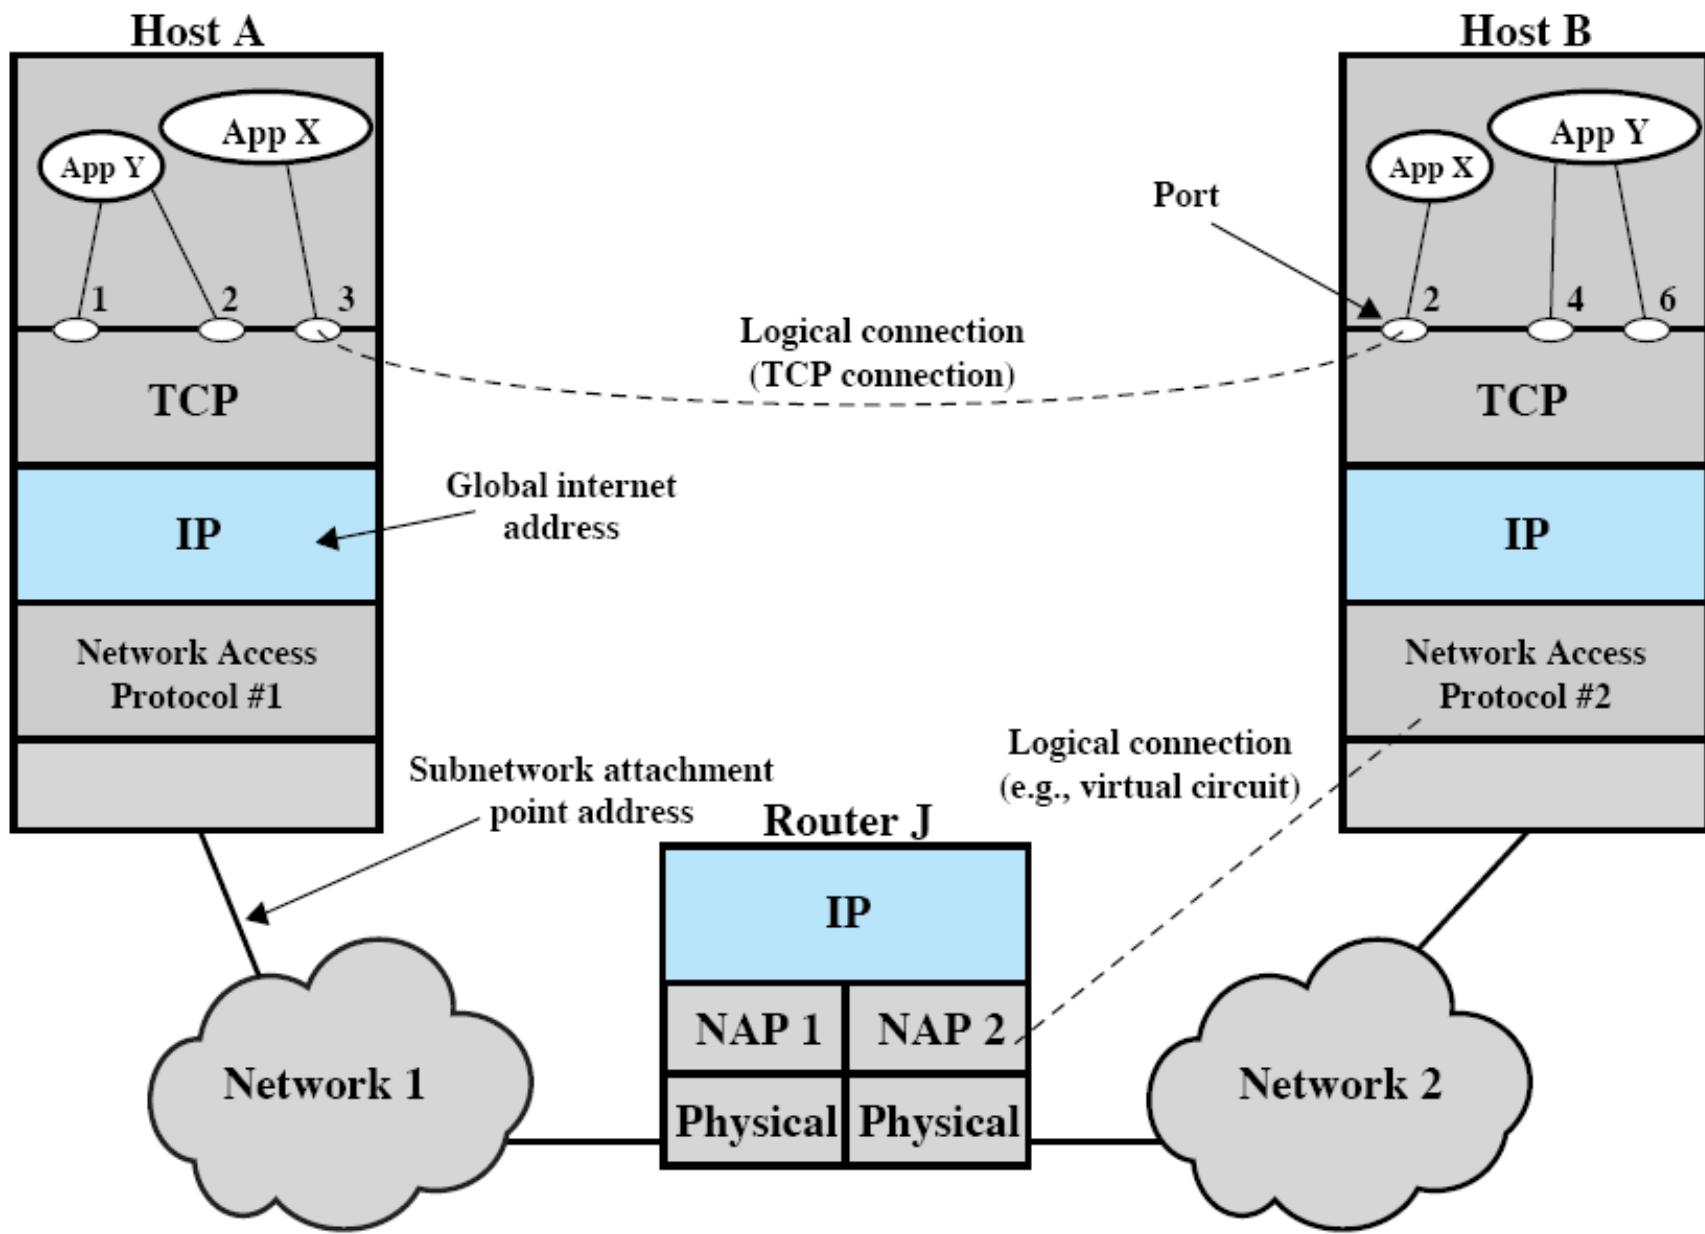


The TCP/IP Reference Model

- **application:** supporting network applications
 - FTP, SMTP, STTP
- **transport:** host-host data transfer
 - TCP, UDP
- **network:** routing of datagrams from source to destination
 - IP, routing protocols
- **link:** data transfer between neighboring network elements
 - PPP, Ethernet
- **physical:** bits “on the wire”

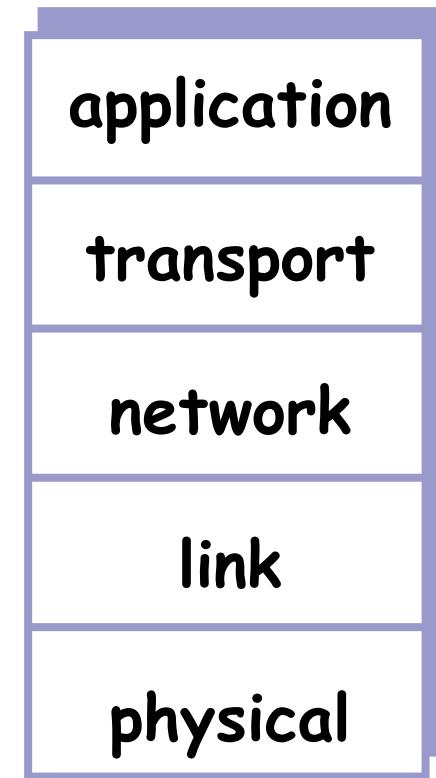


The Internet *Hourglass*

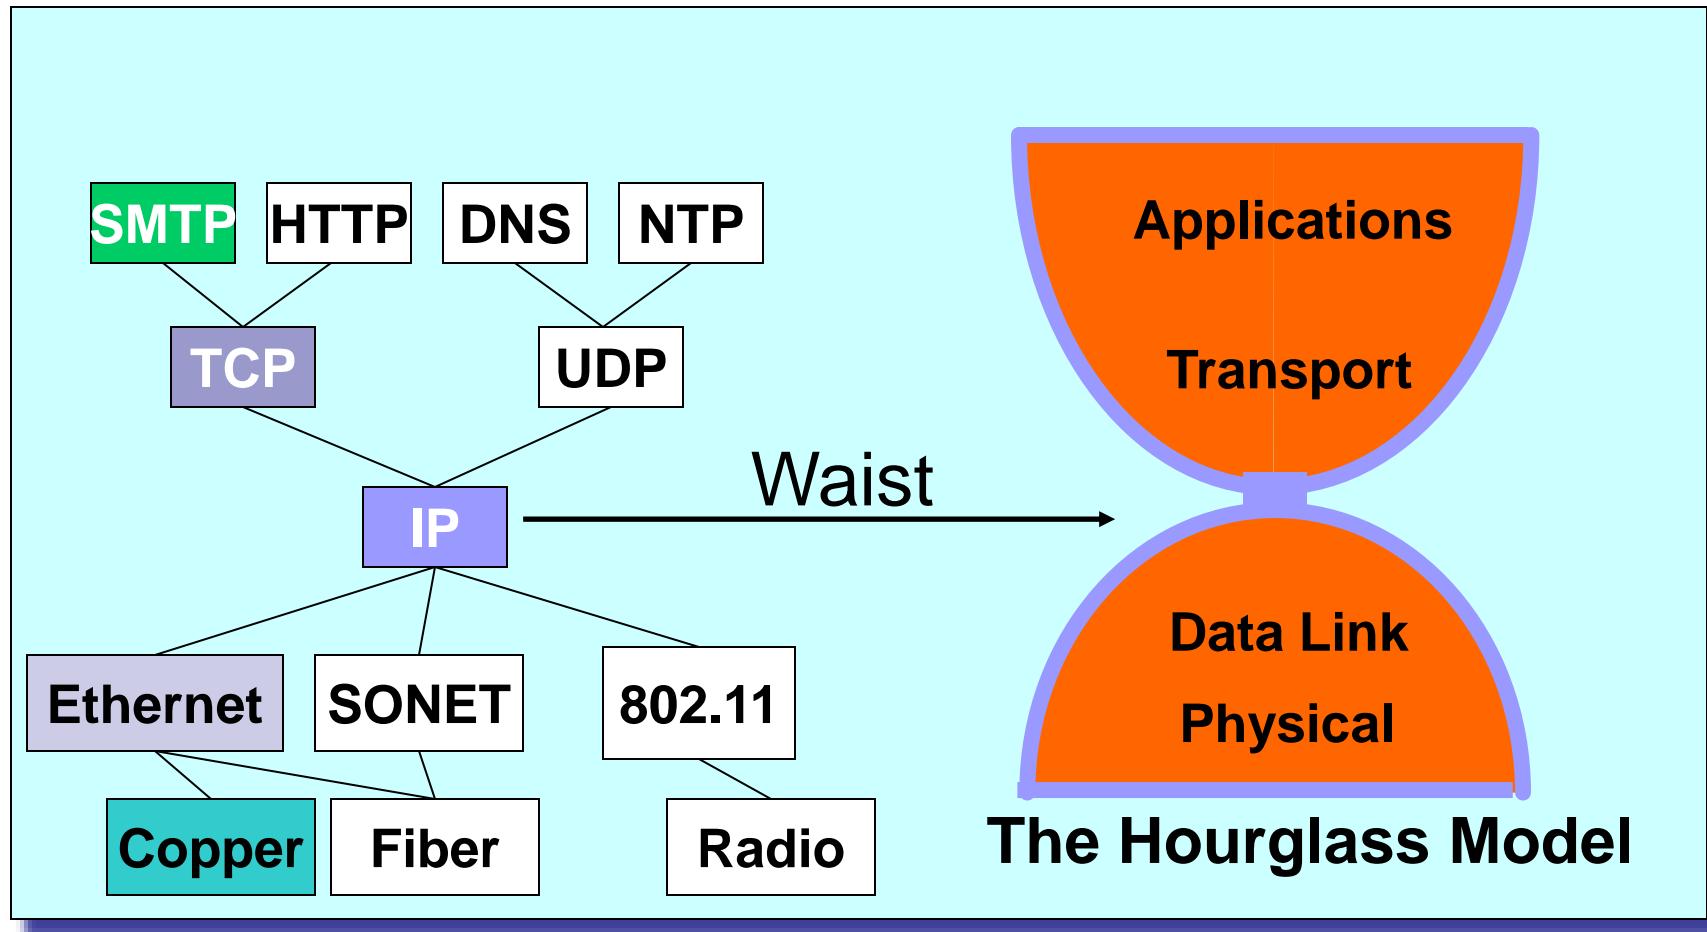

There is just **one** network-layer protocol, IP.
The “narrow waist” facilitates **interoperability**.

The TCP/IP Reference Model

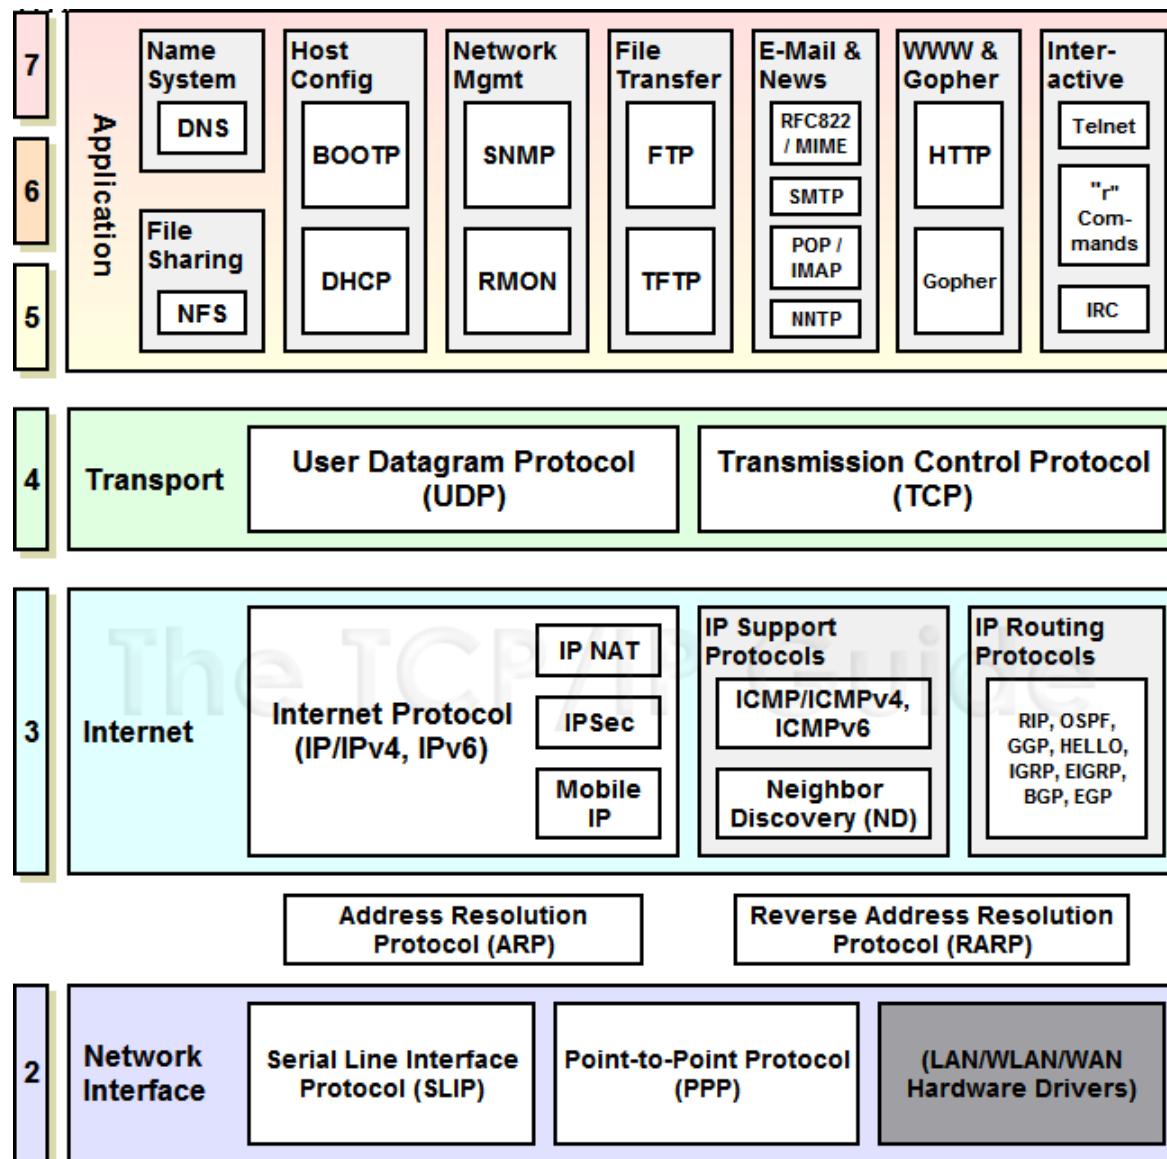

The TCP/IP Reference Model

Layer #	Layer Name	Protocol	Protocol Data Unit	Addressing
5	Application	HTTP, SMTP, etc...	Messages	n/a
4	Transport	TCP/UDP	Segments/ Datagrams	Port #s
3	Network or Internet	IP	Packets	IP Address
2	Data Link	Ethernet, Wi-Fi	Frames	MAC Address
1	Physical	10 Base T, 802.11	Bits	n/a

TCP/IP Terminology Reference

Chapter 1: Roadmap

1.1 Computer network and the Internet

1.2 Network edge and core

1.3 Network access and physical media

1.4 Transmission Technology

1.5 Type and Topology

1.6 Network Performance

1.7 Protocol layers, service models


1.8 Architecture, OSI and TCP/IP Models

1.9 Internet History

Internet History

1961-1972: Early packet-switching principles

- 1961: Len Kleinrock - queuing theory shows effectiveness of packet-switching
- 1964: Paul Baran - packet-switching in military networks
- 1967: ARPAnet conceived by Advanced Research Projects Agency
- 1969: first ARPAnet node operational
- 1972:
 - ARPAnet demonstrated publicly
 - NCP (Network Control Protocol) first host-host protocol
 - first e-mail program
 - ARPAnet has 15 nodes

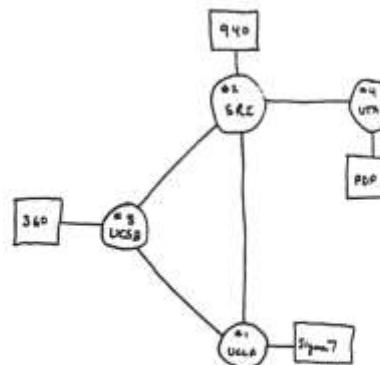

THE ARPANET NETWORK

Internet History

1972-1980: Internetworking, new and proprietary nets

- **1970:** ALOHAnet satellite network in Hawaii
- **1973:** Metcalfe's PhD thesis proposes Ethernet
- **1974:** Cerf and Kahn - architecture for interconnecting networks
- **late 70's:** proprietary architectures: DECnet, SNA, XNA
- **late 70's:** switching fixed length packets (ATM precursor)
- **1979:** ARPAnet has 200 nodes

Cerf and Kahn's internetworking principles:

- minimalism, autonomy
 - no internal changes required to interconnect networks
 - best effort service model
 - stateless routers
 - decentralized control
- define today's Internet architecture**

Internet History

1980-1990: new protocols, a proliferation of networks

- **1983:** deployment of TCP/IP
- **1982:** smtp e-mail protocol defined
- **1983:** DNS defined for name-to-IP-address translation
- **1985:** ftp protocol defined
- **1988:** TCP congestion control
- new national networks: Csnet, BITnet, NSFnet, Minitel
- 100,000 hosts connected to confederation of networks

Internet History

1990's: commercialization, the WWW

- Early 1990's: ARPAnet decommissioned
- 1991: NSF lifts restrictions on commercial use of NSFnet (decommissioned, 1995)
- early 1990s: WWW
 - hypertext [Bush 1945, Nelson 1960's]
 - HTML, http: Berners-Lee
 - 1994: Mosaic, later Netscape
 - late 1990's: commercialization of the web
- Late 1990's:
 - est. 50 million computers on Internet
 - est. 100 million+ users
 - backbone links running at 1 Gb/s
- 2000's:
 - backbones at 10 Gb/s
 - wireless networks
 - broadband home
 - IP telephony

Today's Vision

- **Everything is digital:** voice, video, music, pictures, live events
- **Everything is on-line:** bank statement, medical record, books, airline schedule, weather, highway traffic, toaster, refrigerator ...
- **Everyone is connected:** doctor, teacher, broker, mother, son, friends, enemies

Summary

- **What is a Computer Network?**
 - Definition, Objectives, Components, Types
- **How to connect computers together?**
 - Types of Network Connections (Topologies)
- **How to make computers to communicate?**
 - Broadcasting, Switching (Circuit, Packet)
- **How to evaluate communication performance?**
 - Latency (delay), Bandwidth (capacity), Utilization, RTT, BDP

Summary

- **How to design and organize a computer network system?**
 - Layering, Hierarchical Network Model
- **What does network architecture mean?**
 - Describe how networks are organized
 - Layered Protocol Architectures
- **In a computer network architecture, what is the role and function of each layer?**

Summary

Covered a “ton” of materials!

- **Network overview.**
- **What a protocol is.**
- **Network edge, core, and access network**
 - packet-switching vs circuit-switching
- **Type & Topology, Internet/ISP structure.**
- **Performance: loss, delay, utilization, BDP**
- **Layering and service models**
- **Architecture: OSI, TCP/IP**
- **History**

Summary

- Architecture of a complex system can be simplified by layering.
- Layer architecture simplifies the network design.
- A set of layers and protocols, together with interfaces between layers, is called Network Architecture.
- Service, Interface, Protocol, SAP, PDU