

# **Report for ARM Microcontroller Project**

**uLoader WiSe 2014**

Appel, Dennis (s813783)  
Voigt, Alexander (s814526)  
Merrikhi, Pedram (s827711)

April 11, 2015

# Contents

<b>Glossary</b>	<b>II</b>
<b>List of Figures</b>	<b>IV</b>
<b>List of Tables</b>	<b>V</b>
<b>Listings</b>	<b>VI</b>
<b>1. Introduction</b>	<b>1</b>
1.1. Bootloader . . . . .	1
1.2. SWD . . . . .	3
1.3. CMSIS . . . . .	4
1.4. Nested Vectored Interrupt Controller . . . . .	5
1.5. Differences in Development . . . . .	5
1.6. Network . . . . .	5
<b>2. ARM M4</b>	<b>6</b>
<b>3. NVIC in use</b>	<b>9</b>
<b>4. Network</b>	<b>10</b>
<b>5. CMSIS</b>	<b>12</b>
<b>6. LWIP</b>	<b>13</b>
<b>Bibliography</b>	<b>14</b>

## Glossary

**AHB** AHB, please refer to AMBA. 1

**AHB1** Advanced High-performance Bus is part of the Advanced Microcontroller Bus Architecture (AMBA) of the IP-manufacturer ARM Limited (ARM).. 1

**AMBA** Advanced Microcontroller Bus Architecture is an open-standard, on-chip interconnect specification for the connection and management of functional blocks in system-on-a-chip (SoC) designs. It facilitates development of multi-processor designs with large numbers of controllers and peripherals.. 1

**APB** The Advanced Peripheral Bus (APB) is an internal bus for System-on-Chips (SoC) to connect low power peripheral devices. The APB bus is part of the AMBA-architecture which is designed for low power and simple interface. It can be used with the standardized buses like AHB.. 1

**CAN** Controller Area Network ist ein serieller BUS der asynchron arbeitet. 1 Mbit/s ist hierbei die Maximale Datenrate. Wird meist in Fahrzeugen eingesetzt.. 1

**CMSIS** Microcontroller Software Interface Standard, is a vendor-independent hardware abstraction layer for the Cortex-M processor series and specifies debugger interfaces.. 1

**GPIO** General-purpose input/output is a generic pin on an integrated circuit whose behavior, including whether it is an input or output pin, can be controlled by the user at run time. 1

**JTAG** Joint Test Action Group was formed in 1985 to develop a method of testing finished printed circuit boards after manufacture. In 1990, the effort was codified as a standard by the Institute of Electrical and Electronics Engineers with the designation IEEE Std. 1149.1-1990 entitled Standard Test Access Port and Boundary-Scan Architecture.. 1

**LVM** Logical Volume Manager provides a method of allocating space on mass-storage devices that is more flexible than conventional partitioning schemes. In particular, a volume manager can concatenate, stripe together or otherwise combine partitions (or block devices in general) into larger virtual ones that administrators can re-size or move, potentially without interrupting system use.. 1

**MCU** Microcontroller Unit is a small computer on a single integrated circuit containing a processor core, memory, and programmable input/output peripherals. Program memory in the form of Ferroelectric RAM, NOR flash or OTP ROM is also often included on chip, as well as a typically small amount of RAM.. 1

**NVIC** Nested Vectored Interrupt Controller, facilitates low-latency exception and interrupt handling, controls power management, implements System Control Registers. The NVIC supports up to 240 dynamically reprioritizable interrupts each with up to 256 levels of priority.. 1

**ROM** Read Only Memory is a class of storage medium used in computers and other electronic devices.. 1

**SWD** Serial Wire Debug is an alternative 2-pin electrical interface that uses the same protocol. It uses the existing GND connection. SWD uses an ARM CPU standard bi-directional wire protocol, defined in the ARM Debug Interface v5.. 1

**UART** universal asynchronous receiver/transmitter is a piece of computer hardware that translates data between parallel and serial forms. UARTs are commonly used in conjunction with communication standards such as EIA, RS-232, RS-422 or RS-485. The universal designation indicates that the data format and transmission speeds are configurable.. 1

**USART** universal synchronous/asynchronous receiver/transmitter, modern ICs now come with a UART that can also communicate synchronously. 1

**USB** Universal Serial Bus is an industry standard developed in the mid-1990s that defines the cables, connectors and communications protocols used in a bus for connection, communication, and power supply between computers and electronic devices.. 1

**List of Figures**

1.1. Standard Layout of ARM Cortex-M4 MCU . . . . . 2

2.1. Simple M4 Diagram . . . . . 6

4.1. Blockdiagram for PHY Connection . . . . . 11

5.1. CORTEX MICROCONTROLLER SOFTWARE STANDARD INTER-  
FACE . . . . . 12

## List of Tables

1.1. Boot-Pin Function . . . . .	2
1.2. SWD PINOUT . . . . .	3

**Listings**

3.1. enable usart . . . . . 9

## 1. Introduction

Nowadays, an ARM-MCU could be used in every aspect of everyday life. Additionally, the ARM processor is the number one architecture of choice in many market segments cause it aims to have the best performance to power consumption ratio..

This project is based on the development of a bootloader and its implementation inside a network. The usage stm32f4-discovery Board is a preferred and viewed as an "Allrounder" for such a project. The reasoning behind this is the "value for money" and user-friendliness. This allows for an easy introduction into the world of ARM Microcontroller unit programming.[[STMicroelectronics, 2015](#)]

The ARM-Cortex-M4-Processor found on the STM32f4-discovery board possesses the principle parts shown in the figure below.

The aim of the project is to research the feasibility to create a quick, cheap and easy to use way of utilizing an STM32 Microcontroller to communicate between a user and a remote device.[[ARM Ltd, 2014](#)]

The purpose of the application is meant to be a first step fundamental strategy to creating a product for future projects.

It is hoped that by utilizing a boot loader, a fast and light application could be used to fulfill the desire of a user to achieve a particular objective such as, three way handshake signal to verify a particular device in order to transmit information such as codes or messages, using a TCP/IP protocol stake.

As it can be demonstrated the different applications could be endless.


Analogously, a new and different diagram would be used, in order to illustrate the change in the usage-concept of the processors.

But first, an overview of the discussed focal points would be outlined.

### 1.1. Bootloader

The purpose of a Bootloader program is to allow the installation and utilisation of any program that could be reloaded. Whereas the program that is currently loaded is also being run.

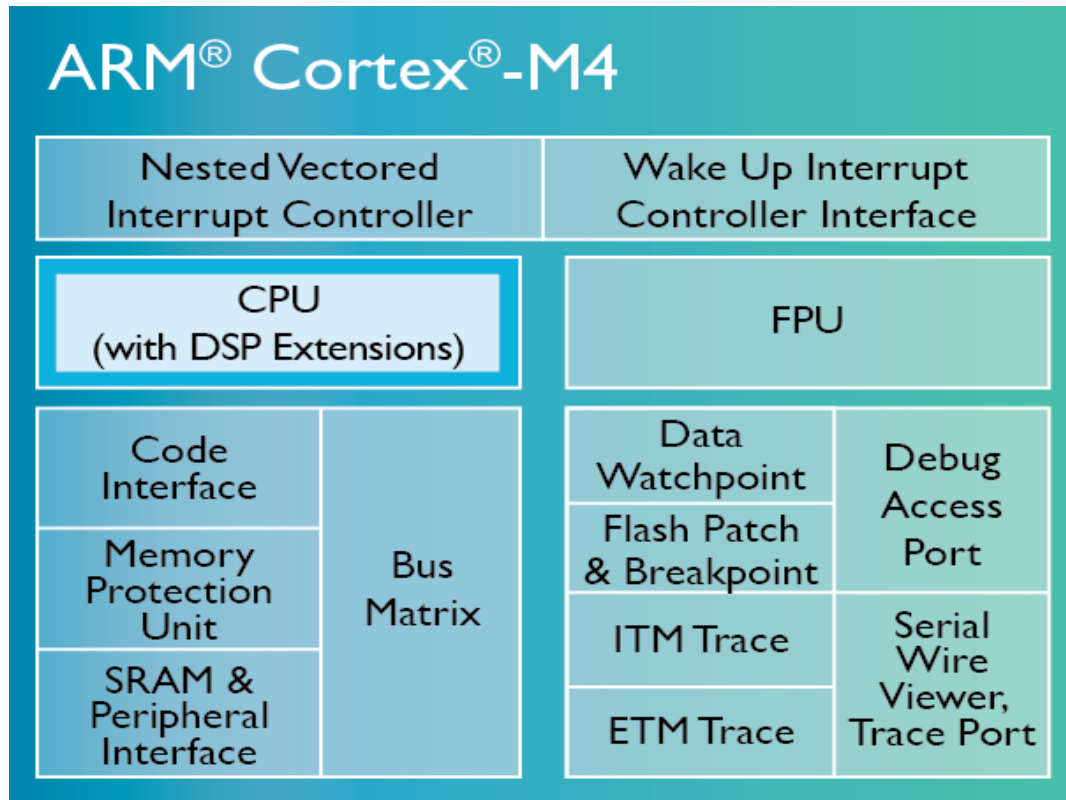

**Figure 1.1.:** Standard Layout of ARM Cortex-M4 MCU

Next it is necessary to initialise the hardware, that would in turn be needed to load the program.

The "STM32f407 discovery board" offers three different methods to boot up the hardware. [Robert Boys, 2012]

In order to switch between the three different boot methods, the Boot-Pins BOOT1 and BOOT2 could be set:

BOOT1	BOOT2	Boot-Mode	Addresse
x	0	Flash Memory (User Flash)	0x8000_0000
0	1	System Memory	0x1FFF_F000
1	1	SRAM	0x2000_0000

**Table 1.1.:** Boot-Pin Function

The ROM memory is included by the manufacturer along with the bootloader. It is very important to set the correct address of the program, that is located in the

## REPORT FOR ARM MICROCONTROLLER PROJECT

### 1. Introduction

---

memory, in order for the reloading of the program to work.

A step by step example of the the sequence after the boot loader is already loaded , is as follows:

1. Hardware initialize (USB / USART / RCC ... )
2. Wait for running program (pending other tasks)
3. Write a program to address XY.
4. Point to address XY

After these steps, the newly setup program is then responsible for the initialization of the hardware.

## 1.2. SWD

During the development of the Boot Loader, a serial wire debug technology was used. The reason behind this is to utilize a Debug-Port that has been specially developed to cater to a MCU that makes allows the use of the least amount of pins possible. This port consists of pins shown in the following:

Pin	Signal	Type	Description
1	VTref	Input	This is the target reference voltage. It is used to check if the target has power, to create the logic-level reference for the input comparators and to control the output logic levels to the target. It is normally fed from Vdd of the target board and must not have a series resistor.
7	SWDIO	I/O	Single bi-directional data pin
9	SWCLK	Output	Clock signal to target CPU. It is recommended that this pin is pulled to a defined state of the target board. Typically connected to TCK of target CPU.
13	SWO	Output	Serial Wire Output trace port. (Optional, not required for SWD communication)
15	RESET	I/O	Target CPU reset signal. Typically connected to the RESET pin of the target CPU, which is typically called "nRST", "nRESET" or "RESET".
19	5V-Supply	Output	This pin is used to supply power to some eval boards. Not all JLinks supply power on this pin, only the KS (Kickstart) versions. Typically left open on target hardware.

**Table 1.2.:** SWD PINOUT

## REPORT FOR ARM MICROCONTROLLER PROJECT

### 1. Introduction

---

The other pins of the 20-pole connection are going to left out, meaning, the other pins are useless for the SWD or they will be used as a GND. Regardless of the pin allocation, it is important that the communication of the SWD would not be interrupted or effected.

This technique represents a new and more effective way to debuggen. Until now JTAG represented the Debugger-Interface.

The advantages of this technology are:

- Only 2 Pins are used
- JTAG TAP controller compatible
- Allows the Debugger to become an extra AMBA-Bus-Master, in order to accomi-date an extra access capability to the Register or Memory
- High Datarates - 4Mbytes/sec @50MHz
- Low Power - no extra power supply
- Error recognition "built in" that performs well
- Protection against errors that cause disconnection

### 1.3. CMSIS

The ARM Cortex Microcontroller Software Interface Standard is a manufacturer inde-pendent abstraction layer for the Cortex-M processors.

Thereby the CMSIS is subdivided into:

- CMSIS-CORE - API access to the processor kernel and peripheral register.
- CMSIS-Driver - Generic access on peripheral devices for Middleware (reusability).
- CMSIS-DSP - DSP LibRARY with over 60 functions
- CMSIS-RTOS API - Standardised (RTOS compatible)
- CMSIS-Pack - Description of the most important components (User view)
- CMSIS-SVD - Description of the most important components (System view)
- CMSIS-DAP - Debug Access Port

Summarized, CMSIS allows a consistent and simple software interfaced to the pro-cessor and peripheral devices, as well as Real-time OS (RTOS) and Middleware.

## 1.4. Nested Vectored Interrupt Controller

The NVIC offers the possibility to configure special interrupts (Priority, Activate, Deactivate...).

Aside from the given interrupts, there are also the configurable implementation dependent interrupts. Because, the first 15 interrupts are allocated, the number of implemented interrupts could be from 0-240.

## 1.5. Differences in Development

The whole project was developed with Vim, make and gcc. The advantage of that is, that it is not necessary to learn how to use an IDE. There are a lot of IDE's which offer programming ARM. Theoretically one could learn to work with a new IDE every project. Vim on the other hand is every time the same, GCC and make also. The only thing one has to do is to write the makefile which can be very time consuming.

The disadvantage is the missing luxury. Nearly every IDE offers things like an address editor or a nice graphical way to debug. But as we are professional engineers, we don't need such tools that do all the work for you in the background so that you don't need to know what you are actually doing.

What is a linker script, how does make / building work, you will probably never learn that if you utilize ready to use IDEs all day. And the most important fact, KEIL and iAR cost so much money with low benefit, why should anyone actually use them? Cause user are to lazy to learn what it means to be a real engineer!

This project is a Bare Metal Project not a click two buttons to be ready with your work project. All the three programs have a steep learning curve, are Open Source, and have the advantage of letting you do what ever you want you just need to know what you are doing.

An Engineer should get payed for their knowledge not for the tools they are using (IMHO).

## 1.6. Network

The stm32f407 discovery board itself has no possibility for any direct network connection. At least no connector and transceiver but it has the Ethernet feature already in it. Thus the BaseBoard (BB) is needed (and used). The BB adds new capabilities like ethernet or rs232. There are other PCB's just for the Network feature available.

## 2. ARM M4

The ARM M4 MCU is the heart of the stm32f407. ARM offers the IP of the CORE-M4 to manufacturers and they can customize the IP as they see fit. A very simple diagram of the used MCU is the following:

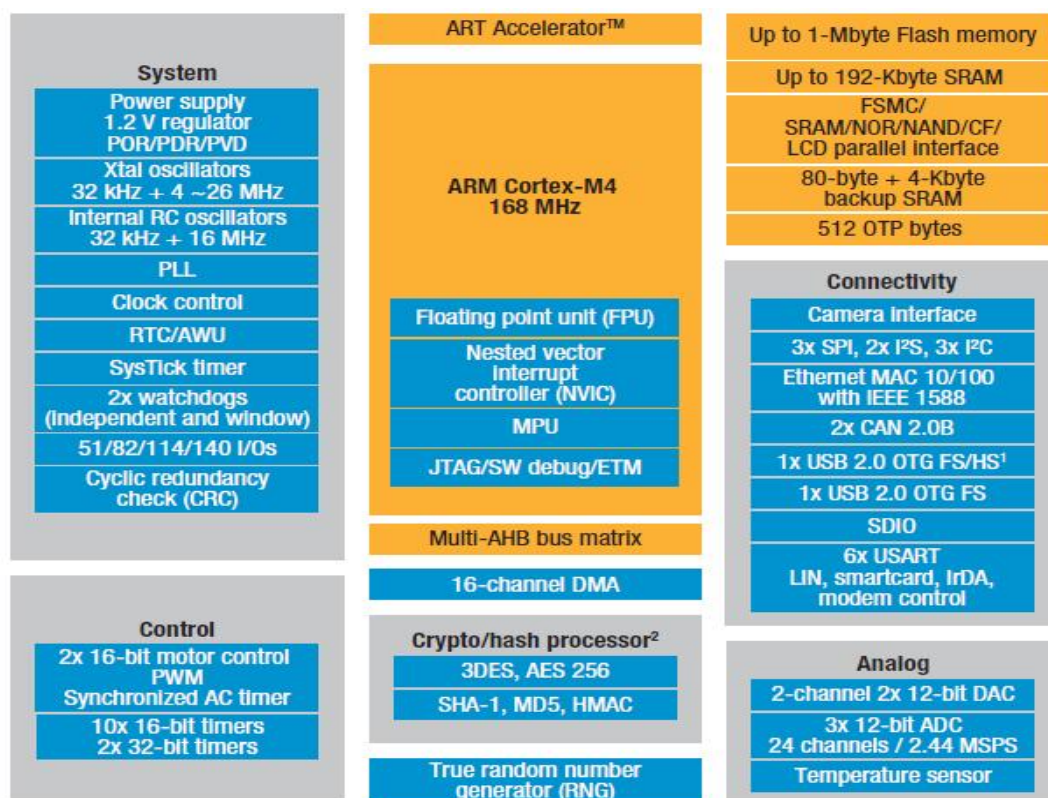


Figure 2.1.: Simple M4 Diagram

The diagram doesn't show, which peripheral systems are connected to which APBX-Bus, but that can be seen in the datasheet. What it does show is, that the GPIO-Pins, are connected to the AHB1-Bus.


The reason for that is, that it's much faster then what is recommended for most the part of what a GPIO demands. The subsystems on the other hand aren't necessarily needed to react that fast.

For example the USART6, which is used in the project, is connected to APB2. A much more precise representation of the STM32F4 is illustrated in the following diagram.

The AHB1 is the system bus and therefore should be really fast.

## 2.2 Device overview

Figure 5. STM32F40x block diagram

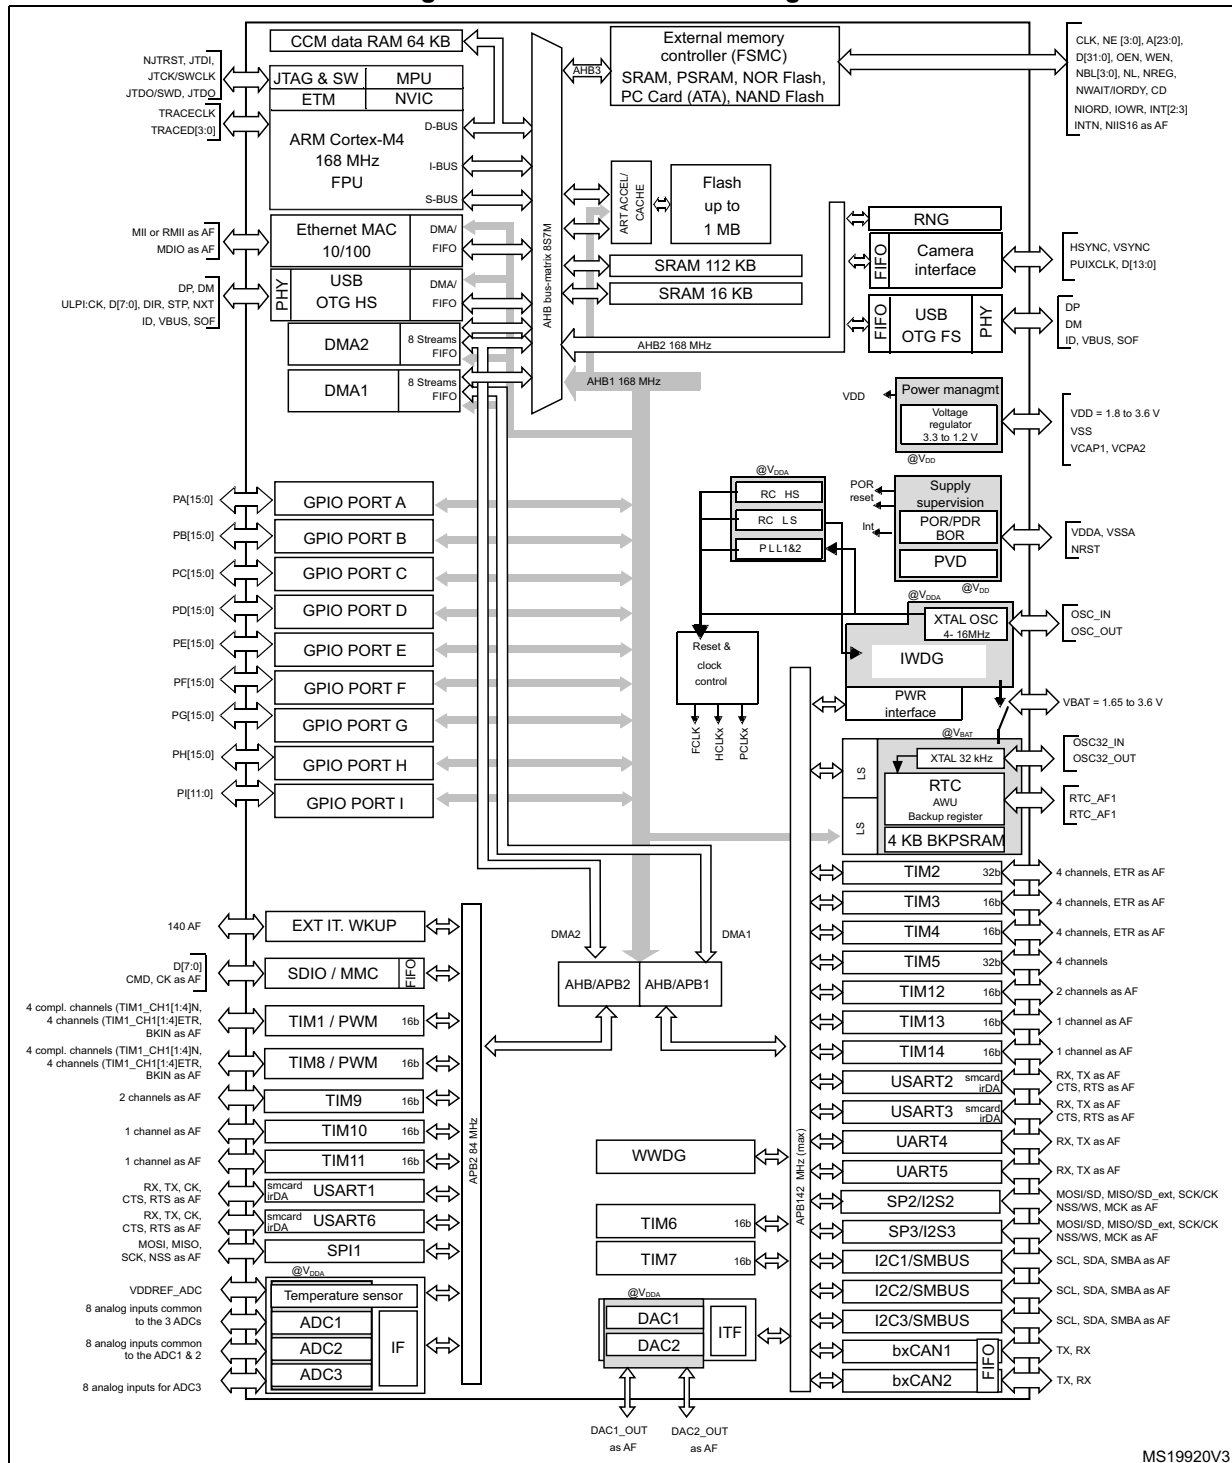

1. The timers connected to APB2 are clocked from TIMxCLK up to 168 MHz, while the timers connected to APB1 are clocked from TIMxCLK either up to 84 MHz or 168 MHz, depending on TIMPRE bit configuration in the RCC\_DCKCFGR register.
2. The camera interface and ethernet are available only on STM32F407xx devices.

### 3. NVIC in use

As already mentioned, the NVIC is used to configure the interrupts. Since there is a bi-directional communication via USART6, the NVIC has to be configured to fit that demand.

Therefore the first thing to do is to enable the clock on APB2 to clock the USART6. Additionally configuration has to be done for the USARTX, but it is not part of the NVIC configuration.

The clock is mentioned because it plays an essential part of the configuration. It is not important which U(S)ART[1..6] pin is used. Naturally, the right APBX has to be configured (precise diagram of stm32f4).

The configuration is done by writing the parameters into a structure and binding them and then load it into the NVIC. The last thing to do is to enable USART globally.

```

1 u->Initialized = 1;
2
3 /* Disable if not already */
4 USARTx->CR1 &= ~USART_CR1_UE;
5
6 /* Init */
7 USART_Init(USARTx, &USART_InitStruct);
8
9 /* Enable RX interrupt */
10 USARTx->CR1 |= USART_CR1_RXNEIE;
11
12 /* Fill NVIC settings */
13 NVIC_InitStruct.NVIC_IRQChannelCmd = ENABLE;
14 NVIC_InitStruct.NVIC_IRQChannelPreemptionPriority = TM_USART_NVIC_PRIORITY;
15 NVIC_InitStruct.NVIC_IRQChannelSubPriority = TM_USART_INT_GetSubPriority(
    USARTx);
16 NVIC_Init(&NVIC_InitStruct);
17
18 /* Enable USART peripheral */
19 USARTx->CR1 |= USART_CR1_UE;

```

**Listing 3.1:** enable usart

The code is part of a function therefor USARTx is a parameter, in this case it is USART6.

The process and as well as the code that was used, generated the desired results which proves the method that was chosen works.



## 4. Network

The Network on the Baseboard is realized through a SMSC LAN8720.

4-bit data nibbles are sent to the MII block. These data nibbles are clocked to the controller at a rate of 25MHz. The controller samples the data on the rising edge of RXCLK. To ensure that the setup and hold requirements are met, the nibbles are clocked out of the transceiver on the falling edge of RXCLK. RXCLK is the 25MHz output clock for the MII bus. It is recovered from the received data to clock the RXD bus. If there is no received signal, it is derived from system reference clock(XTAL1/CLKIN).

When tracking the received data, RXCLK has a maximum jitter of 0.8ns (provided that the jitter of the input clock, XTAL1/CLKIN, is below 100ps).

In RMI mode, the 2-bit data nibbles are sent to the RMI block. These data nibbles are clocked to the controller at a rate of 50MHz. The controller samples the data on the rising edge of XTAL1/CLKIN (REF\_CLK). To ensure that the setup and hold requirements are met, the nibbles are clocked out of the transceiver on the falling edge of XTAL1/CLKIN (REF\_CLK).

The blockdiagram [4.1](#) shows the hardware for the RMI for a network connection.

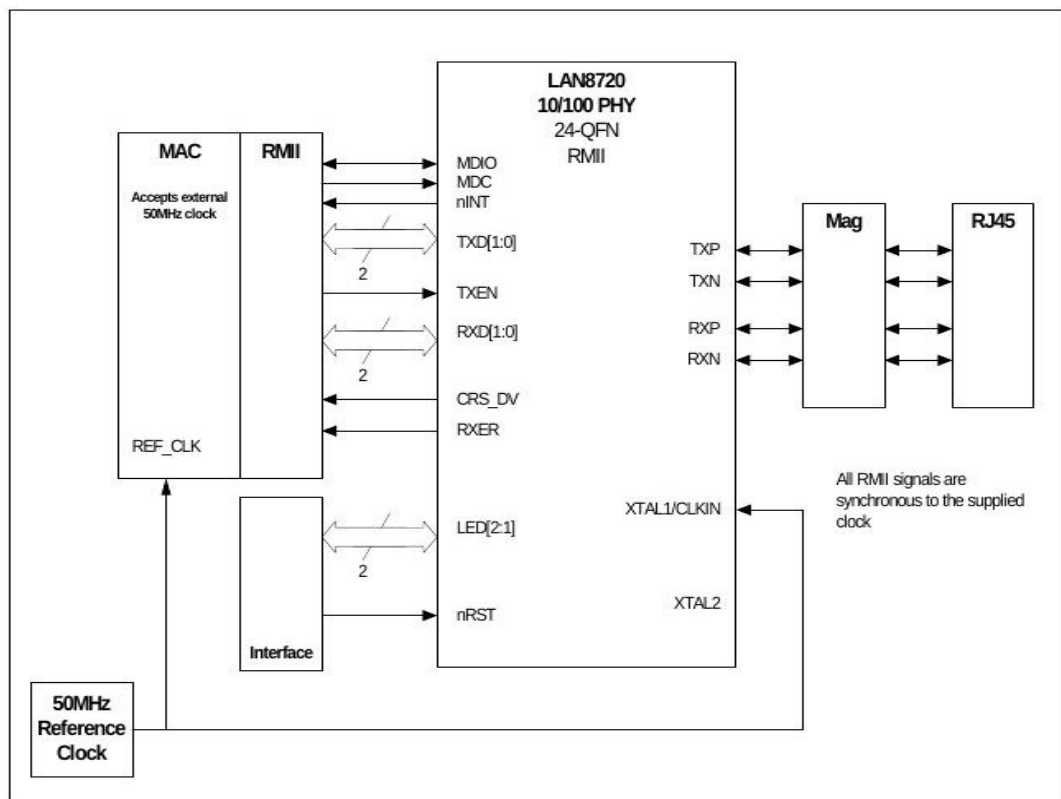
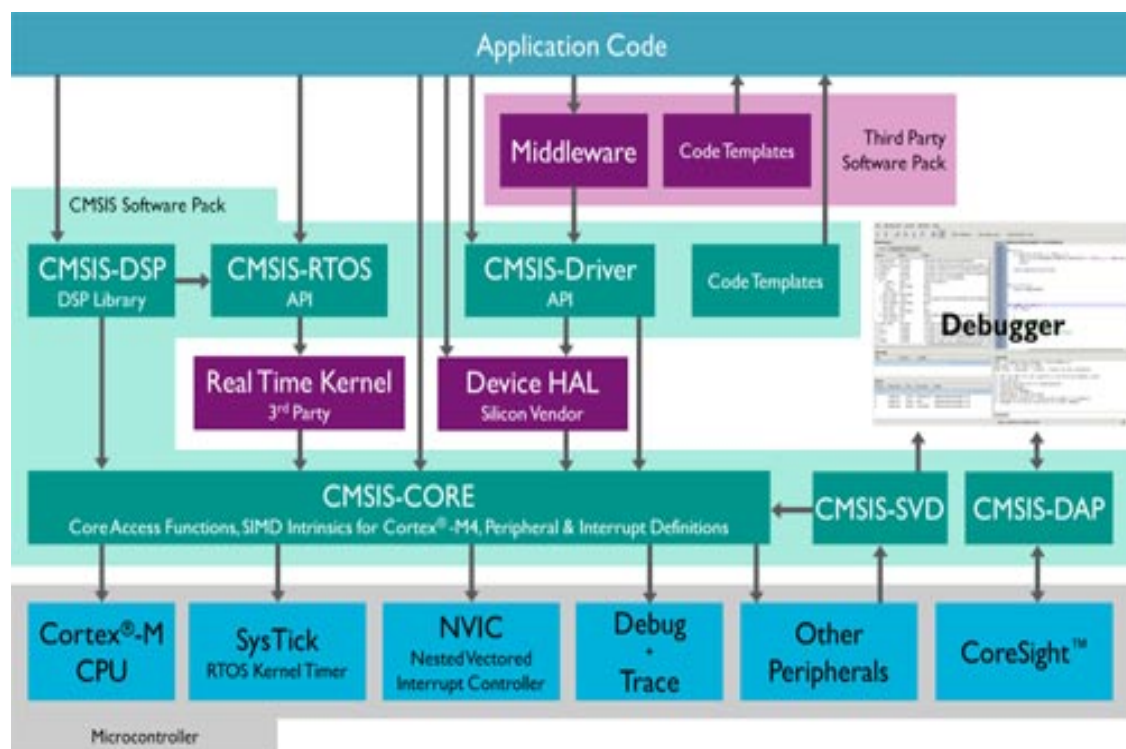


Figure 4.1.: Blockdiagram for PHY Connection

## 5. CMSIS

CMSIS is a huge advantage in code portability. The idea behind that standardized interface is to make the programmer independent of the hardware. Thus CMSIS is a hardware abstraction layer.

The programmer develops code to access the CMSIS driver library instead of the hardware. This way the code becomes portable for all CORTEX MCU's. The following diagram gives an overview about CMSIS:[[ARM Ltd, 2015](#)]



**Figure 5.1.:** CORTEX MICROCONTROLLER SOFTWARE STANDARD INTERFACE

## 6. LWIP

LwIP is open source TCP/IP protocol suite designed for embedded systems. The focus of the LwIP TCP/IP implementation is to reduce RAM usage while still having a full scale TCP. This makes LwIP suitable for use in embedded systems with tens of kilobytes of free RAM and room for around 40 kilobytes of code ROM. LwIP includes the following protocols and features:[[Swedish Institute of Computer Science, 2015](#)]

- IP (Internet Protocol) including packet forwarding over multiple network interfaces
- ICMP (Internet Control Message Protocol) for network maintenance and debugging
- IGMP (Internet Group Management Protocol) for multicast traffic management
- UDP (User Datagram Protocol) including experimental UDP-lite extensions
- TCP (Transmission Control Protocol) with congestion control, RTT estimation and fast recovery/fast retransmit
- Raw/native API for enhanced performance
- Optional Berkeley-like socket API
- DNS (Domain names resolver)
- SNMP (Simple Network Management Protocol)
- DHCP (Dynamic Host Configuration Protocol)
- AUTOIP (for IPv4, conform with RFC 3927)
- PPP (Point-to-Point Protocol)
- ARP (Address Resolution Protocol) for Ethernet

## Bibliography

- [ARM Ltd 2014] ARM LTD: *Cortex-M4 Processor*. <http://www.arm.com/products/processors/cortex-m/cortex-m4-processor.php>, 2014. – [Online, accessed 10-April-2015] [1](#)
- [ARM Ltd 2015] ARM LTD: *CMSIS - Cortex Microcontroller Software Interface Standard*. <http://www.arm.com/products/processors/cortex-m/cortex-microcontroller-software-interface-standard.php?tab=Videos>, 2015. – [Online, accessed 10-April-2015] [5](#)
- [Robert Boys 2012] ROBERT BOYS: *STMicroelectronics: Cortex<sup>TM</sup>-M4 Training STM32F407*. 1.1. [http://aces.shu.ac.uk/staff/engafh/STM32/Discovery\\_M4\\_LAB.pdf](http://aces.shu.ac.uk/staff/engafh/STM32/Discovery_M4_LAB.pdf), July 2012 [1.1](#)
- [STMicroelectronics 2015] STMICROELECTRONICS: *Discovery kit for STM32F407/417 lines - with STM32F407VG MCU*. <http://www.st.com/web/catalog/tools/FM116/SC959/SS1532/PF252419>, 2015. – [Online, accessed 14-March-2015] [1](#)
- [Swedish Institute of Computer Science 2015] SWEDISH INSTITUTE OF COMPUTER SCIENCE: *lwIP - lightweight TCP/IP*. <http://savannah.nongnu.org/projects/lwip/>, 2015. – [Online, accessed 11-April-2015] [6](#)