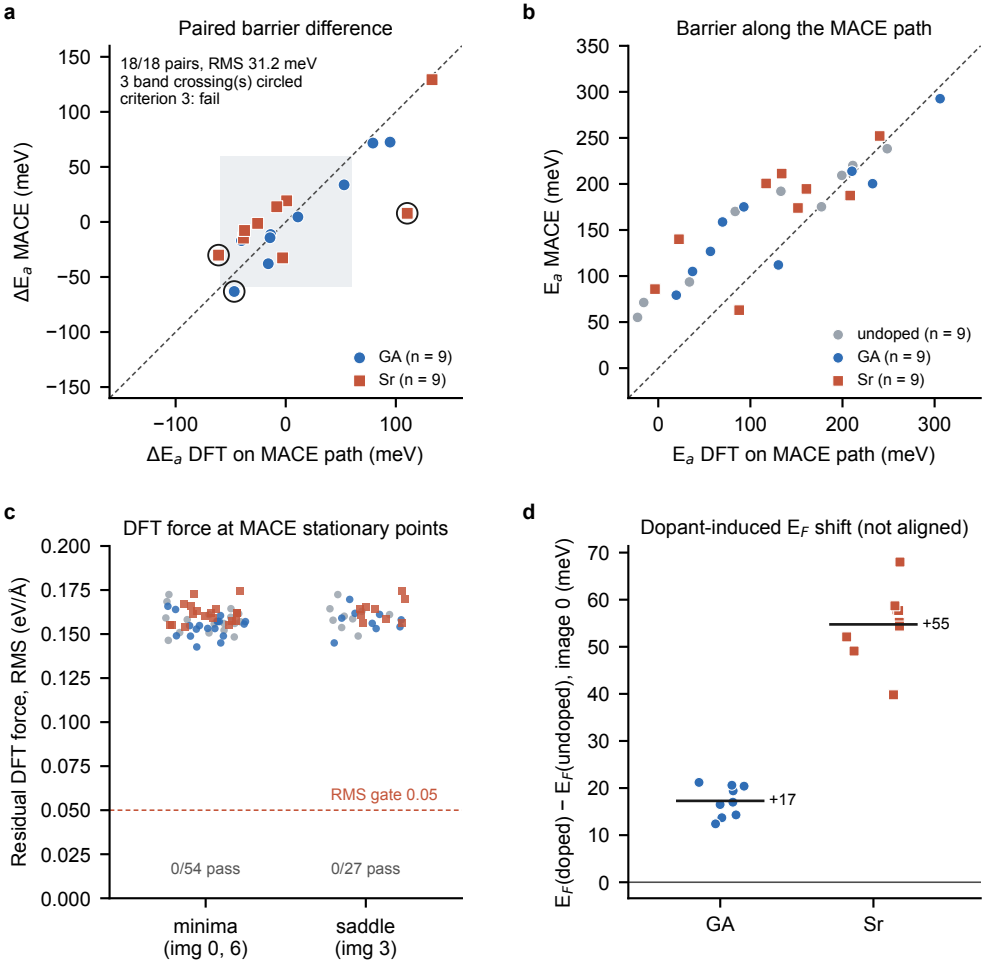
a
Paired barrier difference
18/18 pairs, RMS 31.2 meV
3 band crossing(s) circled
criterion 3: fail
ΔEa MACE (meV)
ΔEa DFT on MACE path (meV)
GA (n = 9)
Sr (n = 9)
b
Barrier along the MACE path
Ea MACE (meV)
Ea DFT on MACE path (meV)
undoped (n = 9)
GA (n = 9)
Sr (n = 9)
c
DFT force at MACE stationary points
Residual DFT force, RMS (eV/Å)
RMS gate 0.05
0/54 pass
0/27 pass
minima
(img 0, 6)
saddle
(img 3)
d
Dopant-induced EF shift (not aligned)
EF(doped) − EF(undoped), image 0 (meV)
+17
+55
GA
Sr