

Survey of Low-Power Electric Vehicles: A Design Automation Perspective

Naehyuck Chang, *Fellow, IEEE*, Mohammad Abdullah Al Faruque, *Senior Member, IEEE*, Zili Shao, *Member, IEEE*, Chun Jason Xue, *Senior Member, IEEE*, Yiran Chen, *Fellow, IEEE*, and Donkyu Baek, *Member, IEEE*

I. INTRODUCTION

Electric vehicles have many fundamental advantages over internal combustion engine vehicles. Electric vehicle idea is not new. As early as in 1891, William Morrison of Des Moines, Iowa already built the first successful electric vehicle in the United States. However, internal combustion engines almost completely replaced electric powertrains in the production vehicles for the past 100 years.

Thanks to recent evolution of Lithium-ion batteries and strong demand for zero-emission vehicles, electric vehicles have successfully repositioned demonstrating commercial success. Nevertheless, electric vehicles still have challenges in terms of the battery weight, fully-charged driving range, costs, etc. In this survey, we provide range of information toward “low-power” electric vehicles that is able to inspire how design automation can overcome such primary electric vehicles’ disadvantages more systematically and more efficiently.

We first introduce propulsion power modeling, estimation, runtime optimization, and design-time optimization in Section II as majority of battery energy in the electric vehicles is used for propulsion. Section III introduces driving profile modeling, estimation and runtime optimization on the top of Section II. Driving profile also largely impacts on non-propulsion power consumption. Indeed, modern electric vehicles also consume significant amount of battery energy for non-propulsion power such as heating, ventilation, and air conditioning. Section IV summarizes non-propulsion power modeling, estimation and runtime optimization. As battery systems are the key component for electric vehicles, we introduce modeling, simulation, estimation, and optimization of electric vehicle battery systems in Section V. Energy harvesting is a proactive way to manage electric vehicle energy. Section VI also summarizes vehicle energy harvesting methods including solar energy, wind energy, regenerative shock absorbers, and regenerative brakes. Section VII summarizes how electric vehicle charging impacts on the power grids. This section also points out unsolved issues and future research direction.

II. PROPULSION POWER MODELING, ESTIMATION, RUNTIME OPTIMIZATION, AND DESIGN-TIME OPTIMIZATION

Electric vehicles of course consume majority of electrical energy for propulsion. Electric vehicle propulsion energy

generally increases proportionally to their weight but also largely variable by the driving conditions such as road slope. Unfortunately, electric vehicles are not lighter than the similar scale of internal combustion engine vehicles due to the battery weight while production electric vehicles deploy light materials such as aluminum to a large portion of chassis and bodies to compensate the battery weight. For instance, Chevrolet Bolt (164” long) weighs 3563 lbs, but a Honda Civic (177” long) does only 2752 lbs.

Electric powertrain efficiency is already close to the their theoretical limits. Electric vehicles also have advantages in well-to-wheel efficiency from idling, downhill driving and braking using regenerative braking. Nevertheless, the well-to-wheel efficiency of electric vehicles is not much higher than that of internal combustion engine vehicles. Regenerative braking is fundamental advantage of electric vehicles that reclaim kinetic energy back to electrical energy, which is dissipated to heat energy in the internal combustion engine vehicles. However, modern internal combustion engine vehicles adopt engine stop-and-go during idle and also regenerative braking using the alternator.

A. Propulsion Power Modeling

Electric Vehicle as a multi-domain Cyber-Physical System (CPS) consists of two major systems of electric motor and auxiliary system that are the main contributors to the power consumption [2], [38]–[40].

Electric motors are the key components of the propulsion system that generates force to propel the vehicle at a desired speed and acceleration. The electric motor consumes battery energy to produce driving force but can also behave as a generator when the applied torque becomes negative during deceleration. This regenerative braking system helps the electric vehicles achieve higher energy efficiency and extended driving range [41]–[43].

Propulsion power generated or consumed by the electric motor significantly influences the stored battery energy, the electric vehicle driving range, and the battery lifetime [44]–[46]. Hence, modeling, estimation, and optimization of the propulsion power are mandatory tools and methodologies to extend the driving range and battery lifetime.

1) *Physics Model*: Most of all, accurate propulsion power modeling is the basis of electric vehicle power estimation, runtime power management and design-time power optimization. Vehicle propulsion power modeling has been used for eco-driving research for internal combustion engine vehicles over

Direct questions and comments about this article to Naehyuck Chang, Korea Advanced Institute of Science and Technology, 291, Daehak-ro, Yuseong-gu, Daejeon, Korea (e-mail: naehyuck@cad4x.kaist.ac.kr).

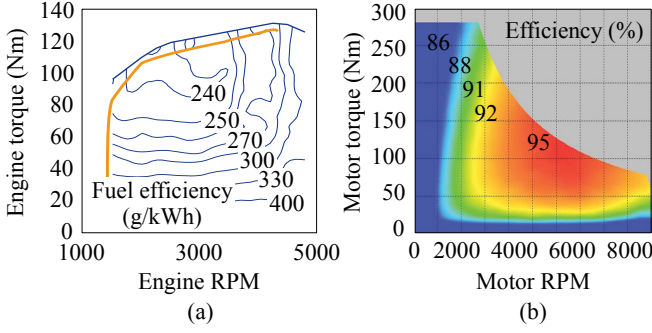


Fig. 1. A 1.4 liter GM Voltec Internal combustion engine efficiency map (a) and a Nissan Leaf 80kW electric motor efficiency map (b) [3], [4].

decades. An underlying propulsion power model is based on well-known physics equations. Such vehicle dynamics model basically takes into account the propulsion power applied to the tires.

$$P_{trac} = F \frac{ds}{dt} = Fv = (F_R + F_A + F_G + F_I + F_B)v \quad (1)$$

where F_R , F_A , F_G , F_I , and F_B are the rolling resistance, aerodynamic resistance, gradient resistance, inertia resistance, and brake force provided by hydraulic brakes, respectively [1], [2]. This model applies to all type of propulsion systems as it assumes 100% efficiency of the propulsion system. As a result, this physics model does not explain electric-vehicle-specific power consumption behaviors such as electric traction motor characteristics, regenerative braking, battery efficiency, etc. Such simplification still can marginally estimate electric vehicle propulsion power but hardly use for propulsion power saving research.

One need to obtain the actual model coefficients for actual deployment of the power models of (1). Vehicle manufacturers often provide a part of model coefficients in the specification sheet such as the aerodynamic resistance as well as the curb weight, and tire manufactures commonly advertises the rolling resistance values of their products. Wind chamber experiments can also obtain unknown aerodynamic resistance values.

2) *Motor Efficiency*: The primary discrepancy between the electric vehicles and internal combustion engine vehicles can be explained by the source of the propulsion power: electric motors and internal combustion engines. Adding the electric motor characteristics to the physics model in (1) is able to accommodate electric powertrain characteristics.

Fig. 1(a) illustrates efficiency maps of a 1.4 liter GM Voltec engine and a Nissan Leaf 80kW motor. Electric vehicle efficiency is largely different from that of engine vehicles even under the same driving condition as the source of the traction force is a completely different characteristics, even if electric vehicles are subject to (1) as well. Electric motor efficiency varies by the motor type, motor revolution per minute (RPM) and torque. Consideration of traction device efficiency can significantly enhance the electric-vehicle-specific characteristics over (1) as shown as

$$P_{EV} = \frac{P_{trac}}{\eta_{EV}} \quad (2)$$

$$\eta_{EV} = \frac{P_{trac}}{P_{trac} + k_c T^2 + k_i \omega + k_w \omega^3 + C},$$

where k_c , k_i , k_w , C are a copper loss, a iron and friction loss, a windage loss and constant loss, respectively [5]–[8].

3) *Drivetrain Efficiency*: Power consumption model in of (2) reflects efficiency of the electric motors. The actual electric vehicle propulsion efficiency is not only dependent on the traction motor but affected by the drivetrain loss in the gearbox, axle bearings, driveshaft, gearbox fluid, and many more, which varies by the vehicle speed, acceleration and motor torque. The actual model coefficients can be obtained from the motor companies, but this is not always the case. It is hard to rely on vehicle specification sheets to figure out drivetrain efficiency. Test run in various conditions helps collect range of power consumption data and obtain the model coefficients by a curve fitting method [9] with a high model fidelity of 1.7% overall cumulative energy consumption error [9]. A dynamometer test provides an isolated experimental environment [10] to obtain the actual efficiency of the traction motor combined with the drivetrain.

Consideration of accurate efficiency change of the traction motors and drivetrain loss can be highly nonlinear, and thus it is challenging to use mathematical equation models such as (1) and (2). Lookup tables are convenient to describe complicated power characteristics and also easy to implement a power simulator [10] while less convenient to use for systematic optimization.

More precise electric vehicle power modeling requires extensive power measurement and characterization. Use of production electric vehicles brings various limitations in non-intrusive power measurement. Fabrication of an electric vehicle [11] or electric vehicle conversion of a production internal combustion engine vehicle [12] efficiently overcomes the limitation in non-intrusive power measurement. The battery power should be measured together with the vehicle driving condition. Global positioning system (GPS) provides the location, altitude and thus road slopes. Such whitebox experiments efficiently isolate the propulsion power consumption from non-propulsion power consumption and give a lot of benefits in power modeling [11], [12]. It turns out that drivetrain loss in the electric vehicle is proportional to the square of the vehicle speed while the electric powertrain model only has a linear term of the speed as shown in (3) [11].

$$P_{EV-specific} = \frac{P_{trac}}{\eta_{EV-specific}} \quad (3)$$

$$\eta_{EV-specific} = \frac{P_{trac}}{P_{trac} + C_0 + C_1 v + C_2 v^2 + C_3 T^2}$$

where C_0 , C_1 , C_2 , and C_3 mean coefficients for constant loss, iron and friction losses, drivetrain loss, and copper loss, respectively. These methods guarantee a very high estimation accuracy (e.g., 2.89% maximum absolute error in [11]) for the target vehicle model. However, these models ensure limited accuracy when applied to general electric vehicles.

4) *Electric Vehicle Driving Range Estimation:* Most electric vehicle owners have range anxiety due to the limited driving range as well as inaccurate remaining range gauge on the instrument cluster. Depletion of the vehicle battery in the middle of a trip may bring a trouble equivalent to vehicle breakdown [11].

The electric vehicle power models of (1)-(3) require vehicle weight, acceleration, speed, and road slope as the input variables. It is impossible to know the actual values of the future vehicle acceleration and speed in real cases due to the uncertainty in the driving conditions. Such unknown factors can be modeled as probability density functions, and the resultant driving range estimation can also be represented probabilistically. This work models the uncertainty with a statistical speed profile [7].

Consideration of the battery characteristics is also attempted such as the state of charge versus the battery output voltage. For example, battery current keeps increasing as battery discharges even if the vehicle maintain a constant cruising speed on a flat road [5]. This work assumes that the vehicle speed should be decreased as the battery voltage decreases, but which is not in the real case because the battery should be cut off before it becomes fully discharged (over-discharge protection typically at 20% SoC) by the battery management system (BMS), and the motor driver should be able to maintain the same torque within the legal voltage range of the battery.

The fidelity of the power consumption model directly impacts on the range estimation accuracy [11]. The power model in (3) that considers the drivetrain efficiency exhibits less than 2.89% maximum absolute error in the power consumption, and thus between 0.05% to 4.39% in range estimation compared with real measurement [11]. On the other hand, the power models in (1) and (2), which consider only propulsion power and motor efficiency, obtain 6.85% and 9.33% maximum absolute error in the power consumption and up to 19.19% and 21.75% in range estimation, respectively.

B. Runtime Propulsion Power Optimization

A large portion of previous work relies on the physics model in (1) or adding the motor efficiency in (2) to estimate electric vehicle power consumption. Therefore, derivation of the energy-optimal vehicle speed for a given road slope is often attempted with (1) or (2) [5]–[8], [12]. As mentioned in Section I, electric vehicles consume different amount of power and energy by the vehicle speed and acceleration due to the non-constant efficiency of the traction motor and the drivetrain even if the vehicles drive on the same route with the same payload. This inspires runtime propulsion power optimization, which is a similar concept of eco-driving of internal combustion engine vehicles [13]–[16]. However, the fundamental discrepancy in the electric powertrain from the engine powertrain makes the optimization policy largely different.

1) *Propulsion Power Optimization with a Constant Road Slope:* According to the electric vehicle power model in (3), propulsion power varies by the road slope as well as the vehicle speed, and thus the total energy consumption to finish the same distance of travel, i.e., the integration of the vehicle

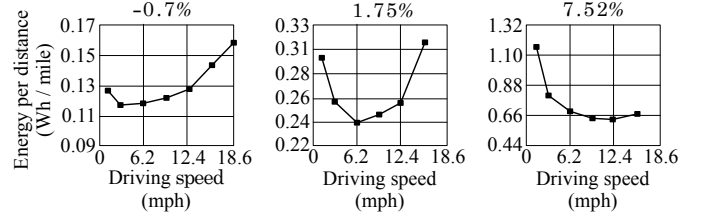


Fig. 2. Energy consumption versus electric vehicle speed on various road slopes.

power over the driving time, forms a convex function of the vehicle speed for a given constant road slope as shown in Fig. 2. The shape of the convex function varies by the road slope, which implies that there exists the energy-optimal electric vehicle speed by a given road slope.

It is very interesting to note that the energy-optimal speed increases by the road slope in the case of electric vehicles, i.e., electric vehicles should run faster on a steeper road to save energy. This inspires the minimum-energy speed planning over time (or distance) for a given driving mission: a route, a payload and a deadline, which is electric-vehicle-specific. Therefore, one of the simplest propulsion power optimization problem is defined as finding the energy-optimal vehicle speed planning (acceleration, cruising and deceleration) for a given constant road slope. Related previous work derives the energy-optimal vehicle speed planning without considering the traffic condition assuming a constant road slope [17], [18]. A trapezoidal driving, a combination of a constant acceleration, a constant speed cruising and a constant deceleration, is not an impractical driving method even in the real world with a smooth traffic flow, and a series of trapezoidal driving pattern planning accommodates intersections with stop signs [17]. Fast computation is always beneficial for practical use to eventually accommodate traffic condition and route change guided by GPS navigation systems. A simplified analytical method that ignores aerodynamic resistance and motor efficiency help rapidly solve the energy-aware trapezoidal driving problem [18].

2) *Propulsion Power Optimization with a Variable Road Slope:* Many cities are located on hills as well as on flat lands. The energy-optimal trapezoidal driving may not work if the road slope varies before a single trapezoidal driving ends. The trapezoidal driving with a constant cruising speed is no longer energy optimal if the road slope changes. Consideration of the road slope change is crucial for freeway driving where there is no traffic signal nor intersection with stop signs.

The problem to solve the propulsion power optimization with a variable road slope is formulated as an optimal speed selection problem over distance as shown in Fig. 3(a). The X-axis and Y-axis in Fig. 3(b) denote the driving distance from the starting point and the driving speed, respectively. Each node indicates the driving speed at a given distance, and an edge between two nodes implies acceleration or deceleration during the distance step.

The energy-optimal speed profiles exhibit dynamically changing cruising speed taking the regenerative braking and speed limit into consideration as well. Previous work tackles

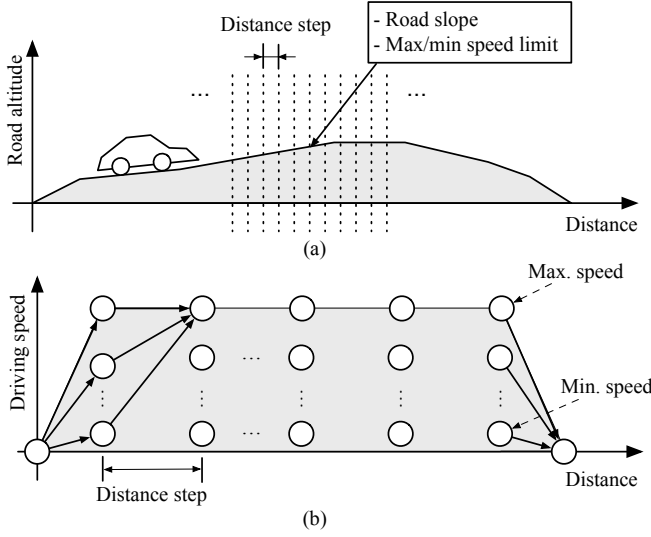


Fig. 3. Problem formulation for the propulsion power optimization with a variable road slope.

this problem without considering the traffic condition and stop signs by the use of analytical method [13], [14], dynamic programming [15], machine learning [16], and model predictive control [10]. Model predictive control (MPC) derives the optimal motor torque with the objective of a weighted sum of the energy consumption in every 400 m drive and the kinetic energy difference between the best constant speed and the derived speed [10]. These methods derives the energy-optimal speed profiles on a variable-slope road with a reasonable computational complexity but can hardly guarantee the deadline constraint.

Even if dynamic programming can hardly guarantee a hard deadline while minimizing the driving energy, making the cost function as a weighted average of the driving time and driving energy is able to consider the deadline in a certain degree [6], [9], [19], [20]. This method is useful for soft real-time system, which is the case of most common driving missions.

The dynamic programming with an weighting factor is formulated with follow:

$$\begin{aligned} \min \quad & \sum_{d=1}^M \sum_{v=1}^N \{w\Delta t x(d,v)P_{d,v} + (1-w)\Delta t\} \quad (4) \\ \text{Subject to} \quad & \sum_{v=1}^N x(d,v) = 1 \quad \forall d \\ & x(d,v) = \{0,1\} \quad \forall d,v \end{aligned}$$

where Δt is a driving time during the distance step, d is a distance from the start point, v is a speed at the distance, $P_{d,v}$ is a power consumption at a distance d and a speed v , and w is weighting factor. Δt is varied by the driving speed and the acceleration during the distance step.

A more explicit deadline awareness can be derived by iterative methods or semi-exhaustive heuristics that forms a multi-objective optimization problem such as genetic algorithm [8], [21]. However, these methods are subject to a very high computational complexity, which can be hardly used for online

methods that are reactive to the traffic condition change and unexpected interruption by other cars or pedestrians.

3) *Propulsion Power Optimization Considering Traffic and Intersections*: The energy-optimal driving method introduced in the previous sections may not actually feasible in real traffic conditions. Safety is always first than energy saving, and thus heavy traffic often makes the vehicle slow down than the energy-optimal speed. Such traffic condition cannot be fully known a priori, and the derived energy-optimal driving method should be computed again whenever unexpected disturbance happens, which ends up with a local minimum energy consumption. Consideration of the traffic condition and traffic signal makes the energy-optimal driving more realistic [20], [22]–[27] even if such work is still based on strong assumptions. Such work is rather a high-level driving problem rather than electric vehicle-specific driving energy optimization.

Average speed of preceding vehicles on the same route marginally explains the distance between vehicles, which constrains the maximum possible target vehicle speed [20], [22]. Traffic signals are often controlled by a periodic schedule that mimics the energy-optimal driving [23]–[27].

A majority portion of intersection driving management is to optimize the throughput. There are intersection driving management work that explicitly optimize driving energy [26], [27] demonstrating 8% to 48% energy saving. Once again, such work does not perform electric-vehicle-specific driving energy optimization, and consideration of electric powertrain and regenerative braking may exhibit a large difference in the energy consumption.

4) *Propulsion Power Optimization minimizing EV life-cycle cost*: The propulsion power optimization minimizing EV life-cycle cost is very important problem for owners since the battery aging varies depending on the speed planning, and directly linked to cost of maintenance increases. It is very complex to solve the optimization problem because we should consider the battery aging mechanism and road information as well as EV powertrain at the same time.

However, there are several research on battery aging and guidelines to extend the EV battery life [36], [37]. Related work performed experiments to analyze the battery performance (capacity and allowable peak power) by cycle times under various driving conditions (e.g. temperature, driving profiles, etc.) Based on the experimental results, some guidelines are proposed under non-operating condition and operating condition.

C. Design-Time Propulsion Power Optimization

It would be a more proactive energy saving if the energy optimality is considered at design time. Determination of the battery capacity is a really critical factor in electric vehicle unlike internal combustion engine vehicles questioning the gas tank size. The battery capacity directly impacts on the vehicle weight as well as the driving range, vehicle price and space utilization. As observed in Sections II-A and II-B, vehicle weight is a major variables that determines energy efficiency. Installation of a larger-capacity battery certainly increases the

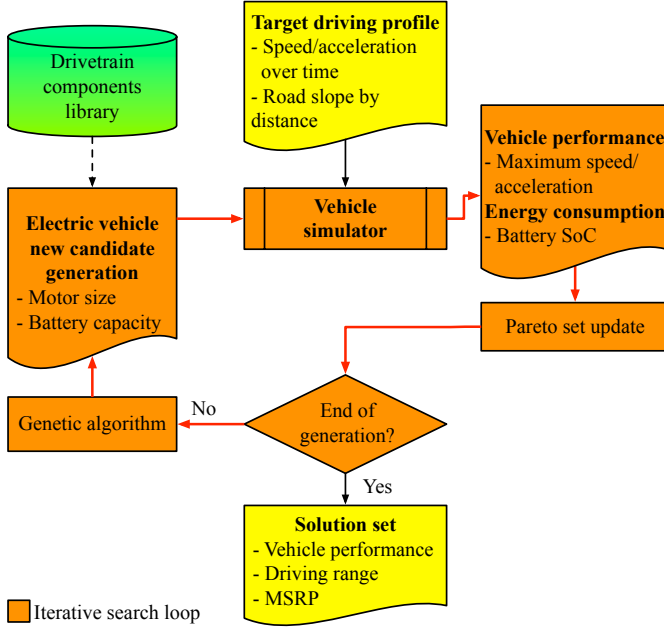


Fig. 4. Design-time propulsion power optimization dedicated to a driving mission.

driving range but certainly decreases fuel efficiency (MPGe, mile per gallon gasoline equivalent.) Electric vehicles would better not carry an unnecessarily big battery pack while commuting in a short distance. A heavier battery pack also degrades the performance of the electric vehicles. On the other hand, a large capacity battery pack provides clear benefits such as a larger C rating (the Ah of the battery pack) that makes the battery efficiency higher, a lower battery temperature rise and a longer cyclelife. As a result, determination of the battery pack capacity must consider various aspects. To make a long story short, tailored specification of an electric vehicle dedicated to a particular operating scenario gives a huge opportunity to save energy consumption.

Design-time optimization requires extensive evaluation of the vehicle characteristics whenever a design variable is changed. It is not feasible to perform actual driving test during the design time. Automotive original equipment manufacturer (OEM) have been collecting range of data over decades and attempt to find a better empirical setup. Simulation environment can significantly reduces the design effort. Driving energy simulators evaluate the power consumption by changing the powertrain specification and estimate the vehicle performance and driving range as shown in Fig. 4. A vehicle simulator on a Matlab evaluates energy consumption by the motor, battery characteristics, gearbox, vehicle chassis, and so on [28], [29]. Related previous work optimizes the battery pack capacity for a given driving mission [30]. A supercapacitor and battery hybrid can prolong the battery lifetime [31]. The optimal reduction ratio of the traction motor to the wheels also increases the electric vehicle fuel efficiency [32]. Power rating of the traction motor, gear reduction ratio and the battery capacity should be jointly optimized. However, such design space is very big, and evaluation time complexity is huge. Genetic

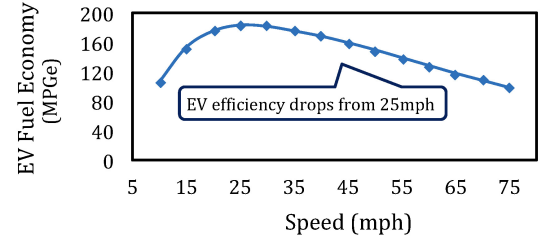


Fig. 5. Electric vehicle fuel economy for different driving speeds [46], [47].

algorithm is a common way to solve such multi-objective optimization, and related work analyzes vehicle efficiency by the motor power rating and the battery capacity [33]. The design space becomes limited if the available components are in the limited number of libraries. Related work derives the optimal hybrid electric bus with 19 choices of diesel engine power rating, 19 choices of alternator capacities, 28 different size of traction motors, nine battery pack capacity variations, and seven gearbox reduction ratios [34]. Similar work attempts the best configuration of passenger vehicles and pickup trucks by the driving scenarios with four fuel cells, four motor power ratings, and eight battery pack capacities using Genetic algorithm [35].

III. DRIVING PROFILE MODELING, ESTIMATION, AND RUNTIME OPTIMIZATION

As mentioned in Section II, driving behavior significantly affects the propulsion power. Figs. 2 and 5 well demonstrate how driving speed affects the propulsion power and fuel economy [42]. The driving behavior can be modeled by the values of the driving speed, acceleration, and deceleration at each time instance of the driving route as the driving profile.

Therefore, modeling and estimation of the driving profile not only help in estimating the driving habits of the drivers, but also enable the designers and engineers to model, estimate, and later optimize the propulsion power in electric vehicles as described in Section II. On the other hand, adjusting and optimizing the driving profile itself is another effective approach to extending the driving range and battery lifetime [47].

A. Modeling and Estimation

As described in Section II, electric motor of an electric vehicle is the main system contributing to the total power consumption and generation. One of the main factors deciding this propulsion power request, is the driving behavior. The driving behavior is modeled by the values of the driving speed, acceleration, and deceleration at each time instance of the driving route. This model that is called driving profile depends on various parameters of driving such as route conditions and the driver characteristics [38], [52].

The driving profile can be generated based on the data gathered from one driver while driving, in order to model a driver-specific driving profile; this can be achieved by monitoring multiple state variables of the electric vehicle at runtime using an On Board Diagnosis (OBD) device [53]. For instance, a biometric system may be incorporated into

vehicle security in order to identify the driver. In other words, the amount of pressure a driver applies on the accelerator and brake pedals may be utilized in modeling their driving behavior and personal identification [54], [55]. Moreover, the anger and emotional aggressiveness of the driver may influence its driving behavior [56]–[58]. Hence, researchers attempt to model these factors that define the driving profile so that they can analyze their influence. Moreover, the safety and energy consumption of the vehicle are important factors influenced by the driving behavior that need to be predicted [58], [59].

On the other hand, the driving profile can also be generated based on the gathered data from all the drivers driving on a specific route, in order to model a route-specific driving profile. Certain navigation system databases like Google Maps [60] generate these models as part of the traffic information of their map databases by gathering data from all their clients or the sensors implemented in the city roads. Moreover, the data of this generic driving behavior can be used to generate driving test cycles. The automotive manufacturers may use these driving cycles to test and analyze the performance of their vehicles in terms of energy consumption and emissions [61], [62].

In summary, these driving profile models can be used for the purpose of personal identification, driver characteristics estimation, or estimation of the propulsion power by the electric motor. Later on, they can be adjusted and optimized for a specific driver or driving route in order to improve the performance of the electric vehicle in terms of battery lifetime, driving range, or even safety.

Typically, driving profile can be implemented simply as a matrix representing consecutive segments of the driving route (\bar{s}) (5). Each row in the matrix stores the information of the route condition and the corresponding driver reactions for each segment of the driving route.

$$\bar{s} = \begin{bmatrix} \text{time} & \text{length} & \text{speed} & \text{acceleration} & \text{slope} \\ t_1 & l_1 & v_1 & a_1 & \alpha_1 \\ \vdots & \vdots & \vdots & \vdots & \vdots \\ t_n & l_n & v_n & a_n & \alpha_n \end{bmatrix} \quad (5)$$

The information for each segment may contain the average time taken to drive the segment (t_i); segment length (l_i); average vehicle speed (v_i); average vehicle acceleration (a_i); and road slope (α_i). The values for these elements can be retrieved based on the data gathered for the drivers and map databases as explained above [38], [47].

B. Runtime Driving Management and Power Optimization

Driving management and route optimization have always been the most common problem of vehicles to improve the quality of transportation. Typically, driving management methodologies consider the driving distance and the driving time in order to find the fastest and shortest route to a specific destination [72]–[74]. Map databases are utilized to provide the required information for selecting the optimal route. More detailed driving profile modeling can enable the methodologies to optimize the driving routes considering other

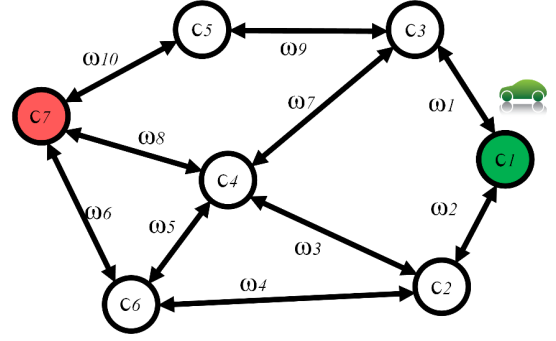


Fig. 6. Routing problem labeled with edge weights [47].

objectives such as energy consumption and the battery lifetime. For instance, driving profile model containing the segment information such as road slope and average speed will enable the driving management methodology to estimate the energy consumption of the electric motor at each segment. The routing algorithm can be implemented such that the weights for the edges of the graph are defined as same as the objective considered in the driving management as shown in Fig. 6 [75]–[77].

The results have shown that by sacrificing about 3 minutes of the driving time, a driving management can take a detailed driving profile and propulsion power modeling into account and reduce the energy consumption by 11.9% compared to the fastest route [47], [52].

Moreover, vehicles implement energy management methodologies that utilize the driving profile modeling to improve the driving range by reducing the energy consumption. For instance, the power split among the battery, combustion engine, and ultracapacitor is very important to the performance of the vehicle and its driving range. Predictive models of the driving profile are incorporated in the control to facilitate with the system estimation and control optimization [2], [44], [46], [69]–[71].

IV. NON-PROPULSION POWER MODELING, ESTIMATION, AND RUNTIME OPTIMIZATION

Besides electric motors, auxiliary systems in electric vehicles are the other major systems which influence its power consumption. Non-propulsion power requested by the auxiliary systems mostly depend on the functionality and objective of the system regardless of the driving behavior and profile. For instance, Heating, Ventilation, and Air Conditioning (HVAC) as an auxiliary system is responsible to maintain the cabin temperature in a comfort thermal range for the passengers [48]–[51].

Fig. 7 illustrates the details of three types of power consumption: 1) propulsion, 2) non-propulsion, and 3) accessory power consumption, for different temperatures in a Tesla Model S. The fraction of the HVAC power consumption (non-propulsion) mainly depends on the ambient temperature and the required comfort range. Although HVAC energy is proportional to the driving time, it is not sensitive to the detailed driving profile (speed and acceleration) unlike the electric motor. This characteristic shows that auxiliary systems

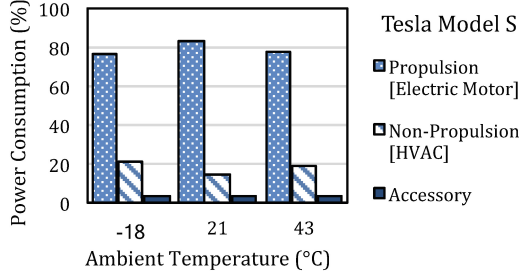


Fig. 7. Percentages of three types of power consumption in an electric vehicle for different ambient temperatures [38], [46].

have flexible load and power pattern. Hence, modeling and estimation of the auxiliary systems such as HVAC will enable the electric vehicle designers and engineers to further exploit this characteristic. Therefore, they will be able to adjust and optimize the non-propulsion power, e.g. HVAC power, in order to improve the operating parameters of the electric vehicles such as driving range and battery lifetime.

A. Modeling and Estimation

Overall, the amount of non-propulsion power requested in an electric vehicle depends on the targeted auxiliary systems, their functioning components and the control process implemented to integrate and manage them. For instance, an HVAC is controlled by an automotive climate control in order to maintain the cabin temperature (T_z). The cabin temperature is influenced by the supply air (T_s) to the cabin and other thermal loads including the heat exchange with outside and the solar radiation. The air supply temperature is controlled by adjusting the temperature set points on heating and cooling coils. Moreover, variable air valves are utilized in a more complex HVAC in order to maintain the required thermal comfort for the passengers even in a multi-zone cabin. These systems utilize variable-speed fans and air ducts to provide the supply air to the zone(s).

Typically, the power consumption of the cooling (P_c) and heating coils (P_h) depends on the energy difference between their inlet and outlet air flows. Moreover, the power consumption of the variable-speed fans (P_f) is quadratically related to the air flow rate (\dot{m}_z). The thermodynamics of the cabin temperature considering all the control inputs and variables are modeled by energy balance differential equations. Hence, Ordinary Differential Equations (ODE) can be implemented to model and estimate the thermodynamic behavior of the HVAC system and its instantaneous power consumption.

These models are typically used for evaluating and analyzing the performance of the auxiliary system – HVAC – and its influence on the whole vehicle. For instance, the researchers estimate the energy consumption of the HVAC system regarding different driving conditions like weather. This estimation is leveraged in order to predict the driving range of the vehicle and analyze how much HVAC influence this crucial parameter of the vehicle [58], [63], [64].

B. Runtime Control Scheduling

During the operation of an electric vehicle, there are multiple control inputs which can be adjusted and optimized towards a certain objective. The controllers implemented are responsible to monitor the state variables and decide these control inputs. They may utilize the integrated modeling towards their estimation and optimization purpose. Previously in Sections II and III, we discussed how modeling of propulsion power and driving profile may help in optimizing the vehicle speed, acceleration, driving route, and power split.

Auxiliary systems in electric vehicles implement control algorithms responsible for scheduling control actions in their systems. The decisions made by the controller will influence the non-propulsion power requested by the auxiliary systems. For instance, in an auxiliary system like HVAC, an automotive climate control basically senses the cabin temperature and weather and decides how hot and cool the supply air temperature should be, given the model of the cabin and HVAC [65]–[68].

The automotive climate control adjusts the control inputs into the HVAC in order to maintain the cabin temperature around a certain target and within a comfort range. The climate control may be implemented using an MPC or a rule-based control. The controller may leverage the HVAC dynamic and non-propulsion power models to estimate the state, auxiliary, and output variables according to specific control inputs for a certain prediction horizon in the future. The controller utilizes an optimizer to adjust the control inputs such as heating and cooling coil temperature set points and the fan speed of the prediction horizon while considering the constraints. The controller may be responsible to minimize an objective or cost function.

An automotive climate control may only consider the cabin temperature as the objective [65]–[68]. However, the power consumption of the HVAC (non-propulsion) and the electric motor (propulsion) may be considered as well in order to reduce the influence on the electric vehicle energy and battery capacity loss [46], [64]. Therefore, depending on the details of the modeling, the cost function may include the 1) cabin temperature variation, 2) HVAC energy consumption, and 3) battery capacity loss. Moreover, there are certain constraints on the control inputs and state variables which should be satisfied during the optimization and control process.

Therefore, the control scheduling of the auxiliary systems may reduce the battery stress, improve the driving range, and the battery lifetime by adjusting the non-propulsion power such that it compensates for the propulsion power or the quality of the system. It has been shown that an MPC-based methodology given the models is able to minimize the non-propulsion power on average 39% compared to the fuzzy-based methodology which minimizes by 6% [46], [67], [78].

V. BATTERY SYSTEMS FOR ELECTRIC VEHICLES

Battery systems are an important part of electric vehicles. The main research areas in battery system are modeling, simulation, estimation and optimization. In the following, literature survey of battery systems for electric vehicles is presented.

A. Modeling

Rechargeable batteries that offer high energy and power density and relative safety are the choice for many applications from consumer electronics to electric vehicles. One example of such batteries are Lithium-ion batteries. Modeling the cycle and calendar life of such batteries is needed to set expectations of reliable product performance. Generally, there are two types of models to predict the battery life [79]. One type of models describe chemistry of the cell [80]. These models, with the help of extensive computation facilities, provide time and temperature effects accurately but do not match with cycle life test data. Such models are best suited for optimization of the physical design aspects of electrodes and electrolyte [90]. The other type is empirical models [81] that fit the test data to equivalent circuit models using power law relationships. These models have limited range of parameters and require extensive testing of each type of cells.

A simple battery model consists of an ideal battery with an open circuit voltage and a constant internal series resistance. A new battery model based on simple battery model was proposed in [82]. In this battery model, SoC (State of Charge) of the battery is considered as well by making the internal resistance variable. Another commonly used model is the Thevenin battery model in Fig. 8, which consists of an ideal no-load battery voltage (E_o), internal resistance (R), capacitance (C_o) and overvoltage resistance (R_o) [137]. C_o represents the capacitance of the parallel plates and R_o represents the non-linear resistance contributed by the contact resistance of plate to electrolyte. The main disadvantage of the Thevenin battery model is that all the elements are assumed to be constant, but in fact all the values are functions of battery conditions.

An empirical mathematical model is developed in [83], [84]. The improvement of this model is to account for the nonlinear characteristic of both the open circuit voltage and internal resistance. A sophisticated and accurate dynamic model for simulation purpose was proposed in [85]. This model includes electrolyte reaction, Ohmic effect and leakage capacitance as well as the self discharge current. The drawbacks of this model include longer time for computation because of its higher order and complicated modeling procedure that involves a lot of empirical data. Another battery model is called over-current battery model as described in [86]. It has a variable current source, a variable voltage source, a variable resistor, and a capacitor. This model provides a good representation of both variable internal drop in the battery and changes

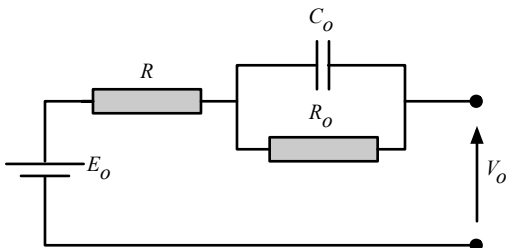


Fig. 8. Thevenin battery model [137].

in the output voltage due to the SoC. However, one of its drawbacks is that too many parameters are required. A model described in [87], [88] considers most nonlinear battery element characteristics both during charging and discharging as well as their dependence on the SoC of the battery. All the elements included in this model are functions of the open-circuit voltage of a battery, which in turn relates to state of charge [89].

The model in [91] is capable of predicting run time and I-V performance, but is not accurate for the transient response to short-duration loads. As a result, it does not predict accurately the SoC throughout drive cycles for electric-vehicle-related simulations [92]. A model proposed in [92] describes accurate determination of the discharge capacity, which is a function of the discharge rate, temperature, cycle number, and a rate factor that accounts for a decrease in capacity due to unwanted side reactions as the current increases. This model can also predicts SoC, terminal voltage and power losses of various batteries for electric vehicles. Along with predicting the battery behavior accurately, this model can be used for simulation as well.

B. Simulation

Simulation with an accurate battery model is able to analyze complex phenomena. Average ratings can be derived from steady-state operation and characteristics of the system, but peak ratings can only be estimated from the steady state results and are often inadequate. A detailed model is appropriate for short-term analysis and supplements the long-term capabilities of a steady-state model as described in [95], [96]. In order to better understand losses, thermal characteristics, and durability of various electric vehicle batteries, a dynamic simulator is a key tool. Estimates of conducting losses in power electronics devices, batteries, supercapacitors, and other components can be supported directly with a dynamic model. Dynamic models are needed to make lower-level comparisons among subsystems and support subsystem design. Steady-state simulation tools for the design and analysis of hybrid electric automobiles have been developed in recent years and support comparisons over long drive cycles. In the past, dynamic simulation models have focused mainly on the analysis of control strategies [94]. A dynamic simulator in [93] offers a more detailed look, based on dynamic equations of each subcomponent (the engine, battery, inverter, motor, and transmission) on microsecond time scales.

Several simulation systems have been developed to describe the operation of hybrid electric power trains such simple electric vehicle simulation (SIMPLEV) from the DOE's Idaho National Laboratory [97]. Simulation programs include MARVEL from Argonne National Laboratory [101], CarSim from AeroVironment Inc., JANUS from Durham University [102], Vehicle Mission Simulator [103], and others [104], [105]. A simulation model (ELPH) is used to study the viability of an electrically peaking control scheme and to determine the applicability of computer modeling to electric vehicle design [98]. V-Elph [99], [100] is a system-level modeling, simulation, and analysis package. This package uses Matlab/Simulink to study issues related to electric vehicle and hybrid electric vehicle

design such as energy efficiency, fuel economy, and vehicle emissions. V-Elph facilitates in-depth study of power plant configurations, component sizing, energy management strategies, and the optimization of important component parameters for several types of hybrid or electric configuration or energy management strategies with visual programming techniques, allowing the user to quickly change architectures, parameters, and to view output data graphically [28].

C. Estimation

Automotive Lithium-ion batteries have high capacity and large serial parallel numbers, which, coupled with the problems such as safety, durability, uniformity and cost, imposes limitations on the wide application of lithium-ion batteries in vehicles. Lithium-ion batteries must operate within the safe and reliable operating area, which is restricted by temperature and voltage windows. Exceeding the restrictions of these windows will lead to rapid attenuation of battery performance and even result in safety problems [106]. The accommodation of such operating conditions requires that a management system has accurate knowledge of many factors e.g. the SoC to facilitate safe and efficient operation. Failure to control SoC, which may lead to under- or over-charging conditions, can degrade the ability of the pack to source/sink subsequent power transients [107].

A variety of techniques have been proposed to measure or monitor the SoC of a cell or battery, each having its relative merits [108]. Coulomb counting or current integration is, at present, the most commonly used technique, requiring dynamic measurement of the cell/battery current, the time integral of which is considered to provide a direct indication of SoC [109].

Due to complexity of electrochemical processes in batteries and noise in sensors, many sophisticated algorithms have been proposed for efficient battery monitoring, such as estimation of SoC [110]. An earlier work which uses voltage as the basis of SoC estimation is presented in [113]. Though this work deals with complexities such as hysteresis, it is difficult to estimate SoC for some battery types such as Nickel-metal hybrid. A fuzzy logic approach for SoC estimation is presented in [114]. This approach requires training data, which is challenging because of changing properties in different conditions. A complex neural-network-based approach is presented in [115], but it is restricted to lead acid batteries and requires complex network design and computation.

A hybrid neural-network and genetic-algorithm based approach of SoC estimation of series connected modules (battery cells) is discussed in [116]. Despite the promising result, the proposed method is relatively complex and has high computational cost. In [117], a complicated mathematical model has been devised, specifically for lead acid batteries, which can predict the SoC and remaining operation time with up to 10% error. A nonlinear estimation method based on the sliding mode observer is presented in [118]. This work also discusses the parameters of the battery model through different tests. A novel algorithm is presented in [119], which combines the weighted sum of complex voltage based methods and Coulomb

counting techniques. An earlier method based on Kalman filter is presented in [120]–[123]. In addition to a few similar methods, a famous estimation algorithm based on Extended Kalman Filter is proposed in [124]–[129] and has shown promising results. The method proposed in [130] can robustly estimate SoC by using simple but accurate battery models employing a conservative filtering technique. The H_∞ filter is solved optimally by formulating it as a Linear Matrix Inequality problem. The separation of computation (calculation of gain once and iterative implementation of estimator) enables the proposed method to be implemented on embedded controllers without compromising real-time operation requirements.

SoH (state of Health) is a quantifying estimation that reflects the general condition of a battery and its ability to deliver the specified performance compared with a fresh battery. Battery capacity (i.e., the energy storage capacity) has long been the target of researchers as the definitive battery SoH indicator [111]. In general, a lithium battery is deemed to fail when its capacity fades by 20 % of the rated value [112].

D. Optimization

One of the problems for electric vehicle designers is that energy and power density need to be carefully balanced. Heavy batteries increase the vehicle's range and light batteries increase the power-to-weight ratio, enabling the electric vehicle to achieve better acceleration. More batteries, however, increase the cost of the vehicle design.

Electric vehicles do have quick acceleration, due to the high torque of the electric motor. Currently nickel metal hydride (NiMH) and Lithium-ion are the common, though research continues into new battery chemistries, such as nano-phosphate cathodes, to allow for high discharge rates and higher performance. The discharge rate for batteries contributes to not only acceleration rates, but also how quickly the batteries will be charged. The higher the rate, the more energy is lost through heat. Supercapacitors are available as alternative components. They have high charge and discharge rates, resulting in lower losses but these benefits can be outweighed by their low energy density [131].

The charging management concepts can also be divided into centralized and decentralized approaches [132]. The decentralized approaches let the electric vehicles optimize its charging behavior based on, for example, a price signal broadcast. The drawback of this approach is that the electric vehicle needs to collect and store the trip history. If the electric vehicles should coordinate their charging, for example to include distribution grid constraints, the need for V2V (Vehicle to vehicle) communication is high.

The centralized approaches focus on a centralized unit that directly controls the charging of electric vehicles. Additional study on forecasting and managing electric vehicle charging can be found in [133], [134]. A novel method for optimization is presented by [135] which describes the method for planing the charging of electric vehicles with electric grid constraints including voltage and power. This method provides an individual charging plan for each vehicle, which helps in avoiding the congestion on distribution grids. Using

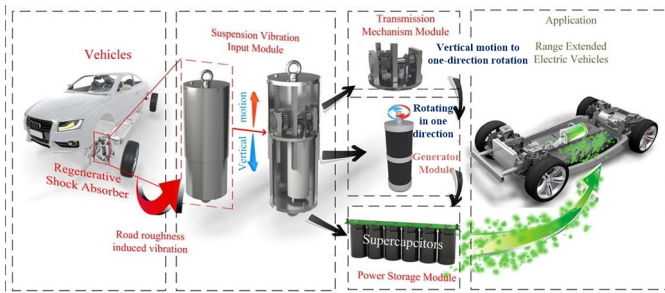


Fig. 10. Regenerative shock energy converted into electricity [197].

can be increased by 9 times [138] while the efficiency of the solar collector is 10% higher compared to that of a conventional flat plate solar collector.

2) *Wind energy*: Wind energy, similar to solar energy is a common energy source which is harvested and transformed to electricity in many areas. For (electric) vehicles, when it is moving, wind will cause a drag force which is opposite to the direction of the propulsion of the vehicle. Now if these stream generated by the interaction of the wind and vehicle is captured in such a way that it would not impose an additional drag at the direction of propulsion of the vehicle, some of the energy can be recovered and fed back to the battery by means of conventional energy conversion processes. Placing a wind turbine, which can be mounted on the body structure of the vehicle can serve the purpose to generate electricity [149], [177].

One major challenge of harvesting wind energy through wind turbines is that normally wind speed varies significantly, which causes voltage and power fluctuation problems at the load side [195]. When the wind speed is high, the peak power might bring damage to the electric system. Also, the extra power can be wasted during the high-speed period. The system thus should be able to efficiently store the energy generated by wind turbines for future use when no wind is available [164]. To achieve this, one way is to appropriately utilize power converters and control strategies to inject proper power to grid [151], [178], [179]. Another conventional method is to store wind energy after appropriate conversion in the form of hydrogen which will be converted to electrical energy via fuel cells [180]. In [144], power conditioning for a wind-hydrogen energy system has been reported. In [145], a simulation and operational assessment is investigated for a small autonomous wind-hydrogen energy system.

Normally, wind energy is not the only harvest energy source in electric vehicles. It is often combined with solar energy together to support the process of electric vehicles [149], [179], [185].

3) *Regenerative shock absorbers*: When an electric vehicles move in the road, the suspension power of the conventional shock absorbers are normally dissipated through friction and heat. However, these wasted energy in a vehicle's shock absorber can be collected and converted to an alternative electric energy through energy regenerative shock absorber, as shown in Fig. 10.

Fundamental research has examined and analyzed the feasi-

bility of harvesting energy from the shock absorber since the 1980s [184]. The regenerative shock absorber was proposed to harvest the kinetic energy dissipated by the suspension vibration in the shock absorber. In [184], the authors described and analyzed how energy lost in a car shock absorber corresponding to different vehicles' speed and road roughness. Recent studies further uncovered the potential of energy harvesting from the shock absorber [161], [199]. The work [199] made a significant improvement in the energy harvesting and ride comfort of regenerative vehicle suspensions over existing techniques. The authors presented a regenerative shock absorber and estimated a power range of 100~400 W at 100 km/h depending on the road profile. In [161] the authors proposed an analytical methodology based on ground tire interface analysis and ride comfort cost function for an energy-regenerative suspension design. This research work aimed to achieve optimal performance and ride comfort and derive the closed-form solutions of the performance metrics for an energy-regenerative suspension. Among these initial theoretic studies, the shock absorber was transformed into an energy harvesting device from an energy dissipating device. Possible noise and heat in the conventional working progress are eliminated, which is environmentally friendly and lifetime extending.

With respect to long-term evolution and development, regenerative shock absorbers can be classified into three categories based on their working principles: electromagnetic, hydraulic and mechanical designs.

The first category directly uses an electromagnetic method to generate the electric power. The methods include linear [157], [165], [192], [194], [198] and rotary schemes [158], [171]. A linear electromagnetic regenerative shock absorber converts the kinetic energy of vertical oscillations into electricity by electromagnetic induction. The structure of linear schemes is simple and kinetic energy is converted directly. Unlike normal linear movement damper, rotary damper rotates by the upper arm of suspension when tire move up and down. This structure has high efficiency which can reach 90% for both driving and back driving but needs to change suspension structure largely which in turn will have influence on the handling and stability performance.

For the second category, hydraulic regenerative shock absorbers can harvest the vibration energy and convert this energy into electricity by employing oscillatory motion to drive the power generator. They utilized commercial DC/AC motors as generators and focused on various methods to drive these generators. A number of studies reformed the existing hydraulic shock absorber and utilized the oil in the shock absorber to flow into a side oil circuit [154], [196]. They normally use the flowing fluid to drive a hydraulic motor, which is connected in parallel to a DC/AC generator. Check valves are also used to ensure unidirectional fluid flow and unidirectional rotation of the hydraulic motor.

The third category is mechanical design, which is developed rapidly because of a greater efficiency and average power. In previous studies [140], [158], [176], [183], ball screws have been used for the transmission of regenerative shock absorbers for the sake of good stiffness and transmitting

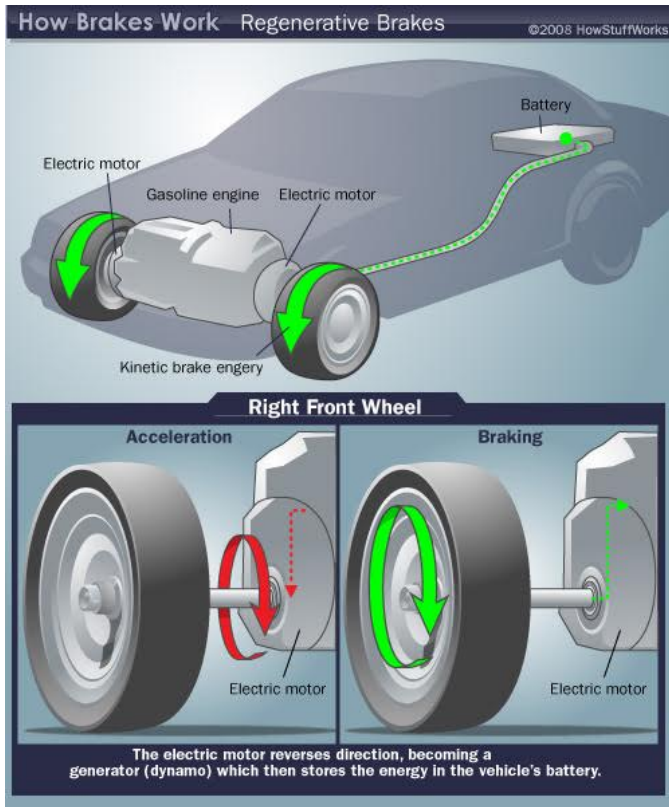


Fig. 11. Regenerative brakes [200].

efficiency. An energy regenerative suspension is designed and improved using an algebraic screw linkage in [176], [183]. A hexagon linkage was used in the initial design, and a two-leg linkage was presented in latter schemes. The work [156] compared different electromagnetic shock absorbers and found that rotary schemes had large power compared with the linear schemes in bench tests. The results also indicated that rack and gears have the potential to drive a larger DC/AC motor to achieve greater power density. In [167], the authors analyzed and modeled an equivalent circuit for an electromagnetic regenerative shock absorber using a rack and gears. This model assisted the evaluation and optimization of the rack-and-gears schemes. Rack-and-gears regenerative shock absorbers based on a mechanical design were rapidly developed because of their high efficiency and average power [168], [169].

4) *Regenerative braking*: Regenerative braking is that the kinetic energy from a moving car generates electricity back to the battery when a vehicle is in coasting and braking modes as shown in Fig. 11. With regenerative braking technique, it is shown that electric vehicles can increase the driving distance up to 15% with respect to electric vehicles without the regenerative braking system.

According to different ways to capture the energy generated by regenerative braking, the state-of-the-art regenerative braking systems can be clarified into the following four types. First, the electricity generated is stored directly into batteries. Unfortunately, due to frequent charging, the lifetime of batteries will be decreased [148], [172]. Second, instead of directly charging to battery, ultracapacitors/supercapacitors

are used to store the energy from regenerative braking [147], [163]. Besides, ultracapacitors are the options with higher power densities compared to batteries. The above two kinds of systems can capture and return around 50% of the energy lost in braking [175], [188].

Third, the brake energy can be stored by hydraulic motors into a small canister through compressed air. When you hit the brakes, this system engages a pump which forces compressed air into a tank. This converts the mechanical energy of motion into elastic energy in the gas. These systems can capture and return around 70% of the energy lost in braking [162], [182].

The last way is that, energy can also be stored in Flywheel energy system (FES) as rotating energy. When you hit the brakes, this system transfers the mechanical energy of motion into electricity, which is then used to speed up the flywheel [152], [159], [193]. These systems can capture and return around 70% of the energy lost in braking [175].

VII. IMPACT OF ELECTRIC VEHICLES ON POWER GRID

Electric vehicles are connected to the power grid via AC charger or fast AC or DC chargers. The power capacity of electric vehicle charging station can be as high to 1.2 kW to 240 kW [201]. The random charging activities of numerous electric vehicles significantly stress the distribution system causing severe voltage fluctuations, degraded efficiency and economy [202], [203]. However, electric vehicles are also able to feed power back to the Grid (regeneration). If properly designed, electric vehicles can provide ancillary services to support the supply network as a distributed storage unit [204], [205]. In power systems, this two-way communication between the utility and the power supplier is also called the Smart Grid [206].

In this section, literature reviews of electric vehicles integration and impact on power grid are presented, including electric vehicle charging load model, impact of electric vehicles charging and discharging on the power grid.

A. Electric vehicle charging load model

Electric vehicles can be considered as active loads connected to the power grid in the charging mode. Therefore, an accurate model of the charging load is critical to the design of the power networks. The properties of batteries and user behaviors are two key factors that influence the charging load modeling of electric vehicles. The modeling of batteries are presented in Section V. In the following we summarize the impact of user behaviors on the charging load modeling.

Previous work [207] analyzed naturalistic driving data and vehicle resting patterns in the context of electric vehicles design and impact on the power grid. Driving schedules were utilized as input through simulations to determine the vehicles energy use per trip and per day. These driving behaviors are then used to make predictions of the possible charging schedules and locations. As data collection is mandatory to ensure the solution fidelity, related work [208] recorded vehicle usage data for 76 vehicles in a one-year period in the city of Winnipeg, Canada, and used this data to predict electric vehicles charging profiles and electrical range reliability. In

this work, a stochastic charging profile prediction model is proposed base on the vehicle usage data. In [209], a preliminary road traffic simulation is conducted to determine the typical range which electric vehicle of a particular technology will achieve under consideration of everyday traffic. By utilizing the exponential distribution, they built the charging load model of electric vehicles.

B. Impact of electric vehicles charging on the power grid

1) *Modeling*: Current research on the impact of massive integration of electric vehicles in power systems is generally focused on the development of business models, integration into the network, and impact on power system operation. These models can be broadly divided into two types: hourly time-series model and longterm large-scale model [210]. The hourly time-series model is only based on hourly historical data of electric supply and demand as well as charging data of electric vehicles to decide whether the power system meet the needs of electricity supply in the short time. The long-term large-scale model run on regional or national scale over decades, with consideration on the mix of various constraints (economic, political, etc.) to build a optimized model. Current models of electric vehicles charging are mostly hourly time-series model due to its simplicity. Previous work [211] established an hourly time-series model, which used a quadratic programming method based on stochastic approach. Compared with classical dynamic programming model, the results show that quadratic and dynamic programming model are giving the same results but quadratic programming is faster and more accurate. A mid-term model simulates hourly power system operation in the Spanish power system is proposed in [212]. This model includes electric vehicles in the unit commitment and represents in detail mobility and connection patterns, and achieves more realistic estimation of electric vehicle economic and other factors. Some researchers believe the future research need to balance the calculation and accuracy of the actual situation [210]. Related work also indicates future research should include more analysis and calculation of randomness and grid reliability index to the model [213].

2) *Simulation*: The integration of electric vehicles in power systems has adverse impact on the distribution grid as extra loads are added by the electric vehicles. A lot of related research [201], [214]–[220] has been done to estimate whether existing of planned power supply capacity can accommodate electric vehicles charging load growth. An observation on the usage of electric vehicles in Virginia and the Carolinas in the U.S. found that peak loads would increase under a simple charging strategy, requiring extra investment in generation and transmission capacity [214].

Electric vehicle charging can also cause the power quality issues, including line loss increase, life span of distribution transformers decline, harmonic and fault current increase [221]–[225]. These and other more technique issues are reviewed in [213]. Electric vehicle charging in a disorderly manner over the distribution network would lead to node voltage offset and the damage of network lines if the owner does not make any restrictions [226]. The effect of electric vehicles on residential distribution transformers is also reported

TABLE I
PHEV CHARGING SCENARIOS (PHEV: PLUG-IN ELECTRIC VEHICLES;
CHP: COMBINED HEAT AND POWER.) [213], [235]

PHEV/CHP Penetration	Grid-To-Vehicle	Vehicle-to-Grid
10	10pm-6am	6am-10pm
10	9pm-9am	9am-9pm
10	Continuous	Continuous
30	10pm-6am	6am-10pm
30	9pm-9am	9am-9pm
30	Continuous	Continuous

in [227]. Results show that the effects are negligible when electric vehicles are at low penetrations, but serious losses arise with increasing vehicle numbers. A study on UK distribution systems [228] indicates that large number of electric vehicles lead to voltage limit violations, transformer overloads and increased line losses.

Recent studies show that the current U.S. generation infrastructure could only support 70% of the existing U.S. electric vehicles [229] if the charging schedule are well coordinated. Otherwise, serious mismatch can arise between the electricity supply and consumption [214]. With the growth of penetration levels of electric vehicles, the distribution system could be further impacted, including increased system peak load, losses, and decreases in voltage and system load factor [230], [231].

3) *Optimization*: To mitigate the impacts of electric vehicle charging on the power grid, additional investment on generating electricity and transmission capacity are needed [201]. It is also important to carry out intelligent control safely and effectively for charging behavior of electric vehicles to increase grid reliability [228]. Other works target at optimization of the charging plan instead of investment on additional electricity capacity. Previous studies have demonstrated that existing capacity can accommodate the overnight loads of a modest penetration (up to 20%) of electric vehicles [232]. Related work show that employment of smart charging plans would achieve a flat overnight load and further optimize overall charging at high electric vehicles penetration [217], [233]. Elaborated optimal charging algorithms can coordinate charging of electric vehicles so that the distribution system losses could be minimized. [234] developed three optimal charging algorithms. The results also provides additional benefits of reduced computation time and problem convexity when using load factor or load variance as the objective function rather than system losses.

C. Impact of electric vehicles discharging on the power grid

Electric vehicles connected into power grid can also play a role in regulating power supply and demand balance. As show in Table I [213], [235], we can charge electric vehicles when grid load is low. When the power grid load is peak, the electric vehicles connected into network can be viewed as a distributed energy storage unit, which contribute electricity back to the grid system. This bi-direction interaction of electric vehicles and the grid is called vehicle-to-grid (V2G) [236], [237]. Moreover, V2G are able to harvest energy form large-scale intermittent renewable energy sources (wind, solar, etc.) as discussed in Section V, this would obviously impact the

distribution grid as V2G enable electric vehicles could actually act as distributed generators connected to the power grid. The fundamental calculation of costs and power that are associated with V2G technology is described in [236]. Based on these basic cost and power models, [238]–[240] further discussed the characteristics, benefits, flaws, economics, and technical specifications of V2G.

The electric vehicle participate in the power system can be viewed as ancillary energy generator. A lot of research are focused on V2G to achieve load shifting, frequency regulation, and other control strategies. Compared with classical power plants, the renewable energy sources have higher power energy fluctuation and intermittent. The electric cars act as distributed power generator to save energy. [241] indicates the wind profile in New York matches electric vehicle charging need very well: the electric vehicles could be charged when power supplied by wind power is the greatest and V2G technology could be use to feedback energy to the grid by wind turbines. Related work [242] investigated the potential role of electric vehicles in an electricity network with a high contribution from variable generation such as wind power. The simulation models 1000 individual vehicle entities to represent the behavior of larger numbers of vehicles. A stochastic trip generation profile is used to generate realistic journey characteristics. Finally, experimental results show that the electric vehicles connected to the grid and discharge make up for intermittent of wind generate power, also bring the owners with a certain economic benefits.

VIII. CONCLUSION

Electric vehicles are being rapidly penetrating the automotive market as they are well accordance with semiconductor and computer system evolution as well as environmental friendliness. However, their energy consumption is yet comparable to that of internal combustion engine vehicles while conventional approaches can hardly achieve further significant amount of energy saving. This work is to inspire range of system-level energy saving research providing comprehensive survey on propulsion power, energy-efficient routes, non-propulsion power, vehicle batteries, energy harvesting, power grids for electric vehicles.

ACKNOWLEDGMENT

This work is partially supported by the National Research Foundation (NRF) in Korea under Grant No. 2015R1A2A1A09005694, by the National Science Foundation (NSF) in the United States under Grant No. ECCS 1611349, by the Council of the Hong Kong Special Administrative Region in China, under Grant No. GRF 152066/17E, by the Council of the Hong Kong Special Administrative Region in China, under Grant No. CityU 11214115, and by the Department of Energy (DOE) in the United States under Grant No. DE-SC0018064. The authors pay special thanks to the student contributors: Korosh Vatanparvar, Shaheer Muhammad and Fan Chen.

REFERENCES

- [1] N. Chang, D. Baek, and J. Hong, "Power consumption characterization, modeling and estimation of electric vehicles," in Proceedings of IEEE/ACM International Conference on Computer-Aided Design, 2014.
- [2] S. Park, Y. Kim, and N. Chang, "Hybrid energy storage systems and battery management for electric vehicles," in Proceedings of IEEE/ACM Design Automation Conference, 2013.
- [3] "2011 nissan leaf vehicle overview," SAE Vehicle Electrification, 2011.
- [4] U. D. Grebe and L. T. Nitz, "Voltec – the propulsion system for chevrolet volt and opel ampera," 2011.
- [5] W. Vaz, A. K. Nandi, R. G. Landers, and U. O. Koylu, "Electric vehicle range prediction for constant speed trip using multi-objective optimization," *Journal of Power Sources*, 2014.
- [6] X. Lin, D. Gorges, , and S. Liu, "Eco-driving assistance system for electric vehicles based on speed profile optimization," in Proceedings of IEEE Conference on Control Applications, 2014.
- [7] J. A. Oliva, C. Weihrauch, and T. Bertram, "A model-based approach for predicting the remaining driving range in electric vehicles," in Proceedings of Conference of the Prognostics and Health Management Society, 2013.
- [8] S. Kachroudi, M. Grossard, and N. Abroug, "Predictive driving guidance of full electric vehicles using particle swarm optimization," *Ieee Transactions On Vehicular Technology*, 2012.
- [9] W. Dib, A. Chasse, D. di Domenico, P. Moulin, and A. Sciarretta, "Evaluation of the energy efficiency of a fleet of electric vehicle for eco-driving application," *Oil Gas Science and Technology*, 2012.
- [10] T. Schwickart, H. Voos, J.-R. Hadji-Minaglou, M. Darouach, and A. Rosich, "Design and simulation of a real-time implementable energy-efficient model-predictive cruise controller for electric vehicles," *Journal of Franklin Institute*, 2015.
- [11] J. Hong, S. Park, and N. Chang, "Accurate remaining range estimation for electric vehicles," in Proceedings of Asia and South Pacific Design Automation and Conference, 2016.
- [12] X. Wu, D. Freese, A. Cabrera, and W. A. Kitch, "Electric vehicles' energy consumption measurement and estimation," *Transportation Research Part D: Transport and Environment*, vol. 34, 2015.
- [13] M. A. S. Kamal, M. Mukai, J. Murata, and T. Kawabe, "Ecological vehicle control on roads with up-down slopes," *IEEE Transactions on Intelligent Transportation Systems*, vol. 12, no. 3, Sept., 2011.
- [14] E. Ozatay, U. Ozguner, J. Micheline, and D. Filev, "Analytical solution to the minimum energy consumption based velocity profile optimization problem with variable road grade," in Proceedings of IFAC world congress, 2014.
- [15] E. Ozatay, S. Onori, J. Wollaeger, U. Ozguner, G. Rizzoni, D. Filev, J. Micheline, and S. Cairano, "Cloud-based velocity profile optimization for everyday driving: a dynamic-programming-based solution," *IEEE Transactions on Intelligent Transportation Systems*, 2014.
- [16] H. Khayyam, S. Nahavandi, and S. Davis, "Adaptive cruise control look-ahead system for energy management of vehicles," *Expert Systems with Applications*, 2012.
- [17] Q. Yan, B. Zhang, and M. Kezunovic, "Optimization of electric vehicle movement for efficient energy consumption," in North American Power Symposium (NAPS), 2014.
- [18] W. Dib, A. Chasse, P. Moulin, A. Sciarretta, and G. Corde, "Optimal energy management for an electric vehicle in eco-driving applications," *Control Engineering Practice*, 2014.
- [19] W. Dib, L. Serrao, and A. Sciarretta, "Optimal control to minimize trip time and energy consumption in electric vehicles," in Proceedings of IEEE Vehicle Power and Propulsion Conference, 2011.
- [20] F. Mensing, E. Bideaux, R. Trigui, , and H. Tattegrain, "Trajectory optimization for eco-driving taking into account traffic constraints," *Transportation Research Part D: Transport and Environment*, 2013.
- [21] E. Dovgana, M. Javorskib, T. Tusara, M. Gamsa, and B. Filipica, "Discovering driving strategies with a multiobjective optimization algorithm," *Applied Soft computing*, 2014.
- [22] H. Lim, W. Su, and C. C. Mi, "Distance-based ecological driving scheme using a two-stage hierarchy for long-term optimization and short-term adaptation," *IEEE Transactions on Vehicular Technology*, 2017.
- [23] S. Mandava, K. Boriboonsomsin, and M. Barth, "Arterial velocity planning based on traffic signal information under light traffic conditions," in Proceedings of IEEE International Conference on Intelligent Transportation Systems, 2009.
- [24] B. Asadi and A. Vahidi, "Predictive cruise control: Utilizing upcoming traffic signal information for improving fuel economy and reducing trip time," *IEEE Transactions on Control Systems Technology*, 2011.

- [25] E. Ozatay, U. Ozguner, D. Filev, and J. Micheline, "Analytical and numerical solutions for energy minimization of road vehicles with the existence of multiple traffic lights," in *Proceedings of IEEE International Conference on Decision and Control*, 2013.
- [26] G. Nunzio, C. Wit, P. Moulin, and D. Domenico, "Eco-driving in urban traffic networks using traffic signals information," *International Journal of Robust and Nonlinear Control*, 2015.
- [27] X. Wu, X. He, and G. Yu, "Energy-optimal speed control for electric vehicles on signalized arterials," *IEEE Transactions on Intelligent Transportation Systems*, 2015.
- [28] K. L. Butler, M. Ehsani, and P. Kamath, "A matlab-based modeling and simulation package for electric and hybrid electric vehicle design," *IEEE Transactions on Vehicular Technology*, 1999.
- [29] T. Markel, A. Brooker, T. Hendricks, V. Johnson, and K. Kelly, "Advisor: a systems analysis tool for advanced vehicle modeling," *Journal of Power Sources*, 2002.
- [30] Y. Gao and M. Ehsani, "Design and control methodology of plug-in hybrid electric vehicles," *IEEE Transactions on Industrial Electronics*, 2010.
- [31] Z. Song, J. Li, X. Han, L. Xu, L. Lu, M. Ouyang, and H. Hofmann, "Multi-objective optimization of a semi-active battery/supercapacitor energy storage system for electric vehicles," *Applied Energy*, 2014.
- [32] Q. Yin, Z. Wu, and X. Rui, "Parameter design and optimization of electric vehicle," in *Proceedings of IEEE International Transportation Electrification Conference and EXPO Asia-Pacific*, 2014.
- [33] J. B. A. Alberto Fraile del Pozo, Emilio Larrode Pellicer and A. Torne, "Influence of the design parameters of electric vehicles in the optimization of energy efficiency in urban routes," *Advanced Microsystems for Automotive Applications*, 2015.
- [34] A. Hasanzadeh, B. Asaei, and A. Emadi, "Optimum design of series hybrid electric buses by genetic algorithm," in *Proceedings of IEEE International Symposium on Industrial Electronics*, 2014.
- [35] J. P. Ribau, C. M. Silva, and J. M. Sousa, "Efficiency, cost and life cycle co2 optimization of fuel cell hybrid and plug-in hybrid urban buses," *Applied Energy*, 2014.
- [36] G. Sarre, P. Blanchard, and M. Broussely, "Aging of lithium-ion batteries," *Journal of Power Sources*, 2004.
- [37] P. Keil, "Aging of Lithium-Ion Batteries in Electric Vehicles," PhD thesis, Technische Universitat Munchen, 2017.
- [38] K. Vatanparvar and M. A. Al Faruque, "Eco-Friendly Automotive Climate Control and Navigation System for Electric Vehicles," in *2016 ACM/IEEE 7th International Conference on Cyber-Physical Systems, ICCPS 2016 - Proceedings*, 2016.
- [39] M. Lukasiewicz et al., "System architecture and software design for electric vehicles," in *Proceedings - Design Automation Conference*, 2013.
- [40] R. C. Hsu, C. T. Liu, and D. Y. Chan, "A reinforcement-learning-based assisted power management with QoR provisioning for human-electric hybrid bicycle," *IEEE Trans. Ind. Electron.*, vol. 59, pp. 3350–3359, 2012.
- [41] E. Kim, J. Lee, and K. G. Shin, "Real-time prediction of battery power requirements for electric vehicles," in *2013 ACM/IEEE International Conference on Cyber-Physical Systems, ICCPS 2013*, 2013, pp. 11–20.
- [42] J. G. Hayes, R. P. R. De Oliveira, S. Vaughan, and M. G. Egan, "Simplified Electric Vehicle Power Train Models and Range Estimation," *IEEE Veh. Power Propuls. Conf.*, pp. 1–5, 2011.
- [43] S. R. Cikanek and K. E. Bailey, "Regenerative braking system for a hybrid electric vehicle," *Control Conf. (IEEE Cat. No.CH37301)*, vol. 4, pp. 3129–3134, 2002.
- [44] K. Vatanparvar and M. A. Al Faruque, "OTEM: Optimized Thermal and Energy Management for Hybrid Electrical Energy Storage in Electric Vehicles," *Conf. Des. Autom. Test Eur.*, pp. 1–6, 2016.
- [45] A. Emadi, Young Joo Lee, and K. Rajashekara, "Power Electronics and Motor Drives in Electric, Hybrid Electric, and Plug-In Hybrid Electric Vehicles," *IEEE Trans. Ind. Electron.*, vol. 55, no. 6, pp. 2237–2245, 2008.
- [46] K. Vatanparvar and M. A. Al Faruque, "Battery Lifetime-Aware Automotive Climate Control for Electric Vehicles," *ACM/IEEE Des. Autom. Conf.*, pp. 1–6, 2015.
- [47] K. Vatanparvar and M. A. Al Faruque, "Electric Vehicle Optimized Charge and Drive Management," *ACM Trans. Des. Autom. Electron. Syst.*, vol. 23, no. 1, p. 3:1–3:25, Aug. 2017.
- [48] A. Kelman and F. Borrelli, "Bilinear Model Predictive Control of a HVAC System Using Sequential Quadratic Programming," in *International Federation of Automatic Control World Congress*, 2011, pp. 9869–9874.
- [49] K. R. Kambly and T. H. Bradley, "Estimating the HVAC energy consumption of plug-in electric vehicles," *J. Power Sources*, vol. 259, pp. 117–124, 2014.
- [50] R. Montgomery, "Fundamentals of HVAC control systems," Elsevier, 2008.
- [51] B. Tashtoush, M. Molhim, and M. Al-Rousan, "Dynamic model of an HVAC system for control analysis," *Energy*, vol. 30, pp. 1729–1745, 2005.
- [52] K. Vatanparvar, J. Wan, and M. A. Al Faruque, "Battery-aware energy-optimal Electric Vehicle driving management," in *Proceedings of the International Symposium on Low Power Electronics and Design*, 2015, vol. 2015–Sept, pp. 353–358.
- [53] P. Baltusis, "On-board vehicle diagnostics," *Converg. Transp. Electron. Assoc.*, p. 15, 2004.
- [54] A. Wahab, C. Quek, C. K. Tan, and K. Takeda, "Driving profile modeling and recognition based on soft computing approach," *IEEE Trans. Neural Netw.*, vol. 20, no. 4, pp. 563–582, 2009.
- [55] A. Rygula, "Driving style identification method based on speed graph analysis," in *Proceedings - 2009 International Conference on Biometrics and Kansei Engineering, ICBACE 2009*, 2009, pp. 76–79.
- [56] E. Berdoulat, D. Vavassori, and M. T. M. Sastre, "Driving anger, emotional and instrumental aggressiveness, and impulsiveness in the prediction of aggressive and transgressive driving," *Accid. Anal. Prev.*, vol. 50, pp. 758–767, 2013.
- [57] A. B. Rodriguez Gonzalez, M. R. Wilby, J. J. Vinagre Diaz, and C. Sanchez Avila, "Modeling and detecting aggressiveness from driving signals," *IEEE Trans. Intell. Transp. Syst.*, vol. 15, no. 4, pp. 1419–1428, 2014.
- [58] J. Neubauer and E. Wood, "Thru-life impacts of driver aggression, climate, cabin thermal management, and battery thermal management on battery electric vehicle utility," *J. Power Sources*, vol. 259, pp. 262–275, 2014.
- [59] J. A. Groeger and J. A. Rothengatter, "Traffic psychology and behaviour," *Transp. Res. Part F Traffic Psychol. Behav.*, vol. 1, no. 1, pp. 1–9, 1998.
- [60] Google Inc., "The Google Directions API." [Online]. Available: developers.google.com/maps/documentation/directions. [Accessed: 01-Jan-2014].
- [61] E. Tzirakis, K. Pitsas, F. Zannikos, and S. Stournas, "Vehicle Emissions and Driving Cycles: Comparison of the Athens Driving Cycle (Adc) with Ece-15 and European Driving Cycle (Edc)," *Glob. NEST J.*, vol. 8, no. 3, pp. 282–290, 2006.
- [62] G. Fontaras, P. Pistikopoulos, and Z. Samaras, "Experimental evaluation of hybrid vehicle fuel economy and pollutant emissions over real-world simulation driving cycles," *Atmos. Environ.*, vol. 42, no. 18, pp. 4023–4035, 2008.
- [63] K. Kambly and T. H. Bradley, "Geographical and temporal differences in electric vehicle range due to cabin conditioning energy consumption," *J. Power Sources*, vol. 275, pp. 468–475, 2015.
- [64] M. A. Al Faruque and K. Vatanparvar, "HVAC System and Automotive Climate Control Influence on Electric Vehicle and Battery," *Asia South Pacific Des. Autom. Conf.*, pp. 1–6, 2016.
- [65] K. D. Huang, S. C. Tzeng, T. M. Jeng, and W. D. Chiang, "Air-conditioning system of an intelligent vehicle-cabin," *Appl. Energy*, vol. 83, pp. 545–557, 2006.
- [66] S. Daly, *Automotive air conditioning and climate control systems*, no. 1. 2006.
- [67] D. Mihai, "Fuzzy control for temperature of the driver seat in a car," in *2012 International Conference on Applied and Theoretical Electricity, ICATE 2012 - Proceedings*, 2012.
- [68] B. S. K. K. Ibrahim et al., "Fuzzy-based Temperature and Humidity Control for HV AC of Electric Vehicle," *Procedia Engineering*, vol. 41, pp. 904–910, 2012.
- [69] E. F. Camacho and C. B. Alba, *Model predictive control*. Springer Science & Business Media, 2013.
- [70] S. T. Cheng, J. S. Shih, and T. Y. Chang, "GA-based actuator control method for minimizing power consumption in cyber physical systems," *Appl. Intell.*, vol. 38, no. 1, pp. 78–87, 2013.
- [71] Y. Wang, Y. Kim, Q. Xie, N. Chang, and M. Pedram, "Charge migration efficiency optimization in hybrid electrical energy storage (HEES) systems," in *Proceedings of the International Symposium on Low Power Electronics and Design*, 2011, pp. 103–108.
- [72] C. Warren, "Fast Path Planning Using Modified A * Method," *Robot. Autom. 1993. Proceedings.*, 1993 IEEE Int. Conf., pp. 662–667, 1993.
- [73] H. Gonzalez, J. Han, and X. Li, "Adaptive fastest path computation on a road network: A traffic mining approach," *Proc. 33rd VLDB*, pp. 794–805, 2007.

- [74] I. Chabini and S. Lan, "Adaptations of the A* Algorithm for the Computation of Fastest Paths in Deterministic Discrete-Time Dynamic Networks," *IEEE Trans. Intell. Transp. Syst.*, vol. 3, no. 1, pp. 60–74, 2002.
- [75] T. Wang, C. G. Cassandras, and S. Pourazarm, "Energy-aware Vehicle Routing in Networks with Charging Nodes," 9th World Congr. Int. Fed. Autom. Control, pp. 1–9, 2014.
- [76] Y. Wang, J. Jiang, and T. Mu, "Context-aware and energy-driven route optimization for fully electric vehicles via crowdsourcing," *IEEE Trans. Intell. Transp. Syst.*, vol. 14, pp. 1331–1345, 2013.
- [77] J. Eisner, S. Funke, and S. Storandt, "Optimal Route Planning for Electric Vehicles in Large Networks," *Aaai*, pp. 1108–1113, 2011.
- [78] M. HE, W. CAI, and S. LI, "Multiple fuzzy model-based temperature predictive control for HVAC systems," *Inf. Sci. (Ny)*, vol. 169, no. 1–2, pp. 155–174, Jan. 2005.
- [79] Alan Millner, "Modeling lithium ion battery degradation in electric vehicles," *Innovative Technologies for an Efficient and Reliable Electricity Supply (CITRES)*, 2010 IEEE Conference on. IEEE, 2010.
- [80] Gang Ning, Ralph E. White and Branko N. Popov, "A generalized cycle life model of rechargeable Li-ion batteries," *Electrochimica acta* 51.10 (2006): 2012–2022.
- [81] Matthieu Dubarry et al. "Capacity loss in rechargeable lithium cells during cycle life testing: The importance of determining state-of-charge," *Journal of Power Sources* 174.2 (2007): 1121–1125.
- [82] Jean Paul Cun, Jean No Fiorina, Michael Fraisse, And Henri Mabboux, "The Experience of a UPS Company in Advanced Battery Monitoring", MGE UPS Systems, Grenoble, France, <http://www.merlingerin.eunet.fr/news/techpap/tp02us.ht>
- [83] M.G. Jayne and C. Morgan, "A New Mathematical Model of a Lead Acid Battery for Electric Vehicles", Eighth Int'l Electric Vehicle
- [84] R.I. Sims, J.C. Carnes, M.A. Dzieciuch and J.E. Fenton, "Computer Modeling of Automotive Lead Acid Batteries", Ford Research Laboratories Technical Report SR-90- 154, Sept., 25, 1990
- [85] R. Giglioli, A. Buonarota, P. Menga, and M. Ceraolo, "Charge and Discharge Fourth Order Dynamic Model of the Lead Battery", 10th Int'l Electric Vehicle Symposium, Hong Kong, 1990, p. 1-9.
- [86] T. Robbins and J. Hawkins "Battery model for Overcurrent Protection Simulation of DC Distribution Systems", INTELEC 16th International Telecommunications Energy Conference, p307–14, 1994.
- [87] Ziyad M. Salameh, Margaret A. Casacca and William A. Lynch, "A Mathematical Model for Lead-Acid Batteries", *IEEE Trans. on Energy Conversion*. Vol. 7, No. 1, March 1992
- [88] Margaret A. Casacca and Ziyad M. Salameh, "Determination of Lead-Acid Battery Capacity Via Mathematical Modeling Techniques", *IEEE Trans. on Energy Conversion*. Vol. 7, No. 3, Sept. 1992
- [89] H. L. Chan "A new battery model for use with battery energy storage systems and electric vehicles power systems." *Power Engineering Society Winter Meeting*, 2000. IEEE. Vol. 1. IEEE, 2000.
- [90] D. W. Dennis, V. S. Battaglia, and A. Belanger, "Electrochemical modeling of lithium polymer batteries," *J. Power Sources*, vol. 110, no. 2, pp. 310–320, 2002.
- [91] M. Chen and G. A. Rincon-Mora, "Accurate electrical battery model capable of predicting runtime and I-V performance," *IEEE Trans. Energy Conversion*, vol. 21m no. 2, pp. 504–511. Jun. 2006.
- [92] Kroeze, Ryan C., and Philip T. Krein. "Electrical battery model for use in dynamic electric vehicle simulations." *Power Electronics Specialists Conference*, 2008. PESC 2008. IEEE. IEEE, 2008.
- [93] D. L. Logue and P. T. Krein, "Dynamic hybrid electric vehicle simulation, version 1.0," University of Illinois, Technical Report UILUENG-98-0409, December 1998.
- [94] M. Amrhein and P. T. Krein, "Dynamic simulation for analysis of hybrid electric vehicle system and subsystem interactions, including power electronics," *IEEE Trans. Vehicular Tech.*, vol. 54, no. 3, pp. 825–836, May 2005.
- [95] K. B. Wipke, M. R. Cuddy, and S. D. Burch, "ADVISOR 2.1: A user-friendly advanced powertrain simulation using a combined backward/forward approach,
- [96] The ADVISOR Code and Manual are Available from the National Renewable Energy Lab. [Online]. Available: <http://www.ctts.nrel.gov/analysis>
- [97] G. Cole, "Simple electric vehicle simulation (SIMPLEV) v3.1," DOE Idaho National Eng. Lab.
- [98] D. L. Buntin and J. W. Howze, "A switching logic controller for a hybrid electric/ICE vehicle," in *Proc. American Control Conf.*, Seattle, WA, June 1995, pp. 1169–1175.
- [99] K. M. Stevens, "A versatile computer model for the design and analysis of electric and hybrid drive trains," Master's thesis, Texas A and M Univ., College Station, 1996.
- [100] K. L. Butler, K. M. Stevens, and M. Ehsani, "A versatile computer simulation tool for design and analysis of electric and hybrid drive trains," in 1997 SAE Proc. Electric and Hybrid Vehicle Design Studies, Detroit, MI, Feb. 1997, pp. 19–25.
- [101] W. W. Marr and W. J. Walsh, "Life-cycle cost evaluations of electric/hybrid vehicles," *Energy Conversion Management*, vol. 33, no. 9, pp. 849–853, 1992.
- [102] J. R. Bumby et al., "Computer modeling of the automotive energy requirements for internal combustion engine and battery electric-powered vehicles," *Proc. Inst. Elect. Eng.*, vol. 132, pt. A, no. 5, pp. 265–279, 1985.
- [103] R. Noons, J. Swann, and A. Green, "The use of simulation software to assess advanced powertrains and new technology vehicles," in *Proc. Electric Vehicle Symp.* 15, Brussels, Belgium, Oct. 1998.
- [104] B. Auert, C. Cheny, B. Raison, and A. Berthon, "Software tool for the simulation of the electromechanical behavior of a hybrid vehicle," in *Proc. Electric Vehicle Symp.* 15, Brussels, Belgium, Oct. 1998.
- [105] C. Kricke and S. Hagel, "A hybrid electric vehicle simulation model for component design and energy management optimization," in *Proc. FISITA World Automotive Congress*, Paris, France, Sept. 1998.
- [106] Lu, Languang, et al. "A review on the key issues for lithium-ion battery management in electric vehicles." *Journal of power sources* 226 (2013): 272–288.
- [107] Bhangu, Bikramjit S., et al. "Nonlinear observers for predicting state-of-charge and state-of-health of lead-acid batteries for hybrid-electric vehicles." *IEEE transactions on vehicular technology* 54.3 (2005): 783–794.
- [108] Piller, Sabine, Marion Perrin, and Andreas Jossen. "Methods for state-of-charge determination and their applications." *Journal of power sources* 96.1 (2001): 113–120.
- [109] O. Caumont, Ph. Le Moigne, P. Lenain, and C. Rombaut, "An optimized state of charge algorithm for lead-acid batteries in electric vehicles," in *Electric Vehicle Symp.*, vol. EVS-15, Brussels, Belgium, Sep-Oct. 30–3, 1998. Proceedings on CD-ROM
- [110] A. B. da Cunha, B. R. de Almeida, and D. C. da Silva Jr., "Remaining capacity measurement and analysis of alkaline batteries for wireless sensor nodes," *IEEE Transactions on Instrumentation and Measurement*, vol. 58, no. 6, pp. 1816–1822, June 2009.
- [111] Yu, Jianbo. "State-of-health monitoring and prediction of lithium-ion battery using probabilistic indication and state-space model." *IEEE Transactions on Instrumentation and Measurement* 64.11 (2015): 2937–2949.
- [112] P. E. Pascoe and A. H. Anbuky, "Standby power system VRLA battery reserve life estimation scheme," *IEEE Trans. Energy Convers.*, vol. 20, no. 4, pp. 887–895, Dec. 2005.
- [113] M. Verbrugge and E. Tate, "Adaptive state of charge algorithm for nickel metal hydride batteries including hysteresis phenomena," *Journal of Power Sources*, vol. 126, no. 1, pp. 236–249, 2004.
- [114] P. Singh, C. Fennie, D. Reisner, and A. Salkind, "A fuzzy logic approach to state-of-charge determination in high performance batteries with applications to electric vehicles," in 15th Electric Vehicle Symposium, vol. 15, 1998, pp. 30–35.
- [115] C. Chan, E. Lo, and S. Weixiang, "The available capacity computation model based on artificial neural network for lead-acid batteries in electric vehicles," *Journal of Power Sources*, vol. 87, no. 1, pp. 201–204, 2000.
- [116] Y. Lee, W. Wang, and T. Kuo, "Soft computing for battery state-of-charge (bsoc) estimation in battery string systems," *IEEE Transactions on Industrial Electronics*, vol. 55, no. 1, pp. 229–239, 2008.
- [117] P. Pascoe and A. Anbuky, "Vrla battery discharge reserve time estimation," *Power Electronics, IEEE Transactions on*, vol. 19, no. 6, pp. 1515–1522, 2004.
- [118] I. Kim, "Nonlinear state of charge estimator for hybrid electric vehicle battery," *IEEE Transactions on Power Electronics*, vol. 23, no. 4, pp. 2027–2034, 2008.
- [119] Y. He, W. Liu, and B. Koch, "Battery algorithm verification and development using hardware-in-the-loop testing," *Journal of Power Sources*, vol. 195, no. 9, pp. 2969–2974, 2010.
- [120] G. Plett, "Extended kalman filtering for battery management systems of lipb-based hev battery packs: Part 1. background," *Journal of power sources*, vol. 134, no. 2, pp. 262–276, 2004.
- [121] G. Plett, "Extended kalman filtering for battery management systems of lipb-based hev battery packs: Part 2. modeling and identification," *Journal of power sources*, vol. 134, no. 2, pp. 262–276, 2004.

- [122] G. Plett, "Extended kalman filtering for battery management systems of lipb-based hev battery packs: Part 3. state and parameter estimation," *Journal of power sources*, vol. 134, no. 2, pp. 277–292, 2004.
- [123] G. Dong, J. Wei, and Z. Chen, "Kalman filter for onboard state of charge estimation and peak power capability analysis of lithium-ion batteries," *Journal of Power Sources*, vol. 328, pp. 615–626, 2016.
- [124] Z. Chen, Y. Fu, and C. Mi, "State of charge estimation of lithium-ion batteries in electric drive vehicles using extended kalman filtering," *IEEE Transactions on Vehicular Technology*, vol. 62, no. 3, pp. 1020–1030, 2013.
- [125] G. Dong, J. Wei, C. Zhang, and Z. Chen, "Online state of charge estimation and open circuit voltage hysteresis modeling of lifepo 4 battery using invariant imbedding method," *Applied Energy*, vol. 162, pp. 163–171, 2016.
- [126] X. Tang, Y. Wang, and Z. Chen, "A method for state-of-charge estimation of lifepo 4 batteries based on a dual-circuit state observer," *Journal of Power Sources*, vol. 296, pp. 23–29, 2015.
- [127] Y. Wang, C. Zhang, and Z. Chen, "A method for state-of-charge estimation of lifepo 4 batteries at dynamic currents and temperatures using particle filter," *Journal of power sources*, vol. 279, pp. 306–311, 2015.
- [128] X. Liu, J. Wu, C. Zhang, and Z. Chen, "A method for state of energy estimation of lithium-ion batteries at dynamic currents and temperatures," *Journal of Power Sources*, vol. 270, pp. 151–157, 2014.
- [129] L. Zhong, C. Zhang, Y. He, and Z. Chen, "A method for the estimation of the battery pack state of charge based on in-pack cells uniformity analysis," *Applied Energy*, vol. 113, pp. 558–564, 2014.
- [130] Muhammad, Shaheer, et al. "A Robust Algorithm for State-of-Charge Estimation with Gain Optimization." *IEEE Transactions on Industrial Informatics* (2017).
- [131] <https://www.coilwindingexpo.com/berlin/design-and-test-perfect-the-electric-vehicle-balancing-act>
- [132] R. A. Waraich, M. Galus, C. Dobler, M. Balmer, G. Andersson, and K. Axhausen, "Plug-in hybrid electric vehicles and smart grid: Investigations based on a micro-simulation," *Institute for Transport Planning and Systems, ETH Zurich, Switzerland*, Tech. Rep. 10.3929/ethz-a-005916811, 2009.
- [133] S. Rahman and Y. Teklu, "Role of the electric vehicle as a distributed resource," in *Proc. IEEE Power Eng. Soc. Winter Meet.*, Singapore, Jan. 23–27, 2000, vol. 1, pp. 528–533.
- [134] M. D. Galus and G. Andersson, "Demand management of grid connected plug-in hybrid electric vehicles (PHEV)," in *Proc. IEEE Energy 2030 Conf.*, Atlanta, GA, Nov. 17–18, 2008, pp. 1–8.
- [135] Sundstrom, Olle, and Carl Binding, "Flexible charging optimization for electric vehicles considering distribution grid constraints," *IEEE Transactions on Smart Grid* 3.1 (2012): 26–37.
- [136] Sundstrom, Olle, and Carl Binding, "Optimization methods to plan the charging of electric vehicle fleets," *Proceedings of the international conference on control, communication and power engineering*. 2010.
- [137] Salameh, Ziyad M., Margaret A. Casacca, and William A. Lynch. "A mathematical model for lead-acid batteries." *IEEE Transactions on Energy Conversion* 7.1 (1992): 93–98.
- [138] Z. Abidin, M. Alim, R. Saidur, M. Islam, W. Rashmi, S. Mekhilef, and A. Wadi, "Solar energy harvesting with the application of nanotechnology," *Renewable and sustainable energy reviews* 26:837–852, 2013.
- [139] S. Agrawal and S. Singh, "Multi-port converter for solar powered hybrid vehicle," in *Photovoltaic Specialists Conference (PVSC)*, 2016 IEEE 43rd pages 3258–3262. IEEE, 2016.
- [140] N. Amati, A. Canova, F. Cavalli, S. Carabelli, A. Festini, A. Tonoli, and G. Caviasso, "Electromagnetic shock absorbers for automotive suspensions: electromechanical design," in *Titolo volume non avvalorato* 2006.
- [141] S. S. Aqeel and N. E. Elizabeth, "An optimized time bounded routing on solar based vehicular ad-hoc networks using particle swarm optimization," in *Intelligent Systems and Control (ISCO)*, 2016 10th International Conference on pages 1–5. IEEE, 2016.
- [142] I. Arsie, M. Cacciato, A. Consoli, G. Petrone, G. Rizzo, M. Sorrentino, and G. Spagnuolo, "Hybrid vehicles and solar energy: a possible marriage?," *ICAT06*, Istanbul, November 17, 2006.
- [143] I. Arsie, G. Rizzo, and M. Sorrentino, "Optimal design and dynamic simulation of a hybrid solar vehicle," *Technical report*, SAE Technical Paper, 2006.
- [144] H. D. Battista, R. J. Mantz, and F. Garelli, "Power conditioning for a wind@hydrogen energy system," *Journal of Power Sources* 155(2):478 – 486, 2006.
- [145] D. Bechrakis, E. McKeogh, and P. Gallagher, "Simulation and operational assessment for a small autonomous wind@hydrogen energy system," *Energy Conversion and Management* 47(1):46 – 59, 2006.
- [146] J. Bourgeois, S. Foell, G. Kortuem, B. A. Price, J. Van Der Linden, E. Y. Elbhanawy, and C. Rimmer, "Harvesting green miles from my roof: an investigation into self-sufficient mobility with electric vehicles," in *Proceedings of the 2015 ACM International Joint Conference on Pervasive and Ubiquitous Computing* pages 1065–1076. ACM, 2015.
- [147] J. Cao and A. Emadi, "A new battery/ultracapacitor hybrid energy storage system for electric, hybrid, and plug-in hybrid electric vehicles," *IEEE Transactions on Power Electronics* 27(1):122–132, Jan 2012.
- [148] J. Cao, N. Schofield, and A. Emadi, "Battery balancing methods: A comprehensive review," in *2008 IEEE Vehicle Power and Propulsion Conference* pages 1–6, Sept 2008.
- [149] C. Chellawamy and R. Ramesh, "Green energy harvesting: Recharging electric vehicle for pollution free environment," in *2014 International Conference on Smart Structures and Systems (ICSSS)* pages 59–66, Oct 2014.
- [150] Y.-S. Chen, Y.-W. Lin, and C.-H. Wang, "A green time-bounded routing protocol in solar-based vehicular networks," in *Innovative Mobile and Internet Services in Ubiquitous Computing (IMIS)*, 2013 Seventh International Conference on pages 336–341. IEEE, 2013.
- [151] B. Delfino and F. Fornari, "Modeling and control of an integrated fuel cell-wind turbine system," in *2003 IEEE Bologna Power Tech Conference Proceedings*, volume 2, pages 6 pp. Vol.2–, June 2003.
- [152] J. Dixon, "Energy storage for electric vehicles," in *2010 IEEE International Conference on Industrial Technology* pages 20–26, March 2010.
- [153] E. N. Elizabeth and S. A. Shahul, "Velocity optimized solar-time bound traffic free routing (vosttr) ee protocol for vanet's," *International Journal of Computer Science and Information Security* 14(12):438, 2016.
- [154] Z. Fang, X. Guo, L. Xu, and H. Zhang, "Experimental study of damping and energy regeneration characteristics" of a hydraulic electromagnetic shock absorber," *Advances in Mechanical Engineering* 5:943528, 2013.
- [155] V. Fthenakis, J. E. Mason, and K. Zweibel, "The technical, geographical, and economic feasibility for solar energy to supply the energy needs of the us," *Energy Policy* 37(2):387–399, 2009.
- [156] A. Gupta, J. A. Jendzejczyk, T. M. Mulcahy, and J. R. Hull, "Design of electromagnetic shock absorbers," *International Journal of Mechanics and Materials in Design* 3(3):285–291, Sep 2006.
- [157] B. L. J. Gysen, T. P. J. van der Sande, J. J. H. Paulides, and E. A. Lomonova, "Efficiency of a regenerative direct-drive electromagnetic active suspension," *IEEE Transactions on Vehicular Technology* 60(4):1384–1393, May 2011.
- [158] L. Hao and C. Namuduri, "Electromechanical regenerative actuator with fault tolerance capability for automotive chassis applications," in *2011 IEEE Energy Conversion Congress and Exposition* pages 1750–1757, Sept 2011.
- [159] R. Hebner, J. Beno, and A. Walls, "Flywheel batteries come around again," *IEEE Spectrum* 39(4):46–51, Apr 2002.
- [160] A. Hopkins, N. McNeill, P. Anthony, and P. Mellor, "High efficiency bidirectional 5kw dc-dc converter with super-junction mosfets for electric vehicle super-capacitor systems," in *Energy Conversion Congress and Exposition (ECCE)*, 2015 IEEE pages 4632–4639. IEEE, 2015.
- [161] B. Huang, C.-Y. Hsieh, F. Golnaraghi, and M. Moallem, "Development and optimization of an energy-regenerative suspension system under stochastic road excitation," *Journal of Sound and Vibration* 357(Supplement C):16 – 34, 2015.
- [162] R. P. Kepner, "Hydraulic power assist ? a demonstration of hydraulic hybrid vehicle regenerative braking in a road vehicle application," *Portugal: Polytechnic Institute of Porto (IPP)* page 8, 11 2002.
- [163] A. Khaligh and Z. Li, "Battery, ultracapacitor, fuel cell, and hybrid energy storage systems for electric, hybrid electric, fuel cell, and plug-in hybrid electric vehicles: State of the art," *IEEE Transactions on Vehicular Technology* 59(6):2806–2814, July 2010.
- [164] M. Khan and M. Iqbal, "Dynamic modeling and simulation of a small wind@fuel cell hybrid energy system," *Renewable Energy* 30(3):421 – 439, 2005.
- [165] P. Khaokhajorn, S. Samipak, S. Nithithanasilp, M. Tanticharoen, and A. Amnuaykanjanasin, "Production and secretion of naphthoquinones is mediated by the mfs transporter mfs1 in the entomopathogenic fungus *ophiocordyceps* sp. bcc1869," *World Journal of Microbiology Biotechnology* 31(10):1543 – 1554, 2015.
- [166] J. Kim, Y. Wang, M. Pedram, and N. Chang, "Fast photovoltaic array reconfiguration for partial solar powered vehicles," in *Proceedings of*

- the 2014 international symposium on Low power electronics and design pages 357–362. ACM, 2014.
- [167] P. Li and L. Zuo, “Equivalent circuit modeling of vehicle dynamics with regenerative shock absorbers,” *International Design Engineering Technical Conferences and Computers and Information in Engineering Conference* 1, 2013.
 - [168] Z. Li, L. Zuo, J. Kuang, and G. Luhrs, “Energy-harvesting shock absorber with a mechanical motion rectifier,” *Smart Materials and Structures* 22(2):025008, 2013.
 - [169] Z. Li, L. Zuo, G. Luhrs, L. Lin, and Y. x. Qin, “Electromagnetic energy-harvesting shock absorbers: Design, modeling, and road tests,” *IEEE Transactions on Vehicular Technology* 62(3):1065–1074, March 2013.
 - [170] F. Liu, S. Duan, F. Liu, B. Liu, and Y. Kang, “A variable step size inc mppt method for pv systems,” *IEEE Transactions on industrial electronics* 55(7):2622–2628, 2008.
 - [171] S. Liu, H. Wei, and W. Wang, “Investigation on some key issues of regenerative damper with rotary motor for automobile suspension,” In *Proceedings of 2011 International Conference on Electronic Mechanical Engineering and Information Technology* volume 3, pages 1435–1439, Aug 2011.
 - [172] S. M. Lukic, J. Cao, R. C. Bansal, F. Rodriguez, and A. Emadi, “Energy storage systems for automotive applications,” *IEEE Transactions on Industrial Electronics* 55(6):2258–2267, June 2008.
 - [173] M. Lv, N. Guan, Y. Ma, D. Ji, E. Knippel, X. Liu, and W. Yi, “Speed planning for solar-powered electric vehicles,” In *Proceedings of the Seventh International Conference on Future Energy Systems* page 6. ACM, 2016.
 - [174] X. Ma, Y. Sun, J. Wu, and S. Liu, “The research on the algorithm of maximum power point tracking in photo voltaic array of solar car,” In *Vehicle Power and Propulsion Conference, 2009. VPPC’09.* IEEE pages 1379–1382. IEEE, 2009.
 - [175] D. MacKay, “Sustainable energy - without the hot air,” *Design and Technology Education: an International Journal* 16(1), 2011.
 - [176] A. Maravandi and M. Moallem, “Regenerative shock absorber using a two-leg motion conversion mechanism,” *IEEE/ASME Transactions on Mechatronics* 20(6):2853–2861, Dec 2015.
 - [177] B. Moshfegh, “World renewable energy congress - sweden; 8-13 may; 2011; linköping; sweden,” In *World Renewable Energy Congress - Sweden; 8-13 May; 2011; Linköping; Sweden* volume 10. Linköping University Electronic Press; Linköpings universitet, 2011.
 - [178] T. Moustafa and W. Moreno, “Ram air and wind energy harvesting survey for electrical vehicles and transportation,” In *SoutheastCon 2017* pages 1–7, March 2017.
 - [179] N. K. Navin and R. Sharma, “A modified differential evolution approach to phev integrated thermal unit commitment proble,” In *2016 IEEE 7th Power India International Conference (PIICON)* pages 1–4, Nov 2016.
 - [180] O. Onar, M. Uzunoglu, and M. Alam, “Dynamic modeling, design and simulation of a wind/fuel cell/ultra-capacitor-based hybrid power generation system,” *Journal of Power Sources* 161(1):707 – 722, 2006.
 - [181] N. A. Rajan, K. D. Shrikant, B. Dhanalakshmi, and N. Rajasekar, “Solar pv array reconfiguration using the concept of standard deviation and genetic algorithm,” *Energy Procedia* 117:1062–1069, 2017.
 - [182] V. S and F. H, “Braking energy regeneration using hydraulic systems,” *Portugal: Polytechnic Institute of Porto (IPP)* page 8, 2008.
 - [183] R. Sabzehgar, A. Maravandi, and M. Moallem, “Energy regenerative suspension using an algebraic screw linkage mechanism,” *IEEE/ASME Transactions on Mechatronics* 19(4):1251–1259, Aug 2014.
 - [184] L. Segel and X. Lu, “Vehicular resistance to motion as influenced by road roughness and highway alignment,” *Australian road research* 12(4):211–222, 1982.
 - [185] T. Senjyu, S. Chakraborty, A. Y. Saber, H. Toyama, A. Yona, and T. Funabashi, “Thermal unit commitment strategy with solar and wind energy systems using genetic algorithm operated particle swarm optimization,” In *2008 IEEE 2nd International Power and Energy Conference* pages 866–871, Dec 2008.
 - [186] R. Singh, M. K. Gaur, and C. S. Malvi, “Study of solar energy operated hybrid mild cars: A review,” *International Journal of Scientific Engineering and Technology* 1(4):139–148, 2012.
 - [187] J. Storey, P. R. Wilson, and D. Bagnall, “The optimized-string dynamic photovoltaic array,” *IEEE Transactions on Power Electronics* 29(4):1768–1776, 2014.
 - [188] S. F. Tie and C. W. Tan, “A review of energy sources and energy management system in electric vehicles,” *Renewable and Sustainable Energy Reviews* 20(Complete):82–102, 2013.
 - [189] P. d. S. Vicente, T. C. Pimenta, and E. R. Ribeiro, “Photovoltaic array reconfiguration strategy for maximization of energy production,” *International Journal of Photoenergy* 2015, 2015.
 - [190] V. V. Vincent and S. Kamalakkannan, “Advanced hybrid system for solar car,” In *Computation of Power, Energy, Information and Communication (ICCPEIC), 2013 International Conference* on pages 21–27. IEEE, 2013.
 - [191] Y. Wang, X. Lin, N. Chang, and M. Pedram, “Dynamic reconfiguration of photovoltaic energy harvesting system in hybrid electric vehicles,” In *Proceedings of the 2012 ACM/IEEE international symposium on Low power electronics and design* pages 109–114. ACM, 2012.
 - [192] X. Xie and Q. Wang, “Energy harvesting from a vehicle suspension system,” *Energy* 86(Supplement C):385 – 392, 2015.
 - [193] M. K. Yoong, Y. H. Gan, G. D. Gan, C. K. Leong, Z. Y. Phuan, B. K. Cheah, and K. W. Chew, “Studies of regenerative braking in electric vehicle,” In *2010 IEEE Conference on Sustainable Utilization and Development in Engineering and Technology* pages 40–45, Nov 2010.
 - [194] G. Zhang, J. Cao, and F. Yu, “Design of active and energy-regenerative controllers for dc-motor-based suspension,” *Mechatronics* 22(8):1124 – 1134, 2012.
 - [195] Y. Zhang, W. Wang, Y. Kobayashi, and K. Shirai, “Remaining driving range estimation of electric vehicle,” In *2012 IEEE International Electric Vehicle Conference* pages 1–7, March 2012.
 - [196] Y. Zhang, X. Zhang, M. Zhan, K. Guo, F. Zhao, and Z. Liu, “Study on a novel hydraulic pumping regenerative suspension for vehicles,” *Journal of the Franklin Institute* 352(2):485 – 499, 2015. Special Issue on Control and Estimation of Electrified vehicles.
 - [197] Z. Zhang, X. Zhang, W. Chen, Y. Rasim, W. Salman, H. Pan, Y. Yuan, and C. Wang, “A high-efficiency energy regenerative shock absorber using supercapacitors for renewable energy applications in range extended electric vehicle,” *Applied Energy* 178(Supplement C):177 – 188, 2016.
 - [198] L. Zuo, B. Scully, J. Shestani, and Y. Zhou, “Design and characterization of an electromagnetic energy harvester for vehicle suspensions,” *Smart Materials and Structures* 19(4):045003, 2010.
 - [199] L. Zuo and P.-S. Zhang, “Energy harvesting, ride comfort, and road handling of regenerative vehicle suspensions,” volume 135, page 8, February 2013.
 - [200] Christopher Lampton, “How Regenerative Braking Works,” *HowStuffWorks.com*, 23, February, 2018, [Online]. Available: <https://auto.howstuffworks.com/auto-parts/brakes/brake-types/regenerative-braking.htm>.
 - [201] S. W. Hadley, “Impact of plug-in hybrid vehicles on the electric grid,”
 - [202] G. A. Putrus, P. Suwanapinkarl, D. Johnston, E. C. Bentley, and M. Narayana, “Impact of electric vehicles on power distribution networks,” in *2009 IEEE Vehicle Power and Propulsion Conference*, pp. 827–831, Sept 2009.
 - [203] K. Clement-Nyns, E. Haesen, and J. Driesen, “The impact of charging plug-in hybrid electric vehicles on a residential distribution grid,” *IEEE Transactions on Power Systems*, vol. 25, pp. 371–380, Feb 2010.
 - [204] S. Deilami, A. S. Masoum, P. S. Moses, and M. A. S. Masoum, “Real-time coordination of plug-in electric vehicle charging in smart grids to minimize power losses and improve voltage profile,” *IEEE Transactions on Smart Grid*, vol. 2, pp. 456–467, Sept 2011.
 - [205] K. Clement-Nyns, E. Haesen, and J. Driesen, “The impact of charging plug-in hybrid electric vehicles on a residential distribution grid,” *IEEE Transactions on Power Systems*, vol. 25, pp. 371–380, Feb 2010.
 - [206] H. Farhangi, “The path of the smart grid,” *IEEE Power and Energy Magazine*, vol. 8, pp. 18–28, January 2010.
 - [207] B. Adornato, R. Patil, Z. Filipi, Z. Baraket, and T. Gordon, “Characterizing naturalistic driving patterns for plug-in hybrid electric vehicle analysis,” in *2009 IEEE Vehicle Power and Propulsion Conference*, pp. 655–660, Sept 2009.
 - [208] A. Ashtari, E. Bibeau, S. Shahidinejad, and T. Molinski, “Pev charging profile prediction and analysis based on vehicle usage data,” *IEEE Transactions on Smart Grid*, vol. 3, pp. 341–350, March 2012.
 - [209] M. Hübner, L. Zhao, T. Mirbach, H. J. Haubrich, and A. Moser, “Impact of large-scale electric vehicle application on the power supply,” in *2009 IEEE Electrical Power Energy Conference (EPEC)*, pp. 1–6, Oct 2009.
 - [210] D. B. Richardson, “Electric vehicles and the electric grid: A review of modeling approaches, impacts, and renewable energy integration,” *Renewable and Sustainable Energy Reviews*, vol. 19, pp. 247 – 254, 2013.
 - [211] K. Clement, E. Haesen, and J. Driesen, “Stochastic analysis of the impact of plug-in hybrid electric vehicles on the distribution grid,” in *CIREN 2009 - The 20th International Conference and Exhibition on Electricity Distribution - Part 2*, pp. 1–1, June 2009.

- [212] C. Fernandes, P. Frias, and J. M. Latorre, "Impact of vehicle-to-grid on power system operation costs: The spanish case study," *Applied Energy*, vol. 96, pp. 194 – 202, 2012. Smart Grids.
- [213] R. C. Green, L. Wang, and M. Alam, "The impact of plug-in hybrid electric vehicles on distribution networks: A review and outlook," *Renewable and Sustainable Energy Reviews*, vol. 15, no. 1, pp. 544 – 553, 2011.
- [214] S. W. Hadley and A. A. Tsvetkova, "Potential impacts of plug-in hybrid electric vehicles on regional power generation," *The Electricity Journal*, vol. 22, no. 10, pp. 56 – 68, 2009.
- [215] S. Letendre and R. Watts, "Plug-in hybrid electric vehicles and the vermont grid: A scoping analysis," 10 2007.
- [216] M. Kintner-Meyer, K. Schneider, and R. G. Pratt, "Impacts assessment of plug-in hybrid vehicles on electric utilities and regional us power grids: Part 1: Technical analysis," 01 2007.
- [217] P. Denholm and W. Short, "An evaluation of utility system impacts and benefits of optimally dispatched plug-in hybrid electric vehicles (revised),"
- [218] A. Hajimiragha, C. A. Canizares, M. W. Fowler, and A. Elkamel, "Optimal transition to plug-in hybrid electric vehicles in ontario, canada, considering the electricity-grid limitations," *IEEE Transactions on Industrial Electronics*, vol. 57, pp. 690–701, Feb 2010.
- [219] A. H. Hajimiragha, C. A. Canizares, M. W. Fowler, S. Moazeni, and A. Elkamel, "A robust optimization approach for planning the transition to plug-in hybrid electric vehicles," *IEEE Transactions on Power Systems*, vol. 26, pp. 2264–2274, Nov 2011.
- [220] N. Hartmann and E. Ozdemir, "Impact of different utilization scenarios of electric vehicles on the german grid in 2030," *Journal of Power Sources*, vol. 196, no. 4, pp. 2311 – 2318, 2011.
- [221] P. Papadopoulos, L. M. Cipcigan, N. Jenkins, and I. Grau, "Distribution networks with electric vehicles," in 2009 44th International Universities Power Engineering Conference (UPEC), pp. 1–5, Sept 2009.
- [222] P. Richardson, D. Flynn, and A. Keane, "Impact assessment of varying penetrations of electric vehicles on low voltage distribution systems," in *IEEE PES General Meeting*, pp. 1–6, July 2010.
- [223] J. C. Gomez and M. M. Morcos, "Impact of ev battery chargers on the power quality of distribution systems," *IEEE Transactions on Power Delivery*, vol. 18, pp. 975–981, July 2003.
- [224] M. S. W. Chan, K. T. Chau, and C. C. Chan, "Modeling of electric vehicle chargers," in *Industrial Electronics Society, 1998. IECON '98. Proceedings of the 24th Annual Conference of the IEEE*, vol. 1, pp. 433–438 vol.1, Aug 1998.
- [225] A. M. L. da Silva, J. L. Jardim, A. M. Rei, and J. C. O. Mello, "Dynamic security risk assessment," in 1999 IEEE Power Engineering Society Summer Meeting. Conference Proceedings (Cat. No.99CH36364), vol. 1, pp. 198–205 vol.1, Jul 1999.
- [226] W. Jian, L. Zhizhen, W. Kuihua, W. Feng, and Z. Yi, "Impact of plug-in hybrid electric vehicles on power distribution networks," in 2011 4th International Conference on Electric Utility Deregulation and Restructuring and Power Technologies (DRPT), pp. 1618–1622, July 2011.
- [227] Q. Gong, S. Midlam-Mohler, V. Marano, and G. Rizzoni, "Study of pev charging on residential distribution transformer life," *IEEE Transactions on Smart Grid*, vol. 3, pp. 404–412, March 2012.
- [228] P. Papadopoulos, S. Skarvelis-Kazakos, I. Grau, L. M. Cipcigan, and N. Jenkins, "Electric vehicles' impact on british distribution networks," *IET Electrical Systems in Transportation*, vol. 2, pp. 91–102, September 2012.
- [229] K. Schneider, C. Gerkensmeyer, M. Kintner-Meyer, and R. Fletcher, "Impact assessment of plug-in hybrid vehicles on pacific northwest distribution systems," in 2008 IEEE Power and Energy Society General Meeting - Conversion and Delivery of Electrical Energy in the 21st Century, pp. 1–6, July 2008.
- [230] C. Roe, E. Farantatos, J. Meisel, A. P. Meliopoulos, and T. Overbye, "Power system level impacts of phev," in 2009 42nd Hawaii International Conference on System Sciences, pp. 1–10, Jan 2009.
- [231] K. Clement, E. Haesen, and J. Driesen, "Coordinated charging of multiple plug-in hybrid electric vehicles in residential distribution grids," in 2009 IEEE/PES Power Systems Conference and Exposition, pp. 1–7, March 2009.
- [232] A. Ford, "The impacts of large scale use of electric vehicles in southern california," *Energy and Buildings*, vol. 22, no. 3, pp. 207 – 218, 1995.
- [233] N. Juul and P. Meibom, "Optimal configuration of an integrated power and transport system," *Energy*, vol. 36, no. 5, pp. 3523 – 3530, 2011.
- [234] E. Sortomme, M. M. Hindi, S. D. J. MacPherson, and S. S. Venkata, "Coordinated charging of plug-in hybrid electric vehicles to minimize distribution system losses," *IEEE Transactions on Smart Grid*, vol. 2, pp. 198–205, March 2011.
- [235] S. Acha, T. C. Green, and N. Shah, "Effects of optimised plug-in hybrid vehicle charging strategies on electric distribution network losses," in *IEEE PES T D 2010*, pp. 1–6, April 2010.
- [236] W. Kempton and J. Tomic, "Vehicle-to-grid power fundamentals: Calculating capacity and net revenue," *Journal of Power Sources*, vol. 144, no. 1, pp. 268 – 279, 2005.
- [237] W. Kempton and J. Tomic, "Vehicle-to-grid power implementation: From stabilizing the grid to supporting large-scale renewable energy," *Journal of Power Sources*, vol. 144, no. 1, pp. 280 – 294, 2005.
- [238] P. Reid, C. Mittelstadt, and T. Faber, "Electric vehicle conductive charge couplers," in 2014 IEEE 60th Holm Conference on Electrical Contacts (Holm), pp. 1–7, Oct 2014.
- [239] D. Sutanto, "Alternative energy resource from electric transportation," in *Proceedings. 2004 First International Conference on Power Electronics Systems and Applications, 2004.*, pp. 149–154, Nov 2004.
- [240] A. Brooks, "Integration of electric drive vehicles with the power grid- a new application for vehicle batteries," in *Seventeenth Annual Battery Conference on Applications and Advances. Proceedings of Conference (Cat. No.02TH8576)*, pp. 239–, Jan 2002.
- [241] N. Y. ISO, "Alternate route: Electrifying the transportation sector," New York ISO, Jun 2009.
- [242] J. Druitt and W.-G. Fruh, "Simulation of demand management and grid balancing with electric vehicles," *Journal of Power Sources*, vol. 216, pp. 104 – 116, 2012.