

DEPARTMENT OF QUANTITY SURVEYING
FACULTY OF ENVIRONMENTAL STUDIES
UNIVERSITY OF UYO, UYO, AKWA IBOM STATE
SECOND SEMESTER EXAMINATIONS FOR 2024/2025 SESSION EXAMINATIONS

COURSE CODE: QUS321 - MEASUREMENT OF BUILDING WORKS II


TIME ALLOWED: 3 Hours

INSTRUCTIONS

1. Answer only 5 questions.
2. All measurement must be in accordance with BESMM4.
3. Clearly state any assumptions made.
4. Only unmarked BESMM4, calculators, rulers, & pens are allowed.

QUESTIONS



1. Using drawings Nos. UNIUYO/QS211/XXXX, take off quantities for the following:
 - a. Concrete, reinforcement and formwork to **Floor Beams 1-4** on Drawing Nos. UNIUYO/QUS321/01. (Beams 2-5)
 - b. Concrete and Formwork to **First Floor Slab** on Drawing Nos. UNIUYO/QUS321/02.
2. Take off quantities for concrete, reinforcement and formwork to **Column 1 to ground floor** on Drawing Nos. UNIUYO/QUS321/03.
3. Take off quantities for the following components of the **Roof Construction** in Drawing Nos. UNIUYO/QUS321/04 - 06: a. Wall Plate b. Rafters c. Kingpost d. Tie Beams e. Roof Covering
4. Using drawing No. UNIUYO/QUS211/09 below, calculate the **Volumes of Excavation and Filling** required for the 'Site A' given a **formation level of 1400**.
5. Take off quantities for the **Doors and Windows** in drawings Nos. UNIUYO/QUS321/04 & 07.
6. Take off quantities for the following components in the **Staircase** in drawings Nos. UNIUYO/QUS321/08:
 - i. Concrete in staircase
 - ii. Formwork to staircase

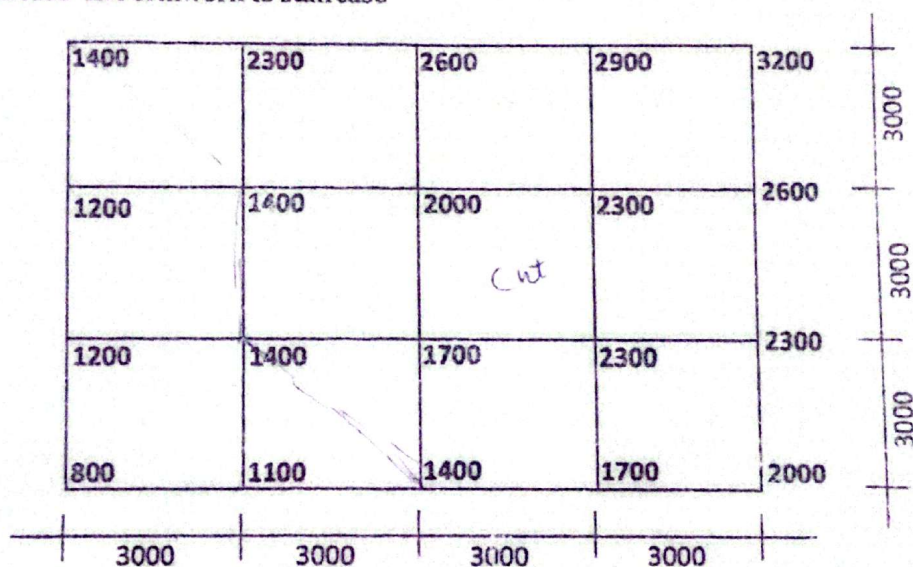


Spot Height Information for Site A (UNIUYO/QUS321/09)


DOOR AND WINDOW SCHEDULE (UNIUYO/QS321/07)

TYPE	SIZE	DESCRIPTION
D1	1200mm x 2100mm	Double-leaf (unequal) timber panel door in hardwood frame; 900mm active leaf and 300mm passive leaf in hardwood frames.
D2	900mm x 2100mm	Single leaf solid core panel door in hardwood frame, fixed to hardwood frames.
D3	750mm x 2100mm	Single leaf solid core flush door in hardwood frame, fixed to hardwood frames.
W1	1500mm x 1200mm	Powder-coated aluminum-framed factory-glazed sliding window with glass panels; fixed in matching aluminum sliding track frames.
W2	1200mm x 1200mm	Powder-coated aluminum-framed factory-glazed sliding window with glass panels; fixed in matching aluminum sliding track frames.
W3	1200mm x 900mm	Side-hung powder-coated aluminum-framed casement window; factory-glazed and fixed in aluminum subframe.
W4	900mm x 750mm	Side-hung powder-coated aluminum-framed casement window; factory-glazed and fixed in aluminum subframe.

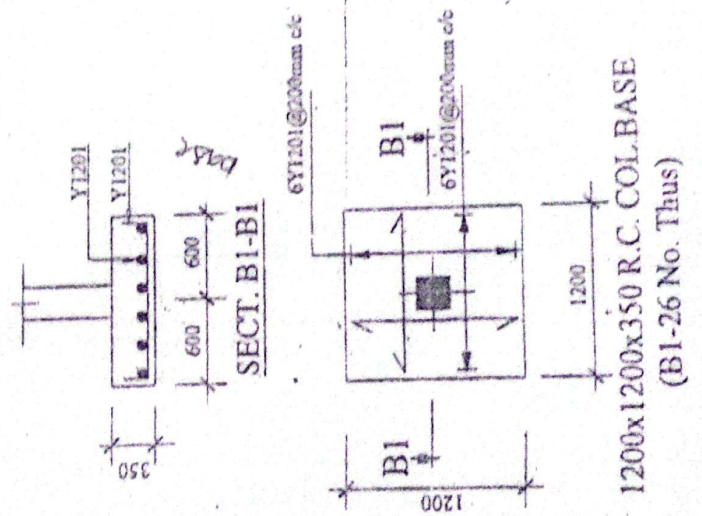

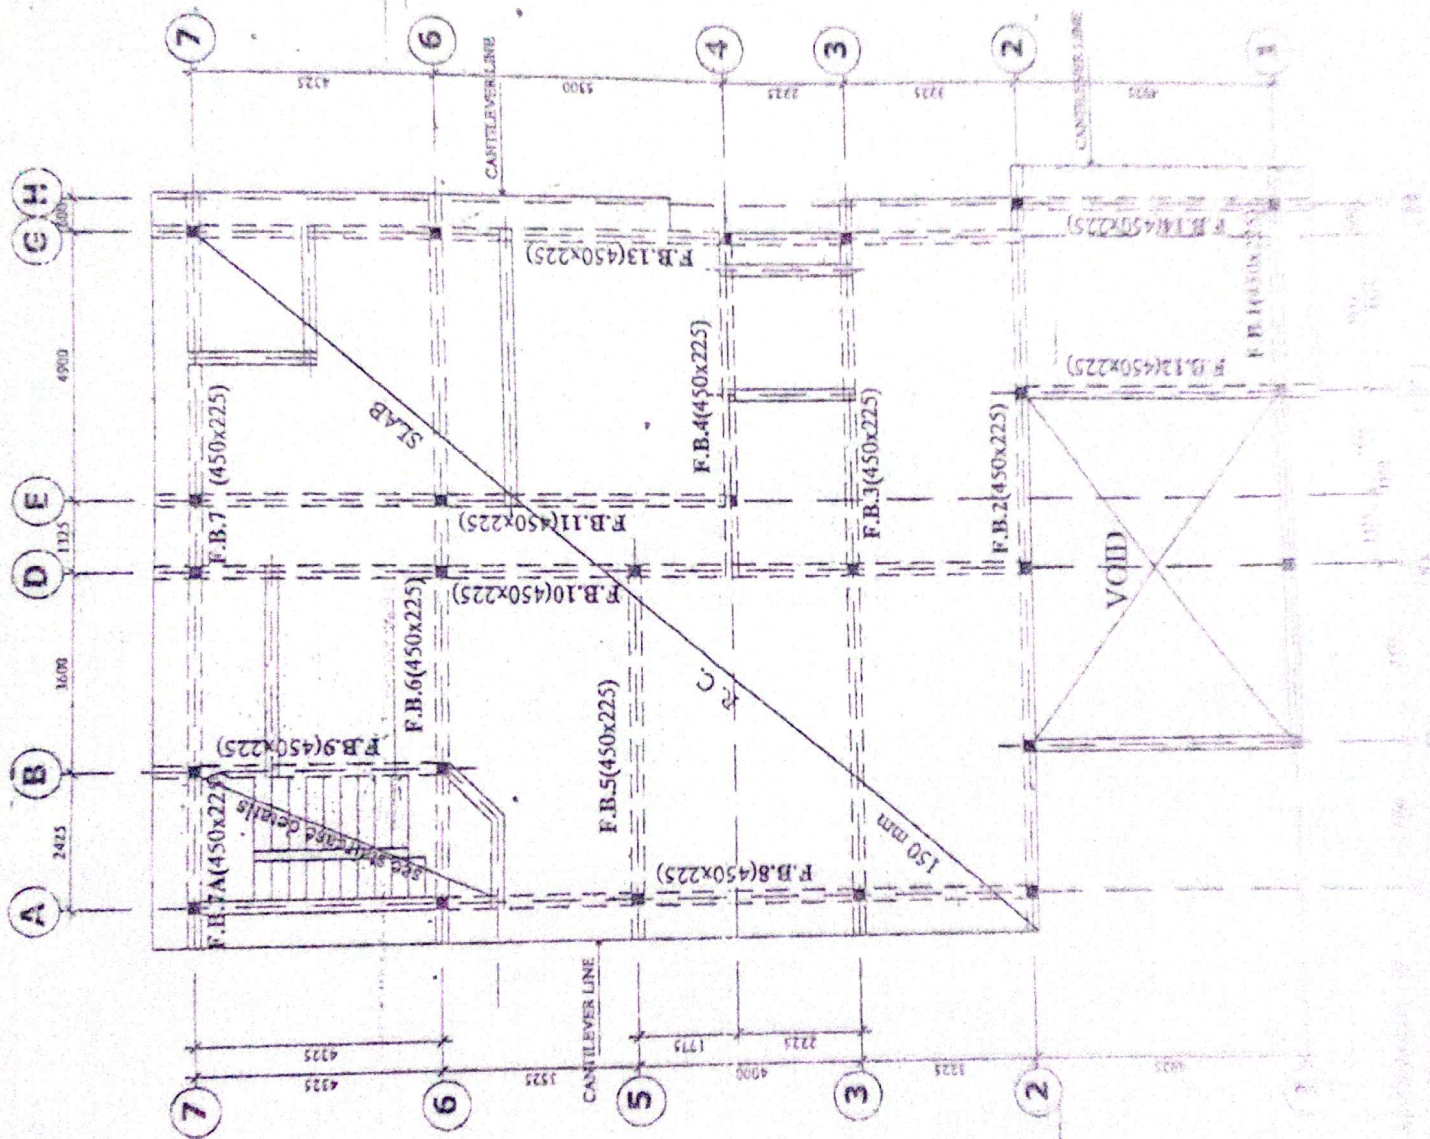



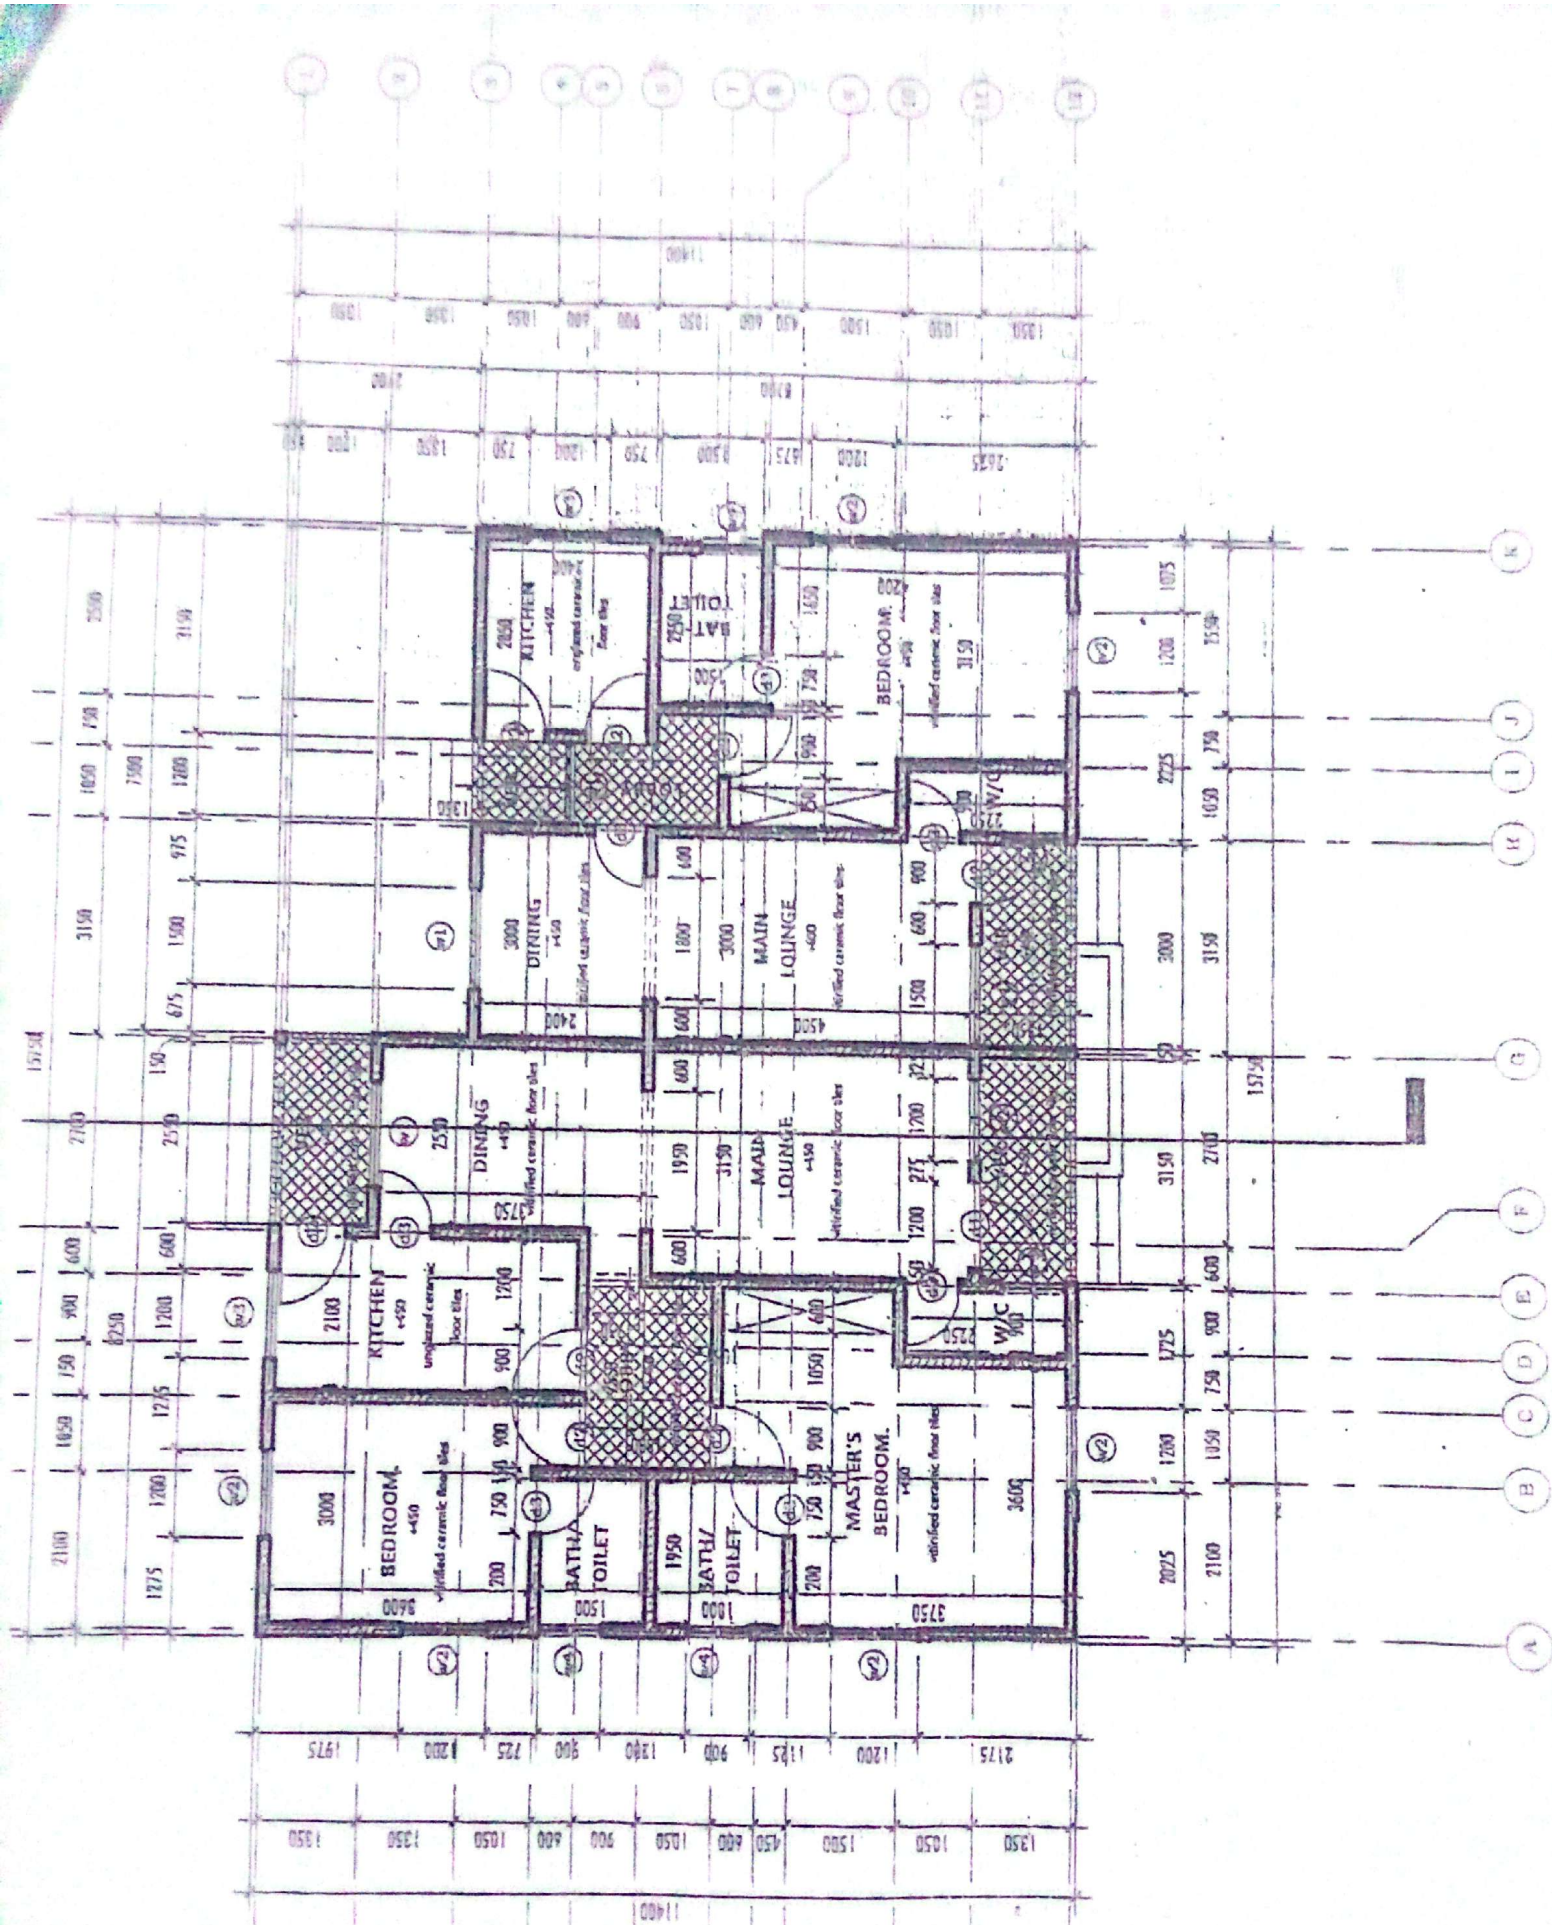

TEXTURE PAINT ON SMOOTH
FINISHED WALL
(Colour: White gloss paint finish)

SPICK FACING TO ROUGHLY
PLASTERED WALL
(Colour: White gloss paint finish)

50 X 150mm PRECAST CONC.
BAND/MOULD
(Colour: White gloss paint finish)

50 X 150mm PRECAST CONC.
BAND/MOULD
(Colour: White gloss paint finish)

APPROACH ELEVATION


ALUMINIUM RIDGE CAP
0.55mm GAUGE THICK 2744 ALUMINIUM
ROOFING SHEETS 2075 X 1041 RIBBED
PURLINS @ 1200mm c/c (20 X 100 X 8 STEEL)
(INROR GUTTERS @ 1200mm CENTRES)

- 1
- 2
- 3
- 4
- 5
- 6
- 7
- 8
- 9
- 10
- 11
- 12

TEXTURE PAINT ON SMOOTH
FINISHED WALL
(Colour: White gloss paint finish)

TEXTURE PAINT ON SMOOTH
FINISHED WALL
(Colour: White gloss paint finish)

25/10/20

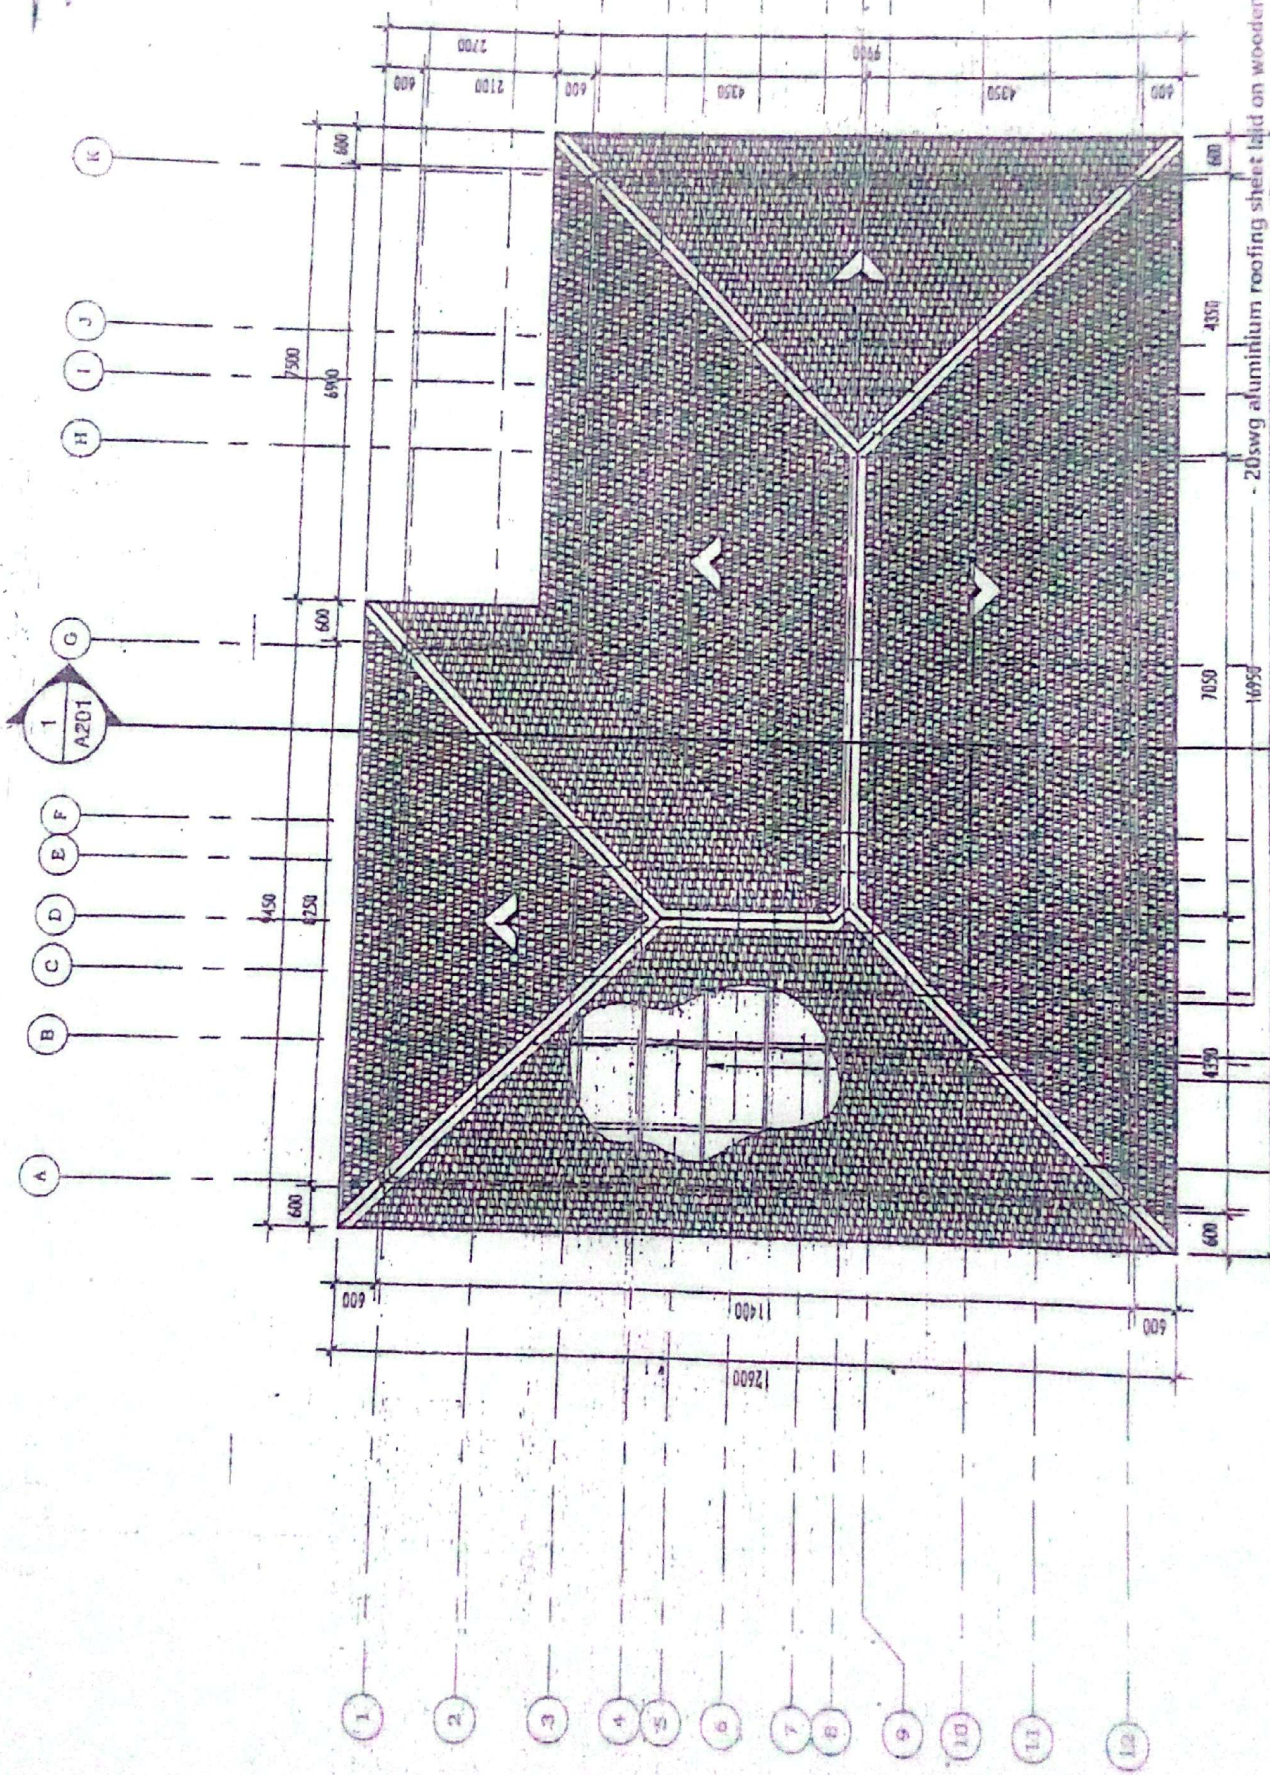

- 20swg aluminium roofing sheet laid on wooden members
- 50mm x 50mm hardwood (h/v) as purlins at 1200mm centers on
- 150mm x 50mm hardwood timber as rafter laid to hip slope

TOTAL ROOF AREA = 235.992sqm

