

Measurement of $Z \rightarrow \mu^+\mu^-$ cross section in pp collisions at $\sqrt{s} = 13$ TeV

J. W. Nam*

Seoul National University, Department of Physics and Astronomy

(Dated: December 7, 2015)

A measurement of $Z \rightarrow \mu^+\mu^-$ cross section in pp collisions at $\sqrt{s} = 13$ TeV is presented. Muon final states are analyzed in a data sample collected with the CMS detector corresponding to an integrated luminosity of 569pb^{-1} .

I. INTRODUCTION

Z boson is a particle which mediate the weak interaction. The production of Z bosons in pp collisions is mainly via the weak Drell-Yan process. Z boson immediately decays into lepton-antilepton pairs. Cross section of $Z \rightarrow \mu^+\mu^-$ can be measured by reconstructing muon data from the CMS detector.

Theoretical prediction are available at next-to-next-leading order (NNLO) in perturbative quantum chromodynamics (QCD). Precise measurements of $Z \rightarrow \mu^+\mu^-$ cross section provide tests of perturbative QCD and validate the theoretical predictions of higher-order corrections. Monte Carlo simulation method is used for theoretical prediction.

II. THE CMS DETECTOR

The Compact Muon Solenoid (CMS) detector is a multi-purpose apparatus due to operate at the Large Hadron Collider (LHC) at CERN. CMS contains a silicon pixel and strip tracker, an electromagnetic calorimeter (ECAL), a hadron calorimeter (HCAL), superconducting solenoid, and a muon detector. The solenoid provides 3.8T magnetic field and this bends muon trajectory oppositely inside and outside. Muons are detected from silicon pixel and strip tracker, and muon detector. Muons are detected in the pseudorapidity window $|\eta| < 2.4$. Three technologies are used for detecting muons: drift tubes, cathode strip chambers, and resistive plate chambers.

III. ANALYSIS

Z boson candidates are required to have reconstructed dimuon mass between 60 and 120 GeV. Because of the high rate of collisions and limited bandwidth for data processing, data must be selected by triggers for making rapid decisions. Muons are triggered by $p_T > 20\text{GeV}$ and $|\eta| < 2.4$ with isolation requirement. Muons are reconstructed from seed tracks in the muon detector with silicon pixel and strip tracker.

The muon data samples are from Run2015C to Run2015D and integrate luminosity $L = 569.017\text{pb}^{-1}$.

Muons are selected online by a single-muon trigger. Monte Carlo (MC) simulated samples are used to calculate acceptance efficiencies.

For muon identification, following selection cut are applied. Muon candidates can be reconstructed by two different ways. One is tracker muons, which starts from inner-tracker information, and another is global muons, which starts from segments in the muon chambers. Muon candidates must be reconstructed as a global muon and particle flow muon. Signals require $\chi^2/N_{dof} < 10$, where N_{dof} is number of degree of freedom of global muon track fit. Also at least one muon chamber hit is included in global muon track fit. Muon segments should be at least two muon stations. Tracker track has transverse impact parameter $d_{xy} < 2\text{mm}$ with respect to the beam axis, and has longitudinal distance with respect to the primary vertex is $d_z < 5\text{mm}$. At least one pixel hits and 6 tracker layers hits are required. Track isolation value $(\Sigma_{tracks} p_T)/p_T$ is less than 0.10. Total selected events of data are shown on Table I.

The acceptance is defined as the fraction of simulated Z signal events with $p_T^{gen} > 25\text{GeV}$ and $|\eta^{gen}| < 2.4$, and $60 < m_{inv} < 120\text{GeV}$ divided by the total number of signal events in the same mass range. The efficiency of the selection is ratio of the number of selected muon pairs from the total accepted events. The acceptance and efficiency calculated from the MC simulated events is $A = 0.3590 \pm 0.0002$, $\epsilon = 0.8580 \pm 0.0007$.

IV. RESULTS

The cross section for $Z \rightarrow \mu^+\mu^-$ decays can be expressed as:

$$\sigma(Z \rightarrow \mu^+\mu^-) = \frac{N_{sig}}{A \cdot \epsilon \cdot L} \quad (1)$$

N is number of Drell-Yan process signal producing two muons in data. While Drell-Yan process is mediated by Z and γ^* , and γ^* mediated process is background signal, which is 3% of the total. A is acceptance, ϵ is efficiency and L is integrate luminosity

V. CONCLUSIONS

TABLE I. Theoretical and measured $Z \rightarrow \mu^+\mu^-$ cross sections.

Channel	N	$\sigma[\text{pb}]$	NNLO [pb]
$Z \rightarrow \mu^+\mu^-$	350,665	$1941 \pm 4(\text{stat.}) \pm 194(\text{lum.})$	1868

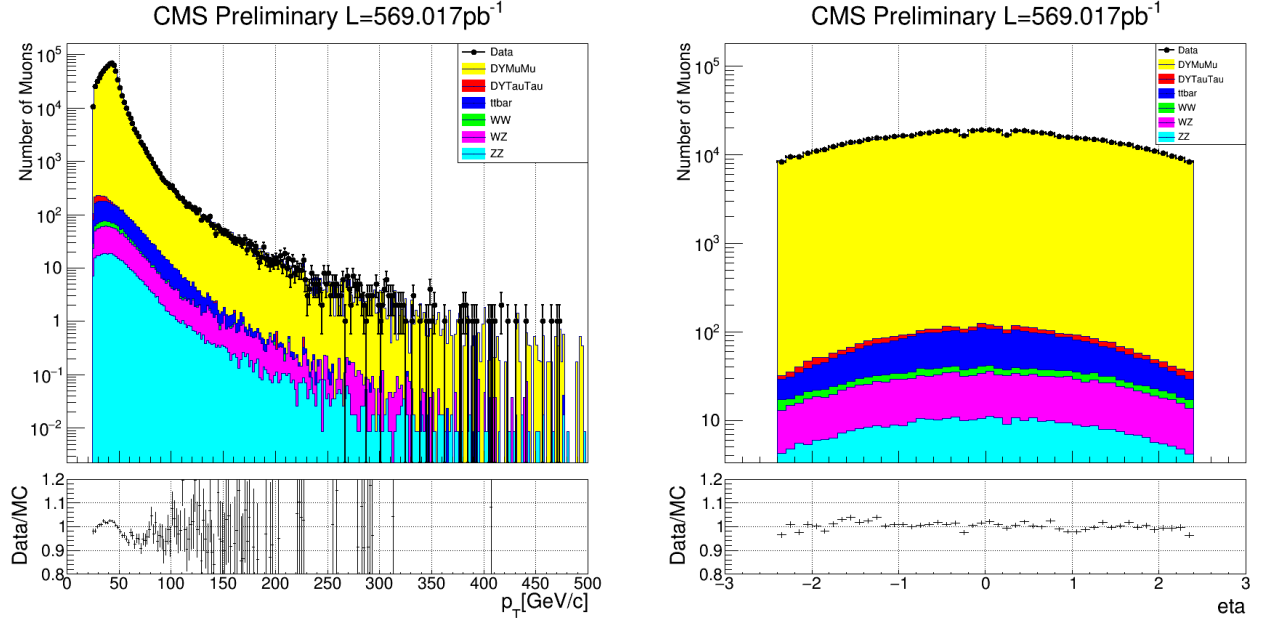


FIG. 1. A figure caption. The figure captions are automatically numbered.

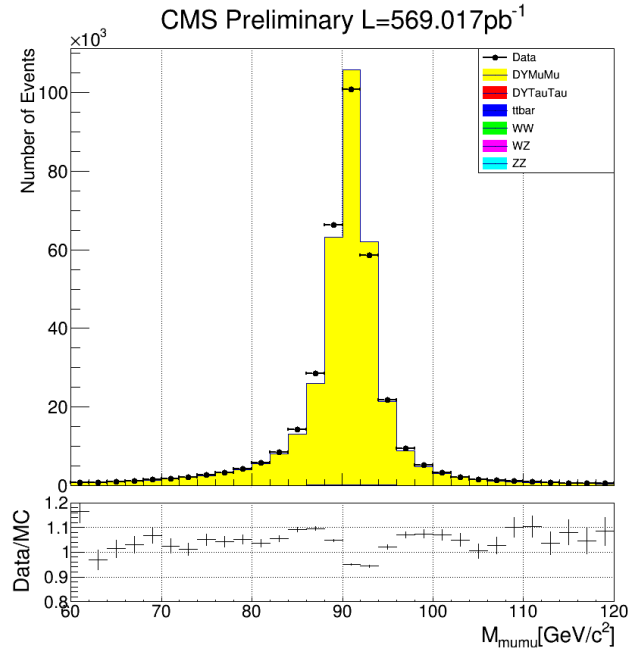


FIG. 2. A figure caption. The figure captions are automatically numbered.

* njw0119@snu.ac.kr