


REVIVAL

HARDWOOD FLOORS

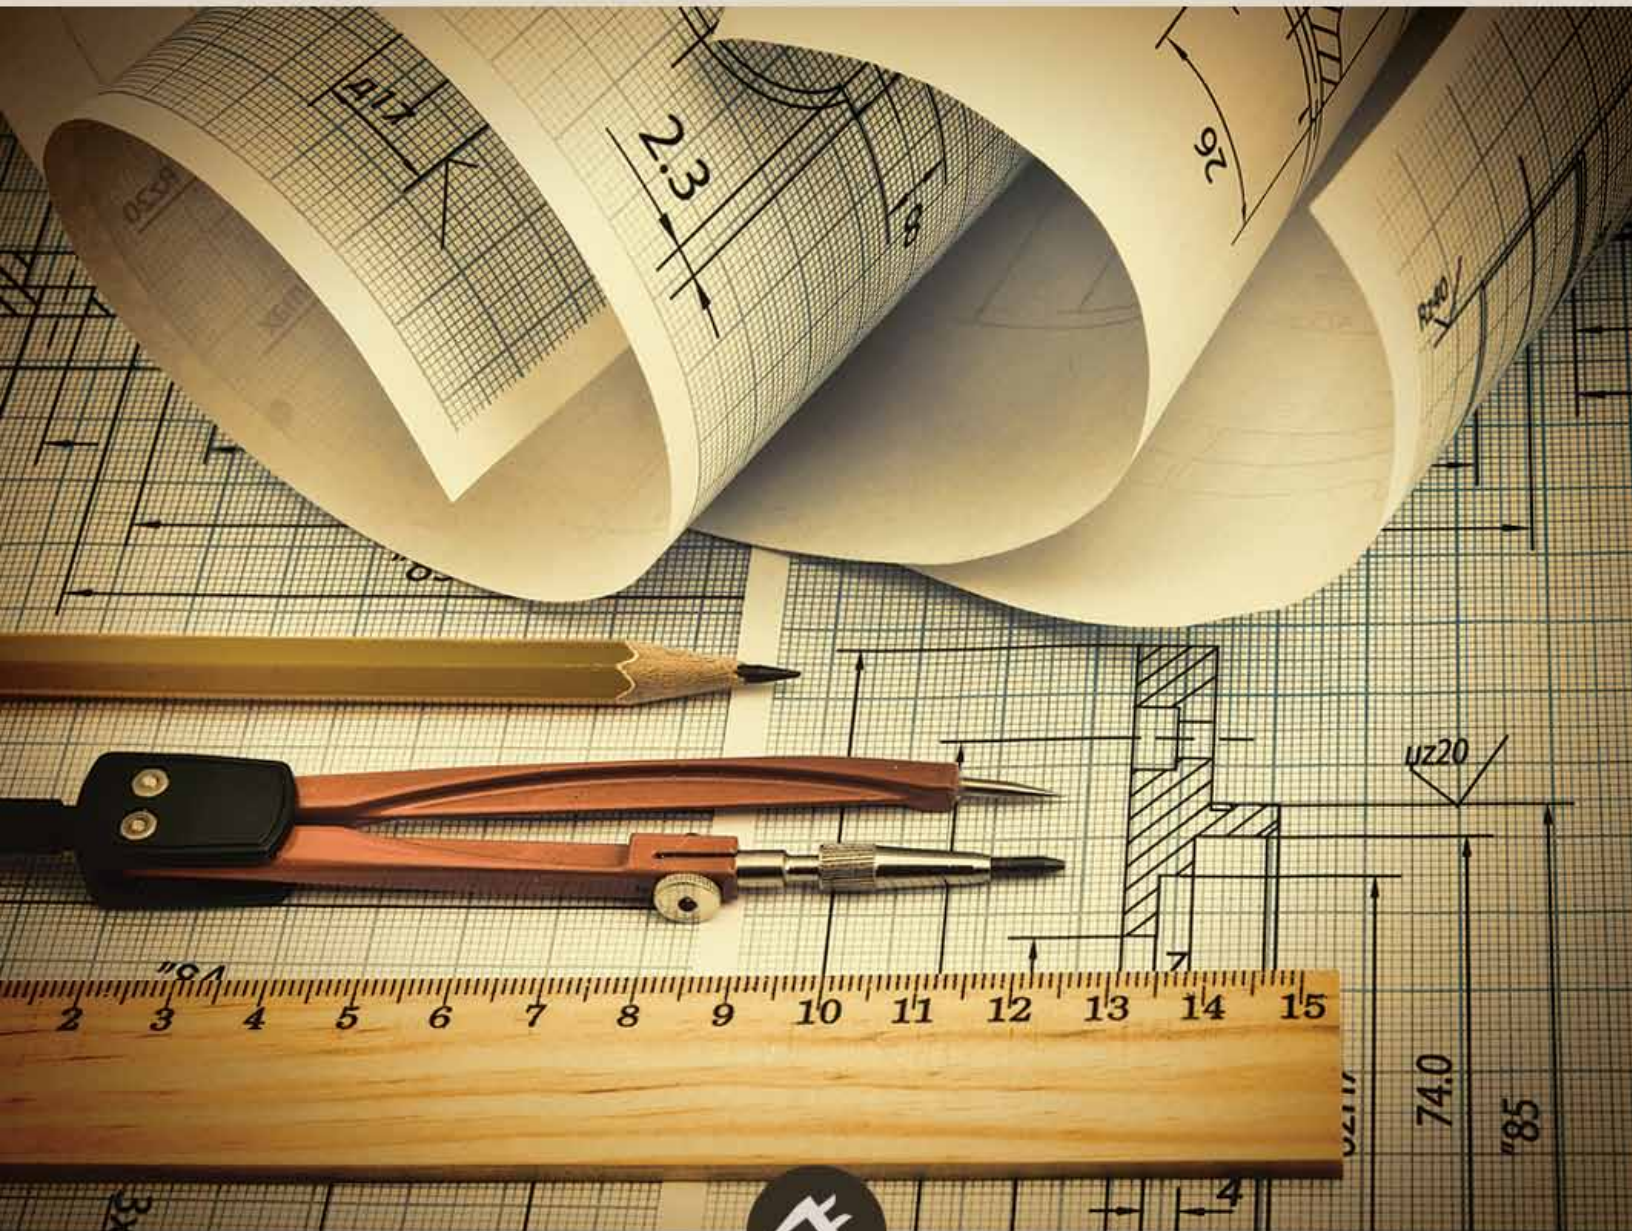

Specifications

REVIVAL

Specifications

Description:

Engineered European Oak hardwood flooring available in 8 color treatments.

Available Sizes:

There are three available patterns and they produced in metric measurements.

Plank - 14mm thick x 180mm wide x 600-2150mm long
[.55" thick x 7.08" wide x 23.62"-84.65" long]

5" Herringbone - 14mm thick x 127mm wide x 762mm long
[.55" thick x 5" wide x 30" long]

7" Herringbone - 14mm thick x 180mm wide x 900mm long
[.55" thick x 7.08" wide x 35.43" long]

Wood Source:

European Oak [Botanical Name: Quercus SSP]

Origin:

Germany and France

Janka hardness:

1360

Grade:

Plank - Rustic

Herringbone - Light Rustic

Construction/Platform:

3 ply construction, 14mm [9/16"] overall

- 3mm lamella

- 9mm lumber core

- 2mm back

Surface:

Wire brushed texture

Connection:

Tongue and groove on sides and end matched

Edge Treatment:

Smooth with Chiseled Edge or Hand Scraped*

Finish:

Commercial grade, UV cured, low VOC oil finish

Installation Methods:

Glue down, Nail down or stapled

Radiant Heating:

Only for use with water radiant heating systems, max 81° Fahrenheit surface temperature

Green Attributes:

CARB [California Air Resource Board] Phase 2 complaint. It meets regulations of the provision of California Code of Regulation 93120 concerning airborne toxic control measure to reduce the formaldehyde emission from composite wood product such as a lumber core or backer. Our flooring is finished in a low VOC oil finish, free from solvent emissions and formaldehyde.

Residential Warranty:

25 year Structural and 25 year Finish