

# DigiPoint<sup>NT</sup> Digital Controller



DigiPoint is a stand-alone Digital Controller (DDC) especially designed to control and monitor lighting and electromechanical systems in the building.

DigiPoint especially designed for hotels, hospitals, large offices and other public buildings.

Simple programming and operation, combined with open protocols (Modbus RTU + IP as well as BACnet IP + MSTP), built in web browser, fast digital inputs and outputs (for counting and producing pulses), makes the DP controller to be very effective as stand alone as well as extension card to any other controller in the system.

## Technical Data

|                        |                                      |
|------------------------|--------------------------------------|
| Power Requirements:    | 24 VAC $\pm$ 20%<br>60/50 Hz<br>50VA |
| Dimensions (WxHxD):    | 157 x 58 x 96.98 mm                  |
| Shipping Weight:       | 0.43 Kg.                             |
| Environmental:         |                                      |
| Operation.             | -20 ~ +70 °C                         |
| Storage.               | -20 ~ +70 °C                         |
| Humidity               | 0 ~ 95 RH%<br>non-condensing         |
| Front Panel Protection | IP33                                 |

## Communication

|                    |                                             |
|--------------------|---------------------------------------------|
| RS485 port:        | Up to 115200 bauds<br>Modbus and BACnet.    |
| Ethernet (TCP/IP): | Modbus and BACnet,<br>Built-in web browser. |


## Features

- Stand-alone operation.
- Weekly time-program.
- RS 485 Communication Port.
- TCP IP Communication Port.
- ModBus and BACnet communication protocols.
- Simple DIN Rail installation.
- Easy operation and programming.
- 220-volt power supply.
- Dry contact outputs up to 150 mA.
- Easy wiring (all of the terminals are removable).
- LCD screen and push buttons for IO monitoring.
- Low Cost.

## Input/output Points

|                     |                          |
|---------------------|--------------------------|
| 16 Digital outputs: | Dry contact (150mA max). |
| 16 Digital inputs:  | Dry contact.             |



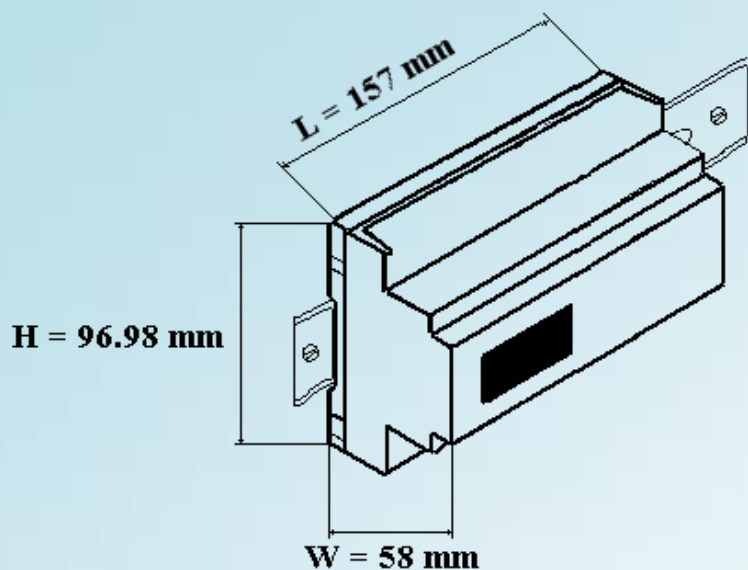

## Standards


EN 60730-1  
 EN 60730-2-11  
 EN 61010-1  
 EN 61000-3-3 Amendment A1  
 EN 55022 Amendment A1  
 EN 55024 Amendments A1; A2  
 EN 61000-3-2

Mechanical mounting – DIN Rail simple installation

## Wiring Diagram Example

יש להתקין בתעלות נפרדת:

1. קווי כח כולל וסתי מהירות
2. קוי כניסות אנלוגיות\דיגטליות של הבקר

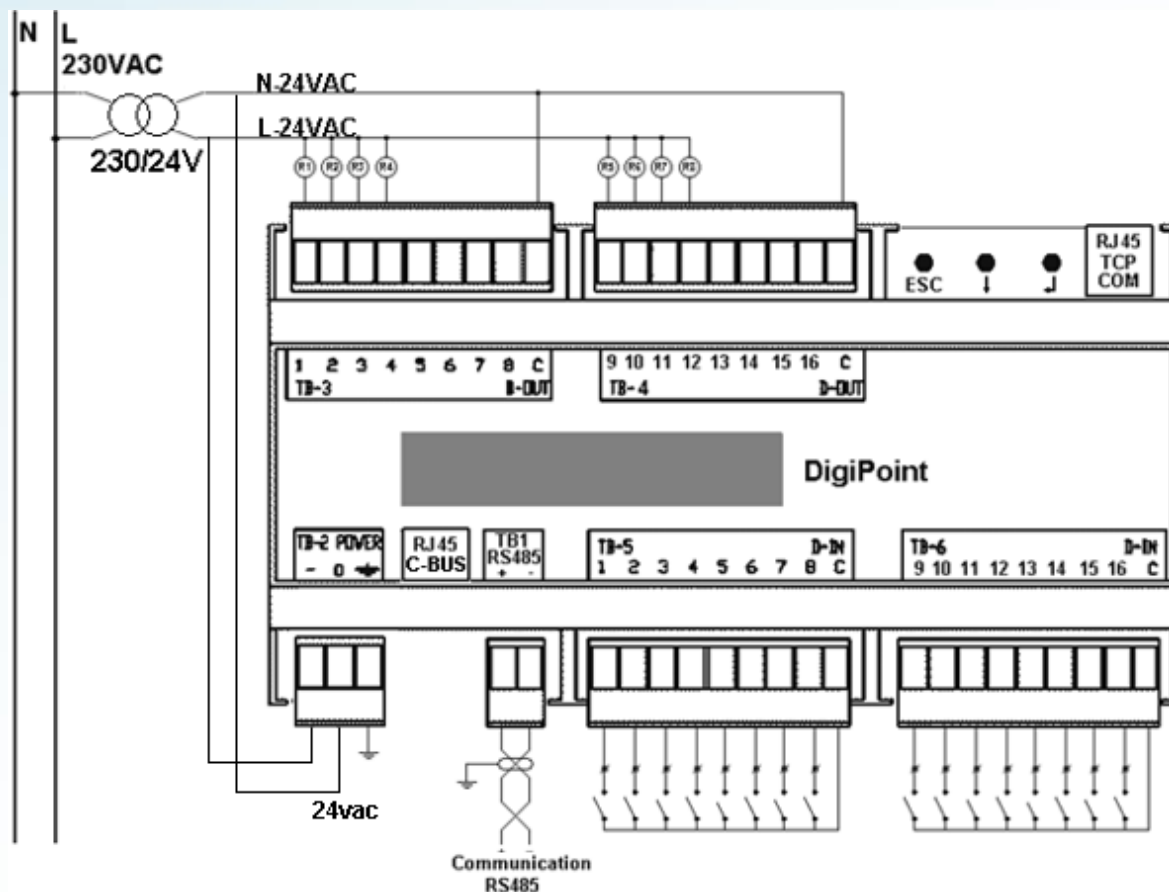

**ישומי בקרה בע"מ**  
**מערכות בקרה ושליטה**

