SANITARYWARE & ACCESSORIES SCHEDULE

G.A. DESIGN INTERNATIONAL

PROJECT:

DATE:

Four Seasons - Riyadh

30-31 Lyme Street London, NW1 0EE PROJECT NO:

7343

2011 July

Tel: 020 7482 0054 Fax: 020 7482 0064


E-mail: ga@ga-design.co.uk


ITEM	Reference	Finish	Manufacturer
Description Thermostatic Valve and diverter.	SW-08	Polished Chrome	Symmons www.symmons.com
Dia – 3500-CYL Dia Dual Outlet Diverter – 35-458- CYL			-

Location Premium King & Deluxe King.

Notes

Contractor to ensure that all associated accessories are ordered and that Hansgrohe shower head and fittings are compatible.

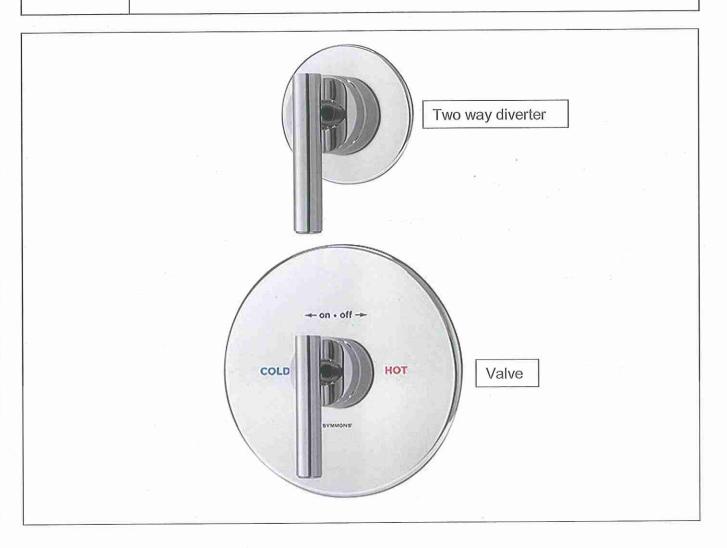

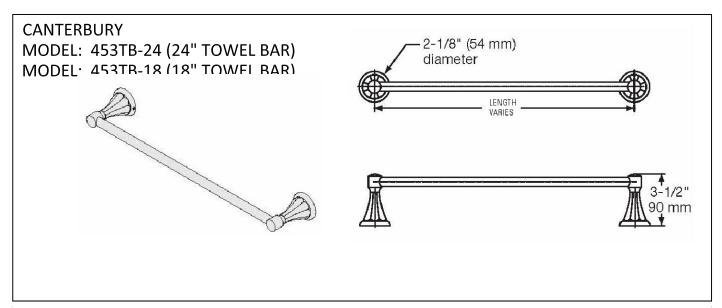



NOTES:

POLISHED CHROME WITH CONCEALED HARDWARE.

1 @ BATHTUB - 610 mm (2'-0") - 24" TOWEL BAR

2 @ VANITY - 510 mm (1'-8") - 18" TOWEL BAR

1 @ BIDET - 510 mm (1'-8") - 18" TOWEL BAR

MOUNTING HEIGHT: 1370 mm (4'-6") AFFL AT BATHTUB, 810 mm (2'-8")

AFFL AT BIDET

NARU

MODEL: 413TB-24 (24" TOWEL BAR) MODEL: 413TB-18 (18" TOWEL BAR)






TOWEL BARS - MANUFACTURER: SYMMONS GUESTROOMS + RELATED SPACES

SECTION E DWG #:

CANTERBURY MODEL: 453RH






SERENO

MODEL: 433RH





NOTES:

CONCEALED HARDWARE, **POLISHED CHROME** FINISH.

2 IN BATHROOM, 1 IN WATER CLOSET ROOM

MOUNTING HEIGHT: 1675 mm (5'-6") AFFL, 1 220 mm (4'-0") AFFL IN HANDICAP BATHROOMS **NARU**

MODEL: 413RH






SECTION E DWG #:









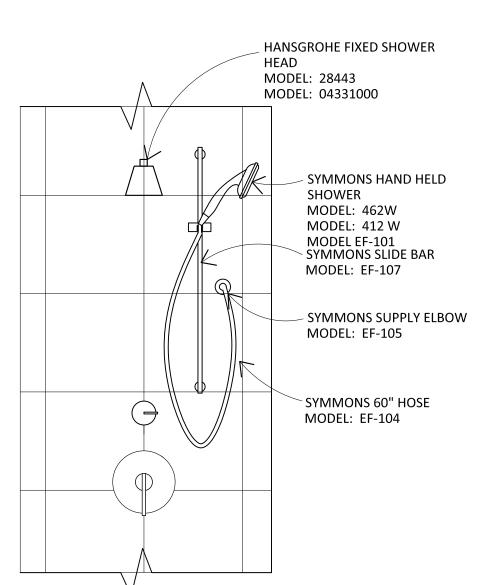







NOTE:

SEE DRAWING E-16 FOR FIXTURE HEIGHT REQUIREMENTS.



SECTION E

DWG #:


GENERAL NOTE:


PRESSURE BALANCING SHOWER VALVE WITH INTEGRAL CHECK STOPS, LEVER HANDLE AND ADJUSTABLE STOP SCREW TO LIMIT HANDLE TURN.


PROVIDE 13 mm (1/2") WATER SUPPLY TO SHOWER VALVE.

POLISHED CHROME FINISH.

NO VISIBLE SCREWS.

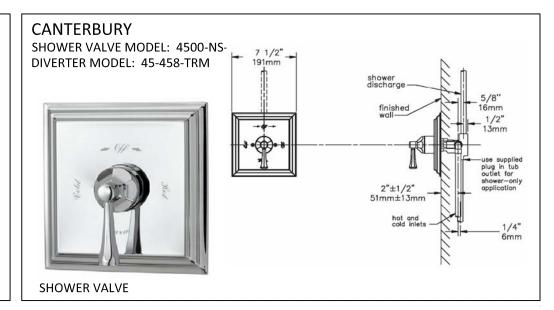

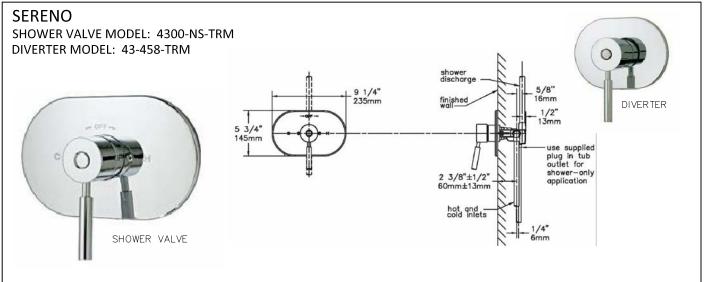

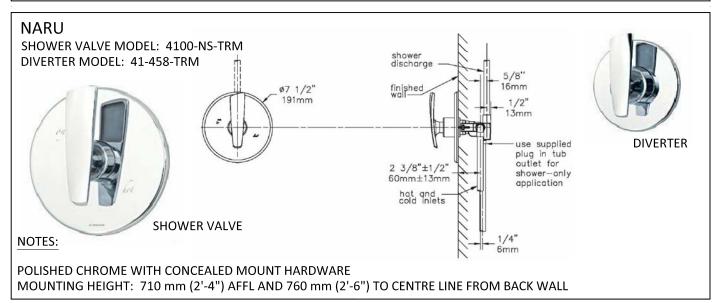



SHOWER VALVE SYSTEM - MANUFACTURER: SYMMONS

GUESTROOMS + RELATED SPACES

SECTION E


GENERAL NOTE:


WIDESPREAD LAVATORY SETS WITH LEVER HANDLES.


PROVIDE 2 LAVATORY BOWLS PER BATHROOM.

POLISHED CHROME FINISH, INCLUDING POLISHED CHROME DRAIN POP-UP.

SYMMONS, CANTERBURY MODEL: SLW-4512 8* (203 mm) min. 4* (102 mm) min. 3-1/8* (80 mm) Deck thickness 1-3/8* (35 mm) max. 1* dia. (25 mm) Hole size 1-1/16* (27 mm) min. 1-7/16* (27 mm) min. 1-7/16* (27 mm) min. 1-7/16* (27 mm) min. 1-1/2* (38 mm) max. Flexible hose

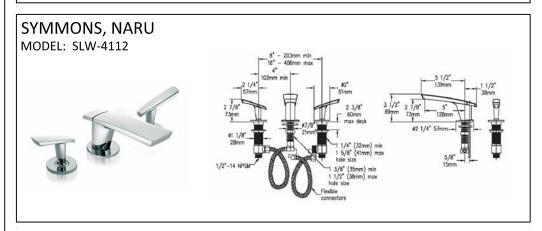

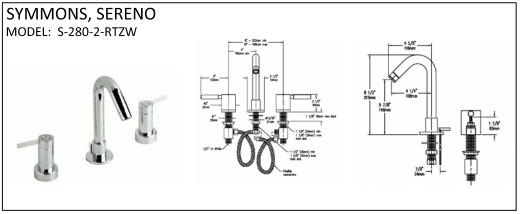


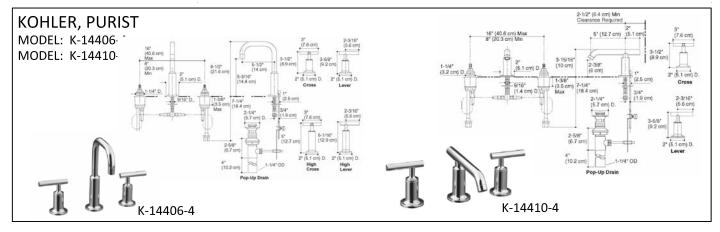




LAVATORY SETS
GUESTROOMS + RELATED SPACES

SECTION E

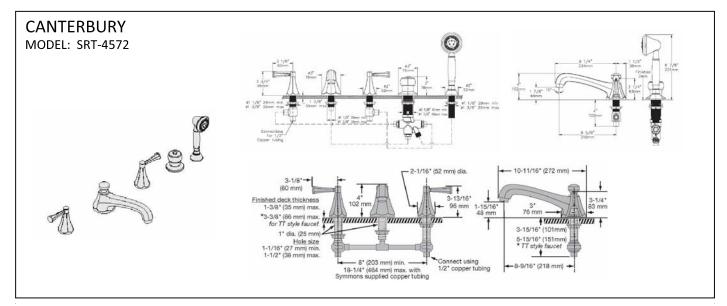

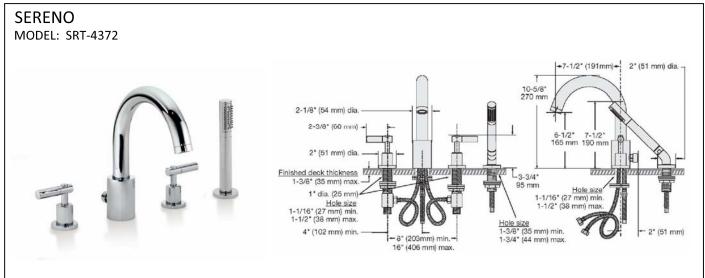

NOTES:


TWO HANDLE FAUCET WITH QUARTER TURN CERAMIC CONTROL COMPONENTS.

HAND SPRAY AND LIFT-ROD DIVERTER.

DECK MOUNT INSTALLATION.

TUB FILLER SPOUT MUST HAVE AERATOR.

POLISHED CHROME FINISH WITH LEVER HANDLES.

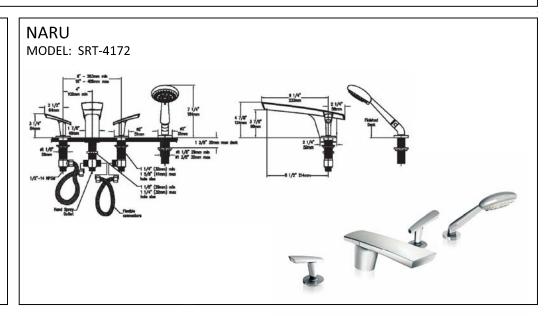




BATHTUB SETS - MANUFACTURER: SYMMONS

GUESTROOMS + RELATED SPACES

SECTION E


DWG#

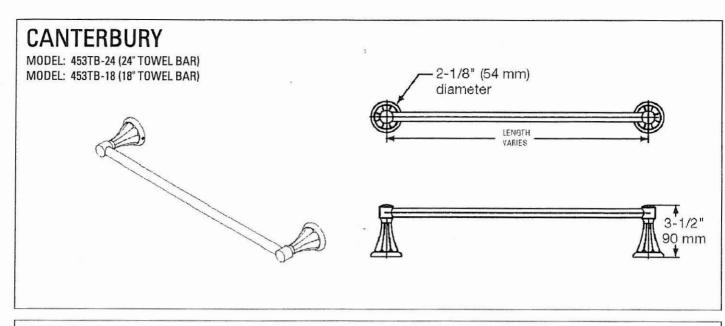




MODEL: 433TB-24 (24" TOWEL BAR) MODEL: 433TB-18 (18" TOWEL BAR)







NOTES:

POLISHED CHROME WITH CONCEALED HARDWARE.

1 @ BATHTUB - 610 mm (2'-0") - 24" TOWEL BAR

2 @ VANITY - 460 mm (1'-8") -18" TOWEL BAR

1 @ BIDET - 460 mm (1'-8") - 18" TOWEL BAR

MOUNTING HEIGHT: 1 370 mm (4'-6") AFFL AT BATHTUB, 810 mm (2'-8") AFFL AT BIDET

NARU

MODEL: 413TB-24 (24" TOWEL BAR) MODEL: 413TB-18 (18" TOWEL BAR)







TOWEL BARS
MANUFACTURER: SYMMONS

SCALE:

NTS

DWG. NO .:






CANTERBURY

MODEL: 453RH






SERENO

MODEL: 433RH





NOTES:

CONCEALED HARDWARE, POLISHED CHROME FINISH.

2 IN BATHROOM, 1 IN WATER CLOSET ROOM

MOUNTING HEIGHT: 1675 mm (5'-6") AFFL, 1 220 mm (4'-0") AFFL IN HANDICAP BATHROOMS

NARU

MODEL: 413RH





ROBE HOOKS
MANUFACTURER: SYMMONS


SCALE:


NTS


DWG. NO.:

E-40 ARCH

CONTRACT DOCUMENT

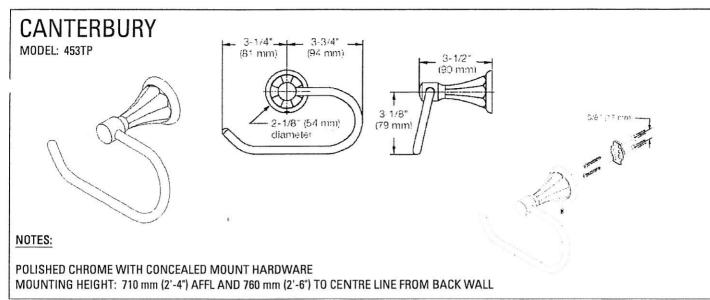

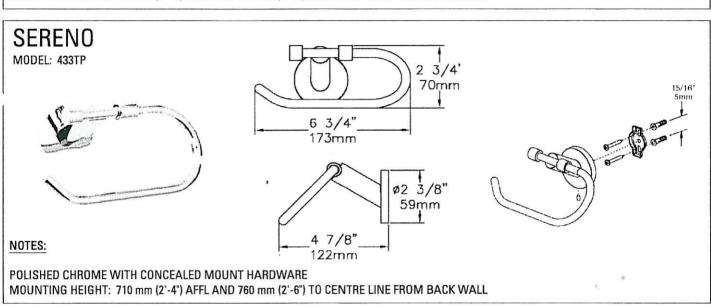

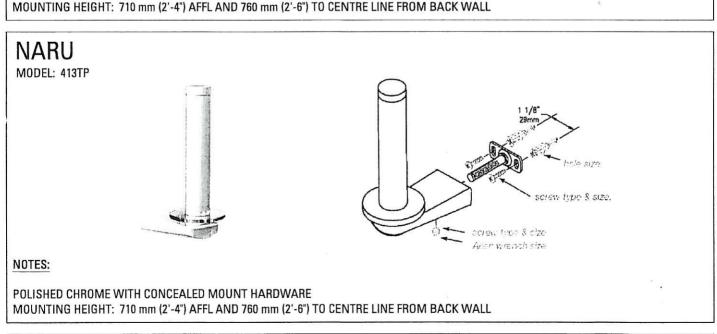



TOILET PAPER HOLDERS

MANUFACTURER: SYMMONS

SCALE:

NTS

DWG. NO.:

E-42_{ARCH}







CANTERBURY

MODEL: 4-166







NOTES:


6" SINGLE MODE RAIN SHOWER HEAD POLISHED CHROME FINISH


PROVIDE 13 mm (1/2") WATER SUPPLY TO SHOWER HEAD AND 13 mm (1/2") WATER SUPPLY TO SHOWER VALVE. WHERE POSSIBLE, MOUNT IN CENTRE OF SHOWER STALL CEILING.

SERENO / NARU

MODEL: 432SH







NOTES:

7-7/8" SINGLE MODE RAIN SHOWER HEAD
POLISHED CHROME FINISH OR SATIN NICKEL FINISH

PROVIDE 13 mm (1/2") WATER SUPPLY TO SHOWER HEAD AND 13 mm (1/2") WATER SUPPLY TO SHOWER VALVE. WHERE POSSIBLE, MOUNT IN CENTRE OF SHOWER STALL CEILING.

SHOWER ARMS

WHERE POSSIBLE, MOUNT SHOWERHEAD IN CENTRE OF SHOWER STALL CEILING. WHRE THIS IS NOT POSSIBLE, THE FOLLOWING SHOWER ARMS MAY BE USED: 300/300-STN/300-PNL; 300M; 300S. CEILING MOUNT SPECIFICATIONS: A6RF/A6SF/A8RF/A8SF/A3RF/A3SF









SHOWER HEADS + SHOWER ARMS

MANUFACTURER: SYMMONS


SCALE:

NTS

DWG. NO .:

E-45 ARCH






HAND HELD SHOWER HEAD WANDS

MODEL: 462W - SINGLE MODE MODEL: 412W - THREE MODE

MODEL: EF101 - EURO FLOW, THREE MODE








NOTES:

THREE MODE HAND HELD SHOWER HEAD WAND (INSTALLED IN ADDITION TO RAIN SHOWER HEAD).

FINISHES: POLISHED CHROME SATIN NICKEL

HOSE LENGTH TO BE SIZED TO PREVENT HAND SHOWER CONTACTING SHOWER FLOOR IF DROPPED (TYPICALLY 60").

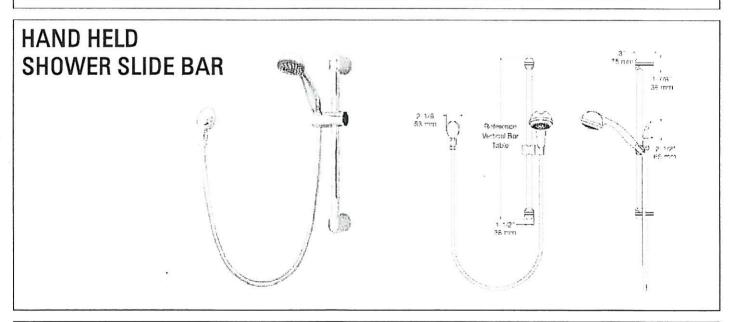



HAND HELD SHOWER HEAD WANDS + SHOWER SLIDE BAR

MANUFACTURER: SYMMONS


SCALE:

NTS

DWG. NO.:

E-46arch



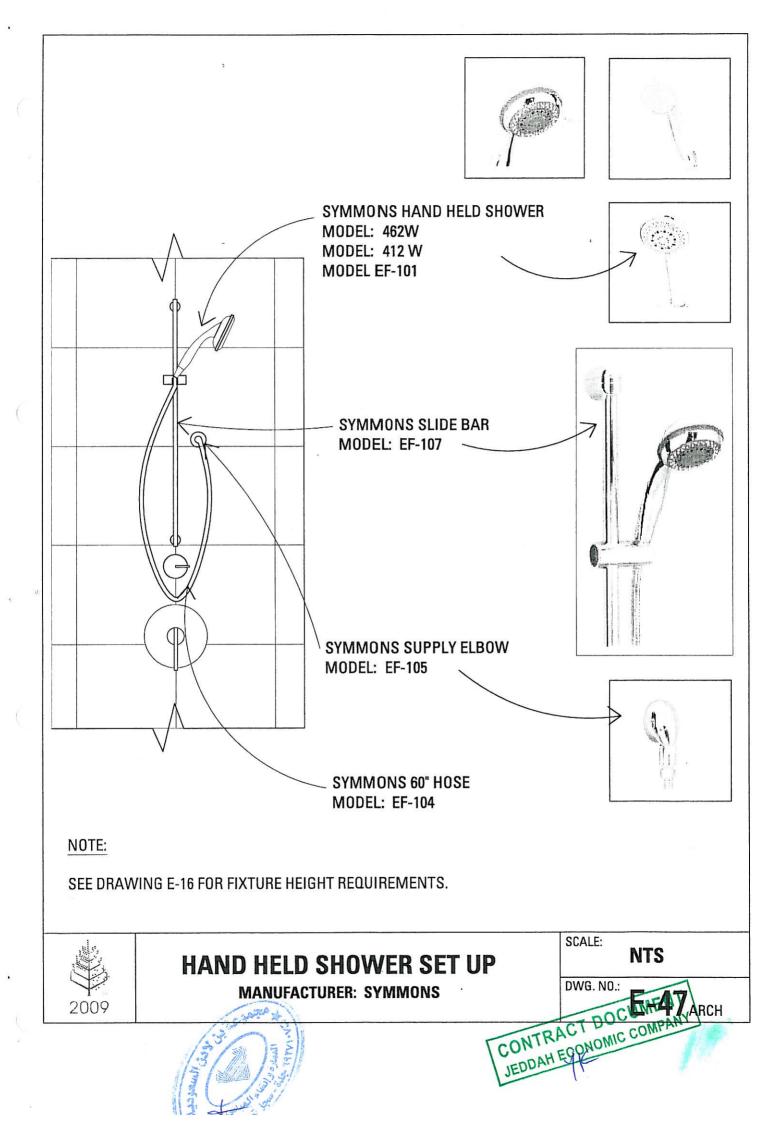



GENERAL NOTE:


PRESSURE BALANCING SHOWER VALVE WITH INTEGRAL CHECK STOPS. LEVER HANDLE AND ADJUSTABLE STOP SCREW TO LIMIT HANDLE TURN.

POLISHED CHROME FINISH.

NO VISIBLE SCREWS.

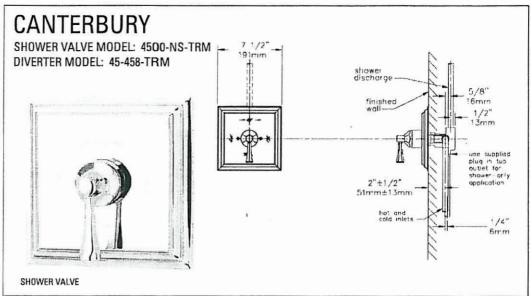

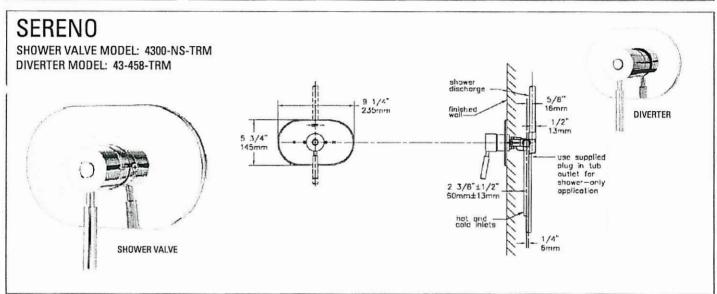

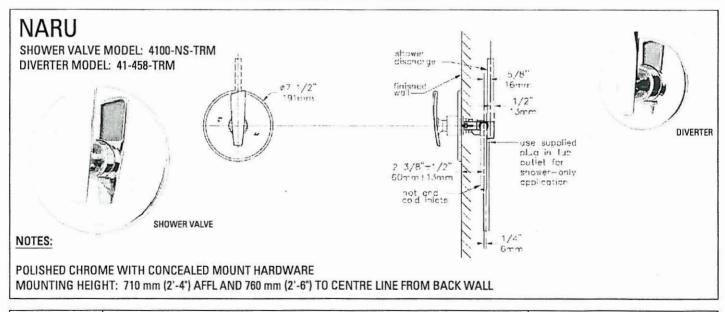



SHOWER VALVE SYSTEM

MANUFACTURER: SYMMONS

SCALE:

NTS

DWG. NO .:







KOHLER

BIDET - AMARETTO MODEL: K-4864-0



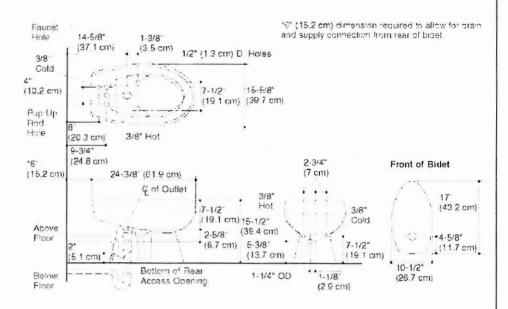

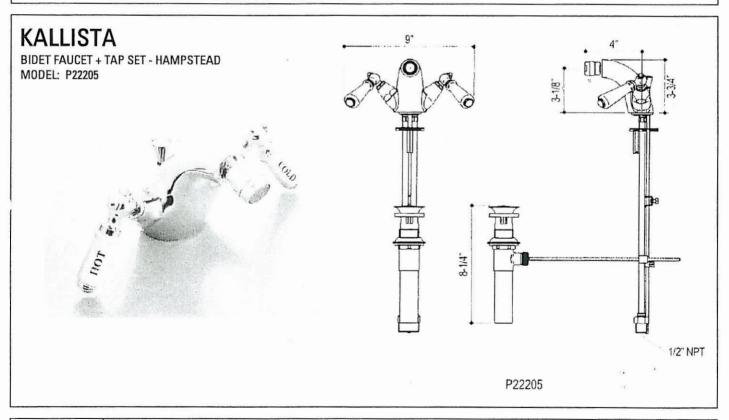



BIDET


BIDET, FAUCET + TAP SET




CONTRACT DOCY



ARCH

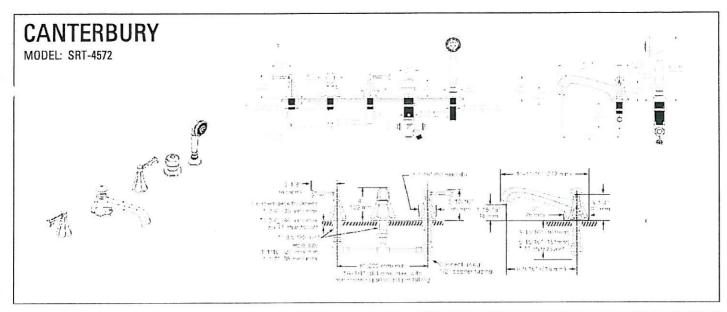

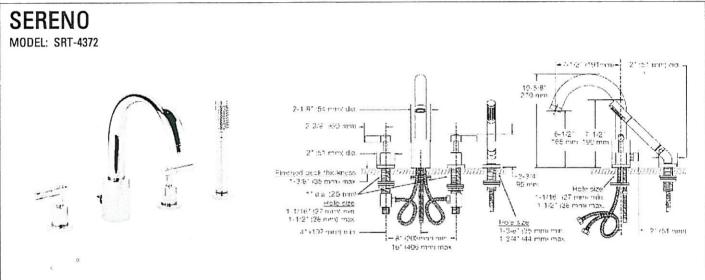

NOTES:


TWO HANDLE FAUCET WITH QUARTER TURN CERAMIC CONTROL COMPONENTS.

HAND SPRAY AND LIFT-ROD DIVERTER.

DECK MOUNT INSTALLATION.

TUB FILLER SPOUT MUST HAVE AERATOR.

POLISHED CHROME FINISH WTH LEVER HANDLES.

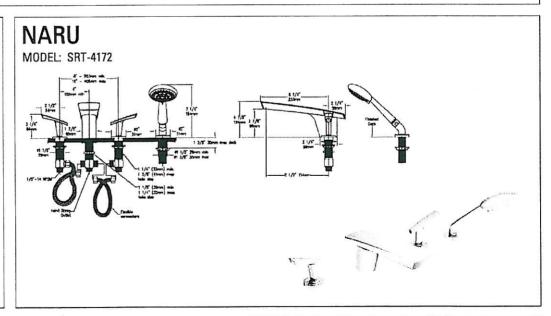



BATHTUB SETS

MANUFACTURER: SYMMONS

SCALE:

NTS

DWG. NO.:

CONTRACT DOCUMENTS COMPA