


# 4-500 Safetymix® Shower Valve

**Safetymix** Pressure-Balancing mixing valve with lever handle and adjustable stop screw to limit handle turn.

## Modifications:


### Add:

- ☐ Suffix X: Integral service stops - allows water shutoff at valve for service
- ☐ Suffix X-3/4: Integral service stops - allows water shutoff at valve for service, 3/4" inlets and outlet
- ☐ Suffix BX: Extra thick wall-back connections - integral stops



SYMMONS PRODUCTS MEET  
ANSI A112.18.1M, EPA '92  
AND ALL KNOWN FLOW RATE  
REQUIREMENTS.

Showerheads and Hand Showers  
2.5 GPM (9.5 L/min)

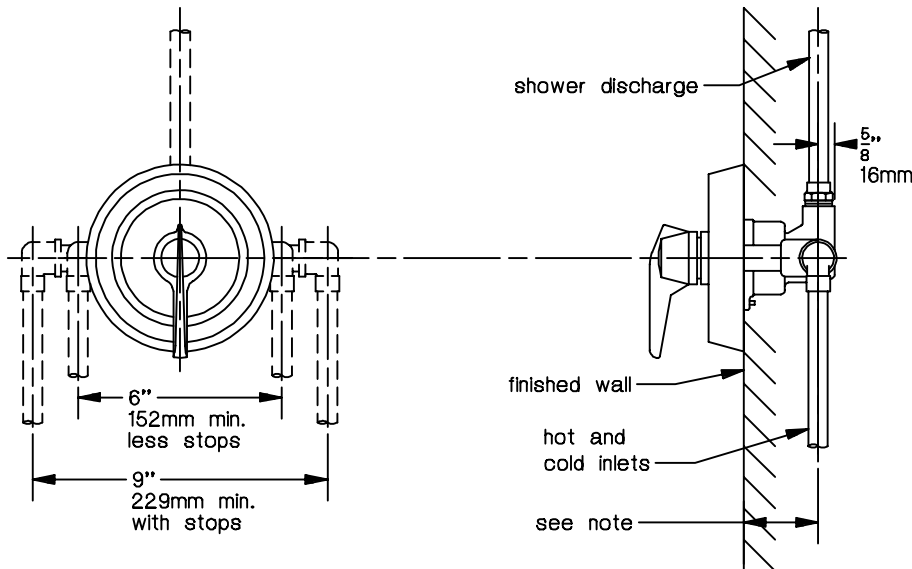

NOTE: 2-3/8" (60mm) min.  
3" (76mm) max.  
2-5/16" (59mm) fixed  
dim. metal stall.

Job/Location

Engineer

Contractor

This drawing to be used for rough-in installation only. All floor to center dimensions optional. Concealed piping and fittings not furnished by manufacturer. For ADA compliance (Americans with Disabilities Act) consult ADAAG or your state regulations for proper product choice and mounting locations. For complete installation, adjustment and service information, see installation instructions.

SYMMONS INDUSTRIES, INC.

31 Brooks Drive, Braintree, MA 02184

TEL: 1-800-SYMMONS, (781) 848-2250 FAX: 1-800-961-9621, (781) 843-3849

website: [www.symmons.com](http://www.symmons.com)

©1998 Symmons Industries, Inc. Printed in U.S.A.

*Symmons®*