

CANTERBURY

MODEL: 453TB-24 (24" TOWEL BAR)
MODEL: 453TB-18 (18" TOWEL BAR)








SERENO

MODEL: 433TB-24 (24" TOWEL BAR) MODEL: 433TB-18 (18" TOWEL BAR)





NOTES:

POLISHED CHROME WITH CONCEALED HARDWARE.

1 @ BATHTUB - 610 mm (2'-0") - 24" TOWEL BAR

2 @ VANITY - 510 mm (1'-8") - 18" TOWEL BAR

1 @ BIDET - 510 mm (1'-8") - 18" TOWEL BAR

MOUNTING HEIGHT: 1 370 mm (4'-6") AFFL AT BATHTUB, 810 mm (2'-8")

AFFL AT BIDET

NARU

MODEL: 413TB-24 (24" TOWEL BAR) MODEL: 413TB-18 (18" TOWEL BAR)






TOWEL BARS - MANUFACTURER: SYMMONS

GUESTROOMS + RELATED SPACES



CANTERBURY MODEL: 453RH






SERENO

MODEL: 433RH





NOTES:

CONCEALED HARDWARE, **POLISHED CHROME** FINISH.

2 IN BATHROOM, 1 IN WATER CLOSET ROOM


MOUNTING HEIGHT: 1675 mm (5'-6") AFFL, 1 220 mm (4'-0") AFFL IN HANDICAP BATHROOMS **NARU**


MODEL: 413RH






SECTION E DWG #:

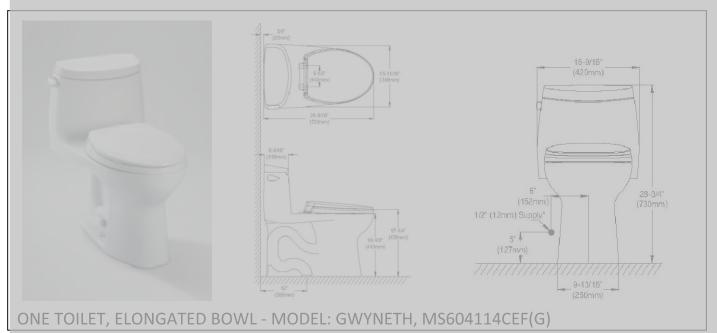

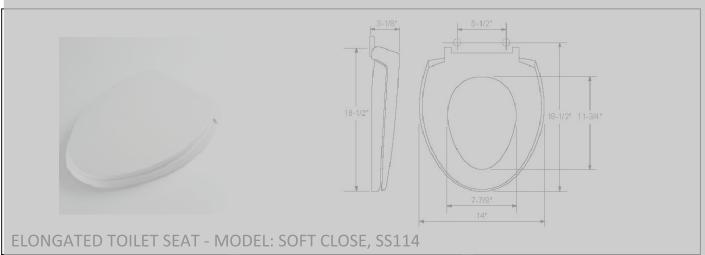


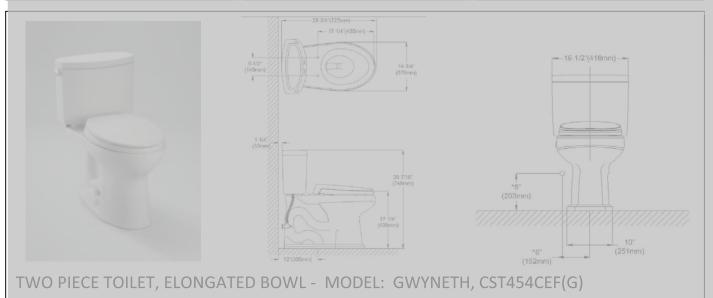





TOILETS - MANUFACTURER: TOTO
GUESTROOMS + RELATED SPACES

SECTION E

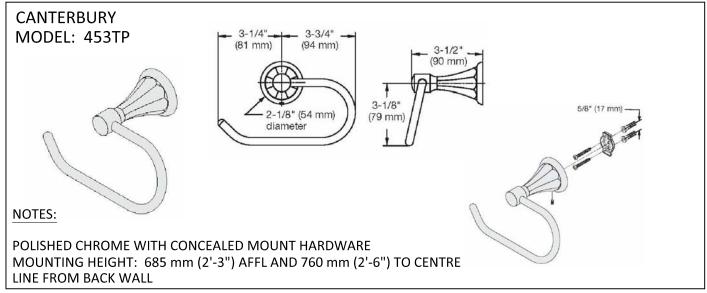

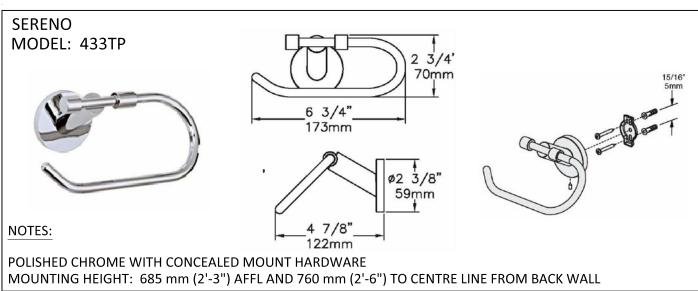

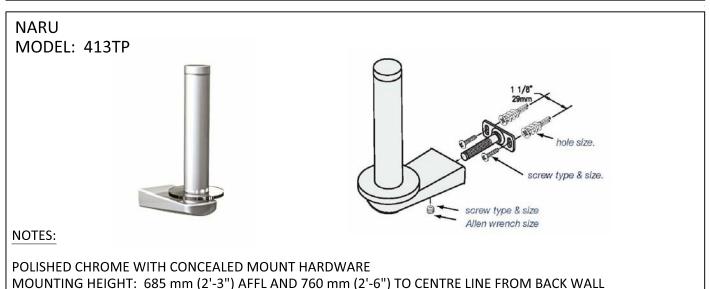




TOILET PAPER HOLDERS







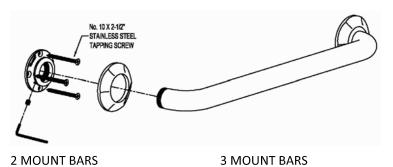



2 MOUNT BARS

MODEL: 660 - 12" (305 mm) MODEL: 666 - 42" (1 067 mm) MODEL: 661 - 16" (406 mm) MODEL: 667 - 48" (1 219 mm) MODEL: 662 - 18" (457 mm)

MODEL: 663 - 24" (610 mm) MODEL: 664 - 32" (813 mm) MODEL: 665 - 36" (914 mm)

MOUNTING HEIGHT: MOUNTED VERTICALLY 865 mm (2'-10") TO CENTRE LINE AT ONE END OF BATHTUB.





LEFT HANDED GRAB BAR

MODEL: 668 L


RIGHT HANDED GRAB BAR

MODEL: 668 R

LEFT AND RIGHT BENT GRAB BARS - GINGER, EMPIRE







FINISHES AVAILABLE





GENERAL NOTES

MUST MEET OR EXCEED ASTM F446 (LOCAL REGULATIONS MAY VARY) MUST CONFORMS TO ADA GUIDELINES

1.25" DIA. HEAVY-GUAGE BAR WITH CONCEALED MOUNTING HARDWARE **FORGED IN SOLID BRASS**

MODEL: 669



BATHROOM GRAB BARS

GUESTROOMS + RELATED SPACES



SPECIALTY RECESSED RAIN SHOWER HEAD WITH INTEGRATED LIGHT FIXTURE VIABIZZUNO, CUBO DOCCIA - LARGE



NOTE:

DIMENSIONS: CEILING PLATE - 155 x 300mm.

316 POLISHED STAINLESS STEEL WITH PROTECTION AND INTEGRATED WATER SUPPLY (1/2" PIPE CONNECTORS NOT SUPPLIED)

WIRED FOR DICHROIC GU4-20/35W LAMP.

TO BE RECESSED INTO CEILING AFFIXED TO SPECIFIED WALL-BOX.

PROVIDE 13 mm (1/2") WATER SUPPLY TO SHOWER VALVE AND SHOWER HEAD.

PART NUMBERS:

SHOWER PLATE: F6.128.04


KIT CB: F9.128.04

BOX FOR MOUNTING: 56.128.03


COUPLING DEVICE: F9.129.91

RETROFIT RAIN SHOWER HEAD - TOTO - 11" RAIN SHOWER HEAD SHOWER HEAD - MODEL: TS100B

3" CEILING MOUNT SHOWER ARM - M@DEL: TS100MC







NOTE:

FINISHES AVAILABLE:

POLISHED CHROME (CP); POLISHED BRASS (PB); BRUSHED NICKEL (BN); POLISHED NICKEL (PN)

CAN ALSO BE USED AS A WALL-MOUNTED OUTDOOR SHOWER HEAD.

PROVIDE 13 mm (1/2") WATER SUPPLY TO SHOWER VALVE AND SHOWER HEAD



CROMA E 75 3-JET SHOWERHEAD


MODEL: 28443

MANUFACTURER: HANSGROHE

NOTES:

- POLISHED CHROME FINISH
- 3 SPRAY MODES
- 40 NO -CLOG SPRAY CHANNELS
- 2.5 GPM
- PROVIDE 13 mm (1/2") WATER SUPPLY TO SHOWER HEAD AND 13 mm (1/2") WATER SUPPLY TO SHOWER VALVE.





CROMA E 100 GREEN VARIO JET SHOWERHEAD


MODEL: 04331000

MANUFACTURER: HANSGROHE



NOTES:

- POLISHED CHROME FINISH
- 4" SPRAY FACE
- 4 SPRAY ZONES ADJUSTABLE INTENSITY
- 85 NO-CLOG SPRAY CHANNELS
- 2.0 GPM
- PROVIDE 13 mm (1/2") WATER SUPPLY TO SHOWER HEAD AND 13 mm (1/2") WATER SUPPLY TO SHOWER VALVE.

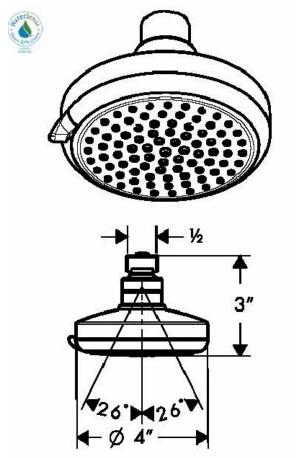



FIXED SHOWER HEADS - MANUFACTURER: HANSGROHE

GUESTROOMS + RELATED SPACES

REF: SECTION E DWG #:

HAND HELD SHOWER HEAD WANDS MODEL: 462W - SINGLE MODE

MODEL: 412W - THREE MODE

MODEL: EF101 - EURO FLOW, THREE MODE



NOTES:


THREE MODE HAND HELD SHOWER HEAD WAND (INSTALLED IN ADDITION TO RAIN SHOWER HEAD).

FINISHES:

POLISHED CHROME

SATIN NICKEL

HOSE LENGTH TO BE SIZED TO PREVENT HAND SHOWER CONTACTING SHOWER FLOOR IF DROPPED (TYPICALLY 60").

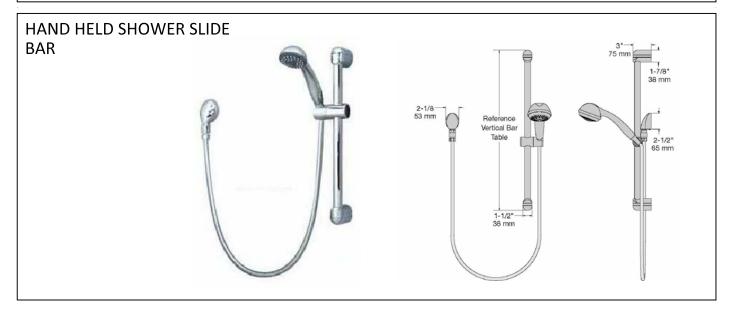












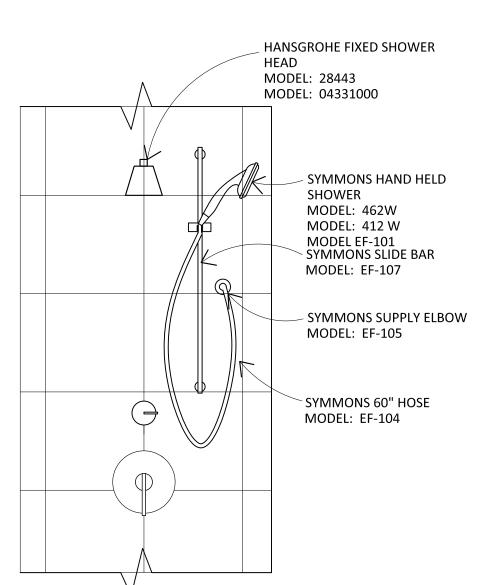







NOTE:

SEE DRAWING E-16 FOR FIXTURE HEIGHT REQUIREMENTS.



SECTION E

DWG #:


GENERAL NOTE:


PRESSURE BALANCING SHOWER VALVE WITH INTEGRAL CHECK STOPS, LEVER HANDLE AND ADJUSTABLE STOP SCREW TO LIMIT HANDLE TURN.


PROVIDE 13 mm (1/2") WATER SUPPLY TO SHOWER VALVE.

POLISHED CHROME FINISH.

NO VISIBLE SCREWS.

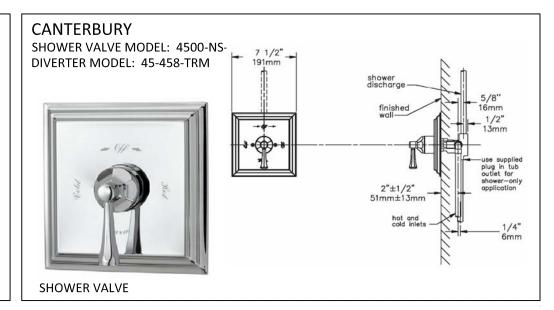

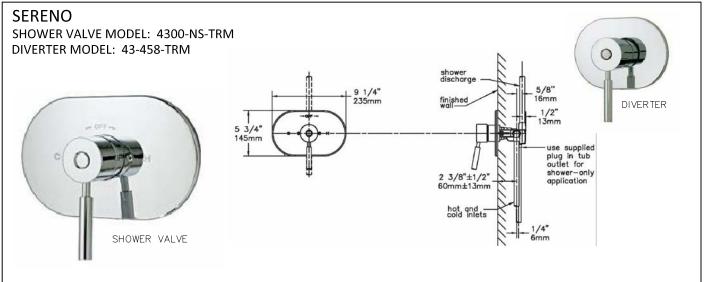

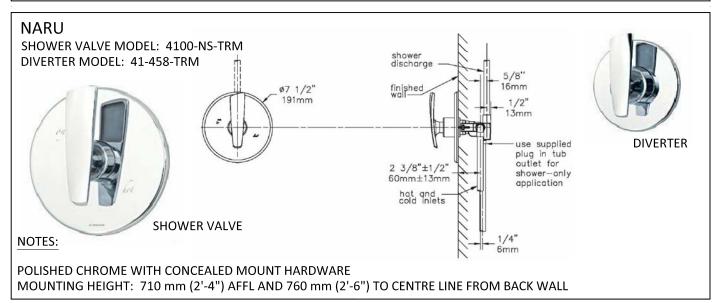



SHOWER VALVE SYSTEM - MANUFACTURER: SYMMONS

GUESTROOMS + RELATED SPACES

SECTION E

STYLEDRAIN MODEL: 9170 / 9171

NOTES:


MODEL: 9170/9171 5 1/4" x 5 1/4"


HEAVY DUTY CAST IRON BODY TREATED WITH CORROSION RESISTANT EPOXY.


COMPATIBLE WITH ZURN Z415 SERIES DRAIN BODIES FOR ADDITIONAL FLEXIBILITY.

SPECIFIED MODEL MEETS OR **EXCEEDSTHE FOLLOWING: ASME/ANSI A112.18.1** CSA B125 IAPMO/UPC











9170 - TRADITIONAL OPEN AREA 8.43 in²








SHOWER DRAIN - MANUFACTURER: CALIFORNIA FAUCETS

SECTION E


KOHLER BIDET - AMARETTO MODEL: K-4864-0



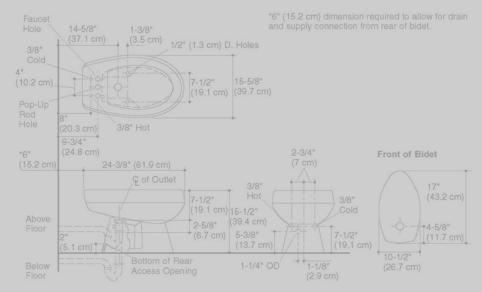

KALLISTA BIDET FAUCET + TAP SET - HAMPSTEAD MODEL: P22205



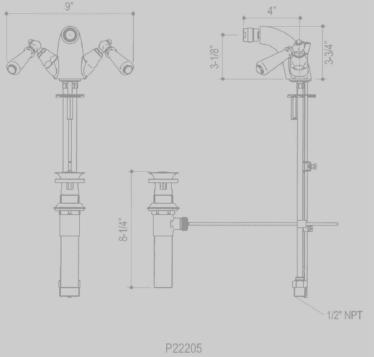



KOHLER


MODEL: CAXTON, K-2211 (WHITE)

NOTE:

485 mm x 380 mm (19" X 15")

205 mm (8") CENTRE SPREAD





KOHLER PEDESTAL LAVATORY - WELLWORTH


MODEL: K-2293-8 (WHITE)




K-2293-4

205 mm (8") CENTRE SPREAD LAV. SET.

KOHLER PEDESTAL LAVATORY - CIMARRON



205 mm (8") CENTRE SPREAD





LAVATORY PLUMBING FIXTURES

SECTION E


GENERAL NOTE:


WIDESPREAD LAVATORY SETS WITH LEVER HANDLES.


PROVIDE 2 LAVATORY BOWLS PER BATHROOM.

POLISHED CHROME FINISH, INCLUDING POLISHED CHROME DRAIN POP-UP.

SYMMONS, CANTERBURY MODEL: SLW-4512 8* (203 mm) min. 4* (102 mm) min. 3-1/8* (80 mm) max 1-3/8* (35 mm) max 1* dia. (25 mm) Hole size 1-1/16* (27 mm) min. 1-7/16* (27 mm) min. 1-7/16* (27 mm) min. 1-7/16* (38 mm) max. Flexible hose 8* (203 mm) min. 151 mm 13/16* dia. (21 mm) Hole size 1-1/8* (29 mm) min. 1-1/2* (38 mm) max. 5/8* 16 mm

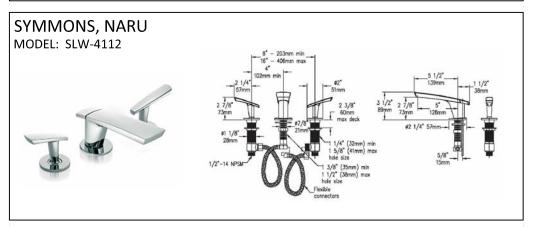

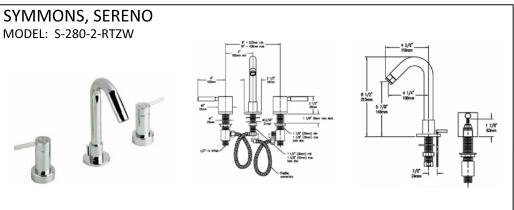


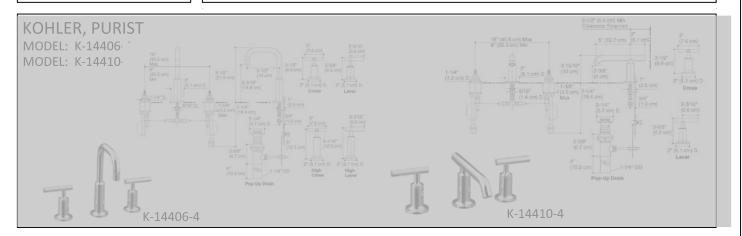




GUESTROOM BATHTUB

DROP-IN, UNDERMOUNT, OR FREESTANDING LUXURY DEEP STEEPING BATHTUB, STANDARD GUESTROOM BATHTUB LENGTH: MIN. 16 75 mm (5'-6") SUITE BATHTUB LENGTH: MIN. 1 830 mm (6'-0")

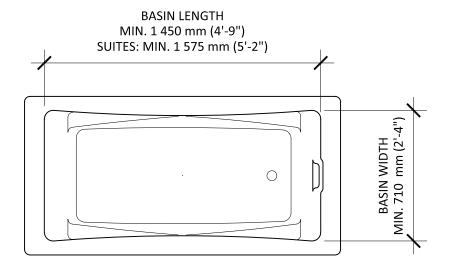

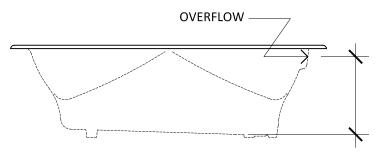

STEEPING DEPTH (FROM BOTTOM OF BASIN TO MAX. WATERLINE AT OVERFLOW DRAIN) MIN. 405mm (1'-0"), MAX. 485mm (1'-7")


MATERIALS:


- 6-10mm THICK CAST-IRON WITH ENAMEL FINISH, OR
- MIN. 2.9mm± THICK STEEL, NON-WELDED, WITH ENAMEL FINISH (TOTAL MIN. 3.5mm), WITH SOUND-ABSORBING INSULATION PADS TO BACK AND UNDERSIDE
- ENAMEL FINISH: FACTORY FINISH TO ALL EXPOSED AREAS, NON-POROUS VITREOUS (GLASS), ACID-AND STAIN-RESISTANT, FULLY BONDED TO CAST-IRON OR STEEL
- ACRYLIC TUBS AND PRESSED-STEEL TUBS ARE UNACCEPTABLE
- CARVED STONE OR TERRAZZO TUBS MAY BE ACCEPTABLE (REVIEWED ON AN INDIVIDUAL BASIS)

RELATED FABRICATION:

- DROP-IN OR UNDERMOUNT APPLICATIONS MUST BE FULLY SEALED AT ALL CHANGES OF MATERIALS
- VISIBLE UNENAMELLED AREAS OF BATHTUB ARE UNACCEPTABLE
- ACRYLIC APRON/SIDE PANELS ARE UNACCEPTABLE
- CABLE-OPERATED PULL-UP DRAIN, BRASS CORE, CHROME FINISH



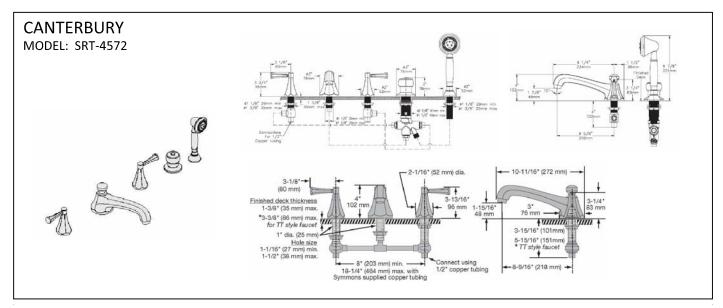

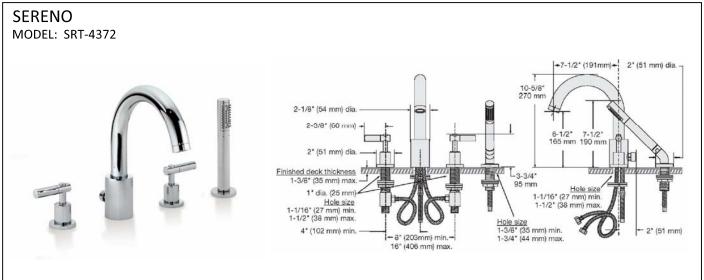

NOTES:


TWO HANDLE FAUCET WITH QUARTER TURN CERAMIC CONTROL COMPONENTS.

HAND SPRAY AND LIFT-ROD DIVERTER.

DECK MOUNT INSTALLATION.

TUB FILLER SPOUT MUST HAVE AERATOR.

POLISHED CHROME FINISH WITH LEVER HANDLES.

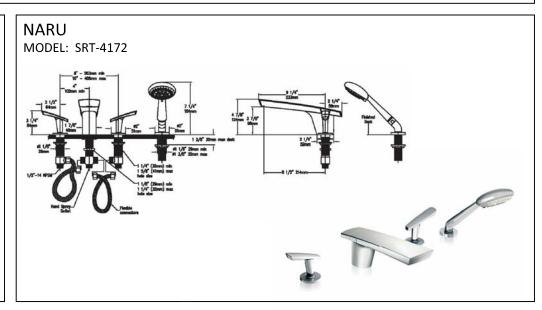



BATHTUB SETS - MANUFACTURER: SYMMONS

GUESTROOMS + RELATED SPACES

SECTION E

DWG#