

Disassembly

TS-WXL


Remove the front panel

Open the front door and remove the four black countersunk screws. Remove the harness to the controller with LCD, SW, etc. on the top



Remove the rear panel

You can remove the rear panel by removing the hidden screws and the four screws on the bottom and both sides beneath the rear panel. Remove the power connector, ground wire, and fan connector.

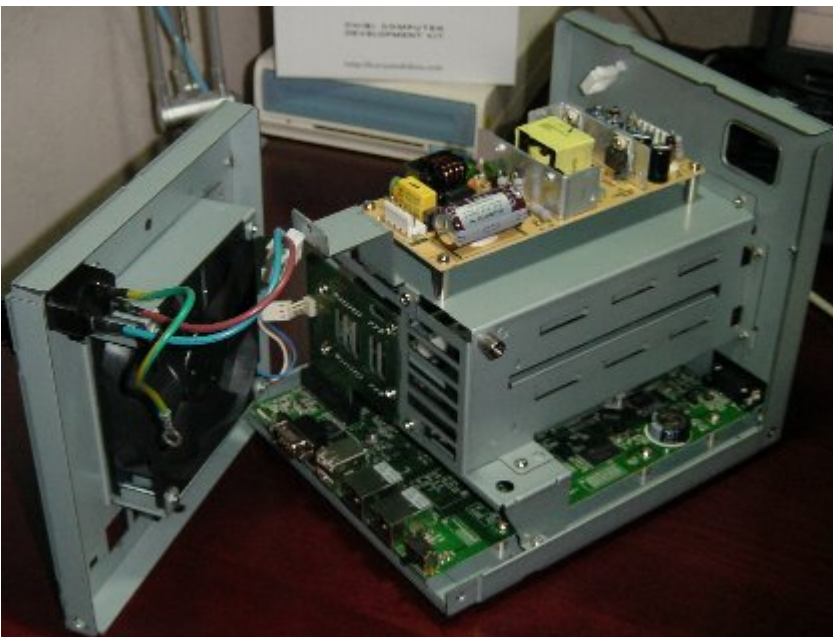

Remove the daughter board


Next time I was looking at where to remove it, I noticed that the main board could be removed without removing the front panel.

Remove daughter board with SATA connector



Remove the main board

The main board can be removed by removing the six screws and pulling it back.

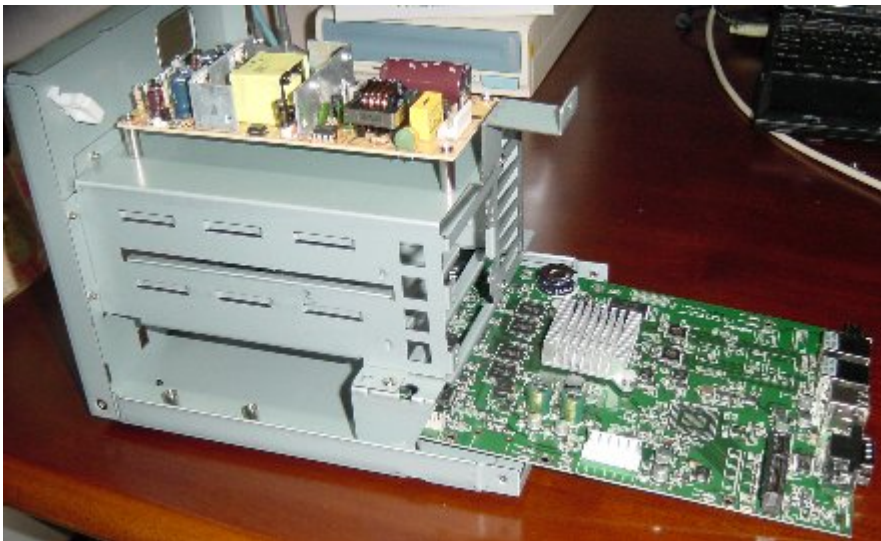

[Rakuten Ichiba](#)
[Amazon](#)
[Yahoo Shopping](#)
[Livedoor Department Store](#)

[←](#)
[Hidden screw](#)

[Hack of record](#)
[LinkStation / KuroBox trying to](#)
[hack](#)

[→](#)
[Main board](#)

ツイート

@yasunari_yさんへツイートする

@yasunari_yさんをフォロー

Copyright (C) 2003-2013 Yasunari Yamashita. All Rights Reserved. [Yasunari](#)
yama yamasita.jp [Yasunari Yamashita](#) 向 Mukoichi, Kyoto