36" Gas Cooktop

500 Series - Stainless Steel NGM5656UC





NGM5656UC Stainless Steel

Bosch gas cooktops are engineered to perform precisely, offering high heat and low simmer options for optimal cooking flexibility.

Features & Benefits

Powerful 16,000 BTU burner for boiling, searing and stir-frying

OptiSim® Burner - simmer delicate sauces and melt chocolate without scorching

Electronic re-ignition will automatically re-ignite the burner in case the flame goes out

Seamless, one-piece stainless steel design makes clean-up simple

Continuous grates make moving heavy pots easier

General Properties		
Knob material	Metal	
Sealed burners	Yes	
Grate material	Cast iron	
Element Performance		
Total BTU load (NG / LP)	51,500 / 47,300	
Power of front left burner (NG / LP)	10,000 / 9,100	
Power of back left burner (NG / LP)	10,000 / 9,100	
Power of center burner (NG / LP)	16,000 / 15,000	
Power of back right burner (NG / LP)	5,500 / 5,000	
Power of front right burner (NG / LP)	10,000 / 9,100	
Technical Details		
Watts	360 W	
Circuit breaker	15 A	
Volts	120 V	
Frequency	60 Hz	
Plug type	3 prong	
Power cord length	60"	
Energy source	Gas	
Convertible to LP (kit required)	Yes	

, ,	
Power of front right burner (NG / LP)	10,000 / 9,100
Technical Details	
Watts	360 W
Circuit breaker	15 A
Volts	120 V
Frequency	60 Hz
Plug type	3 prong
Power cord length	60"
Energy source	Gas
Convertible to LP (kit required)	Yes
•	





Dimensions & Weight	
Overall appliance dimensions (HxWxD)	3 13/16" x 37" x 21 1/4"
Required cutout size (HxWxD)	3 13/16" x 34 15/16" x 19 1/8"
Minimum distance from counter front	1 7/8"
Minimum distance from rear wall	3"
Net weight	39 lbs
Accessories — Included	
Included	LP conversion kit
Accessories — Optional	



Wok ring



HEZGR301 Griddle

Accessories: To purchase Bosch accessories, cleaners & parts please visit www.bosch-home.com/us/store or call 1-800-944-2904 (Mon to Fri 5 am to 6 pm PST). Sat 6 am to 3 pm PST). Notes: All height, width and depth dimensions are shown in inches. BSH reserves the absolute and unrestricted right to change product materials and specifications, at any time, without notice. Consult the product's installation instructions for final dimensional data and other details prior to making cutout. Warranties: Please see Use & Care manual or Bosch website for statement of limited warranty.

36" Gas Cooktop


500 Series - Stainless Steel NGM5656UC





Installation above Wall Ovens

30" Built-in oven - under gas cooktop

Installation Details

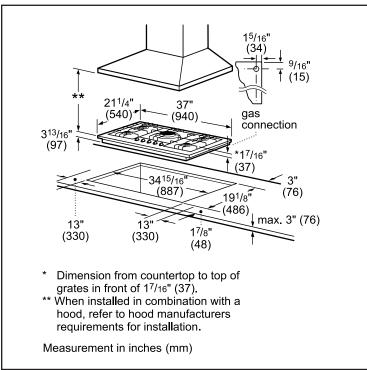

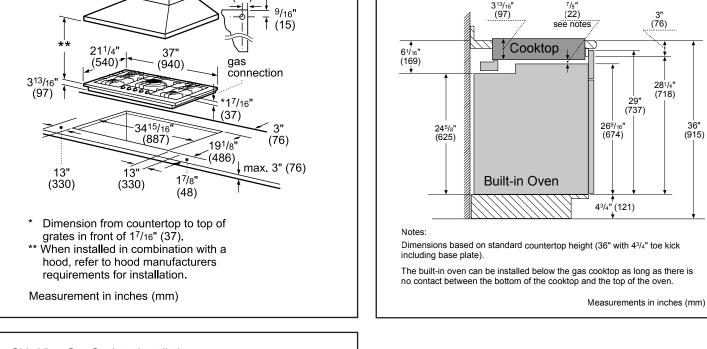

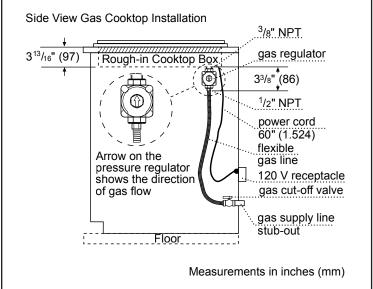

Accessories: To purchase Bosch accessories, cleaners & parts please visit www.bosch-home.com/us/store or call 1-800-944-2904 (Mon to Fri 5 am to 6 pm PST). Sat 6 am to 3 pm PST). Notes: All height, width and depth dimensions are shown in inches. BSH reserves the absolute and unrestricted right to change product materials and specifications, at any time, without notice. Consult the product's installation instructions for final dimensional data and other details prior to making cutout.


Warranties: Please see Use & Care manual or Bosch website for statement of limited warranty.

36" Gas Cooktop

500 Series - Stainless Steel NGM5656UC



Installation Details

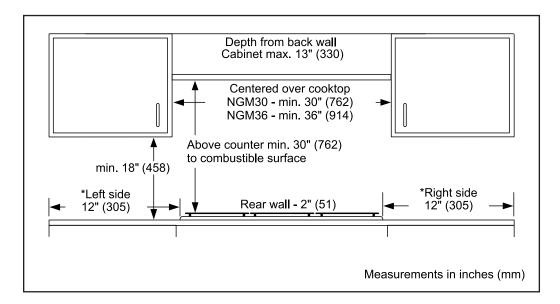

24" Bar Handle Dishwasher

800 Series DLX - Stainless Steel SHX878ZD5N





SHX878ZD5N Stainless Steel

Also available in:

White SHX878ZD2N Black SHX878ZD6N

Patented CrystalDry™ technology transforms moisture into heat to get dishes, including plastics, 60% drier.*

Features & Benefits

42 dBA: dishwasher runs quietly so your kitchen conversations aren't interrupted.

The Flexible 3rd Rack with fold down sides adds 30% more** loading area, perfect for utensils and ramekins.

The AquaStop® leak protection system contains leaks through a precisely engineered system. If a leak occurs, the system contains it by shutting down operation and pumping out water. So you have the ultimate peace of mind whether you are away or at home.

0 ID #	
General Properties	
Number of wash cycles	6
Number of options	6
dBA	42
Third rack	Flexible 3rd Rack
Rack adjustability	Rackmatic®
Tub material	Stainless Steel
Control type	Touch Control
Concealed water heating element	Yes
Leak protection system	24/7 AquaStop®
Water softener	No
Five-level wash	Yes
ChildLock	No
Special features	InfoLight®, CrystalDry™ Option
Efficiency	
Water usage per cycle	3.5
Energy efficiency class	Tier 1
ENERGY STAR® qualified	Yes
Total annual energy consumption (kWh)	269
Total annual water consumption (g)	623.5
Capacity	
Number of place settings	16










performance may vary by dish type.

Warranties: Please see Use & Care manual or Bosch website for statement of limited warranty.



recillical Details	
Watts (W)	1440 W
Current (A)	12 Amps
Volts (V)	120 V
Frequency (Hz)	60 Hz
Power cord length	67"
- Install length from corner of unit	45"
Minimum water pressure (lb/sin)	14
Length outlet hose (in)	79"
Dimensions & Weight	
Overall appliance dimensions (HxWxD) (in)	33 7/8" x 23 9/16" x 23 3/4"
Required cutout size (HxWxD) (in)	33 7/8" x 23 5/8" x 24"
Adjustable feet	Yes
Net weight (lbs)	102 lbs
Accessories—Optional	
Junction Box	SMZPCJB1UC
Bosch Dishwasher Water Supply Hose	SMZSH002UC
Drain Hose Extension Kit	SGZ1010UC
Dishwasher Accessory Kit	SMZ5000
Anti-Tarnish Silverware Cassette	SMZ5002UC

Technical Details



SMZEP001UC

Edge Protector


^{**}Compared to a Bosch dishwasher with 2 racks. Accessories: To purchase Bosch accessories, cleaners & parts please visit www.bosch-home.com/us/store or call 1-800-944-2904 (Mon to Fri 5 am to 6 pm PST). Sat 6 am to 3 pm PST). Notes: All height, width and depth dimensions are shown in inches. BSH reserves the absolute and unrestricted right to change product materials and specifications, at any time, without notice. Consult the product's installation instructions for final dimensional data and other details prior to making cutout.


24" Bar Handle Dishwasher


800 Series DLX - Stainless Steel SHX878ZD5N





Installation Details

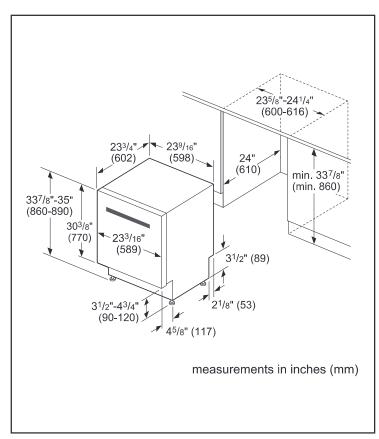

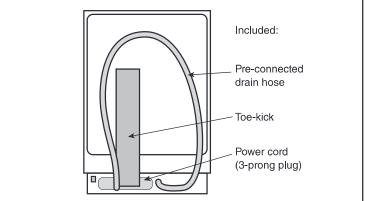

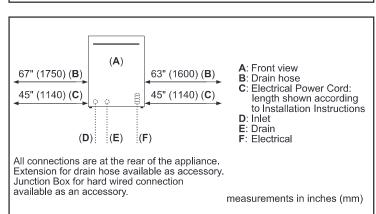

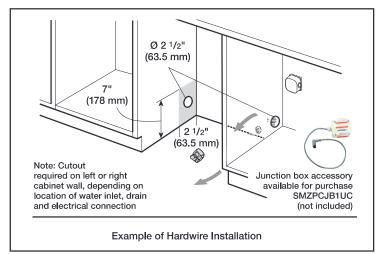

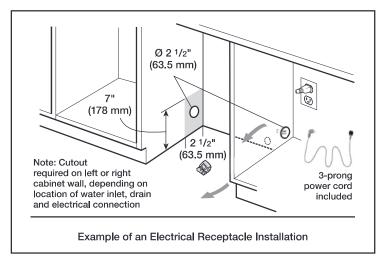

Accessories: To purchase Bosch accessories, cleaners & parts please visit www.bosch-home.com/us/store or call 1-800-944-2904 (Mon to Fri 5 am to 6 pm PST, Sat 6 am to 3 pm PST).

Notes: All height, width and depth dimensions are shown in inches. BSH reserves the absolute and unrestricted right to change product materials and specifications, at any time, without notice. Consult the product's installation instructions for final dimensional data and other details prior to making cutout.


Warranties: Please see Use & Care manual or Bosch website for statement of limited warranty.


24" Bar Handle Dishwasher

800 Series DLX - Stainless Steel SHX878ZD5N



Installation Details





Note: Plumbing installations will vary - refer to local codes. Drain hose included is 79" (201 cm) and can be extended to a maximum of 155 3/4" (396 cm).

Always use the approved drain hose extension kit (SGZ1010UC).

Ensure a portion of the drain hose is raised between min. 33" (84 cm) and max. 43" (110 cm) above the cabinet floor.



KITCHEN VENTILATION SYSTEMS



Inseri

XOI3315SMUA make-up air compliant series

The XOI insert is an integrated blower which allows you to match your custom hood to your kitchen. This simple and affordable design is easy to install. Designed and crafted in Italy for the ultimate in fit and finish. At XO we believe that good design is something everyone can afford.

What does Make-Up Air Compliant mean?

For the last several years, codes and standards required Make-Up air for domestic range hoods with exhaust rates exceeding a certain limit. The International Residential Code Section M1503.4 and the International Mechanical Code Section 505.2 require Make-Up air for all domestic range hoods in excess of 400 cfm. State, county and local codes may be more restrictive. Always check with your jurisdiction for specific Make-Up air requirements in your area.



Model: XOI3315SMUA

Sizes: 33-3/4" **Depth:** 15"

Features and Benefits:

- Make-Up Air Compliant Check Local Codes
- •395 CFM high velocity blower optimally removes Smoke, Grease and Odors.
- 3 speed push button controls.
- Two 50W Halogen Lights Provide brilliant illumination over the cooking surface.
- Dim: 33 3/4" W x 15" D x 11 1/2" T
 Cut Out: 32 1/2" W x 12 7/8" D
- Baffle Filters Trap airborne smoke and grease particles. They can be easily be removed for dishwasher-safe cleaning.
- Mounting Height from cooking surface 27"-32"

Sound level 1 - 4 Sones


Duct Options and Electrical Requirements:

- 6 inch duct required.
- Ductless Option for applications where no ducting is available
- AC 120v-60Hz (6.2amp).

Options:

Optional recirculation kit available XORFK04



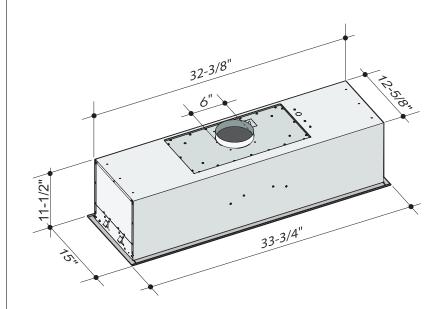

WIDTH	DEPTH	CFM
34"	15"	395



XO is Exclusively Distributed by: Eastern Marketing Corp 24 Eisenhower Parkway Roseland, New Jersey 07068 800-966-8300 www.easternmarketingcorp.com



36" Counter-Depth 3-Door Refrigerator

800 Series - Stainless Steel B21CT80SNS





B21CT80SNS Stainless Steel

Also available in: Black Stainless Steel B21CT80SNB

The 3-Door Counter-Depth Refrigerator features extra-cold storage & humidity controlled drawers to keep food fresh.

Features & Benefits

A full-width Chiller Drawer provides extra-cold storage.


A retractable shelf allows you to easily store tall bottles and items.

Dual AirCool system provides even temperatures & minimal odor transfer.

LED lighting and transparent storage provide ideal visibility throughout.

Humidity controlled crisper drawers help keep food fresher longer.

0 10 4	
General Properties	
Water filter	Yes
Lighting	LED
Defrost process refrigerator section	Frost-free
Number of shelves - refrigerator	5
Adjustable shelves - refrigerator	4 half-width
Shelf material - refrigerator	Tempered glass
Type of shelves - refrigerator	Tempered glass
Gallon storage bins	5
Humidity control drawer	2
Defrost process freezer section	Automatic
Number of drawers - freezer	1
Ice maker	Yes
Capacity	
Total unit gross capacity (cu. ft.) – AHAM	20.7
Refrigerator gross capacity (cu. ft.)	14.7
Freezer gross capacity (cu. ft.)	6.0
Technical Details	
Current (A)	15 A
Volts (V)	120 V
Frequency (Hz)	60 Hz
Power cord length (in.)	67
Plug type	120V-3 prong





Dimensions & Weight	
Appliance dimensions (H x W x D) (in.)	69 7/8" x 35 3/4" x 28 3/4"
Required cutout size (H x W x D) (in.)	70" x 36" x 25"
Net weight (lbs)	294 lbs
Efficiency	
Energy consumption (kWh/yr)	623 kWh
Accessories-Included	
Included	2 Egg trays, Ice storage bin, Ice scoop, Toe kick trim cover, 1 Water filter

Add 63/64" (2.5 cm) to the height dimension when leveling legs

Accessories—Optional



BOHANDL50 Pro-style stainless-steel handle kit (P/N 00775144)

BORPLFTR10 Replacement water filter (P/N 00740570)



For help and assistance with Bosch accessories please visit; www.bosch-eshop.com/eshop/bosch/us or call 1-800-944-2904 Mon-Fri 5am to 6pm PST Sat 6am to 3pm PST

Notes: All height, width and depth dimensions are shown in inches. BSH reserves the absolute and unrestricted right to change product materials and specifications, at any time, without notice. Consult the product's installation instructions for final dimensional data and other details prior to making cutout. Applicable product warranty can be found in accompanying product literature or you may contact your account manager for further details.


Warranties: Bosch warrants that the Product is free from defects in materials and workmanship for a period of three hundred and sixty-five (365) days from the date of purchase. The foregoing timeline begins to run upon the date of purchase, and shall not be stalled, tolled, extended, or suspended, for any reason whatsoever. This Product is also warranted to be free from cosmetic defects in material and workmanship (such as scratches of stainless steel, paint/porcelain blemishes, chip, dents, or other damage) to the finish of the Product, for a period of thirty (30) days from the date of purchase or closing date for new construction. This cosmetic warranty excludes slight color variations due to inherent differences in painted and porcelain parts, as well as differences caused by kitchen lighting, product location, or other similar factors. This cosmetic warranty specifically excludes any display, floor, "As Is", or "B" stock appliances.


36" Counter-Depth 3-Door Refrigerator

800 Series - Stainless Steel B21CT80SNS



Installation Details

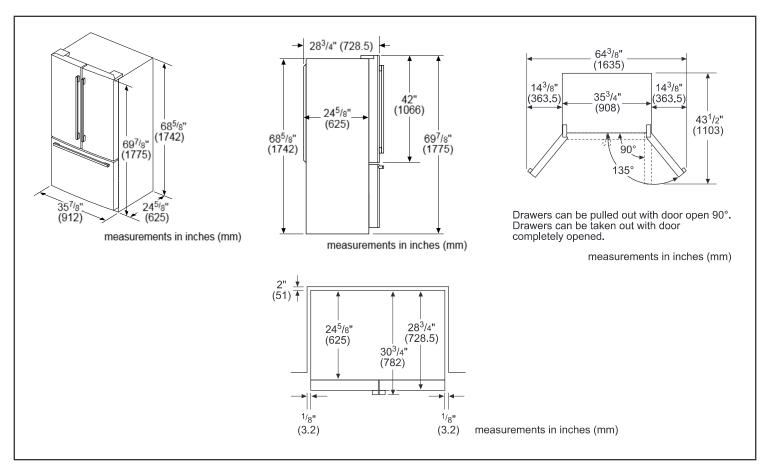

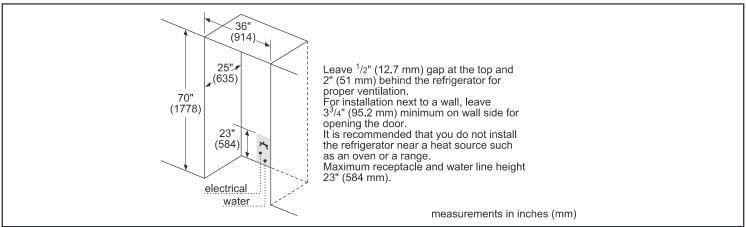



For help and assistance with Bosch accessories please visit: www.bosch-eshop.com/eshop/bosch/us or call 1-800-944-2904 Mon-Fri 5am to 6pm PST Sat 6am to 3pm PST

Notes: All height, width and depth dimensions are shown in inches. BSH reserves the absolute and unrestricted right to change product materials and specifications, at any time, without notice. Consult the product's installation instructions for final dimensional data and other details prior to making cutout. Applicable product warranty can be found in accompanying product literature or you may contact your account manager for further details.

Warranties: Bosch warrants that the Product is free from defects in materials and workmanship for a period of three hundred and sixty-five (365) days from the date of purchase. The foregoing timeline begins to run upon the date of purchase, and shall not be stalled, tolled, extended, or suspended, for any reason whatsoever. This Product is also warranted to be free from cosmetic defects in material and workmanship (such as scratches of stainless steel, paint/porcelain blemishes, chip, dents, or other damage) to the finish of the Product, for a period of thirty (30) days from the date of purchase or closing date for new construction. This cosmetic warranty excludes slight color variations due to inherent differences in painted and porcelain parts, as well as differences caused by kitchen lighting, product location, or other similar factors. This cosmetic warranty specifically excludes any display, floor, "As Is", or "B" stock appliances.

Combination Oven and Speed Oven or Steam Convection Oven 30" Traditional Installation





Combination Oven and Speed Oven or Steam Convection Oven 30" Flush Mount Installation

Flush installation requires two side cleats to be attached inside the cabinet frame, recessed from the front.

