


INPUT: 12 V adapter or bench supply; polyfuse, reverse-polarity P-FET, TVS

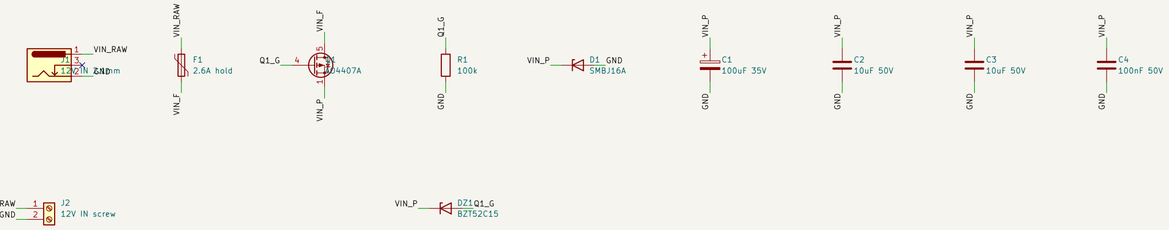


BUCK: TPS54560B, 400 kHz, servo rail 6.58 V sensed after the shunt

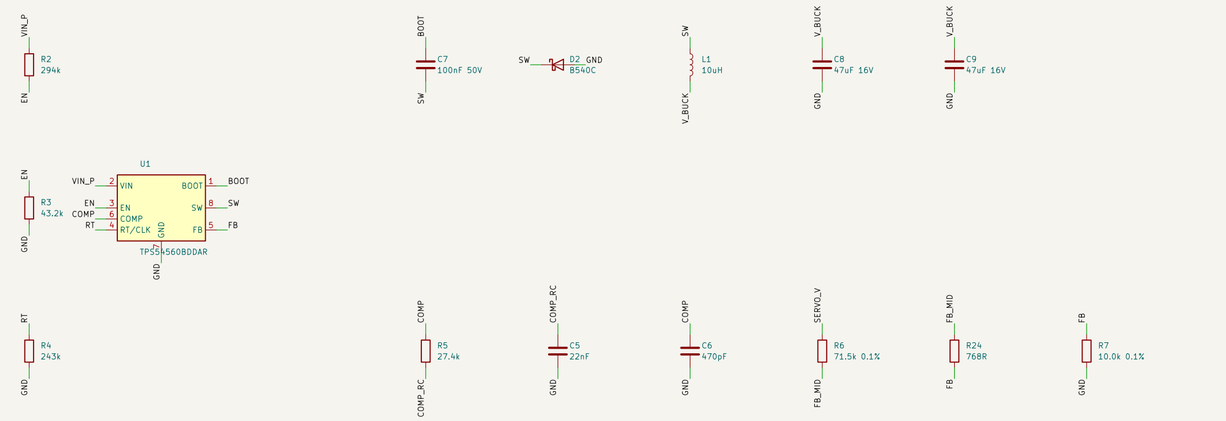


SERVO RAIL: 0.1 ohm Kelvin shunt + INA219 (0x40), 1000 uF bulk, 5 V rail, 5 V PWM buffer

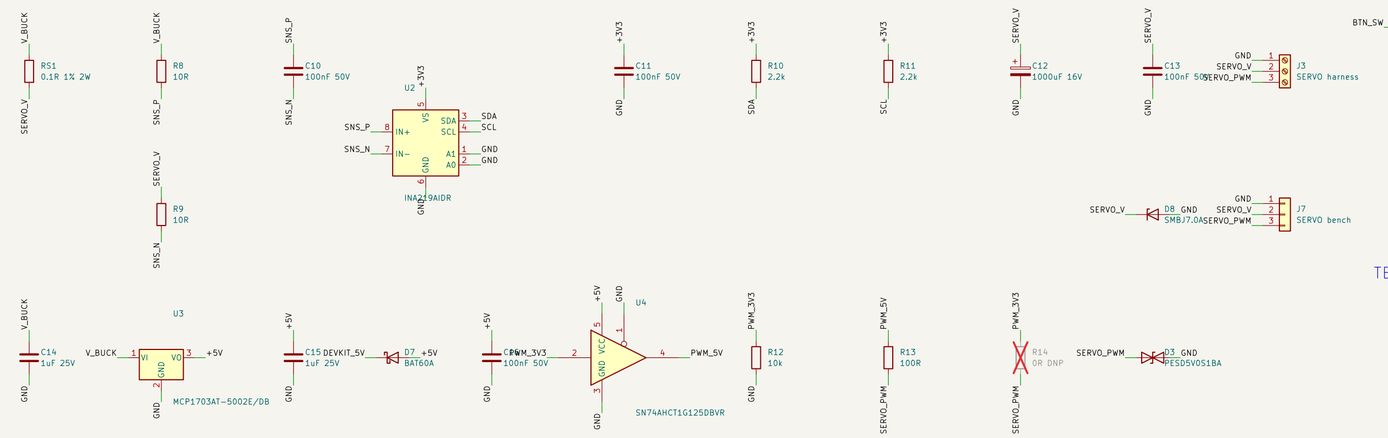

MCU: ESP32-DevKitC V4 on sockets; 5 V from USB or from the board through D7





I/O: FSR divider + anti-alias, limit switch, button, LED, servo feedback



TEST POINTS, MOUNTING, ERC FLAGS



Generated by ecad/gripper/kicad/gen/gen_sch.py from ecad/gripper/design.py; do not hand-edit

berkeley-ai-tutor / ME102B gripper

Sheet: /

File: gripper.kicad_sch

Title: SO-101 cloth-feed gripper controller (off-arm board)

Size: A2	Date: 2026-10-11	**Rev: A**
KiCad E.D.A. 10.0.6		Id: 1/1