

L 35 & L 35 FS

Ultra-light, expandable vertical array

High power density

Easy to transport

Quality surface – also in white

Outdoor with grille

4-year warranty



Firmensitz
speaker trade
Neuenhofer Straße 42-44
42657 Solingen, Germany

P +49 212 38226-10
info@se-audiotechnik.de
www.se-audiotechnik.de

📞 /seaudiotechnik
📧 /se_audiotechnik
📺 /se-audiotechnik
📱 /seaudiotechnik

© 2021 SE AUDIOTECHNIK® is a registered trademark of Speaker Electronic (Jia Shan) Co., Ltd.

All other trademarks are the property of their respective owners. Speaker Electronic (Jia Shan) Co., Ltd. and its subsidiaries and products are not affiliated with, endorsed by, sponsored by or supported by those trademark owners.

Ease® is a registered trademark of AFMG Technologies GmbH, Powercon® is a registered trademark of Neutrik AG, The "f" logo is a registered trademark of Facebook, Inc., The camera logo is a registered trademark of Instagram, LLC, The "in" logo is a registered trademark of LinkedIn corporation, The bird logo is a registered trademark of Twitter, Inc.

L-Line brochure v. 2021/04
Design by pixelmaedchen.de | Renderings by www.redemann-media.de | Photos by www.annikafeuss.com
All product specifications in this document are subject to change without notice.



L-LINE

MISSION: LINE ARRAYS – LIGHT, STRONG, CLEVER



www.se-audiotechnik.de

L-LINE

ROCKET SOUND FROM SOLINGEN –
LIGHT, STRONG, ON A MISSION FOR 40 YEARS

Discover our equipment for clever field work!

The L-Line is our weightless line array for light and sound rental companies, professional bands and installers.

Thanks to our very own factory in China, we are able to offer reasonable prices while retaining absolute quality control. As market leader, we are always sustainable. Your reliable German-based contact person is always available for you on site.

Our lightweight, strong sound missiles offer one of the most compact professional PA solutions for small to large events. The L-Line allows you to precisely control a homogeneous sound field – with amazingly little space in the shuttle.

Our goal is for you to land in the right spot. Therefore, the L-Line is easy to scale and flexible in terms of possible combinations. Ready for landing! Even with the light Flysubs, you can launch different

combinations and adapt our systems to your needs.

The powerful speakers provide for massive thrust on tour and at large installations. From concert hall to church. Indoor and outdoor.


Fancy midnight black or rather starry white? All our speakers feature high-quality coating. For outdoor use, there are secure grilles and rear panels.

The power required for operating your system is delivered by the LA 10.4D – our power plant. A modern Class-D amplifier boasting rich 4x 2,500 W, network control and networked audio. The Library will remember your settings. The user-friendly touch screen is intuitive to use.

In short, the L-Line is a clever solution. Enjoy plenty of power at a reasonable price!



L 35

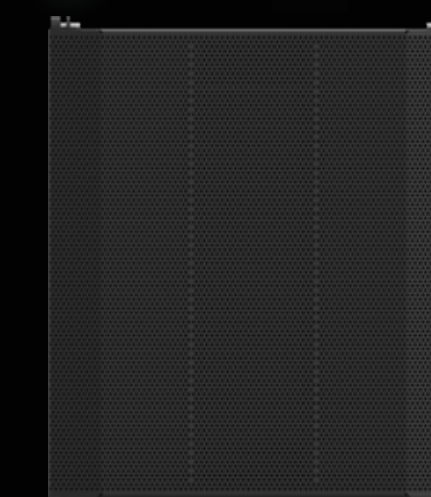

L 35 FS



LA 10.4D NEW



L 65 NEW



L 65 FS NEW

4
YEARS
WARRANTY

L 35

RADAR LOVE: STRONG LOW-FLYING AIRCRAFT FOR LOW CEILINGS

Overcome the limitations of space: With the L 35, line arrays can also be set up in low-ceilinged rooms. Unobtrusive! And still sounds like a rocket launch.



The L 35 is loud. Especially when its lightweight construction is taken into account: The 2-way speaker weighs an astounding 3.6 kg. Yet, the 2-way speaker is as small as the mission description in the flight manual. And all that with a weight of just 3.6 kg! At the same time, this system boasts an incredible 129 dB max. SPL. This is a respectable figure even for significantly bigger systems.

L 35 means tangible savings: More space in the shuttle. Weightless assembly. Save time while rigging. For all that, a skeleton crew will be sufficient. At the same time, the L 35 always provides more than enough power. In proportion to its weight, it reaches an incredible 35.8 dB/kg.

Because the L 35 is so handy and visually discreet, it is as clever in live situations as in installations. And another plus: Vertically, its compact construction allows for more angles.

Few others feature a comparable power with so little space requirements. With its numerous mounting options and the comprehensive range of accessories, the L 35 can be installed almost anywhere and speeds up the assembly as well as the flight home.

L 35 FS

OUR NANO-BOOSTER: IT'S THAT EASY TO GET MORE THRUST

The L 35 FS is the smart bass extension for the L 35 – not on the ground, but immediately suspended along the array. At only 8 kg, the ultra-compact Flysub weighs as little as a Champions League trophy.



Its impact should however never be underestimated: This tiny unit generates 128 dB SPL for a glorious round, powerful sound. The standard housing features an 8" driver. Upwards of 47 Hz, you'll be sure to hear it!

With its mini size, the L 35 FS is suitable for Light and Sound Rental companies, professional bands and fixed installations with high level requirements.

For planning professionals, it is ideal if you need something to be loud in a small space, but where visual discretion is required. What is also clever is: The compact design allows for more vertical angles.

Bassy, boosty, beefy. With these properties, the nano bass extends the application range of the L 35 line array considerably. As with the entire product family, the Flysub is available in white, black and as an outdoor version.

L 65

WEIGHTLESS DOCKING: OUR RELIABLE ALL-ROUNDER

Ground Control to Major Tom: With the L 65, you'll make a safe landing! Our passive 3-way line array is a reliable all-rounder for light and sound rental companies, professional bands and fixed installations with high level requirements. With an SPL of 136 dB at a weight of less than 23 kg, the sound is galactic, without tearing black holes in the cash register.



The rigging is easy – because of its simple suspension and low weight in relation to its performance. Thus you can dock anywhere quickly.

For thunderous sound like that of a rocket engine, SE AUDIO-TECHNIK® uses a passive 3-way system in the L 65 with a value for money that is out of this world.

The three drivers provide for an assertive, neutral sound through the entire frequency range – the ideal launch pad for exciting space manoeuvres. Thanks to the passive construction, up to three L 65 can be used on a 4Ω channel power amplifier. This is a massive saving on amplifiers!

We developed the L 65 in Germany and manufacture them in our own factory. Therefore, all components are matched to one another precisely and deliver maximum sound pressure with minimal distortion.

Since we do not outsource our production, we also retain full quality control. Therefore, our clients get more for less.


With their tough outer skin, low weight and fast assembly and disassembly, the L 65 is the ideal tour companion. It is not cumbersome to transport, and represents a wonderful starting point in the mix.

Its homogeneous sound characteristics can perfectly combine with other elements of the L-Line. And treat yourself to the flying bass L 65 FS to round it off.

L 65 FS

FLYING BASS: THRUST ON TOUR – GALACTIC SOUND IN THE THEATRE

When you have no room for floor subwoofers in front of the stage, and you need a wide dispersion, the L 65 FS is a brilliant solution. This slim flysub in the L 65 line array provides a massive boost in lofty highs and punchy and clear bass from 45 Hz upwards. This makes it suitable for light and sound rental companies, live events and fixed installations with high level requirements.

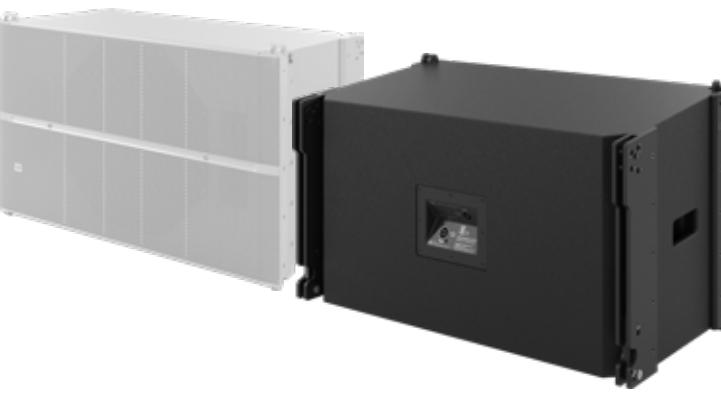

The powerful 15" driver with neodymium magnet provides a stable bass foundation – thus the L 65 FS remains pleasantly light. At only 30 kg, it is easy to transport and allows for an uncomplicated assembly. Even with a two-man outdoor team and extremely low load allowances for the rigging.

Its compact shape, easy set-up thanks to the low weight and its sound pressure of 134 dB make the L 65 FS a reliable companion on tour. An uncomplicated 4-point rigging allows for a quick integration. Both in terms of the sound characteristics and the dimensions, it is ideal as a complement to L 65 array. Angles of up to 8° provide additional flexibility to align fly systems.

and minimal weight come to the fore – and it also sounds much "heavier" than it is!

Furthermore, in theatres where seating is close to the stage, you will appreciate flying this lightweight, powerful bass. Wherever the journey takes you, this flysub is the brilliant solution for every mission.

LA 10.4D

OUR POWER PLANT: CONTROL YOUR APPLICATIONS LIKE A PRO!

A light in the dark? We developed the LA 10.4D so that you remain in control at all times. A 4-channel amplifier with more than 4x 2,500 W specifically for line array systems of the L-Line. Lots of power in a tiny space – for up to 16 speakers per amp! The user-friendly software sets everything up immediately.

Your personal chief assistant allows for full performance monitoring. In this amplifier, signal processing is optimised – all parameters can be set centrally and the operation of the system is constantly monitored.

With this core piece, you will keep the overview: Your Power Station features a high-quality processed integrated DSP, a Dante® network audio connection and remote network control. To optimise the system, you can count on reliable tools: Limiters, parametric EQ to adapt to the room, Delay and FIR filtering.



Now we come to the pulse: The LA 10.4D is a four-channel amplifier system with a capacity of 4x 2,500 W per channel. Thanks to the minimum impedance of 4 Ω, you can connect up to 16 speakers.

The intuitive user interface ensures your supremacy. Optimise your personal work flow by means of the network control! Adjustments can be saved just how you like it. The professional Audio Toolkit saves valuable time. The multiple-users compatibility ensures maximum security – the settings are stored in the amp and not in the computer. Simply reposition, done.

Future-proofed software allows you to plan, analyse and run your application. Control all parameters centrally. Monitor what is happening on your computer. In short, this amp is your power plant. Enjoy your full supremacy!

SPECIFICATIONS

LA 10.4D	
ELECTRICAL	
Type	Networked DSP amplifier with 4x BTL Class-D and Switch Mode Power Supply
Channels	Four
Output Power ¹	4 x 1200 W @ 8 Ω, 1 kHz, 1%THD 4 x 1390 W @ 8 Ω, 1 kHz, 2%THD 4 x 1720 W @ 4 Ω, 1 kHz, 1%THD 4 x 2570 W @ 4 Ω, 1 kHz, 2%THD 4 x 1460 W @ 8 Ω, 50 Hz, 4%THD 4 x 1550 W @ 4 Ω, 50 Hz, 4%THD
Minimum load impedance	4 Ω
Frequency response (Line In) (4 Ω)	20 Hz to 20 kHz: -1 dB
Damping factor	8 Ω: > 500 @ 1 kHz, 4 Ω: > 250 @ 1 kHz
Input impedance	> 20 kΩ balanced
Maximum input level	+23 dBu
SNR Line In to Spk out	110.7 dB, 113.5 dB(A) (@1500 W/8 Ω, +42 dBu)
Noise Floor	-68.7 dBu (280 uV), -71.5 dBu(A) (200 uV(A))
Channel crosstalk	-97.8 dB
THD+N	< 0.0087% at 175 W into 4 Ω (1/8th of Rated Power) < 0.0095% at 350 W into 4 Ω (1/4th of Rated Power)
DSP	48/96 kHz, 32 bit SHARC CPU with floating point processing
System latency	1 ms to 10 ms (preset dependent)
Protection	Short circuit, overheating, overcurrent
Cooling	Two fans with temperature dependant speed and tachometer feedback, Front-to-back air flow
Power efficiency	Up to 76%
Power consumption (both PowerCON [®] summed)	Off: 3 W, Idle: 70 W, at 1/8 of Rated power: 1000 W, at 1/4 of Rated power: 2000 W, at 1/3 of Rated power: 2666 W, Peak power: 8000 W
Inrush current (per PowerCON [®])	40 A (<1 ms) when connected to mains, 9 A (<250 ms) when switching on
Operating voltage range	90 – 265 VAC 50/60 Hz

HARDWARE	
Indicators	-4x Input signal level Led: -30dB, -12dB, -6dB, Clip -4x Channel Led: Mute, Active, -30dB, -12dB, -6dB, Limit, Protect -6x Status Led: Dante, AES1+2, AES3+4, LAN, Stand-By, Fault
Screen	3.5" TFT Color display with Touch Panel & 320 x 240 resolution RGB
User controls	Control encoder with push-button, Touch Screen, 4x channel MUTE, Power On
Input signal connectors	4x XLR-3 male line-level inputs and buffered link outputs 2x XLR-3 male AES/EBU inputs and buffered link outputs 1x Dante® Ultimo 4ch input via separate etherCON® terminal 1x Network control via separate etherCON® terminal 1x Front USB
Output signal connectors	4x Neutrik SpeakON® NL4 outputs
Power connector	2x Neutrik PowerCON® 20 A
SOFTWARE	
DSP Features	Levels, Parametric EQ, Delay, Phase, RMS Limiter, Peak Limiter, IIR/FIR Filtering
Configuration handling	Loading of factory presets provided by SE AUDIOTECHNIK®, Saving and recalling of user presets
Remote control via network	Controlling of individual amplifiers or parameter-groups in distributed amplifiers via desktop software, Configuring of arbitrary numbers of amplifiers with parameters resulting from sound field simulations
Monitoring	Temperatures, Fan speeds, Voltages, Connection states, Fault states, System events, Runtime
MECHANICAL	
Product dimensions [H x W x D]	89 x 483 x 480 mm / 2 RU
Net weight	14.5 kg
Packaging dimensions [H x W x D]	183 x 650 x 565 mm
Total weight	16.5 kg
Cabinet	Aluminium front panel, steel housing
Rack mounting	Four frontal 6 mm holes at sides
Operating ambient temperature range	[5°C ; 40°C]
Storage temperature range	[-20°C ; 90°C]
Ingress Protection	IP20

¹ According to CEA-2006

	L 35	L 35 FS	L 65	L 65 FS
ACOUSTICAL				
Frequency range (-3 dB)	110 Hz - 18 kHz ¹	64 Hz - 110 Hz ²	95 Hz - 17.5 kHz ²	60 Hz - 200 Hz ³
Frequency range (-10 dB)	95 Hz - 19 kHz ¹	57 Hz - 133 Hz ⁵	60 Hz - 18 kHz ²	45 Hz - 275 Hz ⁸
Coverage angles (-6 dB) [H x V]	100° x 20°	Omnidirectional	100° x 20°	Omnidirectional
Nominal impedance	16 Ω	8 Ω	16 Ω	8 Ω
Sensitivity ²	91 dB	86 dB	98.6 dB	95 dB
Peak power	400 W	1200 W	1000 W	2000 W
Continuous power ³	100 W	300 W	250 W	500 W
Maximum Peak SPL	129 dB ⁴	124 dB ⁶	135 dB ⁷	134 dB ⁷
System type	2-way passive system	1-way passive system	3-way passive system	1-way passive system
Crossover frequency	2.2 kHz	-	MF: 400 Hz, HF: 1.8 kHz	-
Transducers	LF: 2 x 3.5" drivers (1" voice coil) MHF: 1" compression driver (1.4" voice coil)	1 x 8" driver (2.6" voice coil)	LF: 2 x 6.5" woofers (2" voice coil) MF: 4 x 3.5" drivers (1" voice coil) HF: 2 x 1" compression drivers (1.4" voice coil)	1 x 15" woofer (4" voice coil)
Enclosure type	Vented box	Vented box	Vented box	Vented box
Connectors	Input / Link signal: Neutrik speakON® NL4	Input / Link signal: Neutrik speakON® NL4	Input / Link signal: Neutrik speakON® NL4	Input / Link signal: Neutrik speakON® NL4
Wiring	Input signal: switchable 1+/1- or 2+/2- Link output: 1+/1- and 2+/2-	Input signal: switchable 1+/1- or 2+/2- Link output: 1+/1- and 2+/2-	Pins 1+/1- : drivers Pins 2+/2- : link signal, pins 1+/1-	Pins 1+/1- : driver Pins 2+/2- : link signal, pins 1+/1-
MECHANICAL				
Product dimensions [H x W x D] (Including rigging)	131 x 312 x 234 mm	379 x 312 x 244 mm	237 x 766 x 383 mm	447 x 766 x 385 mm
Weight	3.6 kg	9.4 kg	22.7 kg	30 kg
Packaging dimensions [H x W x D]	225 x 415 x 311 mm	473 x 410 x 340 mm	363 x 810 x 480 mm	573 x 810 x 480 mm
Total weight	4.7 kg	11 kg	25 kg	33 kg
Cabinet	12 mm plywood with die-cast aluminium front	12 mm plywood	12 mm plywood	12 mm plywood
Cabinet finishing	Black or white polyurea coating	Black or white polyurea coating	Black or white polyurea coating	Black or white polyurea coating
Grille	Powder coated perforated steel	Powder coated perforated steel	Powder coated perforated steel	Powder coated perforated steel
Hardware	-	-	Two side handles in plywood embedded in cabinet Two rear heatsink panels	Side handles in plywood embedded in cabinet
Rigging	Three-point rigging system: two front and one rear 6 mm SE AUDIOTECHNIK® locking pins. 0° / 2.5° / 5° / 7.5° / 10°	Three-point rigging system: two front and one rear 6 mm SE AUDIOTECHNIK® locking pins. 0°	Four-point rigging system: two front and two rear 8 mm SE AUDIOTECHNIK® locking pins. 0° / 1° / 2° / 3° / 4° / 6° / 8°	Four-point rigging system: two front and two rear 8 mm SE AUDIOTECHNIK® locking pins. 0° / 1° / 2° / 3° / 4° / 6° / 8°
ACCESSORIES				
Bumper frame	L 35 BF	L 35 FS BF	L 65 BF	L 65 BF
U-bracket	L 35 UB			
Stacking frame for B 15 or B 15A subwoofers	B 15 SFI L35			
Stacking frame for B 18 subwoofer	B 18 SFI L35			
Pole bar (Ø 36 mm)	SPS20			
L35 Under frame adapter			L 65 UFB	L 65 UFB

¹ Measured with IA 402D amplifier and 2L35FR preset

² Whole space, 1W / 1m, on axis

³ According to EIA-426B Standard (based on RMS Voltage)

⁴ For 4 units measured with IA 402D amplifier and 4L35 preset + 12 dB Crest Factor

⁵ Measured with IA 402D amplifier and L35FS+SAT preset

⁶ For 2 flysubs measured with IA 402D amplifier and L35FS+SAT preset + 12 dB Crest Factor

⁷ Max Peak SPL = Sensitivity + 10log₁₀(Continuous Power) + 12 dB Crest Factor

⁸ Measured with a 6th-order Butterworth low-pass filter applied at 130 Hz