

B-LINE Subwoofer

GOOD VIBRATIONS



B-LINE Subwoofer

PRODUCT OVERVIEW



B 15



B 15A



B 15A FS **NEW**



B 18



B 18A **NEW**



B 21



B 21A **NEW**

High sound pressure, deep bass,
reduced housing size

A-models equipped with Class-D
Amp and integrated DSP

Stackable

FS models stackable and flyable

Easy-to-use LCD screen and
rotary controller (A-models)

Robust and comfortable
side handles

Large selection of models for
every possible application

Available in black and white

4-year warranty

B-LINE

WHEN THE SOUND GETS UNDER YOUR SKIN

Good sound needs a powerful foundation. But every application is different and needs to have its own sound solution. That's why we developed the B-Line into one of the most comprehensive and versatile subwoofer series on the market, so that every professional user, whether rental company or installer, can find the perfect solution for his or her application. Compact 15", powerful 18", mighty 21", active or passive, for fixed installations or touring, stacked on the floor or flown in an array, in classic black or elegant white – we have the right subwoofer in our range!

The B-Line is perfectly matched to SE AUDIOTECHNIK® systems and supports the authentic, transparent

sound reproduction of the arrays with an impressive low-frequency base. In addition, the B-Line models also easily and flexibly complement any other existing system with their rich, clear and dynamic bass reproduction.

The B-Line's Adaptive Port technology optimises the port airflow asymmetrically and thus ensures uniform signal reproduction and an extended dynamic range in all models, regardless of load. Even in the absolute bass registry, undesirable, disturbing noises as well as distortions are significantly reduced. At the same time, the B-Line subwoofers convince with compact dimensions and are thus transport-friendly without compromising on frequency response and SPL.

4
YEARS
WARRANTY



B 18


B 18A




B 15




B 15A FS



B 15A



B 21



B 21A


SHOW GREATNESS

15"



The space miracle. The most outstanding feature of the models with a 15" woofer is their easy handling during set-up and transport in combination with their impressive output power during operation. Thanks to its very compact dimensions, space is saved in storage and during transport, set-up is quicker and easier and you save on man- and muscle power – especially when flying individually or in an array. The 15" woofer boasts a 3" voice coil, so that even the smallest member in our family can already show a stage presence of 136 dB max. SPL. The passive 15" subwoofers feature a powerful load capacity of 1,600 W Peak, the active ones are fitted with an 800 W Class-D amp.

18"

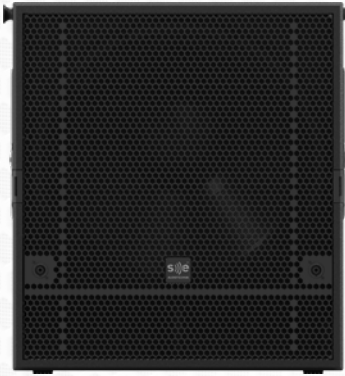


The golden mean. The 18" woofer, in conjunction with its powerful 4" voice coil, delivers up to 138 dB max. SPL and achieves low frequencies down to 28 Hz. The passive version already has a peak output of 2,400 W, while the active subwoofers are powered by a 1,600 W Class-D amp. In order to transport and set up the speakers quickly and safely, there are two ergonomically optimised handles on each side. Pole bar and stacking frame – e.g. for the M-F3A PRO or the L 35 are available as accessories and add to the flexibility of the 18" subwoofers.

21"



The powerhouse. The mighty 21" driver with its huge 5" voice coil thunders with up to 142 W max. SPL down to the deepest depths – performing from 25 Hz it is the bass beast in our line-up. With a load capacity of up to 4,000 W peak, it delivers enough power for every stage and every event. Despite its higher weight, it is easy to manoeuvre thanks to the two well-positioned recessed grips on both sides. In direct comparison, as expected, it delivers the most robust performance at the low end and generates more than enough pressure in any situation. The active versions of this bass monster have a 1,600 W Class-D amp on board.

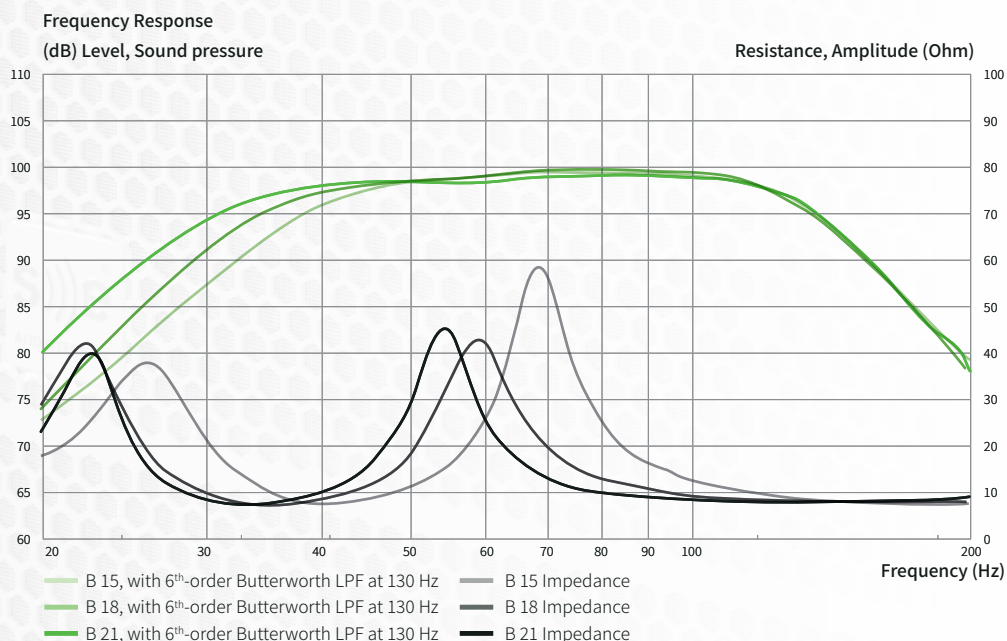

SELF POWERED

The great advantage of powered speakers is the built in amplifier. So there is no need for an external device – the internal amp is optimally matched to the woofer! In the B 15A and the B 15A FS, an 800 W (peak) Class-D amplifier is at work, while the B 18A and B 21A / FS are driven by a mighty 1,600 W (peak) amplifier. Integrated DSP presets allow loading of preset system setups that are optimally matched to SE Audiotechnik products. Thus, the entire system is quickly and easily set up and perfectly adjusted. The directivity can be effortlessly changed in a flash from normal to cardioid or end-fire configuration via the large display and the push/rotary controller. Parameters such as EQ, Delay, Sensitivity and Phase can be adjusted and stored in your own User Presets.



FLIGHT MODE

If there is no room for floor subwoofers in front of or under the stage, but low frequencies need to be reproduced cleanly and powerfully, then you have to fly the sub. That's why we've given the B 15A a flying harness, making the B 15A FS the most versatile model of the B-Line. Like the B 15A, it can be operated on the ground or in a stack, but can also be flown by means of a quick and easy-to-attach flying grid. From 33 Hz upwards, the flying subwoofer provides support from lofty heights with rich bass, if required. The B 15A FS delivers 133 dB max SPL and is impressively powered by an 800 W (peak) Class-D amp with a wide range of adjustment options.



SPECIFICATIONS

	B 15 / FS / i	B 18 / FS / i	B 21 / FS / i
ACOUSTICAL			
Frequency range (-3 dB) ¹	39 Hz - 130 Hz	37 Hz - 130 Hz	33 Hz - 130 Hz
Frequency range (-10 dB) ¹	33 Hz - 160 Hz	29 Hz - 160 Hz	25 Hz - 160 Hz
Coverage angles (-6 dB) [H x V]	Omnidirectional		
Nominal impedance	8 Ω	8 Ω	8 Ω
Sensitivity ²	98 dB	99 dB	99 dB
Peak power	1600 W	2400 W	4000 W
Continuous power ³	400 W	600 W	1000 W
Maximum Peak SPL ⁴	136 dB	138 dB	142 dB
System type	1-way passive system		
Transducers	1 x 15" driver (3" voice coil)	1 x 18" driver (4" voice coil)	1 x 21" driver (5" voice coil)
Enclosure	Vented box		
Connectors	Input / Link signal: 4 Neutrik speakON® NL4, Link output: 1 Neutrik speakON® NL4		
Wiring	Pins 1+/1- : driver, Pins 2+/2- : link (Output CH 2, pins 1+/1-)		
MECHANICAL			
Product dimensions [H x W x D] (Including rigging)	514 x 494 x 650 mm	572 x 542 x 794 mm	666 x 585 x 832 mm
Net weight	30 kg	41 kg	51 kg
Packaging dimensions [H x W x D]	613 x 550 x 733 mm	721 x 615 x 885 mm	796 x 685 x 930 mm
Total weight	33.1 kg	49.5 kg	61.5 kg
Cabinet	15 - 18 mm plywood	15 - 18 mm plywood	15 - 24 mm plywood
Cabinet finishing	Black or white polyurea coating		
Grille	Powder coated perforated steel		
Hardware	4 rubber feet and top recesses for stacking, M20 pole thread, 2 SE AUDIOTECHNIK® ergonomic handles		
Stacking	Two-point SE AUDIOTECHNIK® stacking system		
ACCESSORIES			
Stacking frame for M-F3A PRO	B 15 SFi M	B 18 SFi M	-
Stacking frame for L 35	B 15 SFi L35	B 18 SFi L35	-
Pole bar	SPS20	SPS20	SPS20
Transport dolly	B 15 TD	B 18 TD	B 21 TD
Transport cover	B 15 TC	B 18 TC	B 21 TC

¹ Measured with a 6th-order Butterworth low-pass filter applied at 130 Hz

² Half space, 1W / 1m, on axis

³ According to EIA-426B Standard (based on RMS Voltage)

⁴ Max Peak SPL = Sensitivity + 10log₁₀(Continuous Power) + 12 dB Crest Factor

	B 15A / FS / i	B 18A / FS / i	B 21A / FS / i
ACOUSTICAL			
Frequency range (-3 dB)	40 Hz - 220 Hz ⁵	34 Hz - 210 Hz ⁷	33 Hz - 230 Hz ⁷
Frequency range (-10 dB)	33 Hz - 250 Hz ⁵	28 Hz - 260 Hz ⁷	27 Hz - 280 Hz ⁷
Coverage angles (-6 dB) [H x V]	Omnidirectional		
Maximum Peak SPL ⁶	136 dB	138 dB	140 dB
System type	1-way self-powered system		
Crossover frequency	-	-	-
Transducers	1 x 15" driver (3" voice coil)	1 x 18" driver (4" voice coil)	1 x 21" driver (5" voice coil)
Enclosure type	Vented box	Vented box	Vented box
AMPLIFICATION			
Type	Single channel, class-D with SMPS		
Output power	800 W	1600 W	1600 W
Protection	Short circuit, overheating, overcurrent		
Connectors	Input signal: balanced XLR 3-pin female, Link output: balanced XLR 3-pin male		
Wiring	Power input: powerCON® 20A, Power link output: powerCON® 20A		
Input sensitivity	Pin N: Neutral, Pin L: Conductor, Pin E: Ground		
DSP	+14 dBu (3.88 V), +4 dBu (1.23 V), 0 dBu (0.775 V), 0 dBV (1 V), -10 dBV (0.316 V)		
Processing	48 kHz/24 bit with extended dynamics, Processing latency: 1.1 ms		
User controls	Factory and user presets, EQ, delay, directivity control, input sensitivity, phase inversion		
	Power: ON/OFF switch, DSP: display with digital encoder		
MECHANICAL			
Product dimensions [H x W x D] (Including rigging)	520 x 495 x 654 mm	572 x 542 x 797 mm	666 x 585 x 832 mm
Net weight	34 kg	45 kg	55 kg
Packaging dimensions [H x W x D]	613 x 550 x 733 mm	721 x 615 x 885 mm	796 x 685 x 930 mm
Total weight	37.1 kg	53 kg	65 kg
Cabinet	15 - 18 mm plywood	15 - 18 mm plywood	15 - 24 mm plywood
Cabinet finishing	Black or white polyurea coating	Black or white polyurea coating	Black or white polyurea coating
Grille	Powder coated perforated steel		
Hardware	4 rubber feet and top recesses for stacking		
	M20 pole thread		
	2 SE AUDIOTECHNIK® ergonomic handles		
Stacking	Two-point SE Audiotechnik® stacking system	Two-point SE Audiotechnik® stacking system	-
ACCESSORIES			
Stacking frame for M-F3A PRO	B 15 SFi M	B 18 SFi M	-
Stacking frame for L 35	B 15 SFi L35	B 18 SFi L35	-
Pole bar	SPS20	SPS20	SPS20
Transport dolly	B 15 TD	B 18 TD	B 21 TD
Transport cover	B 15 TC	B 18 TC	B 21 TC

⁵ Measured with MF3AP preset


⁶ Measured with 12 dB Crest factor Pink Noise, half space

⁷ Measured with GENERAL preset with 6th-order Butterworth low-pass filter applied at 200 Hz


ACCESSORIES



B 15 SFi M
B 15 Stacking Frame
M-F3A PRO




B 15 SFi L 35
B 15 Stacking Frame
L 35



B 15 FC
B 15 Flight Case




B 15 TD
B 15 Transport
Dolly




B 15 TC
B 15 Transport
Cover

B 15A TC
B 15A Transport
Cover


B 15A RC5x4
B 15A Rain Cover
5x4m



B 15 FS TK 13
B 15 FS Transport
Kart




B 15 FS TK 23
B 15 FS Transport
Kart



B 15A FS BF




B 15A FS TD
B 15A Transport
Dolly




B 18 SFi M
B 18 Stacking Frame
M-F3A PRO


B 18 SFi L 35
B 18 Stacking Frame
L 35




B 18 FC
B 18 Flight Case




B 18 TD
B 18 Transport Dolly




B 18 TC
B 18 Transport Cover



B 21 FC
B 21 Flight case



B 21 TD
B 21 Transport Dolly



B 21 TC
B 21 Transport Cover



SPS20
M20 Pole support



SPS20 W
M20 Pole support
(white)

3/8" Adaptor

PS 35
Pole Support 35

OVERVIEW

	Built-to-Order (BTO)	Stock keeping unit (SKU)
B15i	●	-
B15i W	●	-
B 18i	●	-
B 18i W	●	-
B 21i	●	-
B 21i W	●	-
B 15	-	●
B 18	-	●
B 21	-	●
B 15 W	●	-
B 18 W	●	-
B 21 W	●	-
B 15 FS	-	●
B 18 FS	-	●
B 21 FS	-	●
B 15 FS W	●	-
B 18 FS W	●	-
B 21 FS W	●	-
B 15Ai	●	-
B 15Ai W	●	-
B 18Ai	●	-
B 18Ai W	●	-
B 21Ai	●	-
B 21Ai W	●	-
B 15A	-	●
B 18A	-	●
B 21A	-	●
B 15A W	●	-
B 18A W	●	-
B 21A W	●	-
B 15A FS	-	●
B 15A FS W	●	-
B 18A FS	●	-
B 18A FS W	●	-
B 21A FS	●	-
B 21A FS W	●	-

A = active / W = white / FS = Flysub / i = Install



AUDIOTECHNIK

Firmensitz

speaker trade
Neuenhofer Straße 42-44
42657 Solingen, Germany

P +49 212 38226-10
info@se-audiotechnik.de
www.se-audiotechnik.de

f /seaudiotechnik
© /se_audiotechnik
in /se-audiotechnik
t /seaudiotechnik

© 2021 **SE AUDIOTECHNIK®** is a registered trademark of Speaker Electronic (Jia Shan) Co., Ltd.

All other trademarks are the property of their respective owners. Speaker Electronic (Jia Shan) Co., Ltd. and its subsidiaries and products are not affiliated with, endorsed by, sponsored by or supported by those trademark owners.

Ease® is a registered trademark of AFMG Technologies GmbH, Powercon® is a registered trademark of Neutrik AG, The "f" logo is a registered trademark of Facebook, Inc., The camera logo is a registered trademark of Instagram, LLC., The "in" logo is a registered trademark of LinkedIn corporation, The bird logo is a registered trademark of Twitter, inc..

Design by pixelmaedchen.de | Renderings by www.redemann-media.de | Photos by www.annikafeuss.com
Photo by © Lukas Gajda (AdobeStock)
All product specifications in this document are subject to change without notice.

B-Line brochure v. 05/21

