

IC 38X / IC 38X W


PRODUCT FEATURES

1. Hi SPL 400 W column speaker
2. 6 x 3.5" + 2 x 3.5" coax with 0.5" compression drivers
3. Horizontal Dispersion 120°
4. Vertical dispersion 30°
5. Mounting bracket included
6. Aluminum housing

PRODUCT PHOTO




PRODUCT DRAWING




PRODUCT DESCRIPTION

The IC 38X is a high SPL surface mount column speaker with an extreme narrow vertical dispersion in an ultra light aluminum housing. 400 W RMS power handling, up to 134 dB mx SPL*

FREQUENCY RESPONSE CURVE

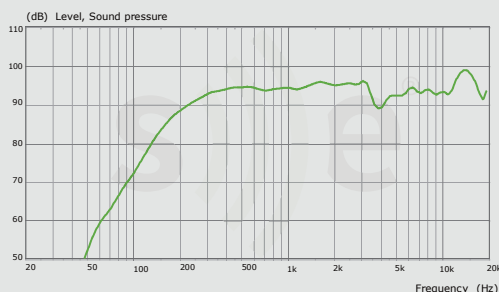

POLAR PLOT

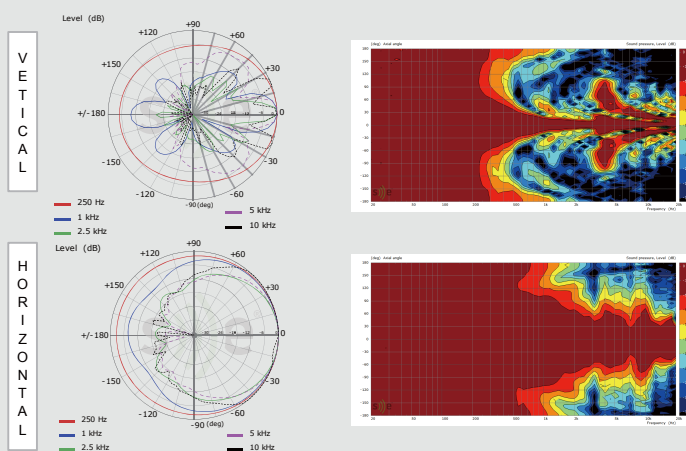

SPECIFICATIONS

Type	Column Speaker
Impedance	4 Ω
Power Handling (RMS)	400 W
Max SPL*	134 dB
Dispersion (HxV)	120 x 30
Frequency response (-6dB)	180 Hz - 20 kHz
Transducers	6 x 3.5" + 2 x 3.5" coax with 0.5" compression drivers
Sensitivity (dB SPL 1 W/1 m)	96 dB
Connectors	2 x Phoenix connectors
Rigging	Mounting bracket incl.
Cabinet	Extruded aluminum
Dimension (W x H x D)	116 x 924 x 150 mm
Weight	7.2 kg

* max SPL peak = Sensitivity + 10* (lg RMS Power) +12 dB crest factor

I-Line PRODUCTS

IC 32	2x 3.5" vented installation column system, black, 16Ω
IC 32 W	2x 3.5" vented installation column system, white, 16Ω
IC 34	4x 3.5" vented installation column system, black, 8Ω
IC 34 W	4x 3.5" vented installation column system, white, 8Ω
IC 38X	8x 3.5" vented installation column system, black, 4Ω
IC 38X W	8x 3.5" vented installation column system, white, 4Ω
S 112i	12" powered subwoofer, DSP, 400W RMS, black
S 112i W	12" powered subwoofer, DSP, 400W RMS, white
IA 202D	Poweramp 19", 2HU, 2x 200 Watts @ 8Ω
IA 402D	Poweramp 19", 2HU, 2x 400 Watts @ 4Ω

SPECIAL ATTENTION

Safety hint	Please always refer to the owner manual
Available versions	IC 38X = black / IC 38X W = white
Content of package	IC 38X, wall bracket, owner manual
Ordering Information	Packed in pairs
Packaging Dimensions (W x H x D)	268 x 975 x 357 mm
Packaging Weight	8 kg

Version 0720191.01