

s)))e® AUDIOTECHNIK

Head office

speaker trade Inh. Michael von Keitz
Neuenhofer Str. 42-44
42657 Solingen Germany
+49 212 38226 - 10
info@se-audiotechnik.de

www.se-audiotechnik.de

f /seaudiotechnik

📷 /se_audiotechnik

in /se-audiotechnik

🐦 /seaudiotechnik

© 2019

SE® Audiotechnik is a registered trademark of Speaker Electronic (Jia Shan) Co., Ltd.. All other trademarks are the property of their respective owners. Speaker trade corp. and its subsidiaries and products are not affiliated with, endorsed by, sponsored by or supported by those trademark owners.

PowerCON® is a registered trademark of Neutrik AG. Dante® is a registered trademark of Audinate Pty Ltd. The "f" logo is a registered trademark of Facebook, Inc. The camera logo is a registered trademark of Instagram, LLC. The "in" logo is a registered trademark of LinkedIn corporation. The bird logo is a registered trademark of Twitter, inc. All product specifications in this document are subject to change without prior notice.

L-Line brochure v. 2.7 | Design by STH design & consulting

L35FS & L35

Ultra light weight expandable
vertical array

High power-density

Ease of transportation

Homogenous sound field coverage

Several finish options available
including white & weather proof



L-Line

Compact line array systems



))) L-Line

Small and flexible line array systems

L-Line offers one of the most compact professional PA-solutions for small-to-medium sized venues, which demand precise control over sound field uniformity, while requiring a minimum of space.

System's flexibility, scalability, and ultra-low distortion make it the right choice for any project from concert hall to arenas, from EDM festivals to


outdoor symphony performances. Weather proofing is available.

All products in the L-Line are designed to be an indispensable tool for users. These products provide flexibility, scalability and low distortion so that they can be used in a large array of applications from live music to installations.

You may also fly a combination with

dedicated accessories, matching your particular needs. All loudspeakers are available in black & white polyurea coating.

The power necessary for running your L-Line setup is being delivered by the LA 804D, a modern class-D amplifier with features such as network control and networked audio.

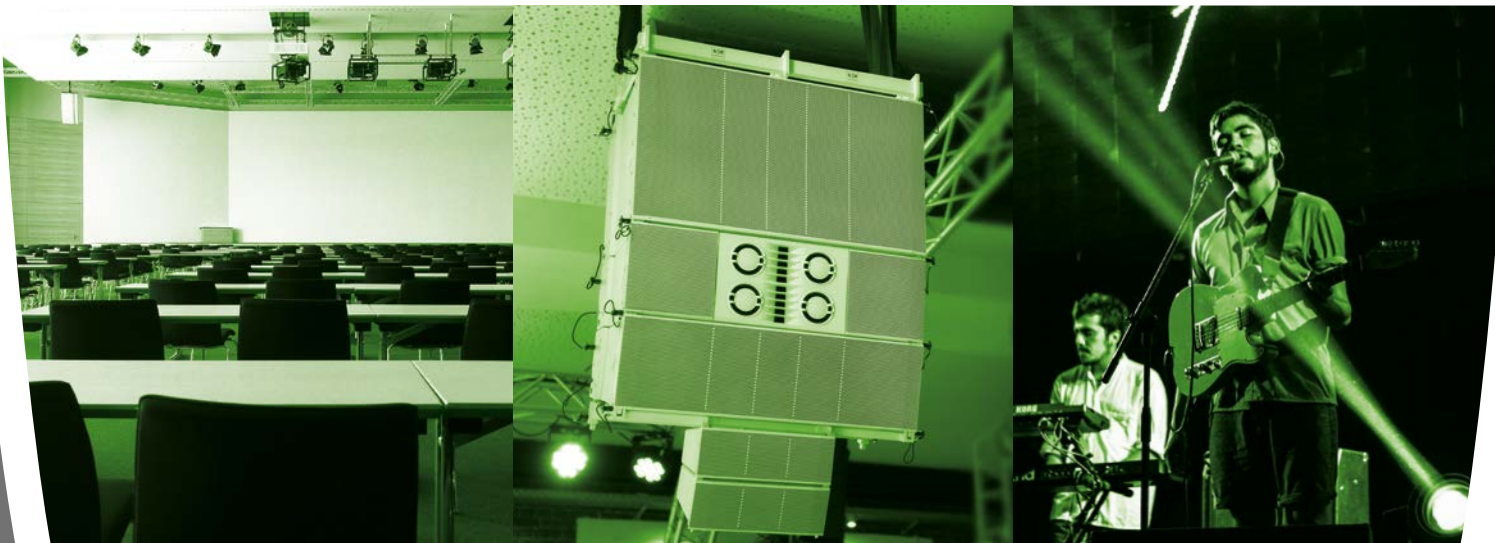

))) L 65FS

The flysub, which makes the difference

If you need powerful lows and can't use ground stacked subwoofers, here is your perfect solution. Powered by a high performance 15" driver with neodymium magnet, it delivers the low end you need up in the air.

Clear and punchy lows with amazing accuracy and a usable frequency range between 50 and 200 Hz.

It has plenty of SPL and delivers enough bass to be flown with 2 or 3 pcs of L 65 line arrays.


Splay angles up to 8° are possible thus allowing to use the system in flown subwoofer arrays when more sophisticated LF directivity needs to be achieved.

Light-weight cabinet and easy-to-use 4-point rigging makes it convenient to rig the system.

Max. configuration:

1x **LA 804D** (4 ch mode)

8x **L 65FS** (2 pcs/ ch)

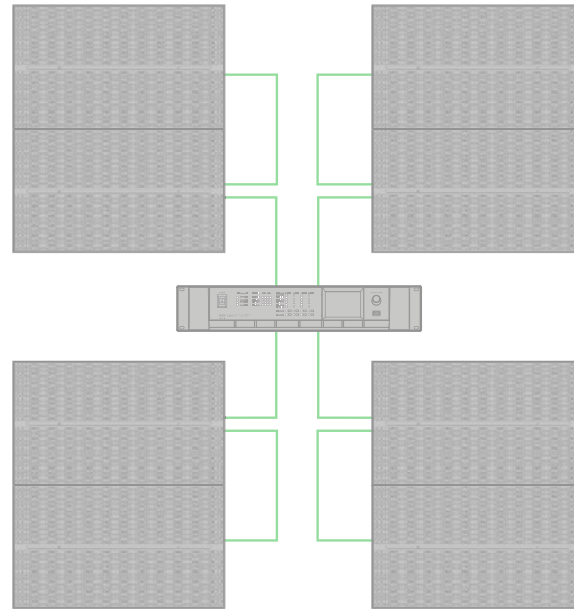


Preliminary Specifications

L 65FS

Type	Bass-reflex
Frequency response* (-3dB)	55 - 200 Hz
Frequency response* (-6dB)	50 - 200 Hz
Nominal impedance	8 Ω
Sensitivity (1 W/ 1 m)	97 dB SPL
Continuous power Handling (AES)	800 W R.M.S.
Max. SPL* (@ 1 m)	126 dB
Transducers	1x 15" woofer with neodymium magnet and 4" voice coil
Audio connectors	2x Neutrik® speakON NL4 IN / LINK
Splay angles	0°, 1°, 2°, 3°, 4°, 6°, 8°
Rigging	4-point SE rigging with 8 mm SE pins
Cabinet	12 & 15 mm plywood, black or white polyurea paint
Dimensions (W x H x D)	712 x 420 x 390 mm (with rigging)
Weight	25 - 30 kg

* with system amplifier

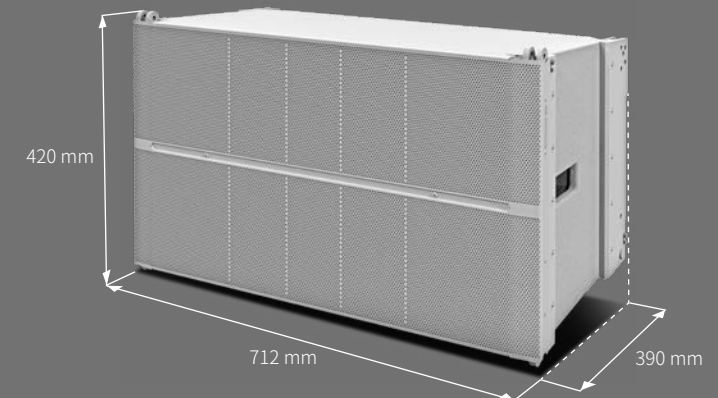

Preliminary Specifications

L 65

Type	3-way line array element w/ passive crossover, bass-reflex
Transducers	<u>LF</u> : 2x 6.5" Woofers with neodymium magnet <u>MF</u> : 4x 3.5" midrange speakers with neodymium magnet <u>HF</u> : 2x 1" Compression drivers (1.4" VC) w/ waveguide / horn combo
Nominal dispersion (H x V)	100° x 20°
Usable frequency range*	70 Hz–18 kHz
Max. SPL* (Average, continuous, 1 W/ 1 m)	121 dB
Sensitivity (Average, 1 W/ 1 m)	95 dB
Nominal impedance	16 Ω
Continuous power handling	500 W R.M.S.
Connections	2x Neutrik® SpeakON NL4 IN / LINK (+1/-1 used or +2/-2 thru)
Rigging	4-point SE rigging
Splay angles	0°, 1°, 2°, 3°, 4°, 6°, 8°
Cabinet	Plywood, black or white polyurea coating
Dimensions (W x H x D)	680 x 208 x 320 mm (without rigging) 712 x 208 x 380 mm (with rigging)
Weight	21 kg

*with system amplifier



L 65

Flyable fullrange system

L 65 module is designed as small-to-medium throw line array system, which seamlessly blends in the L-Line environment.


The height of the unit is exactly two times the compact L 35 thus covering mid-hi section with four 3.5" woofers and two high-power 1" compression drivers.

With two accompanying 6.5" neodymium magnet woofers, it offers impressive punch and dynamics. Powered by L-Line system amplifiers, the line array utilizes precise DSP-controlled crossovers controlled by dedicated filtering and limiting.

Max. configuration:

1x **LA 804D** (2 ch mode)

12x **L 65** (6 pcs/ ch)

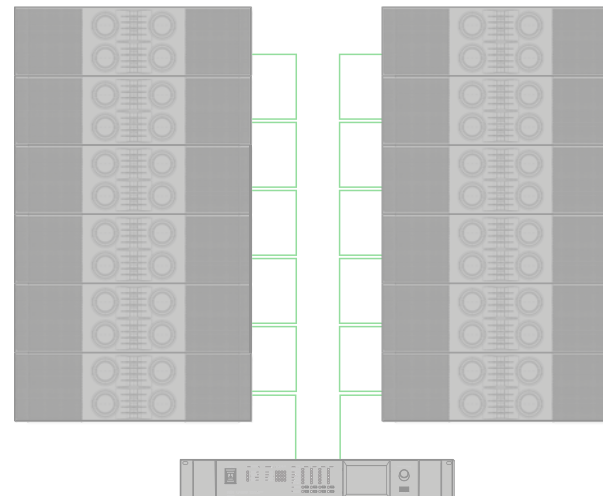

LA 804D

The power station of L-Line

This dedicated system amplifier was designed for maximum ease of operation, versatility and control, when powering the line array systems of L-Line.

The amplifier has high-quality integrated DSP processing, Dante® networked-audio connection and remote network control. Most importantly there are system tuning and optimisation tools at your fingertips: parametric EQ, delay & FIR filtering.

LA 804D is a four-channel system amplifier with a power output of 4x 1250 Watts per channel. 2 Ω minimum impedance support allows high maximum number of speakers to be connected.

Dedicated software for planning, analyzing & executing your application will be available in the future. With an intuitive user interface, professional audio toolkit and comprehensive network control, you'll be able to optimise your workflow by saving time and money.



Preliminary Specifications

LA 804D

Type	Class D
Channels	4
Power output	4x 1250 W or 2x 2500 W
Minimum load impedance	2 Ω
Damping factor	>100
Max. line input level	+23 dBu
Input SNR	128 dB (A)
Output SNR (DSP + amp)	112 dB (A)
Analog line input impedance	Minimum 20 kΩ balanced
Controls	Control encoder with push-button, 4x channel MUTE, 4x channel SELECT, Power On
Indicators	4x 4 Input sig. level LED, 4x 4 Output sig. level LED, 4x 4 Channel status (power, select, protect, mute), 1x Dante status, 1x LAN status, 1x Standby, 1x Fault
Screen	3.5" TFT 320 x 240 pixel resolution, coloured touch display
Analog audio connections	4x XLR Input/ Link
Digital audio connections	2x AES/ EBU (XLR)
Network connectors	1x Neutrik® etherCON (LAN control), 1x etherCON (Dante®)
Speaker outputs	4x Neutrik® speakON NL4
Dante® input channel count	Optional, Ultimo chip
DSP	32-bit SHARC processor with floating point processing
DSP sampling frequency	48/ 96 kHz
DSP features	Levels, parametric EQ, delay, phase, RMS limiter, peak limiter, FIR filtering
Main input voltage	85–265 VAC
Dimensions (W x H x D)	19" x 2 RU x 450 mm

¹ Maximum output power per channel (all channels driven, THD + N ≤ 1%)



))) L 35

Compact power & sound field control solution

L35 is an extremely compact line array coming with a sturdy die-cast aluminium front panel, two high-performance 3.5" neodymium drivers and a 1" compression driver. A single unit can deliver 111 dB on average and 114 dB peak SPL whilst maintaining excellent sound reproduction quality.




Above is a rear view of the passive two-way vented system with integrated crossover and 16 Ω nominal impedance, allowing a connection of up to four units in parallel when used in 4 Ω mode.

L 35 is also available as outdoor version with added front grill and weatherproof connectors to ensure longevity under exposed conditions.

Max. configuration:

1x **LA 804D** (4 ch mode)
24x **L 35** (6 pcs/ ch)

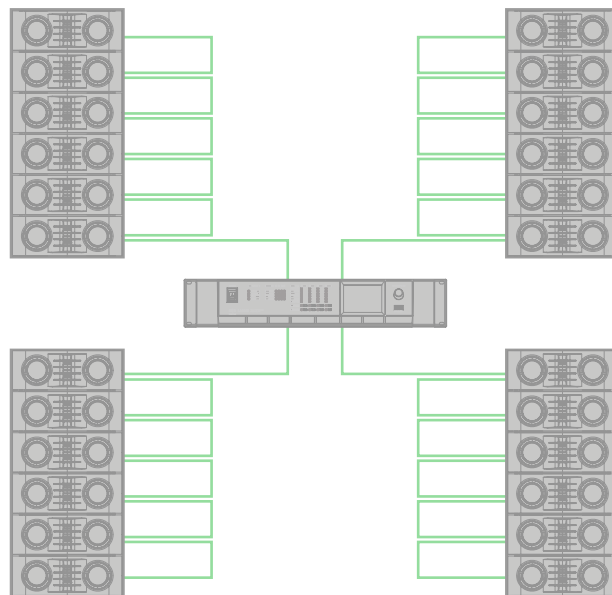


Specifications

L 35

Type	Bass-reflex Closed box (outdoor model)
Frequency response* (-6dB)	90 Hz–19 kHz
Frequency response* (-3dB)	110 Hz–18 kHz
Nominal impedance	16 Ω
High-pass frequency (min 12 dB / oct.)	70 Hz (-6 dB) full range, 130 Hz (-6 dB) with L35 FS subwoofer
Sensitivity (dB SPL @1W/1m)	91 dB
Continuous power Handling (AES)	100 W
Max. cont. SPL*	111 dB
Max. peak SPL*	114 dB
Transducers	2x 3.5" + 1x 1" comp. driver
Dispersion (H x V)	100 x 20°
Controls	2-way input channel switch (+1/-1 or +2/-2)
Audio connectors	2x Neutrik SpeakON® NL4 IN / LINK
Splay angles	0°, 2.5°, 5°, 7.5°, 10°
Rigging	3-point rigging: 2x flat SE rigging pins with clip 1x standard SE rigging pin
Cabinet	9–14 mm plywood, black or white polyurea coating
IP Code	IP44 (outdoor model)
Dimensions (W x H x D)	300 x 111 x 208 mm 312 x 133 x 230 mm (with rigging)
Weight	3.6 kg

*with system amplifier

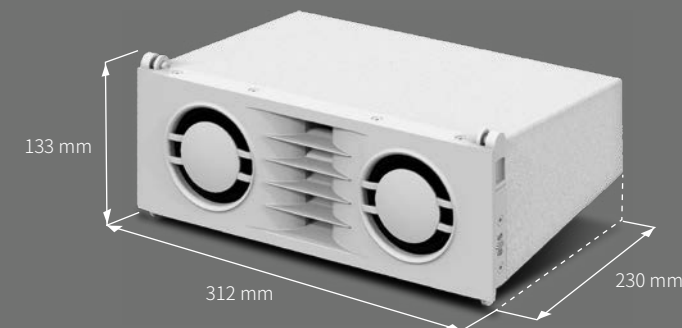

))) L 35FS

Ultra-compact flying bass extension

L 35FS is an ultra-compact single 8" vented flyable bass extension, available as 8 Ω version.

It produces 115 dB on average and 121 dB peak SPL and offers the same ease of operation and setup as the L 35 line array modules.

L 35FS can be used to either work in stand-alone mode or in combination with ground stacked subwoofers in larger setups.


Available in black or white polyurea coating with a dedicated protective grill for outdoor use.



Max. configuration:

1x **LA 804D** (4 ch mode)

12x **L 35FS** (3 pcs/ ch)

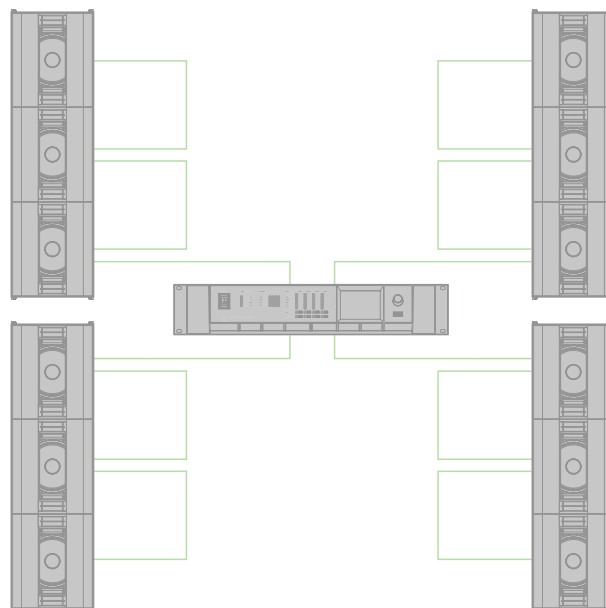

Specifications

L 35FS

Type	Bass-reflex
Frequency response* (-6dB)	58-280 Hz
Frequency response* (-3dB)	60-250 Hz
Nominal impedance	8 Ω
High-pass frequency (min. 12 dB / oct.)	45 Hz (-6 dB)
Sensitivity (dB SPL @ 1W/ 1m)	91 dB
Continuous power Handling (AES)	300 W
Max. cont. SPL*	115 dB
Transducers	1x 8" woofer
Controls	2-way input channel switch (+1/-1 or +2/-2)
Audio connectors	2x Neutrik® SpeakON NL4 IN / LINK
Rigging	3-point rigging: 2x flat SE rigging pins with clip 1x standard SE rigging pin
Cabinet	12 - 14 mm plywood, black or white polyurea coating
Dimensions (W x H x D)	300 x 360 x 243 mm 312 x 382 x 243 mm (with rigging)
Weight	8 kg

*with system amplifier

