Requirements BOARD - 2:

- Analog Input:
Temperature Sensor: 4 + (1)
Presure Sensor (Voltage or Current Source Selectable): 8 + (1)

-Relay Output:
16- Pin through Terminal Block (4-PinTerminal Block per AA)

-Alarm Output:
6 Alarms

- Input Alarm:
Alarm Input (Triggered at 24VDC or GND, Selectable): 20 (5 alarms per AA) + 4 (Add)


- Input Supply Support:
100-240VAC - 0.8VAC // 48VDC- 1ADC

- Switches
ON/OFF
Bypass


- Wires

- Presure Sensor:
https://www.aliexpress.us/item/3256802386337922.html?gatewayAdapt=esp2usa4itemAdapt


- Example of measurement of volt and current sensor:
https://www.ti.com/lit/ds/symlink/ina826.pdf

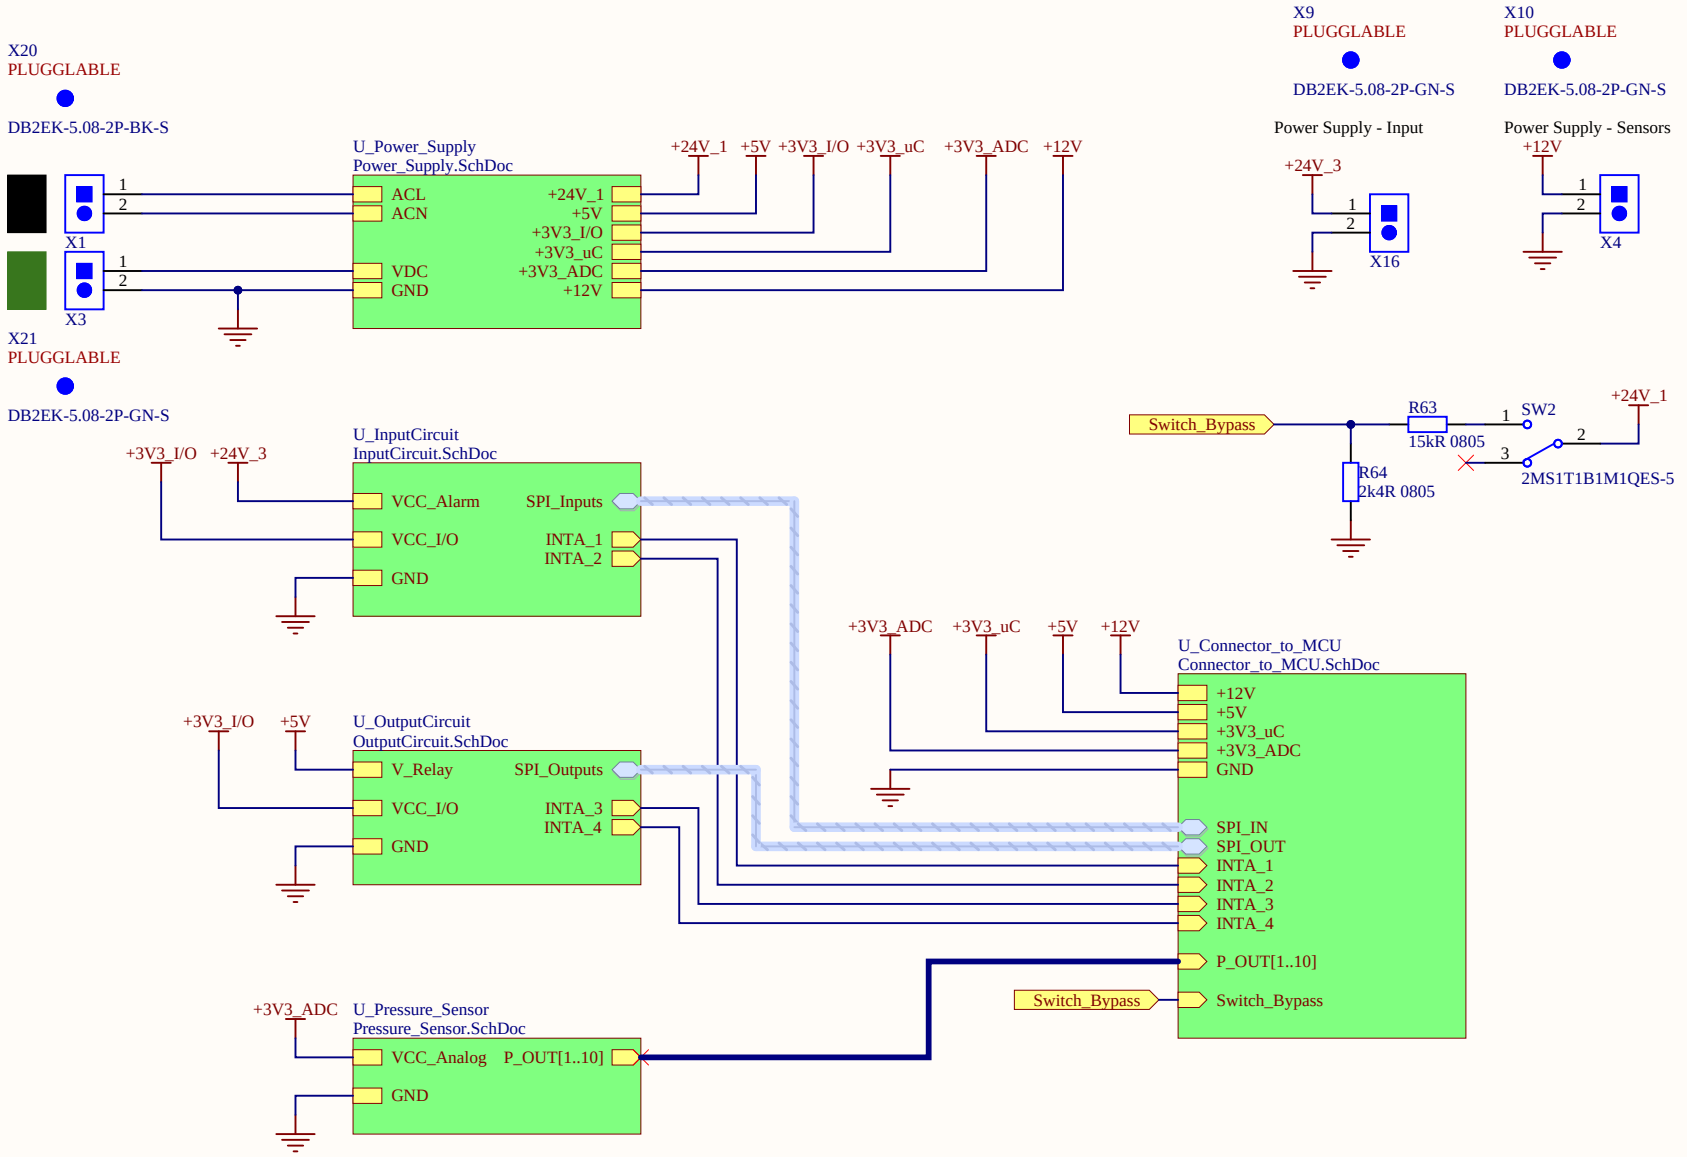


Title		
Size A4	Number	Revision
Date: 7/27/2026		Sheet of
File: D:\Documentos\..\Main.SchDoc		Drawn By:

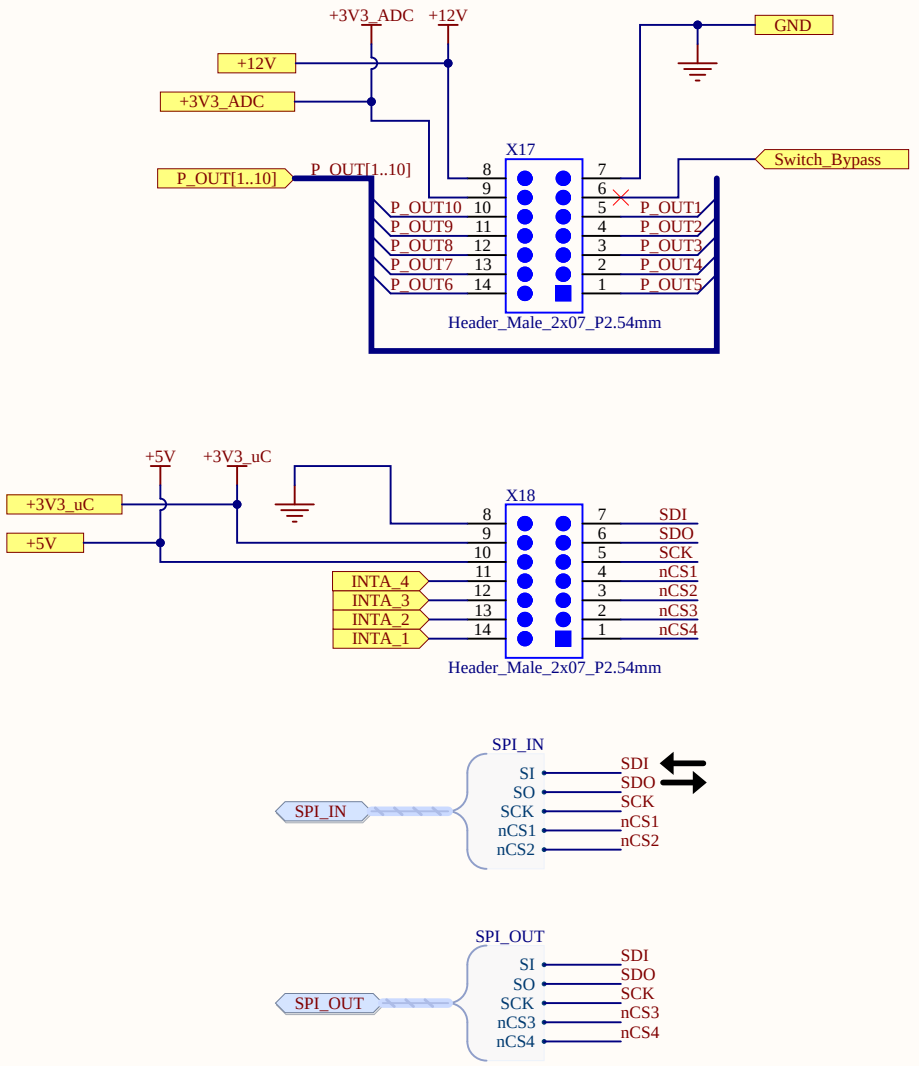


Title		
Size: A4	Number	Revision
Date: 7/27/2026		Sheet of
File: D:\Documentos\..\Connector_to_MCU.SchDoc		Drawn By:

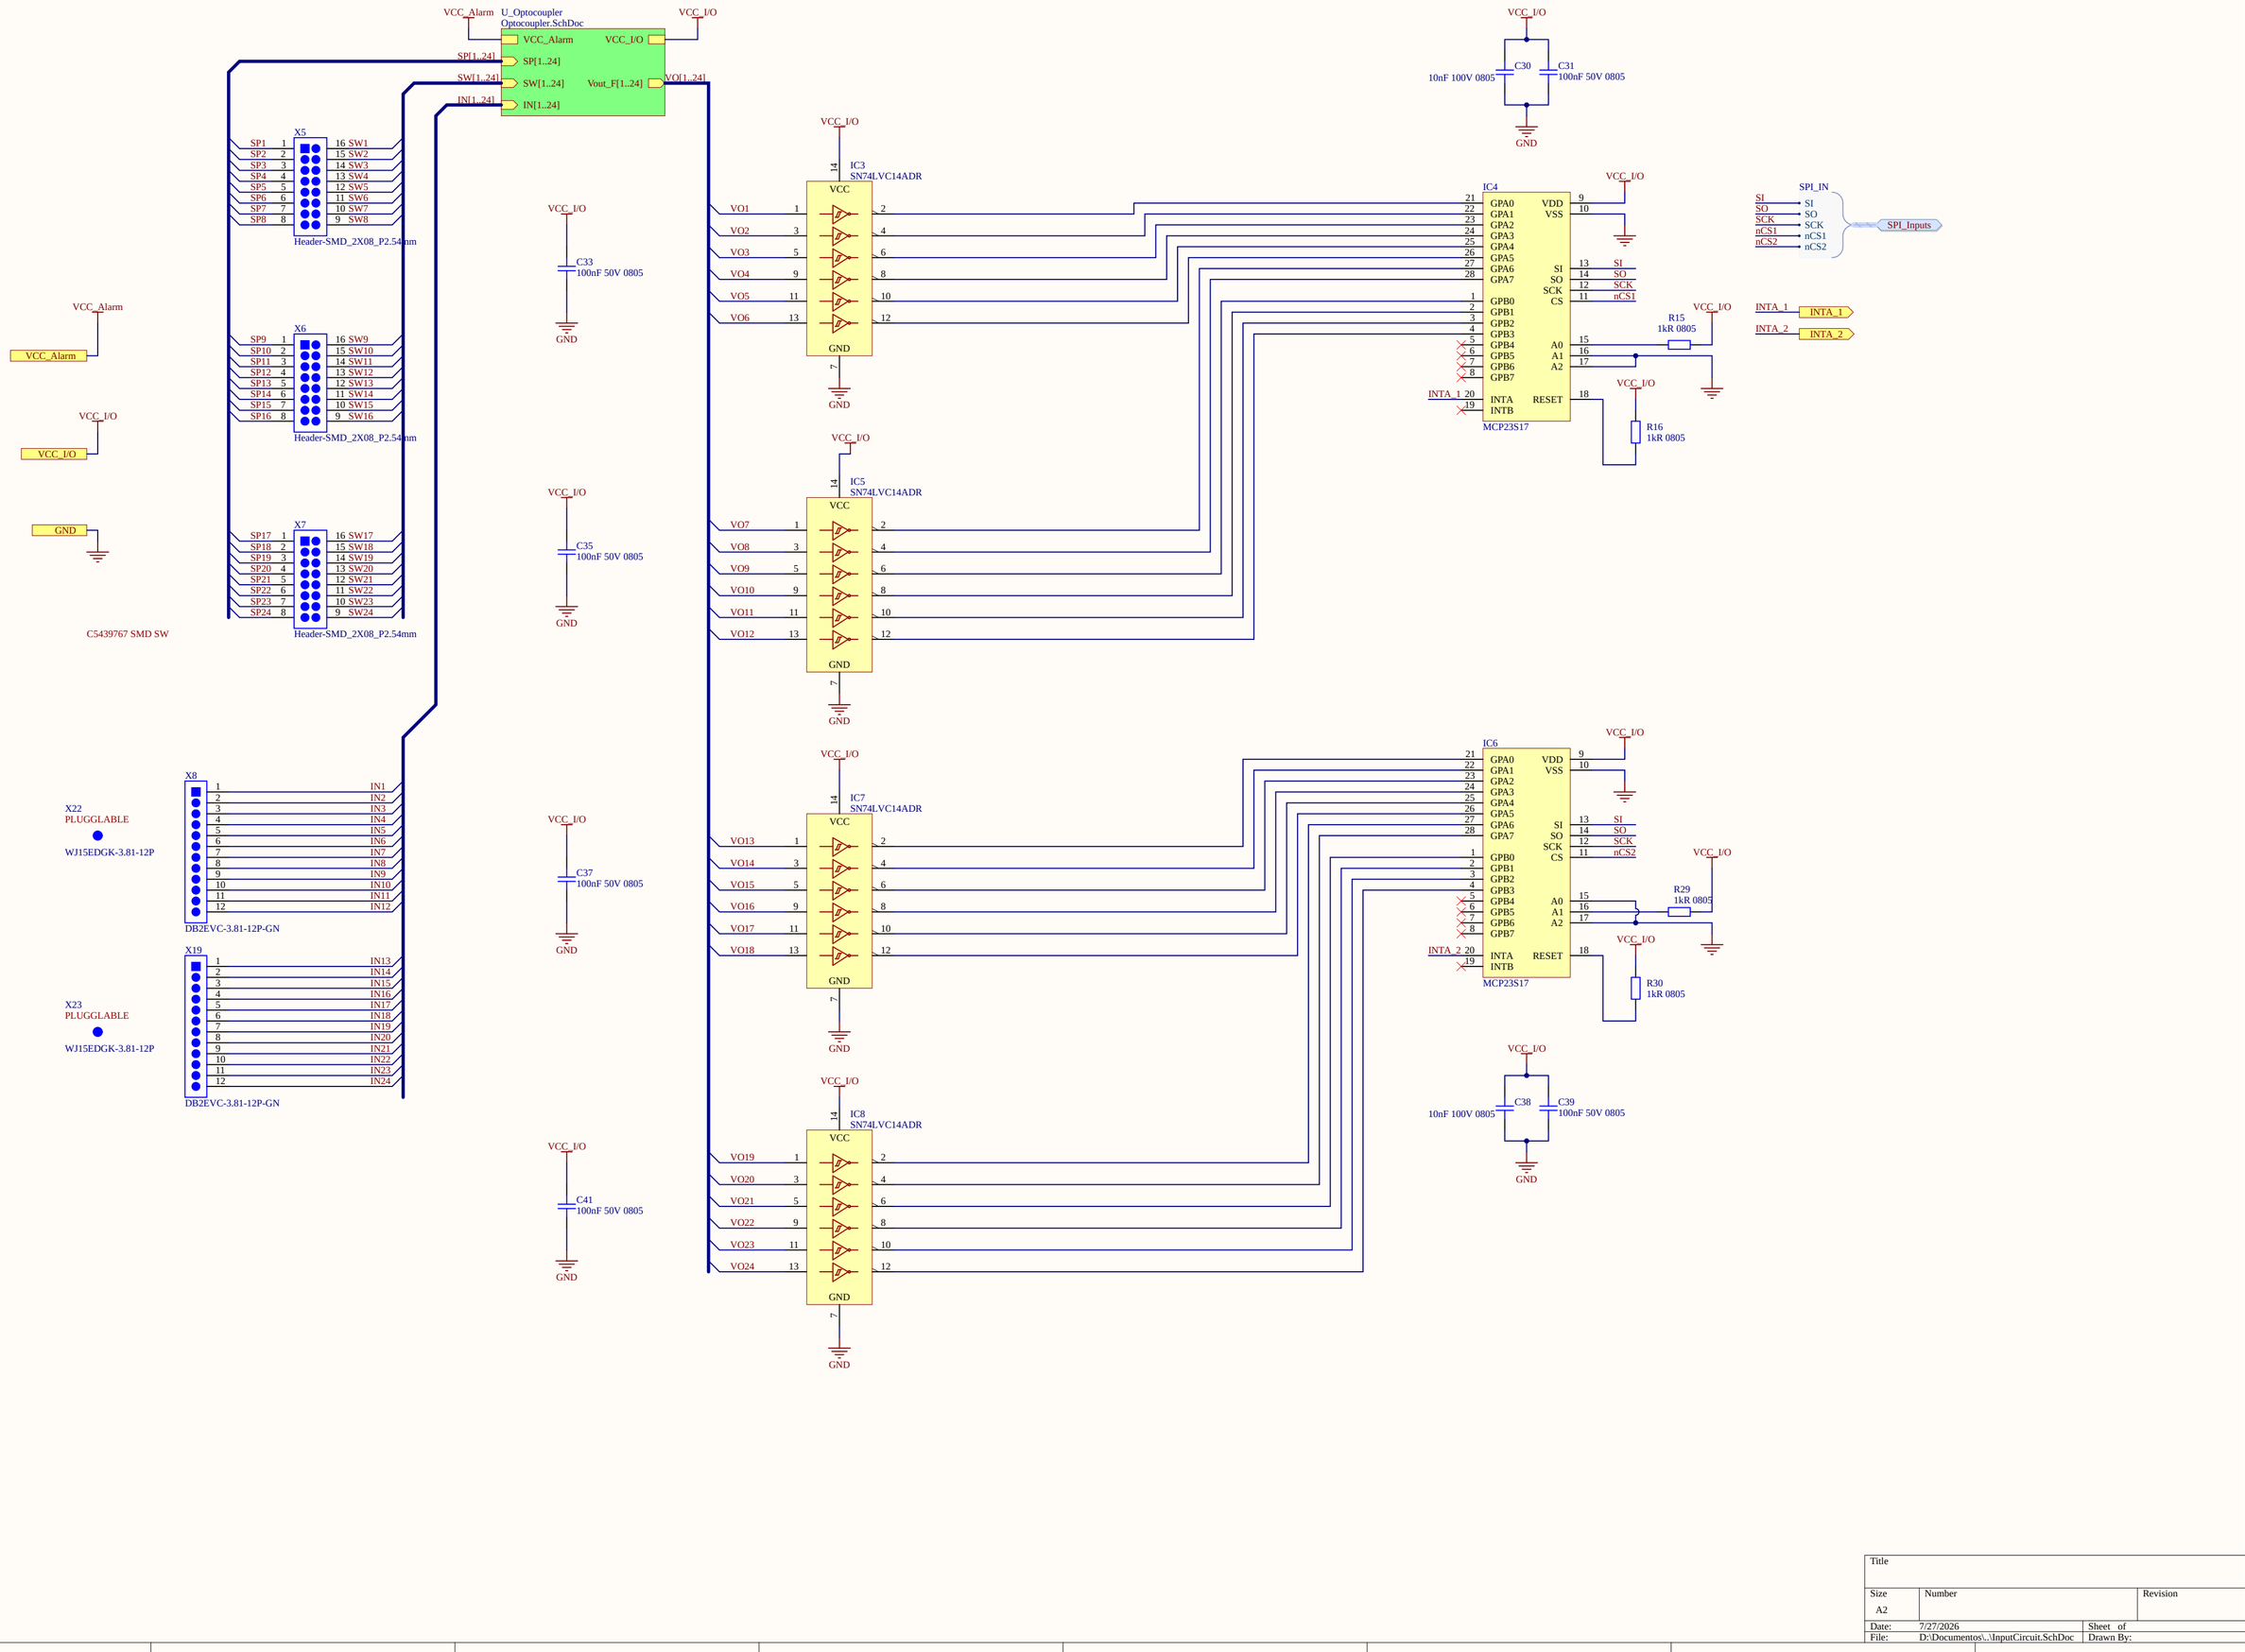


Title			
Size A2	Number		Revision
Date: 7/27/2026		Sheet of	
File: D:\Documentos\..\InputCircuit.SchDoc		Drawn By:	

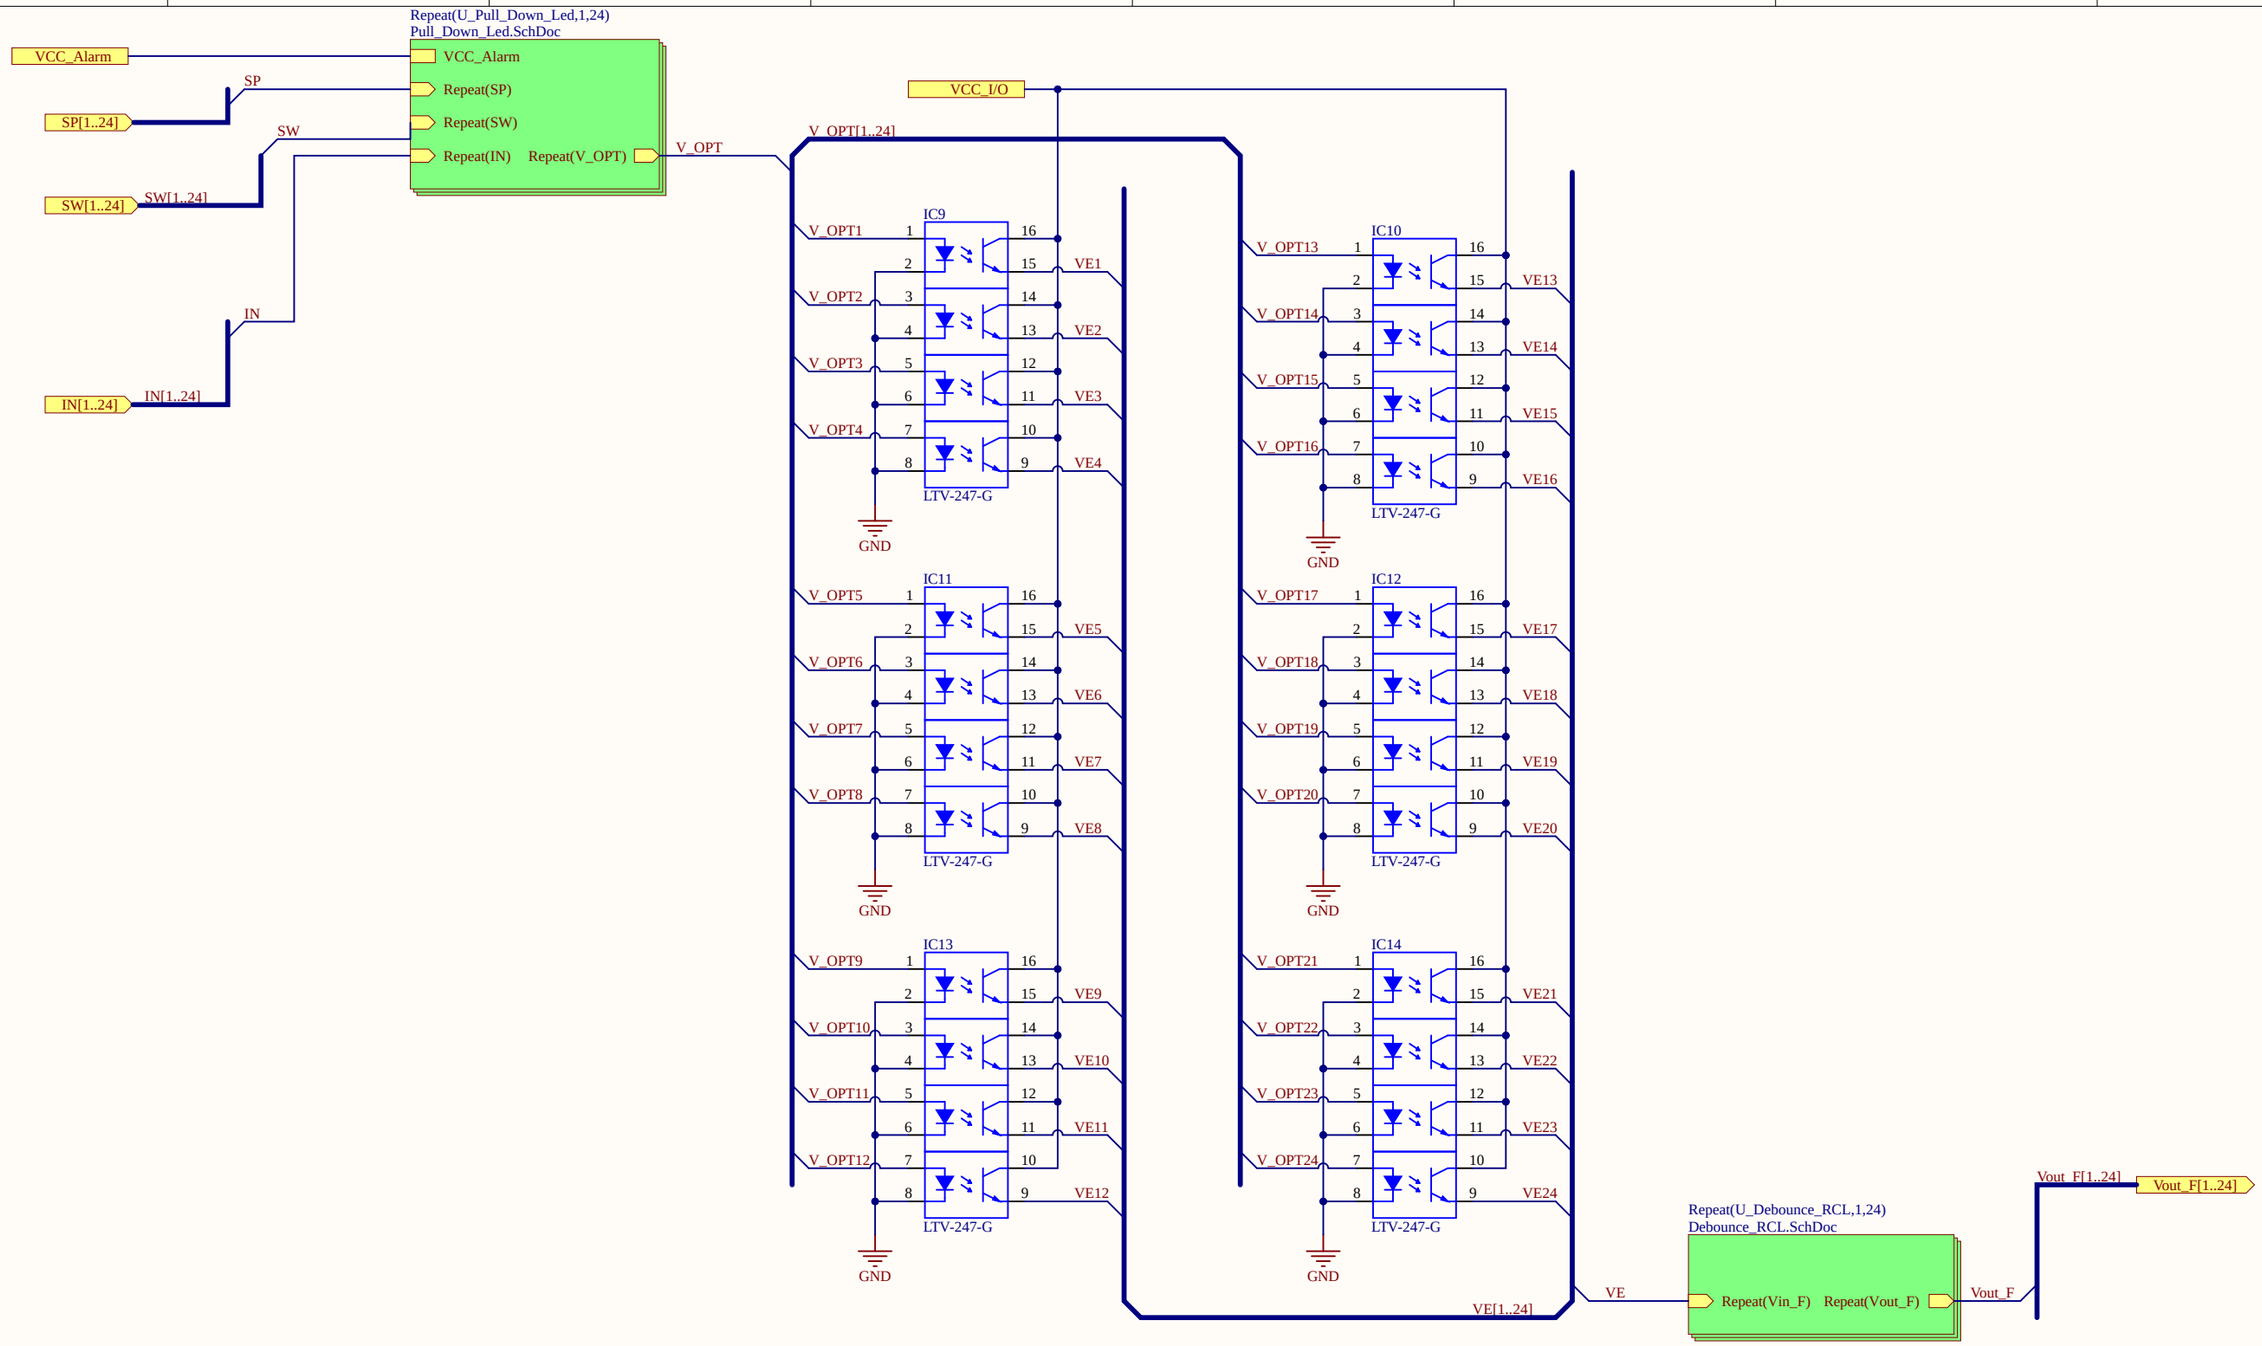


Title		
Size A3	Number	Revision
Date: 7/27/2026		Sheet of
File: D:\Documentos\..\Optocoupler.SchDoc		Drawn By:

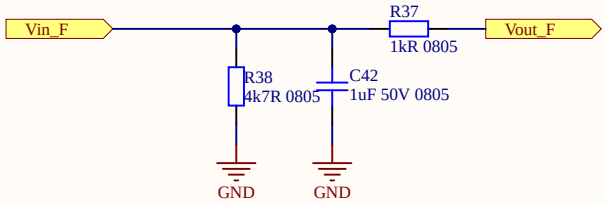

Title		
Size: A4	Number	Revision
Date: 7/27/2026		Sheet of
File: D:\Documentos\..\Debounce_RCL.SchDoc		Drawn By:

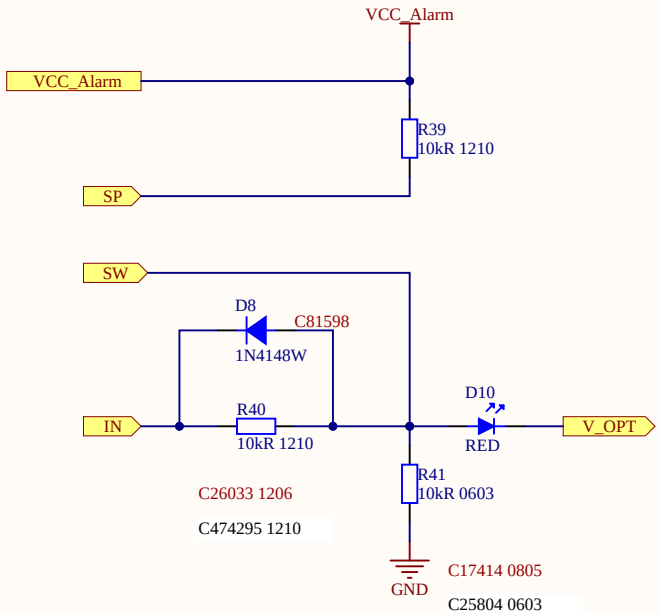



Title		
Size A4	Number	Revision
Date: 7/27/2026		Sheet of
File: D:\Documentos\..\Pull_Down_Led.SchDoc		Drawn By:

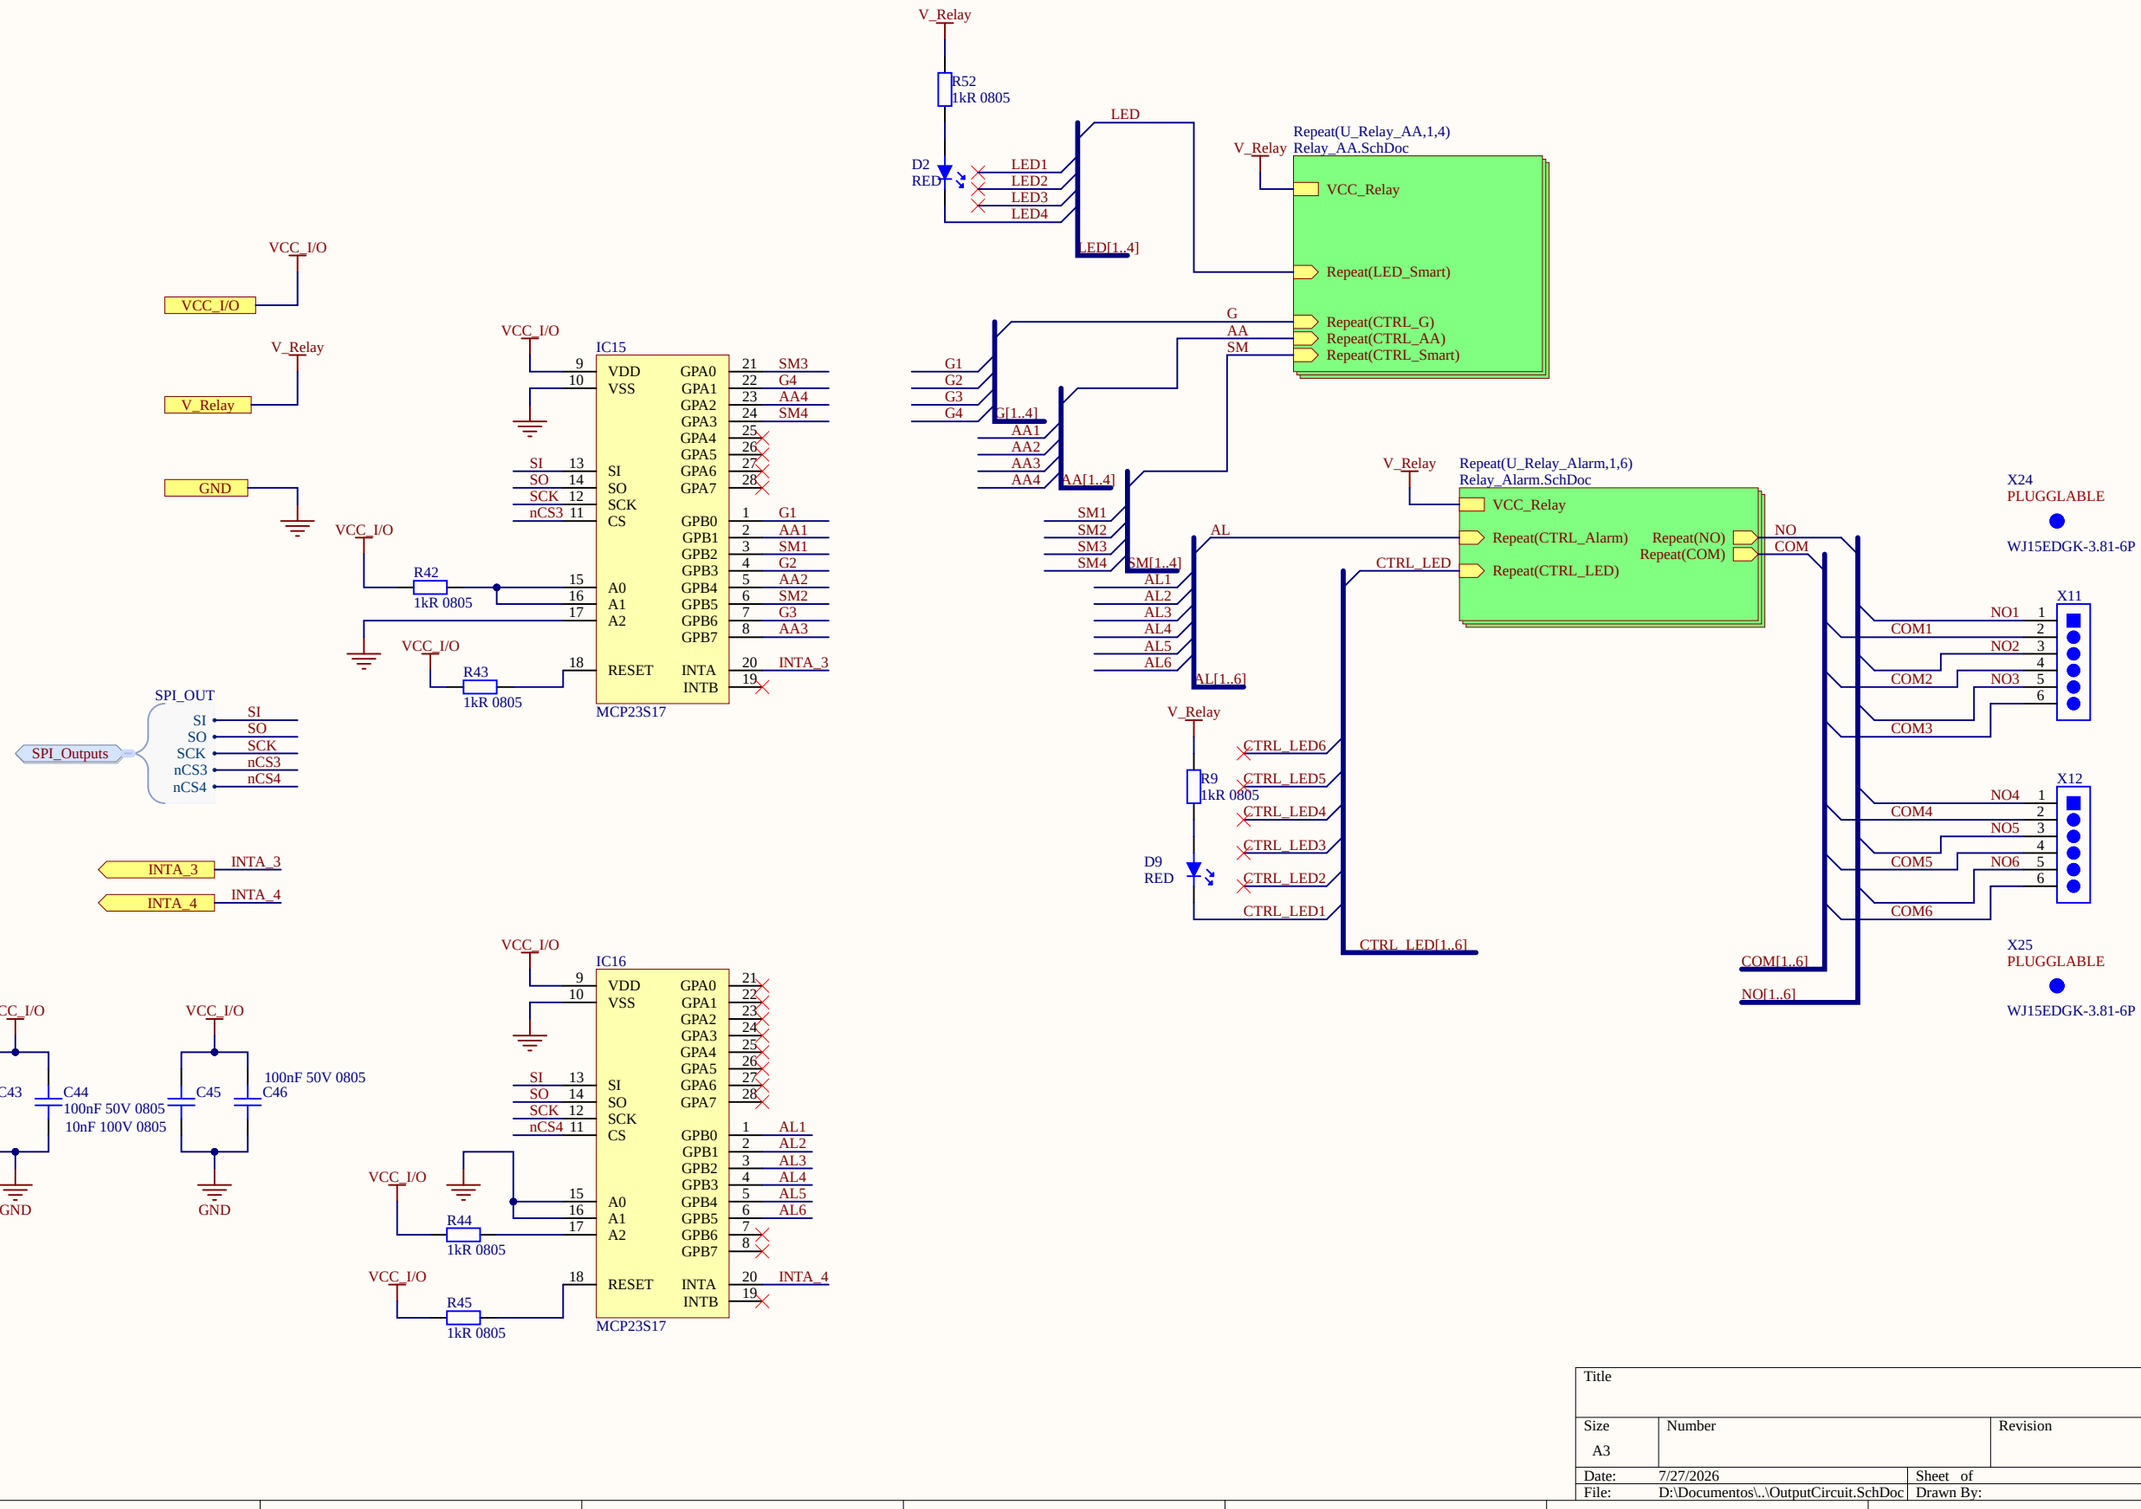


Title		
Size A3	Number	Revision
Date: 7/27/2026		Sheet of
File: D:\Documentos\..\OutputCircuit.SchDoc		Drawn By:

CTRL_AA	CTRL_SMART	MODE
0	0	SMART
0	1	OFF
1	0	X
1	1	CTRL




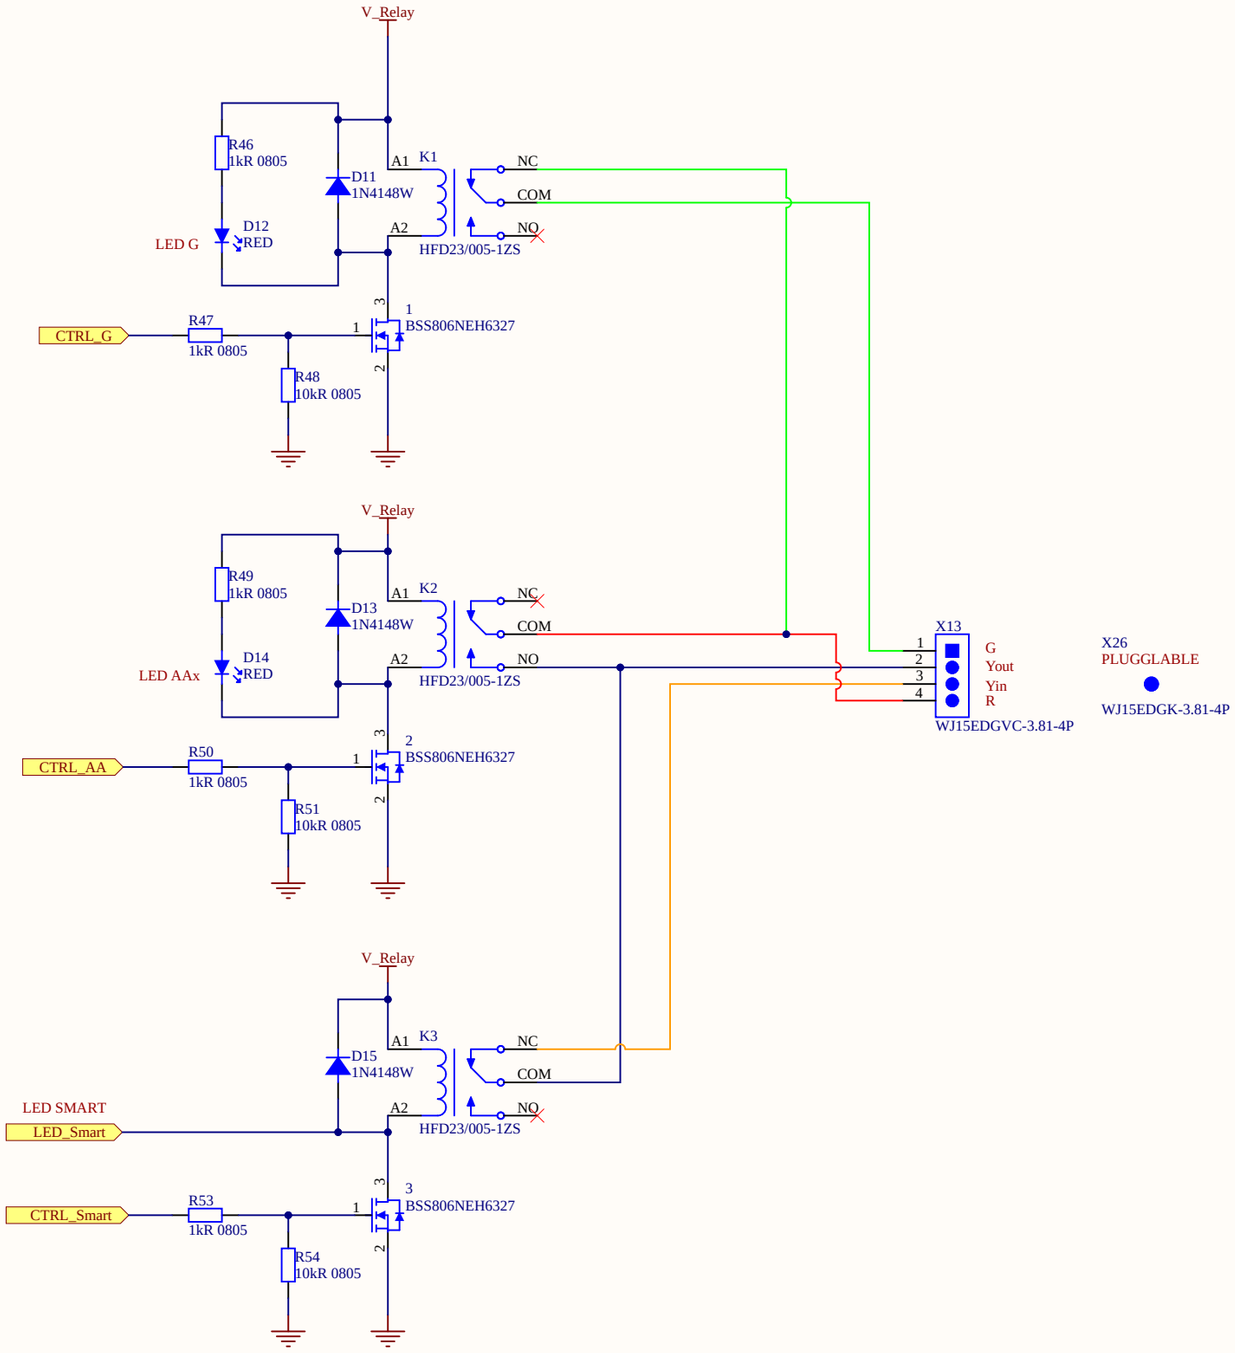


Title		
Size: A3	Number	Revision
Date: 7/27/2026		Sheet of
File: D:\Documentos\..\Relay_AA.SchDoc		Drawn By:

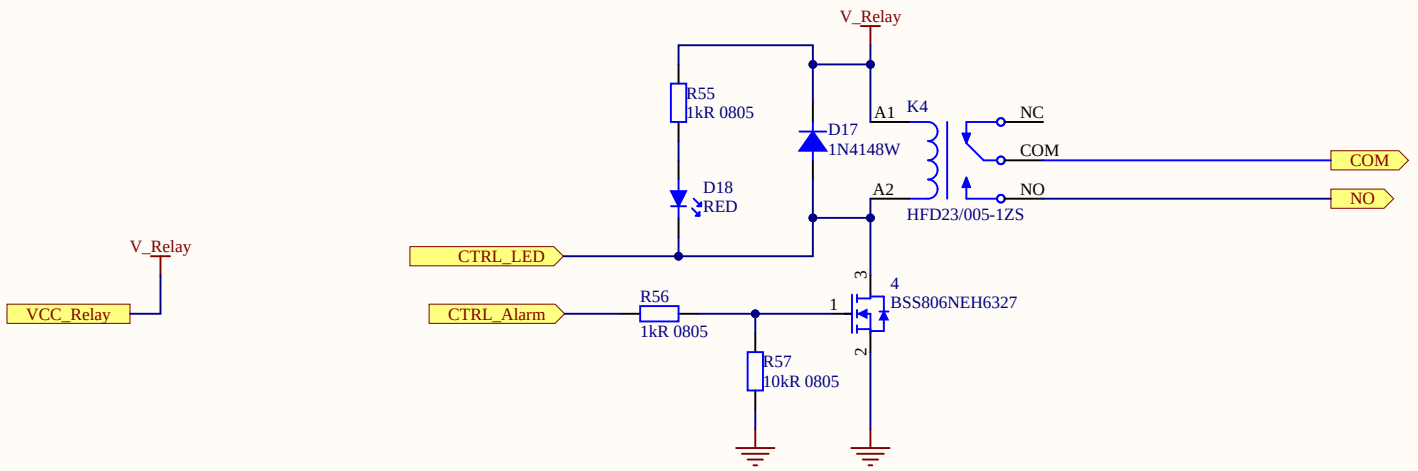

Title		
Size: A4	Number	Revision
Date: 7/27/2026		Sheet of
File: D:\Documentos\..\Relay_Alarm.SchDoc		Drawn By:

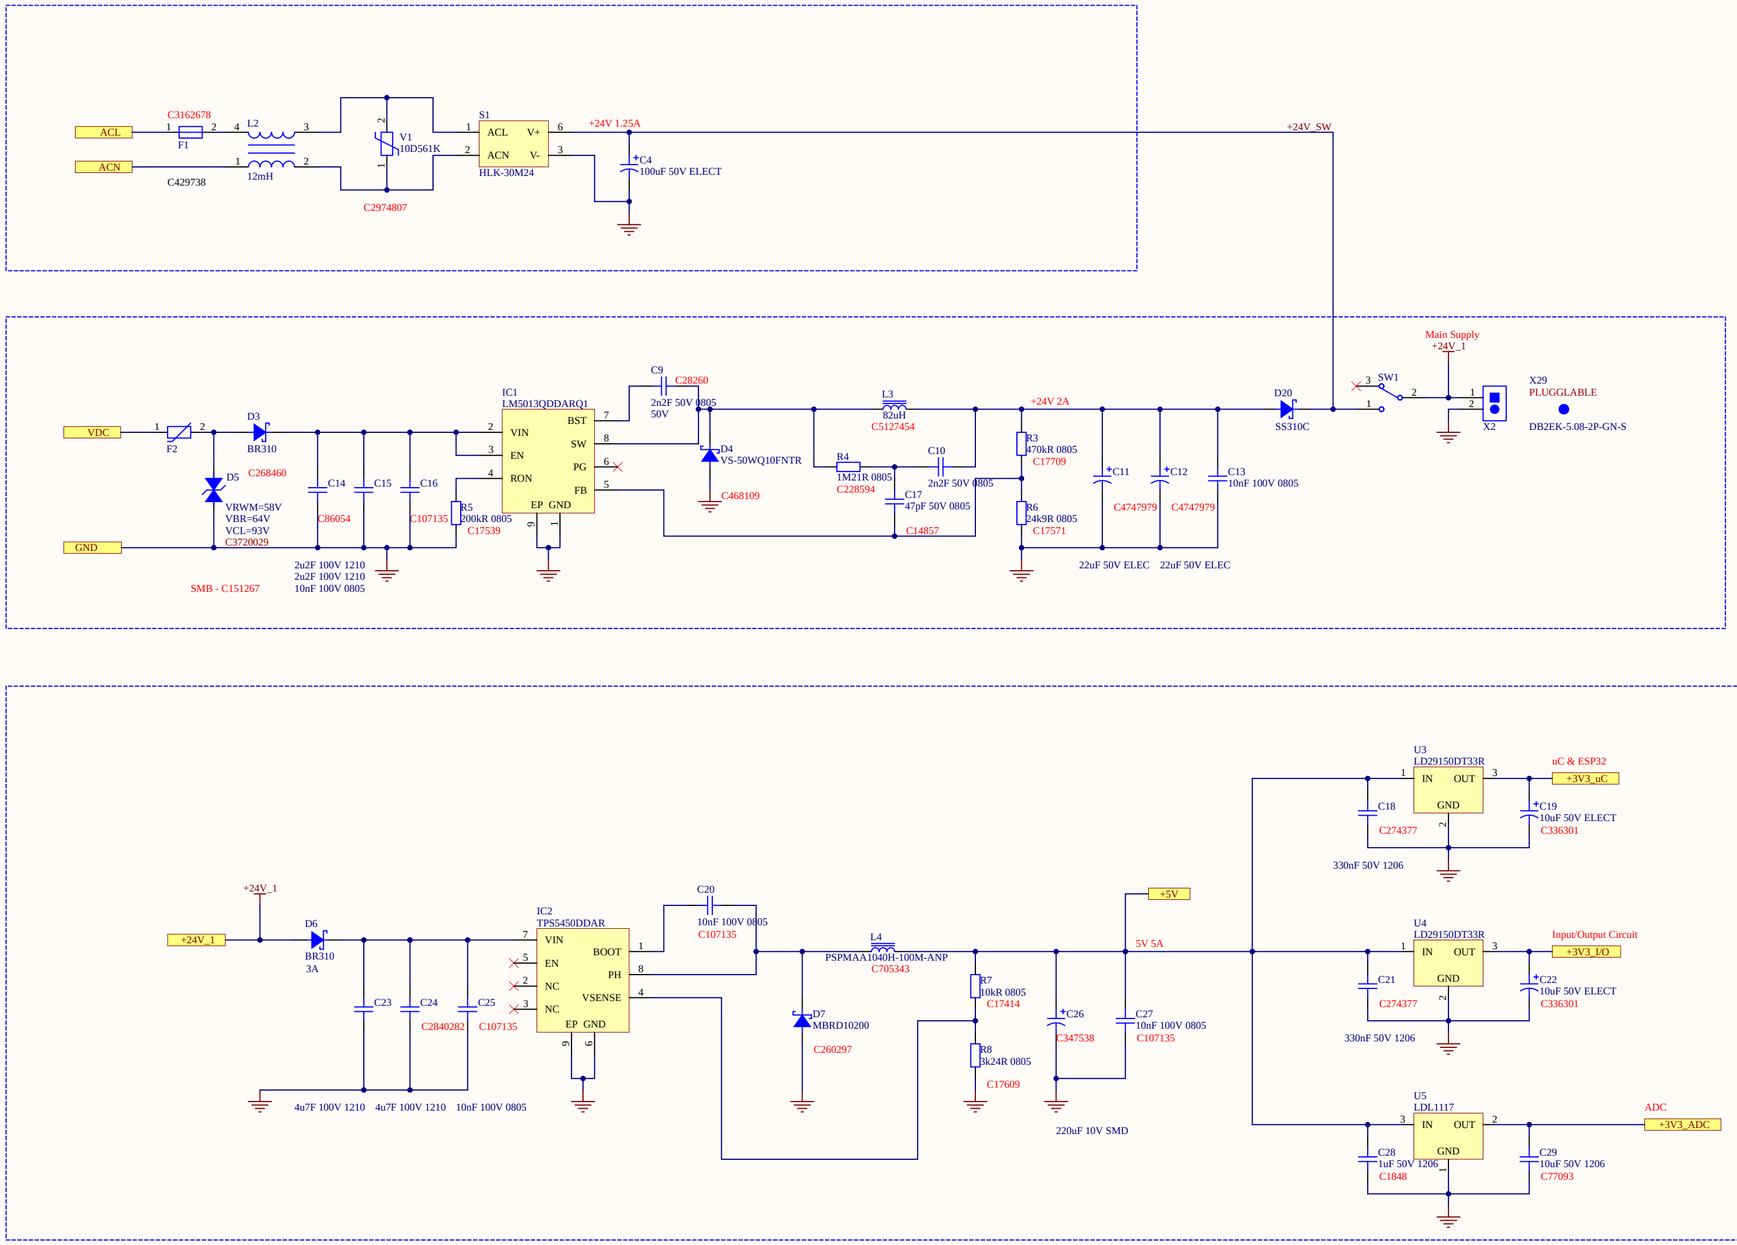

Title		
Size: A2	Number	Revision
Date: 7/27/2026		Sheet of
File: D:\Documentos\..\Power_Supply.SchDoc		Drawn By:

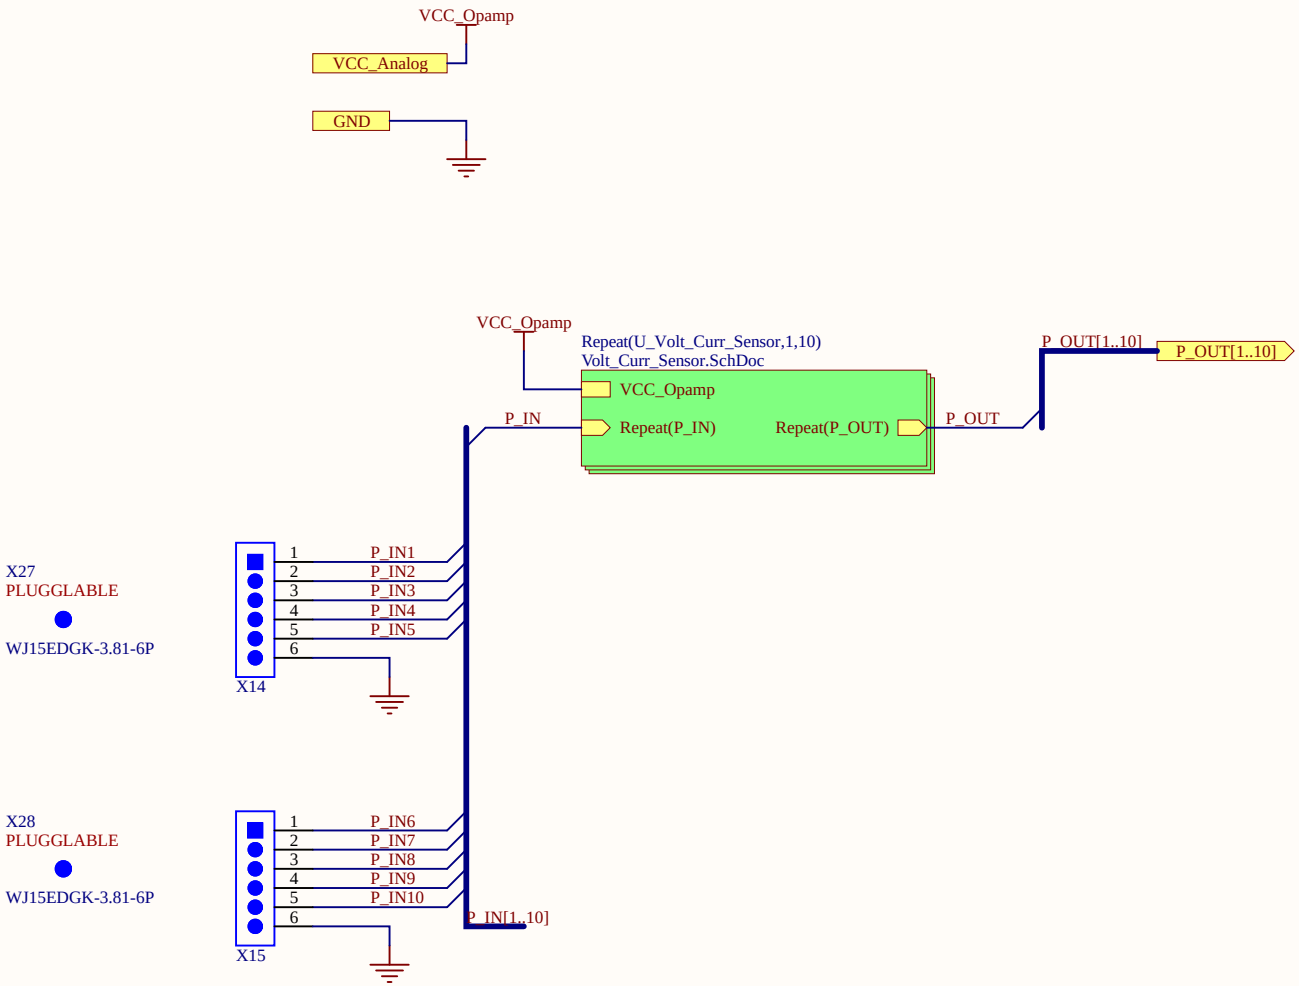

Title		
Size A4	Number	Revision
Date: 7/27/2026		Sheet of
File: D:\Documentos\..\Pressure_Sensor.SchDoc		Drawn By:

Pressure Sensor:

Opam's Characteristics
Gain: x1.98 aprox

Circuit:
Vin * R2/(R1+R2) * Gain

VOLTAGE:
Input: 0.5V - 4.5V
Output: 331.7mV - 2.984V


0.5V* 10/(20 + 10) * 1.98 = 331.7mV

CURRENT
Input: 4mA - 20mA
Output: 579.5mV - 2.9V

For 4mA, Vin = 579.5mV
For 20mA, Vin = 4.37V

873.6mV * 10/(20+10)*1.98 #NAME?

LINK:
https://www.aliexpress.us/item/10050025726526
74.html?gatewayAdapt=4itemAdapt

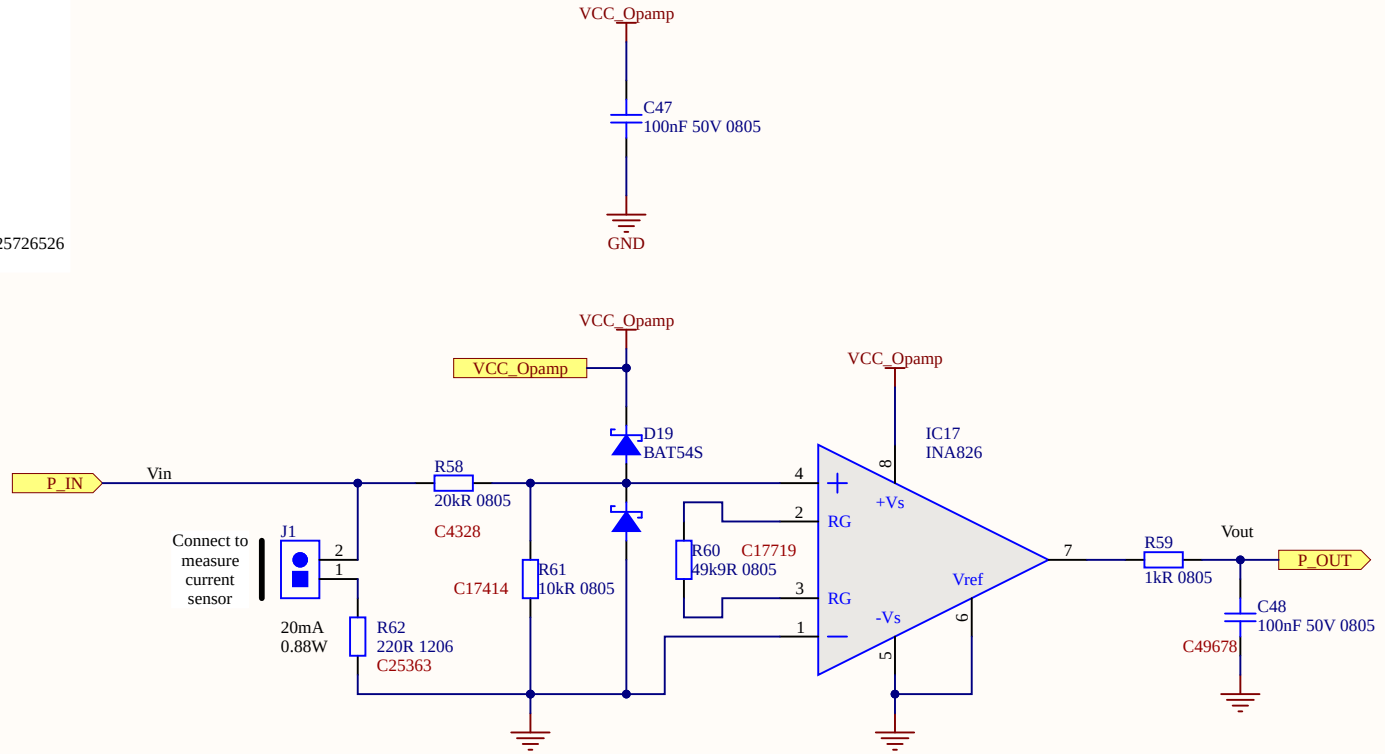

Title		
Size A4	Number	Revision
Date: 7/27/2026		Sheet of
File: D:\Documentos\..\Volt_Curr_Sensor.SchDoc		Drawn By: