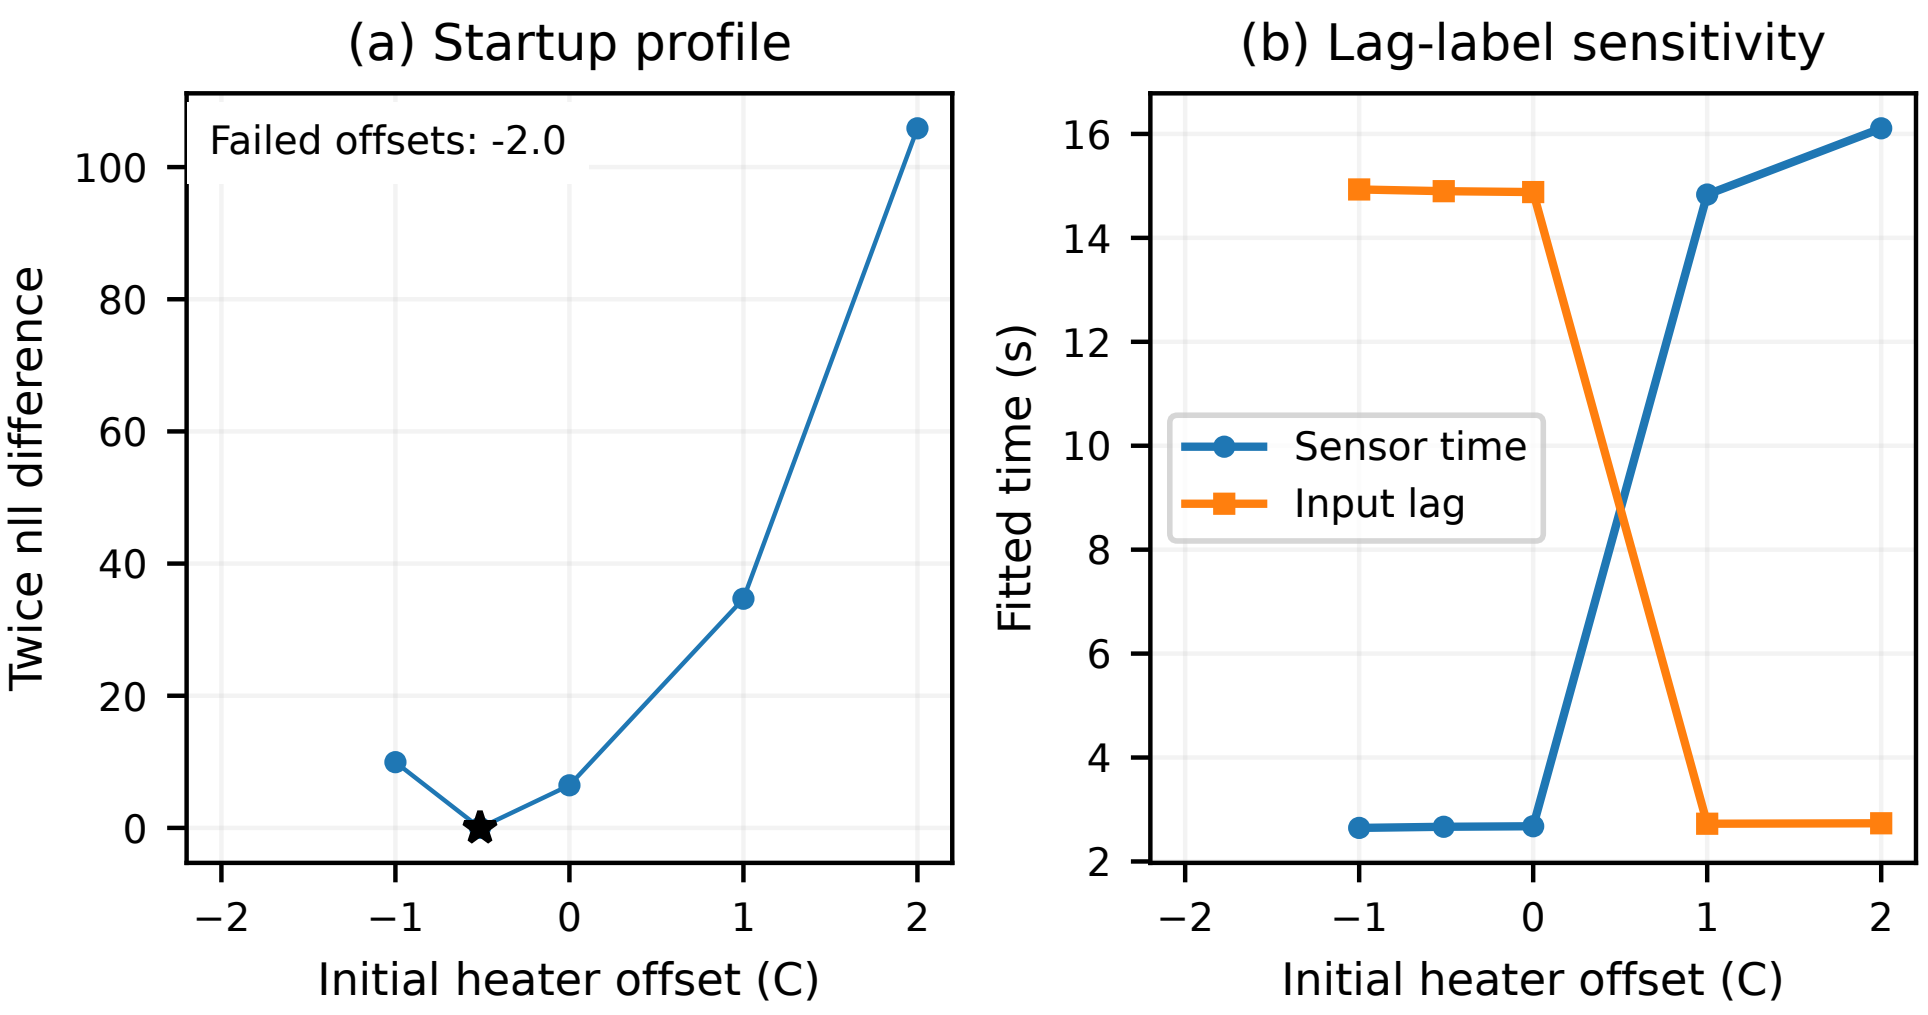
(a) Startup profile
Failed offsets: -2.0
Twice nll difference
100
80
60
40
20
0
−2
−1
0
1
2
Initial heater offset (C)
(b) Lag-label sensitivity
Fitted time (s)
16
14
12
10
8
6
4
2
Sensor time
Input lag
−2
−1
0
1
2
Initial heater offset (C)