TEJ AUTOSYSTEM PVT. LTD.





....The versatile
Conveyor company

www.taplindia.net









CONTENTS

INFRASTRUCTURE 01

ASSEMBLY BELT CONVEYORS 02

FLAT BELT CONVEYORS 02

FREE FLOW PALLET CONVEYORS 03

MODULAR BELT CONVEYORS 03

ROLLER CONVEYORS 04

FG TRANSFER CONVEYORS 04

EXPENDABLE CONVEYOR 05

INCLINED CONVEYORS 06

SLAT CHAIN CONVEYORS 06

ASSEMBLY WORKSTATIONS 07

MI CONVEYORS 08

AGING RACKS 09

AGING CONVEYOR FOR LED BULB 10

UNIVERSAL AGING CONVEYOR 11

LAZER MARKING CONVEYOR'S 12

PIPE AND JOINTS 13

MATERIAL HANDLING TROLLEYS 14

TRUCK LOADING CONVEYOR 15

OTHER PRODUCTS 16

ALUMINIUM PROFILE & FITTINGS 16

OUR VALUABLE CUSTOMER 17

INFRASTRUCTURE











OUR PRODUCTS


Assembly Belt Conveyors

Application

- All Types of LED Lamps/Lights Assembly
- Electrical & Electronics Appliances Assembly
- Small & Light Weight Products Assembly
- Inspection & Packing

Specification

- Conveyor L x W X H can customised as per customer requirement.
- Conveyor structure made by 40 x40 Alu. Profile anodized.
- Belt - Imported High Quality PVC/ESD
- Working Table - High Quality 18 mm plywood with PVC / ESD Mat.
- Top Structure for Lighting and Instruction display Board Acrylic Blue Colour.
- Tube Lights, Power Socket and Pneumatic Line As per Customer Requirement or to be installed by yourself.

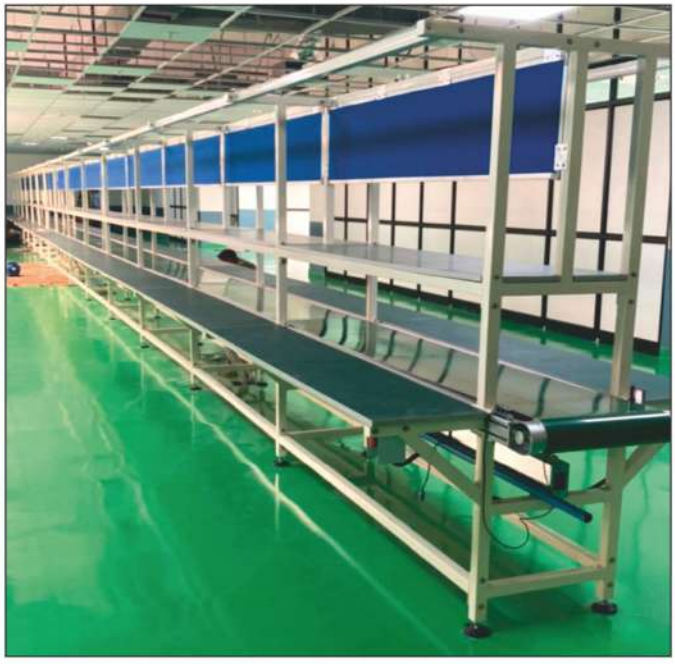



Flat Belt Conveyors







Free Flow Pallet Conveyors









Modular Belt Conveyors









Roller Conveyors











FG Transfer Conveyors

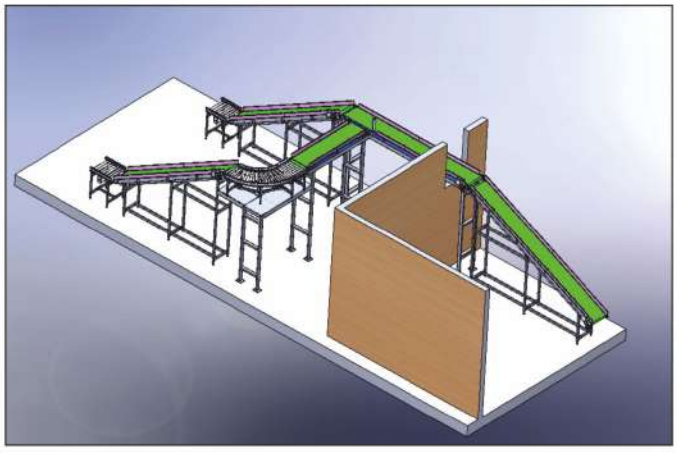

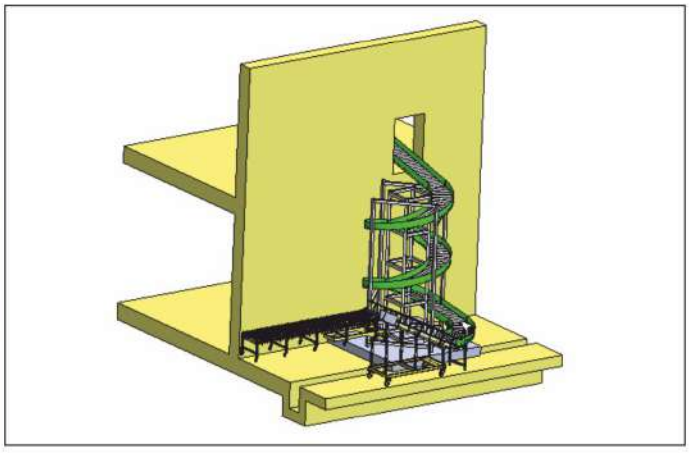

Expendable Conveyor









Roller Conveyor
(Max. Extended Length)

Idler roller conveyors have extendable, flexible frames and are commonly used for loading and unloading, temporary assembly lines, and adding length to an existing conveyor. Their according-style frames can stretch, curve, and contract to change the length and shape of the conveyors, and the conveyors collapse for compact Storage

Features:

High weight burden Smooth and quiet running Suitable for middle or big items Impact Resistant Adjustable Height

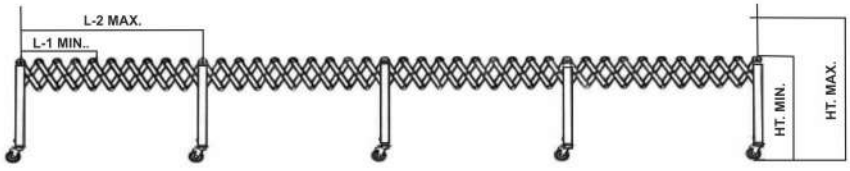

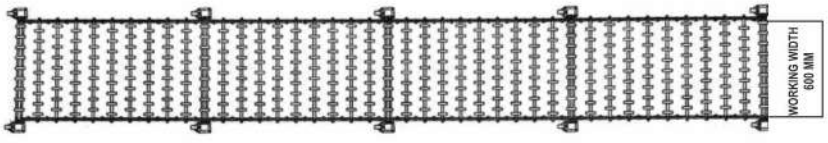



Skate Wheel Conveyor

Model	Conveyor Width	HT Min. (mm)	HT Max. (mm)	HT Max. (mm)	Single Retracted L1 (mm)	Extended Length L (mm)	Load Capacity (kg/m)
FEC-01	600	625	925	925	400	4000	50
FEC-02	400	625	625	295	400	4000	50

Inclined Conveyors







Slat Chain Conveyors







Assembly Workstations

Products
Assembly Work Stations

Application

- All Types of LED Lamps/Lights Assembly
- Electrical & Electronics Appliances Assembly
- Small & Light Weight Products Assembly
- Inspection & Packing

Specification

- L x W X H can customised as per customer requirement.
- Frame Made By 40 x40 Alu. Profile anodized, M.S./Powder Coated and SS-202/304. Working Top - High Quality 18 mm Plywood with PVC / ESD Mat and SS also.
- Top Structure for Lighting and Instruction display Board Acrylic Blue Colour.
- Tube Light and Power Socket As per Customer Requirement or to be installed by at your end.











Products
Motorised Manual Insertion Conveyors


Application

- All Types of PCB Assembly
- LED Lighting, Electrical & Electronics Appliances

Specification

- PCB Size - 50 mm to 300 mm
- Conveyor Length as per customer requirement.
- Conveyor Structure Made By 40 x40 Alu. Profile anodized.
- Top Structure for Lighting and Instruction display Board Acrylic Blue Colour.
- Tube Light and Power Socket As per Customer Requirement or to be installed at your end.



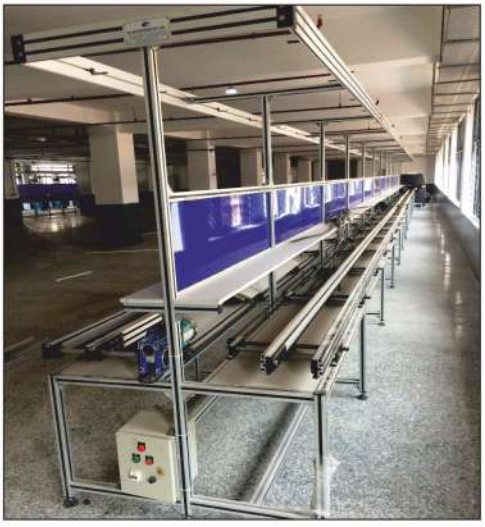

Cooling and Connecting Conveyors



Cooling Conveyors



Connecting Conveyors

Pcb Board Loading Machine

The board loading machine is used at the start of the SMT production line, By receiving the board signal from the next position to load pcb board automatic.

Specification:

Model	XJS-PC250L	XJS-PC330L	XJS-PC390L
Air Pressure	5KGf/cm2		
Power Supply	AC220V 50/60HZ		
Transmission Height	900±20mm		
PCB Thickness	0.4-8mrn		
PCB Transport Direction	Left to right or right to left		
Repeatability	0.05mm		
Dimension (LxWxH)	1100x800x1300 (mm)		
Adapt To Pcb Magazine Rack Size	355x320x563mrn	355x320x563mrn	355x320x563mrn
Adapt To Pcb Size	50x50-L350xW250 mm	50x50-L350xW250 mm	50x50-L350xW250 mm



PCB BOARD UNLOADING MACHINE



Specification:

Model	XJS-PC250L	XJS-PC330L	XJS-PC390L
Air Pressure	5KGf/cm2		
Power Supply	AC220V 50/60HZ		
Transmission Height	900±20mm		
PCB Thickness	0.4-8mrn		
PCB Transport Direction	Left to right or right to left		
Repeatability	0.05mm		
Dimension (LxWxH)	1100x800x1300 (mm)		
Adapt To Pcb Magazine Rack Size	355x320x563mrn	355x320x563mrn	355x320x563mrn
Adapt To Pcb Size	50x50-L350xW250 mm	50x50-L350xW250 mm	50x50-L350xW250 mm

Linking Inspection Conveyor

Specification:	
Dimension	L1000 x W620 x H1000mm
PBC Board Width	350mm
Transporting Speed	0-1800mm/min
Transporting Direction	L-R
Power	220V 50/60Hz 60W
Weight	45Kg



PCB SHUTTLE CONVEYOR



Specification:	
PCB Size	50-400mm & Customised
Direction	Left-Right/Right-Left
Height	850mm & Customised
Too Cover	Option Available
Options Available	1 In 2 Out/ 2 In 1 Out

Aging Racks

Products
Aging Racks & Trolley for LED Lights

Application


- Aging For LED Tube Light (Batten), LED Street Lights, LED Down lighters, LED Bulb LED Panel Lights.

Specification

- L x W X H can customised as per customer requirement.
- Frame Made By 40 x40 Alu. Profile anodized, M.S./Powder Coated
- Top - High Quality 18 mm Plywood with PVC / ESD Mat or power coated Top
- Testing Parameters - as per requirement customer.





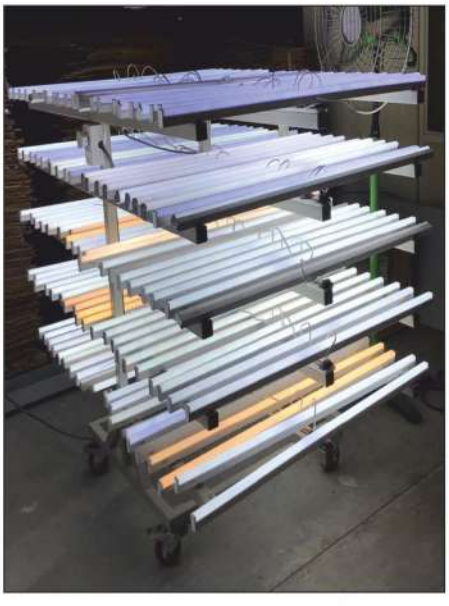





Aging Conveyor For LED Bulb

Products
Aging Conveyor For LED Bulbs

Application

- LED Bulb Aging

Specification

- Conveyor Size L=4500 x W=1400 X H=1200
- Conveyor structure made by 40 x40 Alu. Profile anodized.
- Conveyor Chain - 1" Pitch with Mounting attachment
- Slat Size - Width=200 x Length=1220 M.S. Powder Coated
- Total No of Bulb Holder - 1419 Nos
- Holder Type - B-22
- Single Phase Bus Bar System For Slat Connection
- Power Connector - Roller Type
- Motor 1/2 HP With Double Reduction Gear Box
- Speed : Adjustable by Frequency control system - As per Aging Time.
- Aging Parameters - 6 Zone Voltage control independently with 1 Zone Switching & can also be custom according to customer requirement.

Zone	Voltage Range	Max. Load	Variac Rating
1	100V to 140V	35 Apm at 100V	50 Amp
2	220V to 230V	15 Apm at 220V	25 Amp
3	240V to 280V	15 Apm at 240V	25 Amp
4	0	Cooling Zone	No Power
5	220V to 230V	Switching ON/OFF By Timer	Direct - Input V
6	220V to 230V	15 Apm At 220V	25 Amp





Universal Aging Conveyor

Products
Universal aging conveyor for all LED lights

Application
Aging For LED Tube Light (Batten), LED Street Lights, LED Down lighters, LED Bulb LED Panel Lights.

Specification
- Conveyor Size : L-8500 X W-1800 X H-1500
- Conveyor structure made by 40 x40 Alu. Profile anodized.
- Conveyor Chain - 1-1/2" Pitch
- 20 nos aging trolley - size 600x600x500
- Single Phase Bus Bar System For Trolley Connection
- Power Connector - Roller Type
- Motor 1/2 HP With Double Reduction Gear Box
- Speed : Adjustable by Frequency control system - As per Aging Time.
- Aging Parameters - 6 Zone Voltage control independently with 1 Zone Switching & can also be custom according to customer requirement.

Pallets
- Replicable Pallets for Street light & down lights 20 nos. with 10 nos. NG Switch each pallet.
- Replicable Pallets for Tube Light (Batten) 20 nos. with 25 nos. NG Switch each pallet.
- Total Batten Loaded-500 Nos
- Replicable Pallets for LED Bulb 45 nos. with 25 Holders B-22 Type.
- Total Bulbs Loaded = 1000 Nos Max.

Zone	Voltage Range	Max. Load	Variac Rating
1	100V to 140V	35 Apm at 100V	50 Amp
2	220V to 230V	15 Apm at 220V	25 Amp
3	240V to 280V	15 Apm at 240V	25 Amp
4	0	Cooling Zone	No Power
5	220V to 230V	Switching ON/OFF By Timer	Direct - Input V
6	220V to 230V	15 Apm At 220V	25 Amp





Lazer Marking Conveyor's

Products
Conveyor for lazer marking on LED Lights

Products
Conveyor used for marking or printing on led bulb / batten / down lights etc.

Specification

- Conveyor Size : 2000 X 210 X 850 Mm For Bulb
- Conveyor Size : 2000 X 1300 X 850 Mm For Batten
- Lazer Source to Be Supplied By Costumer
- Conveyor Structure-alu Profile 40 X 40 mm





Batten Laser Marking Conveyor















Material Handling Trolleys





















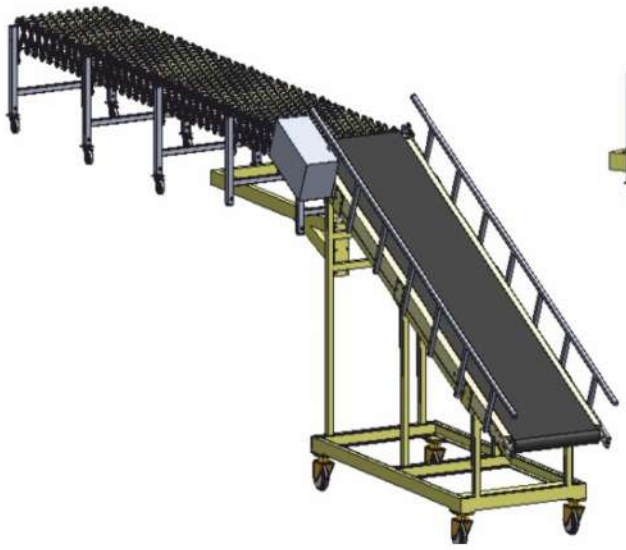



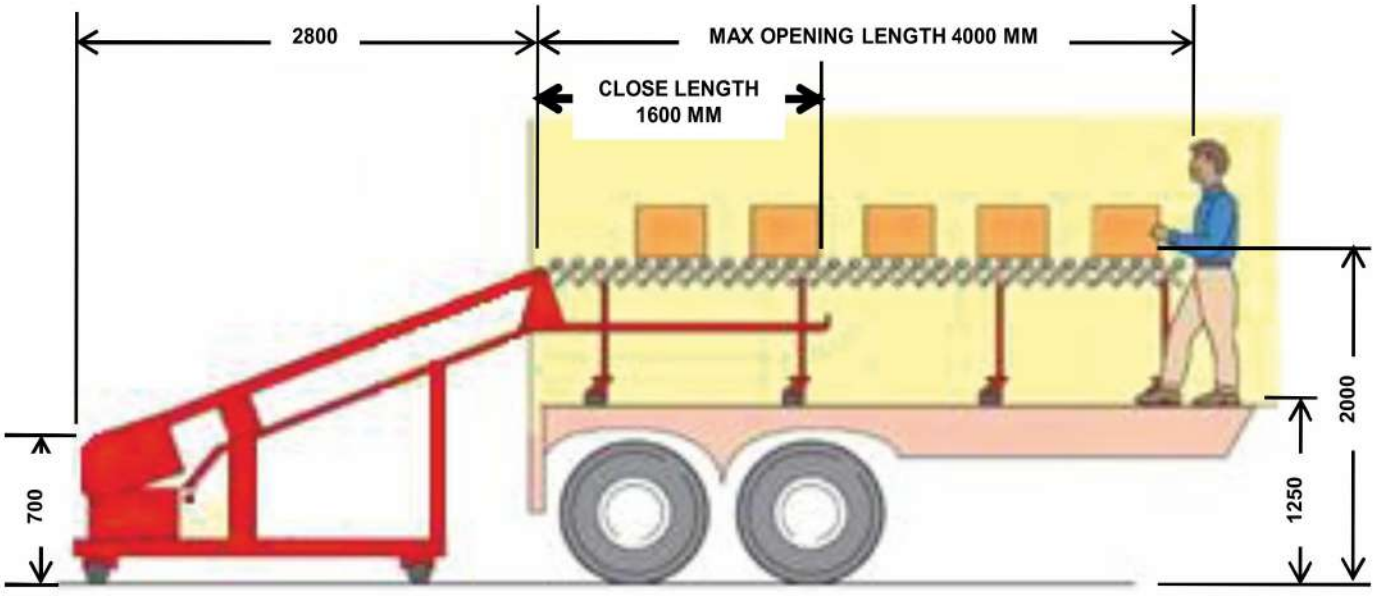

Specifications

- Belt Width : 600mm
- Belt : Rough Top PVC + Fabric 5mm
- Conveyor speed : 15 Meter per minute
- Speed : Adjustable By VFD
- Construction : M.S. Fabricated steel Frame.
- Swivel castors for easy maneuverability.
- Motor : 0.75kw flange with Gearbox.
- Electrical supply : Single phase supply.
- Controls : Stop/Start/Reverse
- Finish : Powder coated

Vertical Reciprocating Conveyor






Expendable Conveyor



Expendable Conveyor

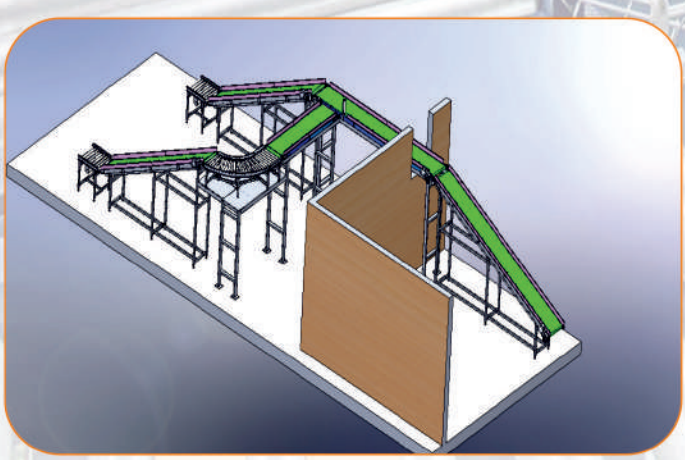

Fg Material Transfer Conveyor



Truck Loader





Pope & Joints-Fifo Racks & Workstation






Material Handling Trolley






Other Products

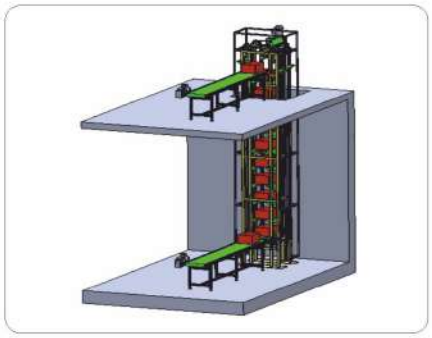






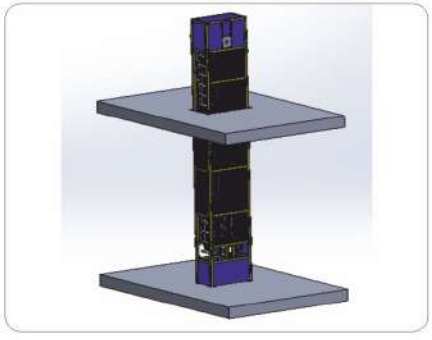



Aluminium Profile & Fittings


Alu. Profile-40 X 40


T-Bolt with Nut M8 X 20mm



Alu. Bracket-4040


Alu. Profile-40 X 80, 100 X 20



Tool Hanger


Cover Profile


Levelling Foot


T-Nut M6 & M8


M.I Section & Chain


Free Flow Section & Chain

Our Valuable Customer



About
The company

TAPL is an engineering and manufacturing company was formed in 2004. Since then the company has become a principle supplier of Customized Conveyors for Electrical, Electronics, Automobiles, Pharma & Food Industries. We are able to offer you the complete solution of your requirement to meet or exceed all your customer expectations by providing the highest quality products and service on time.



TEJ AUTOSYSTEM PVT. LTD.

Add. : Plot No-353, Sec-68, IMT Faridabad-121004, Haryana (India)
Phone No : +91-9711415164, 8053650222
E-mail : info@taplindia.net, **Web. :** www.taplindia.net

Karoliya Advt : +91-9911117158, 9891142254