







SN74LVC7032A-Q1 SCLS972A - OCTOBER 2023 - REVISED MARCH 2024

SN74LVC7032A-Q1 Automotive Quadruple 2-Input OR Gates with Schmitt-Trigger Inputs

1 Features

- AEC-Q100 qualified for automotive applications:
 - Device temperature grade 1: -40°C to +125°C
 - Device HBM ESD classification level 2
 - Device CDM ESD classification level C4B
- Available in wettable flank QFN (WBQA) package
- Operating range from 1.1V to 3.6V
- 5.5V tolerant input pins
- Supports standard pinouts
- Latch-up performance exceeds 250mA per JESD 17
- ESD protection exceeds JESD 22
 - 2000V Human-Body Model (A114-A)
 - 1000V Charged-Device Model (C101)

2 Applications

- Use fewer inputs to monitor error signals
- Combine active-low enable signals


3 Description

This device contains four independent 2-input OR Gates with Schmitt-trigger inputs. Each gate performs the Boolean function Y = A + B in positive logic.

Package Information

PART NUMBER	PACKAGE ⁽¹⁾	PACKAGE SIZE(2)	BODY SIZE (NOM)(3)
SN74LVC7032A-Q1	BQA (WQFN, 14)	3mm × 2.5mm	3mm × 2.5mm
5N/4LVC/032A-Q1	PW (TSSOP, 14)	5mm × 6.4mm	5mm × 4.4mm

- For more information, see Section 11
- The package size (length × width) is a nominal value and includes pins, where applicable
- The body size (length × width) is a nominal value and does not include pins.



Functional Pinout




Table of Contents

1 Features	7.3 Feature Description	.10
2 Applications		
3 Description		. 12
4 Pin Configuration and Functions	8.1 Application Information	. 12
5 Specifications		
5.1 Absolute Maximum Ratings	8.3 Power Supply Recommendations	.14
5.2 ESD Ratings		. 14
5.3 Recommended Operating Conditions		
5.4 Thermal Information	9.1 Documentation Support	. 16
5.5 Electrical Characteristics	9.2 Receiving Notification of Documentation Updates	.16
5.6 Switching Characteristics	9.3 Support Resources	. 16
5.7 Noise Characteristics		. 16
5.8 Typical Characteristics	9.5 Electrostatic Discharge Caution	.16
6 Parameter Measurement Information	9.6 Glossary	.16
7 Detailed Description1	10 Revision History	. 16
7.1 Overview10		
7.2 Functional Block Diagram1		. 16



4 Pin Configuration and Functions






Figure 4-1. SN74LVC7032A-Q1 BQA Package, 14-Pin WQFN (Top View)

Figure 4-2. SN74LVC7032A PW Package, 14-Pin TSSOP (Top View)

Table 4-1. Pin Functions

PIN		TYPE ⁽¹⁾	DESCRIPTION		
NAME	NO.	1166/	DESCRIPTION		
1A	1	I	Channel 1, Input A		
1B	2	I	Channel 1, Input B		
1Y	3	0	Channel 1, Output Y		
2A	4	I	Channel 2, Input A		
2B	5	I	Channel 2, Input B		
2Y	6	0	Channel 2, Output Y		
GND	7	_	Ground		
3Y	8	0	Channel 3, Output Y		
3A	9	I	Channel 3, Input A		
3B	10	I	Channel 3, Input B		
4Y	11	0	Channel 4, Output Y		
4A	12	I	Channel 4, Input A		
4B	13	I	Channel 4, Input B		
VCC	14	_	Positive Supply		
Thermal Pad ⁽²⁾		_	The thermal pad can be connected to GND or left floating. Do not connect to any other signal or supply.		

- (1) I = input, O = output, I/O = input or output, G = ground, P = power.
- (2) BQA package only.



5 Specifications

5.1 Absolute Maximum Ratings

over operating free-air temperature range (unless otherwise noted)(1)

				MIN	MAX	UNIT
V _{CC}	Supply voltage range			-0.5	6.5	V
VI	Input voltage range ⁽²⁾			-0.5	6.5	V
Vo	Output voltage range ⁽²⁾			-0.5	V _{CC} + 0.5	V
I _{IK}	Input clamp current	V _I < 0V			-50	mA
I _{OK}	Output clamp current	V _O < 0V			-50	mA
Io	Continuous output current				±50	mA
Io	Continuous output current through V	Continuous output current through V _{CC} or GND			±100	mA
TJ	Junction temperature	Junction temperature		-65	150	°C
T _{stg}	Storage temperature			-65	150	°C

⁽¹⁾ Operation outside the Absolute Maximum Ratings may cause permanent device damage. Absolute maximum ratings do not imply functional operation of the device at these or any other conditions beyond those listed under Recommended Operating Conditions. If briefly operating outside the Recommended Operating Conditions but within the Absolute Maximum Ratings, the device may not sustain damage, but it may not be fully functional. Operating the device in this manner may affect device reliability, functionality, performance, and shorten the device lifetime.

5.2 ESD Ratings

			VALUE	UNIT
Electrostatic	Human body model (HBM), per AEC Q100-002 HBM ESD Classification Level 2 ⁽¹⁾	±2000		
V _(ESD)	discharge	Charged device model (CDM), per AEC Q100-011 CDM ESD Classification Level C4B	±1000	V

⁽¹⁾ AEC Q100-002 indicate that HBM stressing shall be in accordance with the ANSI/ESDA/JEDEC JS-001 specification.

5.3 Recommended Operating Conditions

over operating free-air temperature range (unless otherwise noted)

Specifications	Description	Condition	MIN	MAX	UNIT
V _{CC}	Supply voltage		1.1	3.6	V
VI	Input voltage			5.5	V
Vo	Output voltage	(High or low state)		V _{CC}	V
		V _{CC} = 1.8V		-4	
	High-level output current	V _{CC} = 2.3V		-8	mA
I _{OH}		V _{CC} = 2.7V		-12	IIIA
		V _{CC} = 3V		-24	
		V _{CC} = 1.8V		4	
	Low-level output current	V _{CC} = 2.3V		8	mA
I _{OL}		V _{CC} = 2.7V		12	IIIA
		V _{CC} = 3V		24	
Δt/Δν	Input transition rise or fall rate		10	ns/V	
T _A	Operating free-air temperature	;	-40	125	°C

Product Folder Links: SN74LVC7032A-Q1

⁽²⁾ The input and output voltage ratings may be exceeded if the input and output current ratings are observed.



5.4 Thermal Information

THERMAL METRIC ⁽¹⁾		Package	Package Options		
		PW (TSSOP)	BQA (WQFN)	UNIT	
		14 PINS	14 PINS		
$R_{\theta JA}$	Junction-to-ambient thermal resistance	150.8	102.3	°C/W	
R _{0JC(top)}	Junction-to-case (top) thermal resistance	78.3	96.8	°C/W	
$R_{\theta JB}$	Junction-to-board thermal resistance	93.8	70.9	°C/W	
Ψ_{JT}	Junction-to-top characterization parameter	24.7	16.6	°C/W	
Y_{JB}	Junction-to-board characterization parameter	93.2	70.9	°C/W	
$R_{\theta JC(bot)}$	Junction-to-case (bottom) thermal resistance	-	50.1	°C/W	

⁽¹⁾ For more information about traditional and new thermal metrics, see the Semiconductor and IC Package Thermal Metrics application report.

5.5 Electrical Characteristics

over operating free-air temperature range (unless otherwise noted)

PARAMETER	TEST CONDITIONS	V _{CC}	-40°C to	UNIT	
			MIN	TYP MAX	ONIT
/ _{T+}	Positive-going input threshold voltage	1.1V	0.5	0.8	V
V _{T+}	Positive-going input threshold voltage	1.5V	0.7	1.11	V
V _{T+}	Positive-going input threshold voltage	1.65V	0.4	1.3	V
V _{T+}	Positive-going input threshold voltage	1.95V	0.6	1.5	V
J _{T+}	Positive-going input threshold voltage	2.3V	0.8	1.7	V
V _{T+}	Positive-going input threshold voltage	2.5V	0.8	1.7	V
V _{T+}	Positive-going input threshold voltage	2.7V	0.8	2	V
V _{T+}	Positive-going input threshold voltage	3V	0.9	2	V
V _{T+}	Positive-going input threshold voltage	3.6V	1.1	2	V
V _{T-}	Negative-going input threshold voltage	1.1V	0.2	0.6	V
V _{T-}	Negative-going input threshold voltage	1.5V	0.34	0.75	V
V _{T-}	Negative-going input threshold voltage	1.65V	0.2	0.9	V
V _{T-}	Negative-going input threshold voltage	1.95V	0.3	1	V
V _{T-}	Negative-going input threshold voltage	2.3V	0.4	1.2	V
V _{T-}	Negative-going input threshold voltage	2.5V	0.4	1.2	V
V _{T-}	Negative-going input threshold voltage	2.7V	0.4	1.4	V
V _{T-}	Negative-going input threshold voltage	3V	0.6	1.5	V
V _{T-}	Negative-going input threshold voltage	3.6V	0.8	1.7	V
ΔV _T	Hysteresis (V _{T+} - V _{T-})	1.1V	0.07	0.53	V
ΔV _T	Hysteresis (V _{T+} - V _{T-})	1.5V	0.18	0.60	V
ΔV _T	Hysteresis (V _{T+} - V _{T-})	1.65V	0.1	1.2	V
ΔV _T	Hysteresis (V _{T+} - V _{T-})	1.95V	0.2	1.3	V
7N ^L	Hysteresis (V _{T+} - V _{T-})	2.3V	0.3	1.3	V
ΔV _T	Hysteresis (V _{T+} - V _{T-})	2.5V	0.3	1.3	V
7N ^L	Hysteresis (V _{T+} - V _{T-})	2.7V	0.3	1.1	V
7A ^L	Hysteresis (V _{T+} - V _{T-})	3V	0.3	1.2	V
7A ^L	Hysteresis (V _{T+} - V _{T-})	3.6V	0.3	1.2	V
V _{OH}	I _{OH} = -100μA	1.1V to 3.6V	V _{CC} - 0.2		V
V _{OH}	I _{OH} = -4mA	1.65V	1.2		V

5.5 Electrical Characteristics (continued)

over operating free-air temperature range (unless otherwise noted)

DADAMETED	TEST CONDITIONS	V _{cc}	-40°C to 125°C			LINUT
PARAMETER			MIN	TYP	MAX	UNIT
V _{OH}	I _{OH} = -8mA	2.3V	1.75			V
V _{OH}	I - 40m A	2.7V	2.2			V
V _{OH}	— I _{OH} = −12mA	3V	2.4			V
V _{OH}	I _{OH} = –24mA	3V	2.2			V
V _{OL}	I _{OH} = 100μA	1.1V to 3.6V			0.15	V
V _{OL}	I _{OH} = 4mA	1.65V			0.45	V
V _{OL}	I _{OH} = 8mA	2.3V			0.7	V
V _{OL}	I _{OH} = 12mA	2.7V			0.4	V
V _{OL}	I _{OH} = 24mA	3V			0.55	V
I _I	V _I = V _{CC} or GND	3.6V			±5	μA
I _{off}	V _I or V _O = V _{CC}	0V		-	±10	μΑ
I _{cc}	$V_I = V_{CC}$ or GND, $I_O = 0$	3.6V			40	μA
ΔI _{CC}	One input at V_{CC} - 0.6V, other inputs at V_{CC} or GND	2.7V to 3.6V			500	μΑ
C _I	V _I = V _{CC} or GND	3.3V				pF
Co	V _O = V _{CC} or GND	3.3V				pF
C _{PD}	f = 10MHz	1.8V		31		pF
C _{PD}	f = 10MHz	2.5V		31		pF
C _{PD}	f = 10MHz	3.3V		32		pF

5.6 Switching Characteristics

over operating free-air temperature range; typical values measured at $T_A = 25$ °C (unless otherwise noted). See *Parameter Measurement Information*

PARAMETER	FROM TO (OUT)	TO (OUTBUT)	LOAD CAPACITANCE	V	-40°C to 125°C			UNIT
PARAMETER	(INPUT)	TO (OUTPUT)	LOAD CAPACITANCE	V _{CC}	MIN	TYP	MAX	UNIT
t _{pd}	A or B	Υ	C _L = 15pF	1.2V ± 0.1V		12	44	ns
t _{pd}	A or B	Υ	C _L = 15pF	1.5V ± 0.12V		9	15	ns
t _{pd}	A or B	Υ	C _L = 30pF	1.8V ± 0.15V			10.2	ns
t _{pd}	A or B	Υ	C _L = 30pF	2.5V ± 0.2V			6.9	ns
t _{pd}	A or B	Υ	C _L = 50pF	2.7V			6.4	ns
t _{pd}	A or B	Υ	C _L = 50pF	3.3V ± 0.3V			5.6	ns
t _{sk(o)}				3.3V ± 0.3V			1.5	ns

5.7 Noise Characteristics

VCC = 3.3V, CL = 50pF, TA = 25°C

PARAMETER	DESCRIPTION	MIN	TYP	MAX	UNIT
V _{OL(P)}	Quiet output, maximum dynamic V _{OL}		0.9	0.8	V
V _{OL(V)}	Quiet output, minimum dynamic V _{OL}	-0.8	-0.3		V
V _{OH(V)}	Quiet output, minimum dynamic V _{OH}	2.2	3.3		V
V _{IH(D)}	High-level dynamic input voltage	2.0			V
$V_{IL(D)}$	Low-level dynamic input voltage			0.8	V

Product Folder Links: SN74LVC7032A-Q1



5.8 Typical Characteristics

T_A = 25°C (unless otherwise noted)




Figure 5-1. Supply Current Across Input Voltage 1.8V and 2.5V Supply




Figure 5-2. Output Voltage vs Current in HIGH State; 3.3V Supply




Figure 5-3. Output Voltage vs Current in LOW State; 3.3V






Figure 5-4. Output Voltage vs Current in HIGH State; 2.5V Supply









Figure 5-6. Output Voltage vs Current in HIGH State; 1.8V Supply



5.8 Typical Characteristics (continued)

T_A = 25°C (unless otherwise noted)

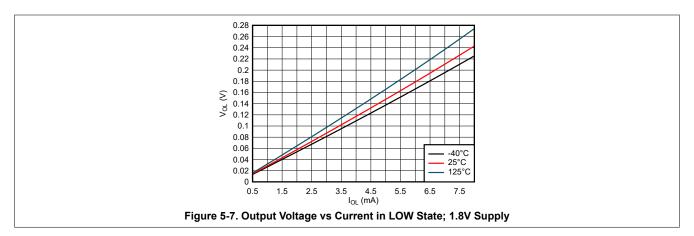




6 Parameter Measurement Information

Phase relationships between waveforms were chosen arbitrarily. All input pulses are supplied by generators having the following characteristics: $PRR \le 1MHz$, $Z_O = 50\Omega$.


For clock inputs, f_{max} is measured when the input duty cycle is 50%.

The outputs are measured one at a time with one input transition per measurement.




(1) C_L includes probe and test-fixture capacitance.

Figure 6-1. Load Circuit for Push-Pull Outputs



(1) The greater between t_{PLH} and t_{PHL} is the same as $t_{\text{pd}}.$

Figure 6-2. Voltage Waveforms Propagation Delays



(1) The greater between t_{r} and t_{f} is the same as t_{t} .


Figure 6-3. Voltage Waveforms, Input and Output Transition Times

7 Detailed Description

7.1 Overview

This device contains four independent 2-input OR Gates with Schmitt-trigger inputs. Each gate performs the Boolean function Y = A + B in positive logic.

7.2 Functional Block Diagram



7.3 Feature Description

7.3.1 CMOS Schmitt-Trigger Inputs

This device includes inputs with the Schmitt-trigger architecture. These inputs are high impedance and are typically modeled as a resistor in parallel with the input capacitance given in the *Electrical Characteristics* table from the input to ground. The worst case resistance is calculated with the maximum input voltage, given in the *Absolute Maximum Ratings* table, and the maximum input leakage current, given in the *Electrical Characteristics* table, using Ohm's law ($R = V \div I$).

The Schmitt-trigger input architecture provides hysteresis as defined by ΔV_T in the *Electrical Characteristics* table, which makes this device extremely tolerant to slow or noisy inputs. While the inputs can be driven much slower than standard CMOS inputs, it is still recommended to properly terminate unused inputs. Driving the inputs with slow transitioning signals will increase dynamic current consumption of the device. For additional information regarding Schmitt-trigger inputs, please see *Understanding Schmitt Triggers*.

7.3.2 Balanced CMOS Push-Pull Outputs

A balanced output allows the device to sink and source similar currents. The drive capability of this device may create fast edges into light loads so routing and load conditions should be considered to prevent ringing. Additionally, the outputs of this device are capable of driving larger currents than the device can sustain without being damaged. It is important for the output power of the device to be limited to avoid damage due to over-current. The electrical and thermal limits defined in the *Absolute Maximum Ratings* must be followed at all times.

The device can drive a load with a total capacitance less than or equal to the maximum load listed in the *Switching Characteristics - 74* connected to a high-impedance CMOS input while still meeting all of the data sheet specifications. Larger capacitive loads can be applied, however it is not recommended to exceed the provided load value. If larger capacitive loads are required, it is recommended to add a series resistor between the output and the capacitor to limit output current to the values given in the *Absolute Maximum Ratings*.

7.3.3 Clamp Diode Structure

Figure 7-1 shows the inputs and outputs to this device have negative clamping diodes only.

CAUTION

Voltages beyond the values specified in the *Absolute Maximum Ratings* table can cause damage to the device. The input and output voltage ratings may be exceeded if the input and output clamp-current ratings are observed.

Submit Document Feedback

Copyright © 2024 Texas Instruments Incorporated






Figure 7-1. Electrical Placement of Clamping Diodes for Each Input and Output

7.3.4 Wettable Flanks

This device includes wettable flanks for at least one package. See the *Features* section on the front page of the data sheet for which packages include this feature.

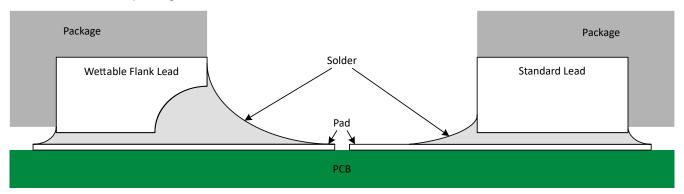


Figure 7-2. Simplified Cutaway View of Wettable-Flank QFN Package and Standard QFN Package After Soldering

Wettable flanks help improve side wetting after soldering, which makes QFN packages easier to inspect with automatic optical inspection (AOI). As shown in Figure 7-2, a wettable flank can be dimpled or step-cut to provide additional surface area for solder adhesion which assists in reliably creating a side fillet. See the mechanical drawing for additional details.

7.4 Device Functional Modes

Table 7-1. Function Table

INPU	ITS ⁽¹⁾	OUTPUT ⁽²⁾
A	В	Y
Н	X	Н
X	Н	Н
L	L	L

- (1) H = High Voltage Level, L = Low Voltage Level, X = Don't Care
- (2) H = Driving High, L = Driving Low

8 Application and Implementation

Note

Information in the following applications sections is not part of the TI component specification, and TI does not warrant its accuracy or completeness. TI's customers are responsible for determining suitability of components for their purposes, as well as validating and testing their design implementation to confirm system functionality.

8.1 Application Information

In this application, three 2-input OR gates are combined to produce a 4-input OR gate function as shown in Figure 8-1. The fourth gate can be used for another application in the system, or the inputs can be grounded and the channel left unused.

The SN74LVC7032A-Q1 is used to directly control the Enable pin of a fan driver. The fan driver requires only one input signal to be HIGH before being enabled, and should be disabled in the event that all signals go LOW. The 4-input OR gate function combines the four individual overheat signals into a single active-high enable signal.

Temperature sensors can often be spread throughout a system rather than being in a centralized location. This would mean longer length traces or wires to pass signals through leading to slower edge transitions. This makes the SN74LVC7032A-Q1 an excellent choice for the application since it has Schmitt-trigger inputs that do not have input transition rate requirements.

8.2 Typical Application

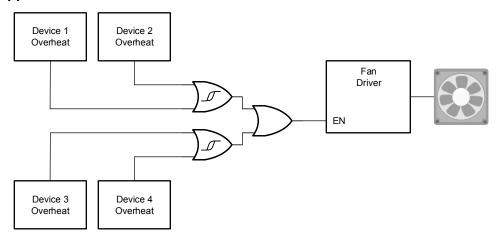


Figure 8-1. Typical Application Block Diagram

8.2.1 Design Requirements

8.2.1.1 Power Considerations

Ensure the desired supply voltage is within the range specified in the *Recommended Operating Conditions*. The supply voltage sets the electrical characteristics of the device as described in the *Electrical Characteristics* section.

The positive voltage supply must be capable of sourcing current equal to the total current to be sourced by all outputs of the SN74LVC7032A-Q1 plus the maximum static supply current, I_{CC} , listed in the *Electrical Characteristics*, and any transient current required for switching. The logic device can only source as much current that is provided by the positive supply source. Be sure to not exceed the maximum total current through V_{CC} listed in the *Absolute Maximum Ratings*.

Submit Document Feedback

Copyright © 2024 Texas Instruments Incorporated

The ground must be capable of sinking current equal to the total current to be sunk by all outputs of the SN74LVC7032A-Q1 plus the maximum supply current, I_{CC}, listed in the *Electrical Characteristics*, and any transient current required for switching. The logic device can only sink as much current that can be sunk into its ground connection. Be sure to not exceed the maximum total current through GND listed in the *Absolute Maximum Ratings*.

The SN74LVC7032A-Q1 can drive a load with a total capacitance less than or equal to 50pF while still meeting all of the data sheet specifications. Larger capacitive loads can be applied; however, it is not recommended to exceed 50pF.

The SN74LVC7032A-Q1 can drive a load with total resistance described by $R_L \ge V_O / I_O$, with the output voltage and current defined in the *Electrical Characteristics* table with V_{OH} and V_{OL} . When outputting in the HIGH state, the output voltage in the equation is defined as the difference between the measured output voltage and the supply voltage at the V_{CC} pin.

Total power consumption can be calculated using the information provided in the *CMOS Power Consumption* and *Cpd Calculation* application note.

Thermal increase can be calculated using the information provided in the *Thermal Characteristics of Standard Linear and Logic (SLL) Packages and Devices* application note.

CAUTION

The maximum junction temperature, $T_{J(max)}$ listed in the *Absolute Maximum Ratings*, is an additional limitation to prevent damage to the device. Do not violate any values listed in the *Absolute Maximum Ratings*. These limits are provided to prevent damage to the device.

8.2.1.2 Input Considerations

Input signals must cross $V_{t-(min)}$ to be considered a logic LOW, and $V_{t+(max)}$ to be considered a logic HIGH. Do not exceed the maximum input voltage range found in the *Absolute Maximum Ratings*.

Unused inputs must be terminated to either V_{CC} or ground. The unused inputs can be directly terminated if the input is completely unused, or they can be connected with a pull-up or pull-down resistor if the input will be used sometimes, but not always. A pull-up resistor is used for a default state of HIGH, and a pull-down resistor is used for a default state of LOW. The drive current of the controller, leakage current into the SN74LVC7032A-Q1 (as specified in the *Electrical Characteristics*), and the desired input transition rate limits the resistor size. A $10k\Omega$ resistor value is often used due to these factors.

The SN74LVC7032A-Q1 has no input signal transition rate requirements because it has Schmitt-trigger inputs.

Another benefit to having Schmitt-trigger inputs is the ability to reject noise. Noise with a large enough amplitude can still cause issues. To know how much noise is too much, please refer to the $\Delta V_{T(min)}$ in the *Electrical Characteristics*. This hysteresis value will provide the peak-to-peak limit.

Unlike what happens with standard CMOS inputs, Schmitt-trigger inputs can be held at any valid value without causing huge increases in power consumption. The typical additional current caused by holding an input at a value other than V_{CC} or ground is plotted in the *Typical Characteristics*.

Refer to the *Feature Description* section for additional information regarding the inputs for this device.

8.2.1.3 Output Considerations

The positive supply voltage is used to produce the output HIGH voltage. Drawing current from the output will decrease the output voltage as specified by the V_{OH} specification in the *Electrical Characteristics*. The ground voltage is used to produce the output LOW voltage. Sinking current into the output will increase the output voltage as specified by the V_{OL} specification in the *Electrical Characteristics*.

Push-pull outputs that could be in opposite states, even for a very short time period, should never be connected directly together. This can cause excessive current and damage to the device.

Two channels within the same device with the same input signals can be connected in parallel for additional output drive strength.

Unused outputs can be left floating. Do not connect outputs directly to V_{CC} or ground.

Refer to the *Feature Description* section for additional information regarding the outputs for this device.

8.2.2 Detailed Design Procedure

- Add a decoupling capacitor from V_{CC} to GND. The capacitor needs to be placed physically close to the device and electrically close to both the V_{CC} and GND pins. An example layout is shown in the *Layout Example* section.
- 2. Ensure the capacitive load at the output is ≤ 70pF. This is not a hard limit; by design, however, it will optimize performance. This can be accomplished by providing short, appropriately sized traces from the SN74LVC7032A-Q1 to the receiving device.
- 3. Ensure the resistive load at the output is larger than $(V_{CC} / I_O(max)) \Omega$, so that the maximum output current from the *Absolute Maximum Ratings* is not violated. Most CMOS inputs have a resistive load measured in mega ohms; much larger than the minimum calculated previously.
- 4. Thermal issues are rarely a concern for logic gates, however the power consumption and thermal increase can be calculated using the steps provided in the application report, *CMOS Power Consumption and Cpd Calculation*

8.2.3 Application Curves

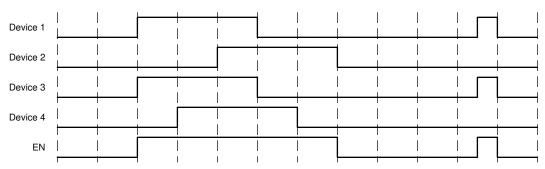


Figure 8-2. Application Timing Diagram

8.3 Power Supply Recommendations

The power supply can be any voltage between the minimum and maximum supply voltage rating located in the *Recommended Operating Conditions*. Each V_{CC} terminal should have a bypass capacitor to prevent power disturbance. A $0.1\mu F$ capacitor is recommended for this device. It is acceptable to parallel multiple bypass capacitors to reject different frequencies of noise. The $0.1\mu F$ and $1\mu F$ capacitors are commonly used in parallel. The bypass capacitor should be installed as close to the power terminal as possible for best results, as shown in Figure 8-3.

8.4 Layout

8.4.1 Layout Guidelines

When using multiple-input and multiple-channel logic devices inputs must never be left floating. In many cases, functions or parts of functions of digital logic devices are unused; for example, when only two inputs of a triple-input AND gate are used. Such unused input pins must not be left unconnected because the undefined voltages at the outside connections result in undefined operational states. All unused inputs of digital logic devices must be connected to a logic high or logic low voltage, as defined by the input voltage specifications, to prevent them from floating. The logic level that must be applied to any particular unused input depends on the function of the device. Generally, the inputs are tied to GND or V_{CC} , whichever makes more sense for the logic function or is more convenient.

Product Folder Links: SN74LVC7032A-Q1



8.4.2 Layout Example




Figure 8-3. Example Layout for the SN74LVC7032A-Q1



9 Device and Documentation Support

TI offers an extensive line of development tools. Tools and software to evaluate the performance of the device, generate code, and develop solutions are listed below.

9.1 Documentation Support

9.1.1 Related Documentation

For related documentation, see the following:

- Texas Instruments, CMOS Power Consumption and Cpd Calculation application note
- · Texas Instruments, Designing With Logic application note
- Texas Instruments, Thermal Characteristics of Standard Linear and Logic (SLL) Packages and Devices application note
- Texas Instruments, Implications of Slow or Floating CMOS Inputs application note

9.2 Receiving Notification of Documentation Updates

To receive notification of documentation updates, navigate to the device product folder on ti.com. Click on *Notifications* to register and receive a weekly digest of any product information that has changed. For change details, review the revision history included in any revised document.

9.3 Support Resources

TI E2E™ support forums are an engineer's go-to source for fast, verified answers and design help — straight from the experts. Search existing answers or ask your own question to get the quick design help you need.

Linked content is provided "AS IS" by the respective contributors. They do not constitute TI specifications and do not necessarily reflect TI's views; see TI's Terms of Use.

9.4 Trademarks

TI E2E™ is a trademark of Texas Instruments.

All trademarks are the property of their respective owners.

9.5 Electrostatic Discharge Caution



This integrated circuit can be damaged by ESD. Texas Instruments recommends that all integrated circuits be handled with appropriate precautions. Failure to observe proper handling and installation procedures can cause damage.

ESD damage can range from subtle performance degradation to complete device failure. Precision integrated circuits may be more susceptible to damage because very small parametric changes could cause the device not to meet its published specifications.

9.6 Glossary

TI Glossary

This glossary lists and explains terms, acronyms, and definitions.

10 Revision History

NOTE: Page numbers for previous revisions may differ from page numbers in the current version.

Changes from Revision * (October 2023) to Revision A (March 2024)

Page

Changed the status of the datasheet from: Advanced Information to: Production Data

11 Mechanical, Packaging, and Orderable Information

The following pages include mechanical, packaging, and orderable information. This information is the most current data available for the designated devices. This data is subject to change without notice and revision of this document. For browser-based versions of this data sheet, refer to the left-hand navigation.

Product Folder Links: SN74LVC7032A-Q1

www.ti.com 12-May-2025

PACKAGING INFORMATION

Orderable part number	Status	Material type (2)	Package Pins	Package qty Carrier	RoHS	Lead finish/ Ball material	MSL rating/ Peak reflow	Op temp (°C)	Part marking (6)
						(4)	(5)		
CLVC7032AWBQAF	Q1 Active	Production	WQFN (BQA) 14	3000 LARGE T&R	Yes	NIPDAU	Level-1-260C-UNLIM	-40 to 125	LC732Q
SN74LVC7032APW	Q1 Active	Production	TSSOP (PW) 14	3000 LARGE T&R	Yes	NIPDAU	Level-1-260C-UNLIM	-40 to 125	LC7032Q

⁽¹⁾ Status: For more details on status, see our product life cycle.

Multiple part markings will be inside parentheses. Only one part marking contained in parentheses and separated by a "~" will appear on a part. If a line is indented then it is a continuation of the previous line and the two combined represent the entire part marking for that device.

Important Information and Disclaimer: The information provided on this page represents TI's knowledge and belief as of the date that it is provided. TI bases its knowledge and belief on information provided by third parties, and makes no representation or warranty as to the accuracy of such information. Efforts are underway to better integrate information from third parties. TI has taken and continues to take reasonable steps to provide representative and accurate information but may not have conducted destructive testing or chemical analysis on incoming materials and chemicals. TI and TI suppliers consider certain information to be proprietary, and thus CAS numbers and other limited information may not be available for release.

In no event shall TI's liability arising out of such information exceed the total purchase price of the TI part(s) at issue in this document sold by TI to Customer on an annual basis.

OTHER QUALIFIED VERSIONS OF SN74LVC7032A-Q1:

Catalog: SN74LVC7032A

⁽²⁾ Material type: When designated, preproduction parts are prototypes/experimental devices, and are not yet approved or released for full production. Testing and final process, including without limitation quality assurance, reliability performance testing, and/or process qualification, may not yet be complete, and this item is subject to further changes or possible discontinuation. If available for ordering, purchases will be subject to an additional waiver at checkout, and are intended for early internal evaluation purposes only. These items are sold without warranties of any kind.

⁽³⁾ RoHS values: Yes, No, RoHS Exempt. See the TI RoHS Statement for additional information and value definition.

⁽⁴⁾ Lead finish/Ball material: Parts may have multiple material finish options. Finish options are separated by a vertical ruled line. Lead finish/Ball material values may wrap to two lines if the finish value exceeds the maximum column width.

⁽⁵⁾ MSL rating/Peak reflow: The moisture sensitivity level ratings and peak solder (reflow) temperatures. In the event that a part has multiple moisture sensitivity ratings, only the lowest level per JEDEC standards is shown. Refer to the shipping label for the actual reflow temperature that will be used to mount the part to the printed circuit board.

⁽⁶⁾ Part marking: There may be an additional marking, which relates to the logo, the lot trace code information, or the environmental category of the part.

PACKAGE OPTION ADDENDUM

www.ti.com 12-May-2025

NOTE: Qualified Version Definitions:

• Catalog - TI's standard catalog product

PACKAGE MATERIALS INFORMATION

www.ti.com 23-Mar-2024

TAPE AND REEL INFORMATION





A0	Dimension designed to accommodate the component width
В0	Dimension designed to accommodate the component length
K0	Dimension designed to accommodate the component thickness
W	Overall width of the carrier tape
P1	Pitch between successive cavity centers

QUADRANT ASSIGNMENTS FOR PIN 1 ORIENTATION IN TAPE



*All dimensions are nominal

Device	Package Type	Package Drawing		SPQ	Reel Diameter (mm)	Reel Width W1 (mm)	A0 (mm)	B0 (mm)	K0 (mm)	P1 (mm)	W (mm)	Pin1 Quadrant
CLVC7032AWBQARQ1	WQFN	BQA	14	3000	180.0	12.4	2.8	3.3	1.1	4.0	12.0	Q1
SN74LVC7032APWRQ1	TSSOP	PW	14	3000	330.0	12.4	6.9	5.6	1.6	8.0	12.0	Q1

www.ti.com 23-Mar-2024



*All dimensions are nominal

Device	Package Type	Package Drawing	Pins	SPQ	Length (mm)	Width (mm)	Height (mm)
CLVC7032AWBQARQ1	WQFN	BQA	14	3000	210.0	185.0	35.0
SN74LVC7032APWRQ1	TSSOP	PW	14	3000	356.0	356.0	35.0

2.5 x 3, 0.5 mm pitch

PLASTIC QUAD FLATPACK - NO LEAD


This image is a representation of the package family, actual package may vary. Refer to the product data sheet for package details.



www.ti.com



PLASTIC QUAD FLATPACK - NO LEAD

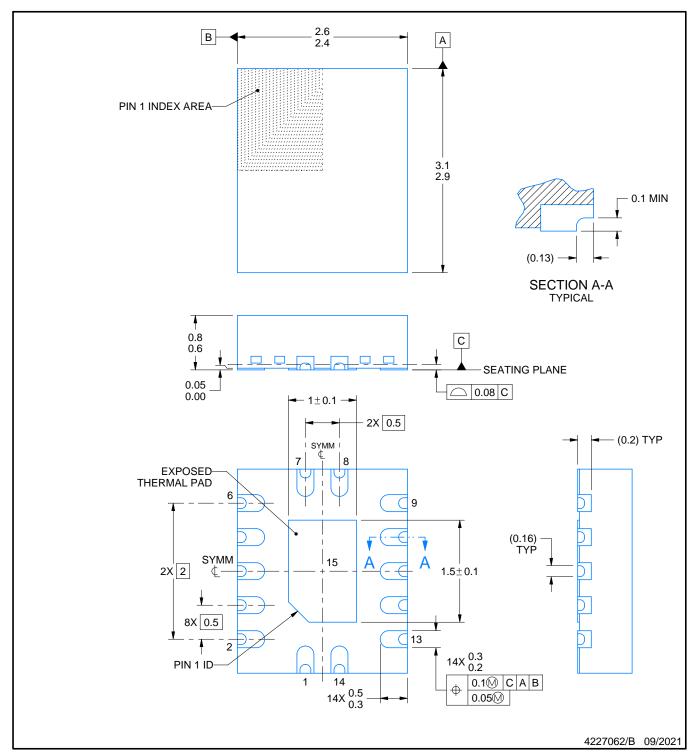


NOTES:

- 1. All linear dimensions are in millimeters. Any dimensions in parenthesis are for reference only. Dimensioning and tolerancing per ASME Y14.5M.
 2. This drawing is subject to change without notice.
- 3. The package thermal pad must be soldered to the printed circuit board for thermal and mechanical performance.



PLASTIC QUAD FLATPACK - NO LEAD

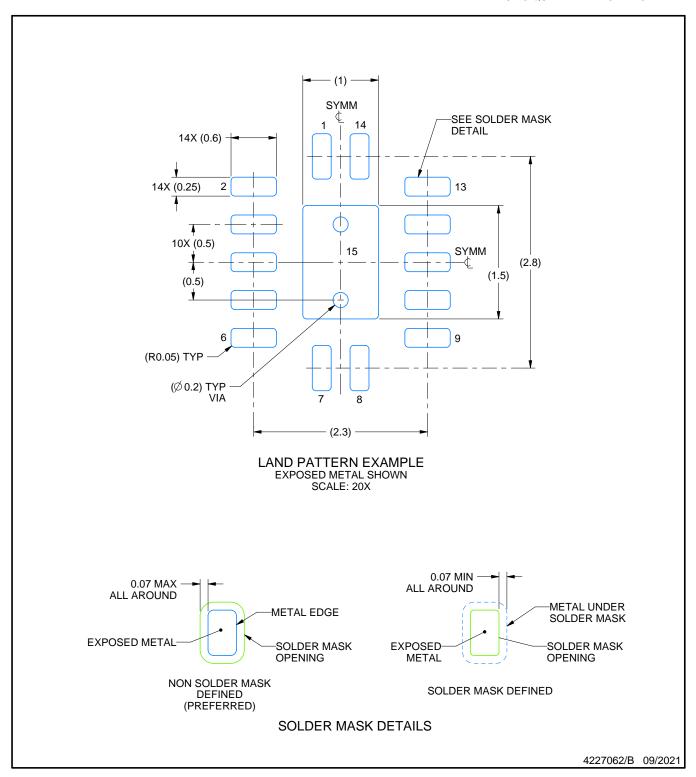


NOTES: (continued)

- 4. This package is designed to be soldered to a thermal pad on the board. For more information, see Texas Instruments literature number SLUA271 (www.ti.com/lit/slua271).
- 5. Vias are optional depending on application, refer to device data sheet. If any vias are implemented, refer to their locations shown on this view. It is recommended that vias under paste be filled, plugged or tented.



PLASTIC QUAD FLATPACK - NO LEAD

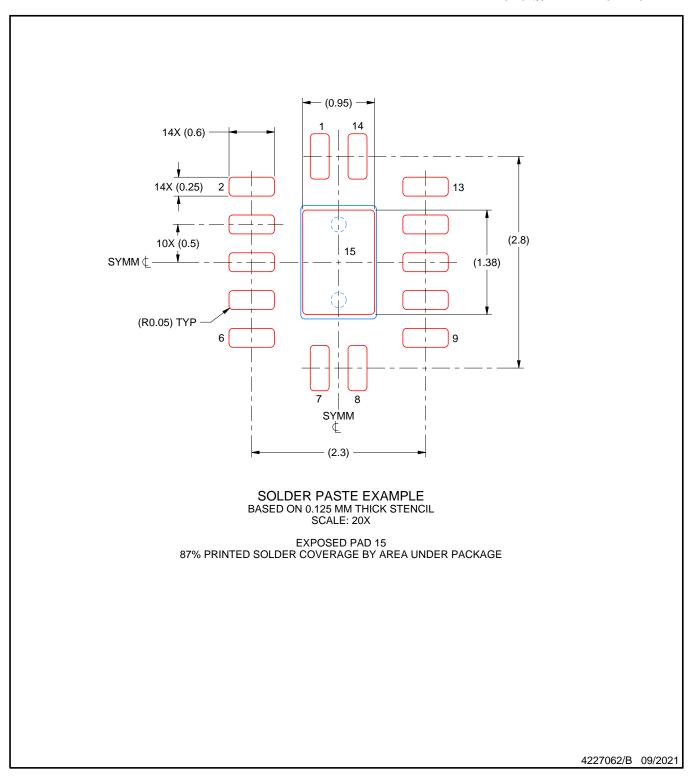

NOTES: (continued)

^{6.} Laser cutting apertures with trapezoidal walls and rounded corners may offer better paste release. IPC-7525 may have alternate design recommendations.





SMALL OUTLINE PACKAGE



NOTES:

- 1. All linear dimensions are in millimeters. Any dimensions in parenthesis are for reference only. Dimensioning and tolerancing per ASME Y14.5M.

 2. This drawing is subject to change without notice.

 3. This dimension does not include mold flash, protrusions, or gate burrs. Mold flash, protrusions, or gate burrs shall not
- exceed 0.15 mm per side.
- 4. This dimension does not include interlead flash. Interlead flash shall not exceed 0.25 mm per side.
- 5. Reference JEDEC registration MO-153.



SMALL OUTLINE PACKAGE



NOTES: (continued)

6. Publication IPC-7351 may have alternate designs.

7. Solder mask tolerances between and around signal pads can vary based on board fabrication site.



SMALL OUTLINE PACKAGE



NOTES: (continued)

- 8. Laser cutting apertures with trapezoidal walls and rounded corners may offer better paste release. IPC-7525 may have alternate design recommendations.
- 9. Board assembly site may have different recommendations for stencil design.



IMPORTANT NOTICE AND DISCLAIMER

TI PROVIDES TECHNICAL AND RELIABILITY DATA (INCLUDING DATA SHEETS), DESIGN RESOURCES (INCLUDING REFERENCE DESIGNS), APPLICATION OR OTHER DESIGN ADVICE, WEB TOOLS, SAFETY INFORMATION, AND OTHER RESOURCES "AS IS" AND WITH ALL FAULTS, AND DISCLAIMS ALL WARRANTIES, EXPRESS AND IMPLIED, INCLUDING WITHOUT LIMITATION ANY IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE OR NON-INFRINGEMENT OF THIRD PARTY INTELLECTUAL PROPERTY RIGHTS.

These resources are intended for skilled developers designing with TI products. You are solely responsible for (1) selecting the appropriate TI products for your application, (2) designing, validating and testing your application, and (3) ensuring your application meets applicable standards, and any other safety, security, regulatory or other requirements.

These resources are subject to change without notice. TI grants you permission to use these resources only for development of an application that uses the TI products described in the resource. Other reproduction and display of these resources is prohibited. No license is granted to any other TI intellectual property right or to any third party intellectual property right. TI disclaims responsibility for, and you will fully indemnify TI and its representatives against, any claims, damages, costs, losses, and liabilities arising out of your use of these resources.

TI's products are provided subject to TI's Terms of Sale or other applicable terms available either on ti.com or provided in conjunction with such TI products. TI's provision of these resources does not expand or otherwise alter TI's applicable warranties or warranty disclaimers for TI products.

TI objects to and rejects any additional or different terms you may have proposed.

Mailing Address: Texas Instruments, Post Office Box 655303, Dallas, Texas 75265 Copyright © 2025. Texas Instruments Incorporated