



Projector Distance Calculator

Software Version 1.2.4

USER'S MANUAL

Contents

1. Introductions	3
2. Main user interface.....	4
3. Projector & Lens.....	5
3.1 Projectors information.....	5
3.2 Select the projector from the project types list.....	5
3.3 Search the projector by model name.....	6
3.4 Search the projector by install condition.....	6
3.5 Lens information	7
4. Input installation conditions.....	8
4.1 Basic Setting.....	8
4.2 Room Size	8
4.3 Screen Size	8
4.4 Screen Position	9
4.5 Projector Position	9
4.6 Brightness Estimation.....	10
5. View	11
5.1 Change View	11
5.2 Side view	11
5.3 Front view	12
5.4 Top view.....	13
5.5 3D view.....	13
5.6 Projected image position	14
6. Others and Export simulation results	14
6.1 History Snapshot	15
6.2 Results export.....	15


1. Introductions

"Projector Distance Calculator" is a Web-based application software that is used to calculating the throw distance between screen and the Vivitek projector. Mainly to help you choose a suitable projector for your room. It calculates the relationship between the size and distance of the projected image, and recommends the proper placement of the projector.








*Please note: The calculation are for estimation purposes only, It can't absolutely guarantee the actual performance. The projection distance is the distance from the center of the lens tip to the screen. Before installing any parts of the projector, please go to the official website to detail study the product specifications or contact the local system installer for support.

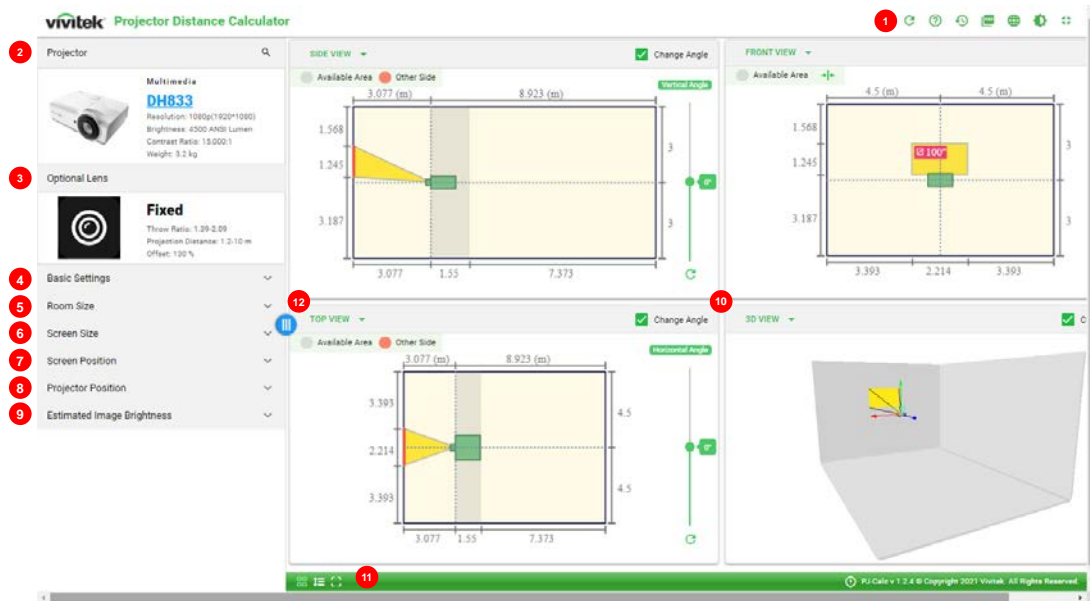Please Notes: When using the Vivitek Projection Calculator software, please use the latest version.

2. Main user interface



Menus and Functions in the Main user interface are shown below.

Tab	Description
1.     	Reset, User Guide, Export, Language and Maximum setting.
2. Projector	Select and show the projector for installation
3. Lens	Show and select the available lens for calculation
4. Basic Setting	Select the units and installation type for all calculation
5. Room Size	Setting the room dimension for calculating
6. Screen Size	Setting the screen dimension for calculating
7. Screen Position	Setting the screen position for calculating
8. Projector Position	Setting the projector position for calculating
9. Brightness Estimation	Brightness estimation guide
10. View	This provides 2D and 3D perspective views of the projector installation area
11. Views Format	Two/Equal, Vertical and Single
12. Hide function window	Select  to hide the function window, Select  Show Function Window

3. Projector & Lens

3.1 Projectors information


The name, photo and dimensions of the selected projector will show up. Discontinued models will show up with an alert.


The basic specification of the projector include photo, resolution, brightness, contrast, throw ratio and weight (For interchangeable lens projectors, the weight does not include the lens.)

For more detail product information, click on the model name and the website link will take you to the webpage for the more projector information.




3.2 Select the projector from the project types list

Click  to select the projector from the type of projector you want to install and enter the model number, or enter the projector installation condition to select the projector.

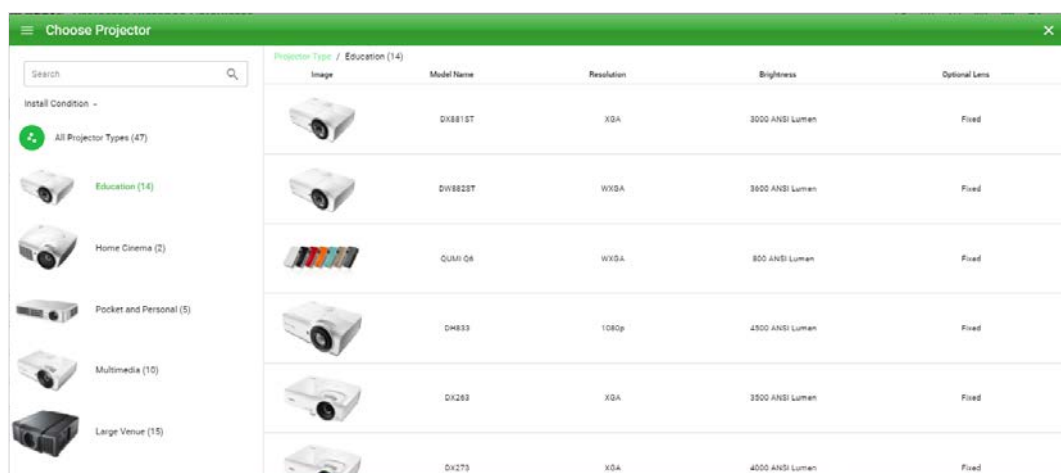


3.3 Search the projector by model name

Please input the partial or complete model number to find a specific model or list of matching projector models. After you input a model name or parts number the automatically populates in the Model Name box and you can select from a list of models from the pull-down menu.

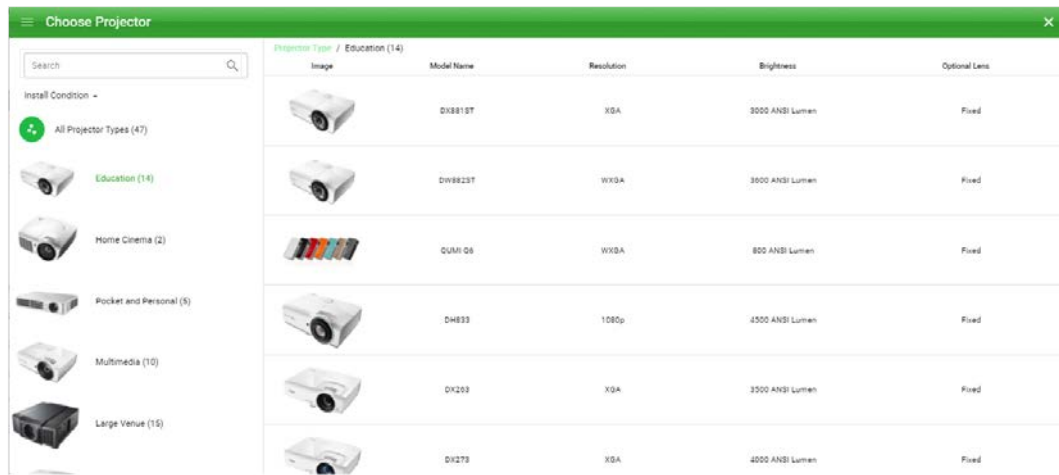


3.4 Search the projector by install condition

Input the installation conditions for the projector and it will automatically find the right projector for you based on these conditions.

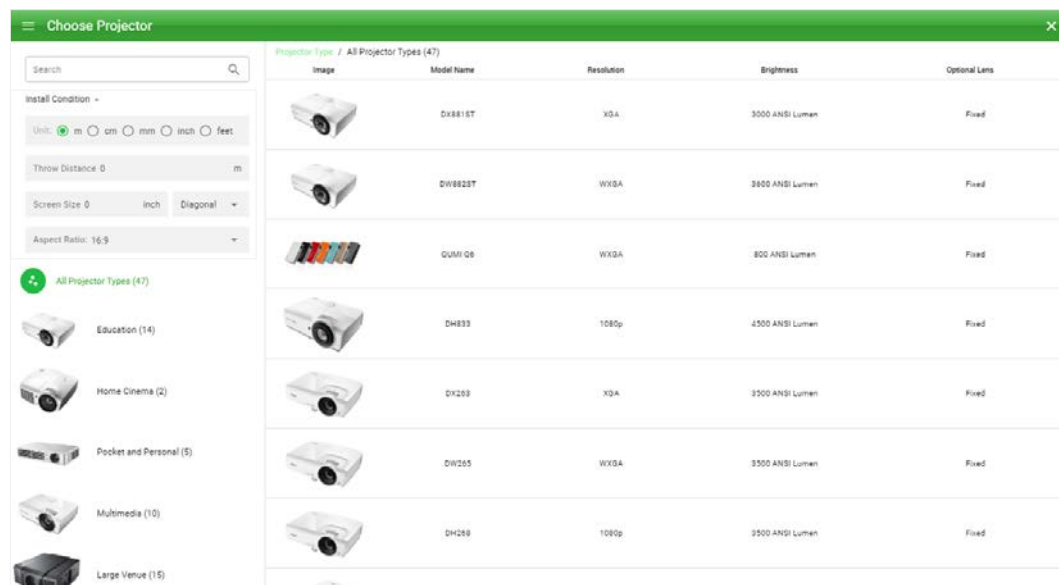


3.5 Lens information

This shows the information for projector models with lens type (fixed or exchangeable lenses), lens throw ratio, throw distance and offset.

Select an optional lens interchangeable lens projectors only) , you can also click  select a different lens when calculating throw distance, image size, etc. Projectors with single fixed lenses will show up as fixed.

Optional Lens



Standard Lens


D88-ST001

Throw Ratio: 1.73-2.27

Projection Distance: 1.45-24.85 m

Offset: 0 %


Choose Lens



D88-ST001

Throw Ratio: 1.73-2.27


Projection Distance: 1.45-24.85 m



D88-WF18501

Throw Ratio: 0.78-0.76


Projection Distance: 0.64-8.3 m



D88-WZ01

Throw Ratio: 1.25-1.79


Projection Distance: 1.09-19.99 m



D88-SMLZ01

Throw Ratio: 2.22-3.07


Projection Distance: 1.87-40.33 m



D88-LOZ101

Throw Ratio: 3.38-5.38


Projection Distance: 3.01-59.02 m



D88-LOZ201

Throw Ratio: 3.31-4.25

Projection Distance: 4.42-91.54 m



D88-UST01B

Throw Ratio: 0.38-0.38

Projection Distance: -0.024-1.916 m

4. Input installation conditions


4.1 Basic Setting

- Units

Select the calculation unit including meters, centimeters, millimeters, inches and feet

- Installation

Projectors can be placed on a desktop or ceiling mounted.

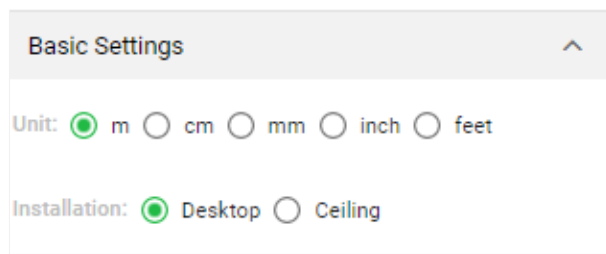


Basic Settings

Unit: ☒ m ☐ cm ☐ mm ☐ inch ☐ feet

Installation: ☒ Desktop ☐ Ceiling

4.2 Room Size

The projection distance and screen size will be limited by the size of the environment. Please enter the room dimension for calculating.

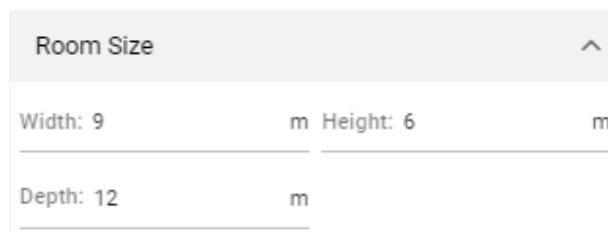

Room Size


Width: 9 m Height: 6 m

Depth: 12 m

4.3 Screen Size

Key in your desired screen size. The width, height and diagonal will depend on the aspect ratio you have chosen. These fields adjust automatically when entering a value in any of the boxes, so you don't need to input all values.

If the key in screen size is bigger than the room size, the available value automatically to the maximum or minimum value according to the input value.

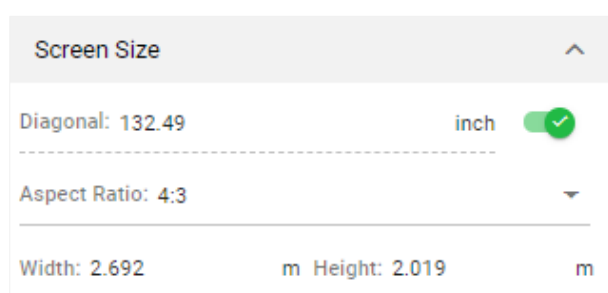

Screen Size



Diagonal: 132.49 inch ☒

Aspect Ratio: 4:3

Width: 2.692 m Height: 2.019 m

- Aspect Ratio

Select the image aspect ratio you would like to display. When the aspect ratio setting is changed from the initial value, the black band will appear on the left/right or top/bottom of the screen image.

	The default is 16:10 aspect ratio, When you change to “16:9”, The black will mask on the top/bottom of projection image.
	The default is 16:10 aspect ratio, When you change to “4:3”, The black will mask on the left/right of projection image.

4.4 Screen Position

Screen Position
^

Screen Offset: 0 m

From Floor: 1.99 m

From Left Wall: 3.154 m

- Screen Offset

Key in the thickness if you use whiteboards and so on.

- From floor

Key in the height from floor to bottom of screen.

- From left wall

Key in the width from left wall to left of screen.

4.5 Projector Position

Projector Position
^

From Screen: 5.589 m ✓

From Left Wall: 4.5 m ✓

From Floor: 3 m ✓

Vertical Angle: 0 ° ↻ ✓

Horizontal Angle: 0 ° ↻ ✓

Horizontal Lens Shift: 0 % ↻ ✓

Vertical Lens Shift: 0 % ↻ ✓

- From screen to lens (Throw distance)

Key in the throw distance, the input value is limited according to the lock status of the screen size.

- From floor

Key in the height from floor to the center of screen.

- From left wall

Key in the distance from left wall to the center of screen.

- Projector angle

Simulate diagonal projection in horizontal or vertical direction. You can enable the function in the vertical and horizontal directions at the same time. When this function is enabled, the slider and input box will appear in the side view or top view window.

- Lock function


The projector position will be locked

Please Notes :

- If the screen size is not locked, the screen size will automatically be adjusted to the largest size in the room size.
- Screen size is locked, If the input throw distance is within the range limits, the position of the projector in the “View” boxes will adjust accordingly.

4.6 Brightness Estimation

This is the brightness of the image based on the distance of your projector to the screen, screen gain and zoom settings, When key in room brightness and screen gain, you can confirm whether the actual brightness, screen contrast, and the brightness of the selected projector are sufficient appropriate.

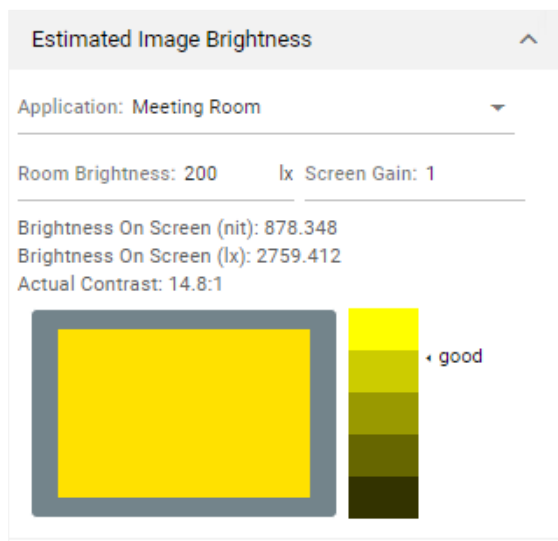

- Application

If you do not know the brightness of the installation environment, please select the application list from the drop-down menu. It will automatically bring into the regular brightness level of each application scenario. If the brightness of the installation environment has a specific brightness level, please select "Custom" and enter the brightness value.

- Room brightness

Key in the brightness value of the installation environment. If you use a measuring tool to measure the actual brightness, it is recommended that you measure the brightness of the wall surface on which the image is projected.


- Screen gain

Please key in the screen gain according to the screen specification, A normal white wall is designated 1 for screen gain. Screens with better reflective indexes will have a larger screen gain, giving the viewer a brighter perception of the projected image.

5. View


You can visualize the position of the projector in the 2D and 3D perspective areas, and even change three views format.


5.1 Change View

The view layout includes equal, vertical and single, which can be changed by selecting the  , Change the view by swap list SIDE VIEW ▾ .

5.2 Side view


This provides a 2D perspective from the side of the room. This the room viewed from the side. The projector position setting can be changed using a mouse.

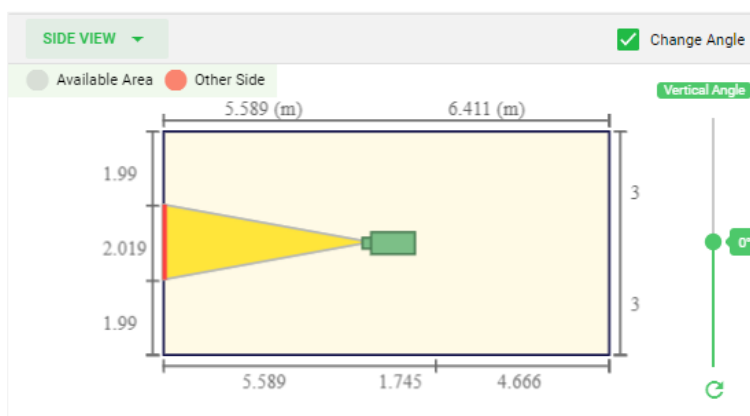



- If you want to change the position of the projector without changing the screen size, first lock the screen size.
- If the selected model uses an optional lens shift function, "Available Range" will be displayed. If you want to change the position of the projector within the available range area, first lock the screen size and screen position.
- When the vertical angle is set to "ON", the slide bar and input box will appear on the right side of the view box.
- The reset button  returns the adjustments to their default settings by clearing all entered data and adjustments made to the illustration.

5.3 Front view

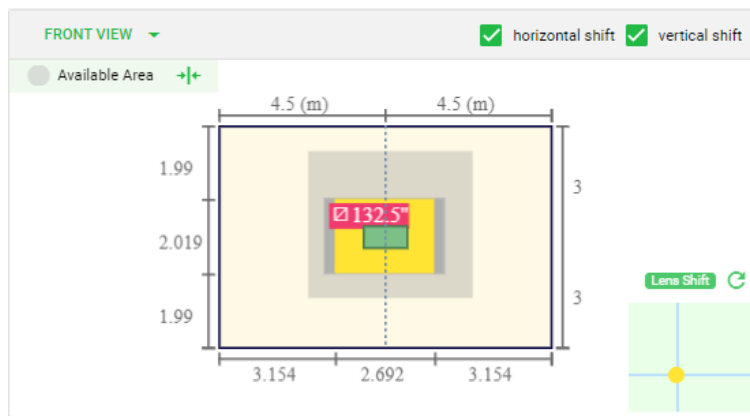
This is the view when facing the wall where the image is projected.




- If the selected projector supports the lens shift function, the "Available Range" will be displayed. If you want to change the position of the projector within the available range, use the lens shift slider (right: vertical lens shift, bottom: horizontal lens shift).
- If you want to move the projector position (and lens shift position) horizontally to the center, press the center button  .
- The reset button  returns the adjustments to their default settings by clearing all entered data and adjustments made to the illustration.


5.4 Top view

This is the room view from the top.

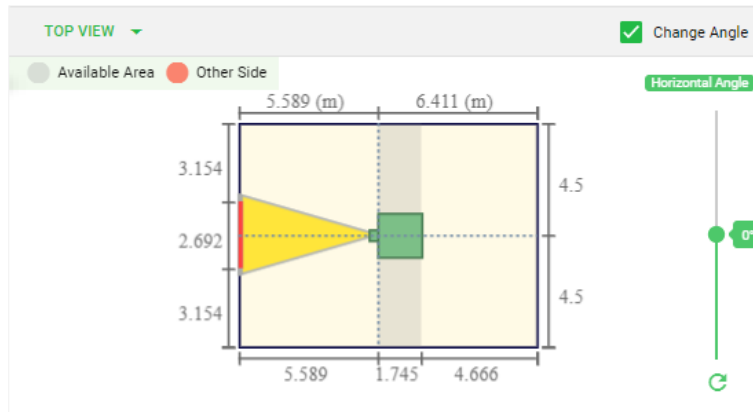

- The basic operation is the same as “Side view”.
- When the horizontal change angle checkbox is enabled, the slider bar and the input box will appear on the right side of top view area.
- The reset button  returns the adjustments to their default settings by clearing all entered data and adjustments made to the illustration.

5.5 3D view

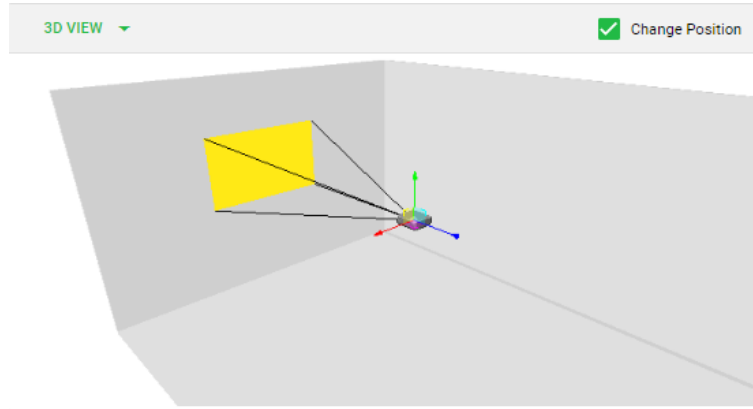

- This is the 3D room view. Operations are as follows:
- Zoom: Rotate the mouse wheel or drag the mouse while clicking the wheel.
- Rotation: Drag the mouse while left clicking.
- Pan: Drag the mouse while drag the mouse while right-clicking.
- Move the projector position by dragging the mouse while left clicking on surface around the projector.


Rear : Up-down or Left-right direction

Left/Right : Front-back direction

Top: Front-back or Left-right direction

5.6 Projected image position

If any part of the projected image hits the side wall, ceiling or floor, the image beam will show a shaded pink – see example below.

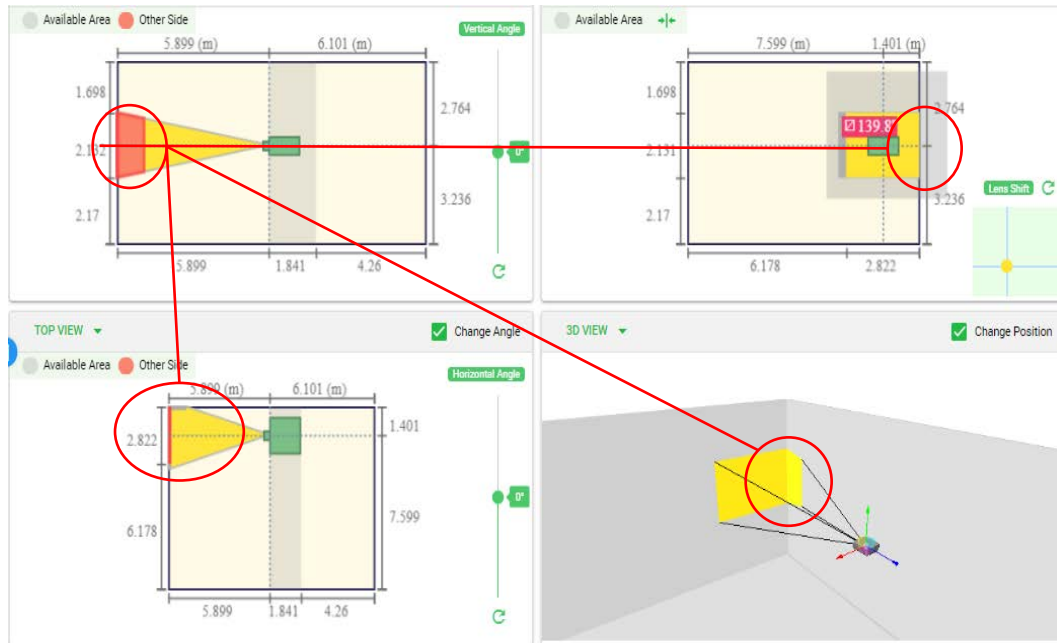


6. Others and Export simulation results




Icon	Description
Reset	The reset button reverts the projection distance calculator back to its default settings by clearing all data entered and adjustments made to the illustration.
User Guide	Open user's manual.
History Snapshot	Record simulation result data in the configuration file
Results export	You can save the data and illustrations at the end of the calculation of the installation conditions as a PDF file.
Language	Select the language list from the drop-down menu.
Background	Change window light or dark background color
Maximum	Maximum view window

6.1 History Snapshot

To store simulation results data, enter the customer name and select the **+** button.

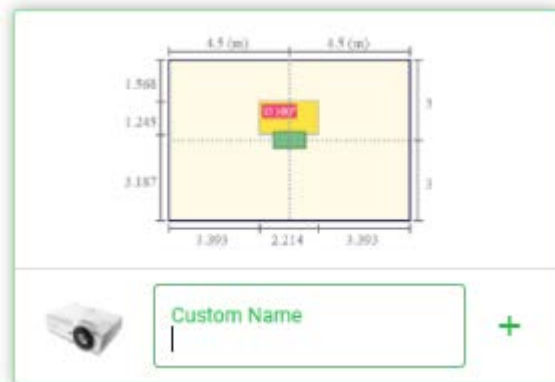

Manage the simulation result data file, you can select **🗑** Delete simulation result data, or select **↶** Update simulation data, or select **✓** load simulation data

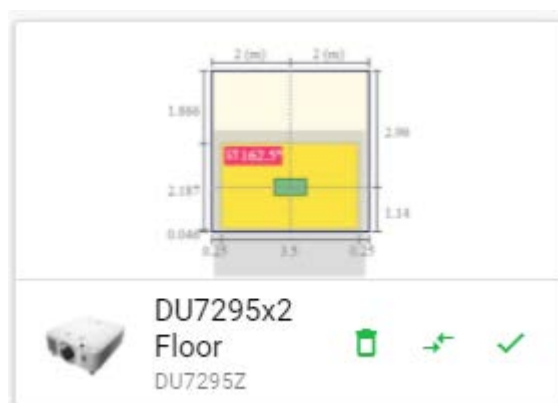

6.2 Results export

You can enter the simulation file name and select PDF or PNG file format to export the result data.