AURORA LOGISTICS / FICTITIOUS DESIGN

FICTITIOUS DESIGN • MCP integration test • 01 Oct 2026

180 people • Montréal HQ / Québec distribution / private cloud / remote work

01 WAN & site overview

01 WAN & SITE OVERVIEW

Two independent circuits • encrypted site links • identity-led remote access

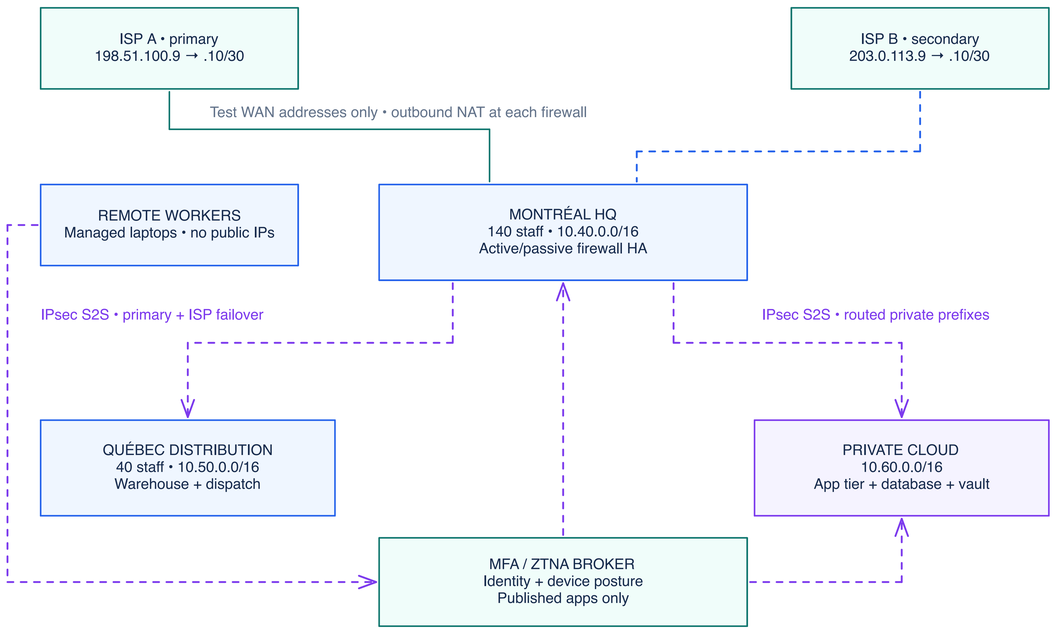

Overview links summarize sites. Detailed links remain local to their own panel.

03 Branch & private cloud

03 BRANCH & PRIVATE CLOUD

Same segmentation model • restricted VPN routes • private service addresses

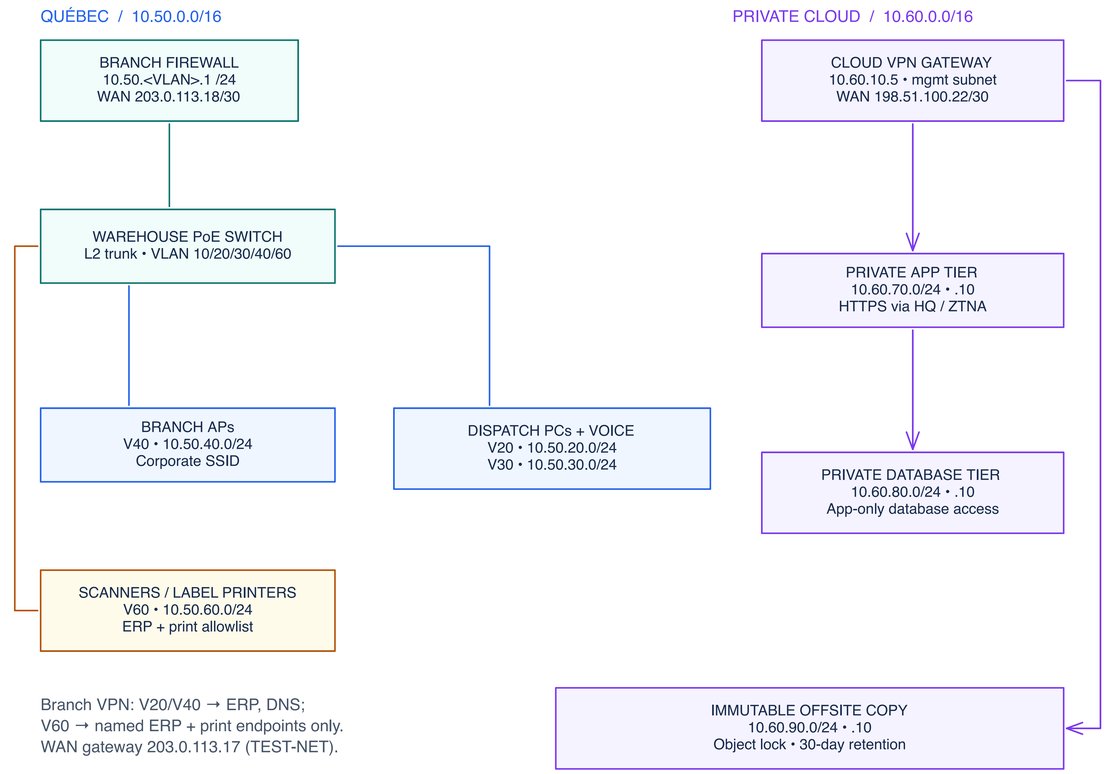

Branch VPN: V20/V40 → ERP, DNS;
V60 → named ERP + print endpoints only.
WAN gateway 203.0.113.17 (TEST-NET).

HQ backup → vault over VPN
Write-only backup identity; restore approval

02 HQ LAN & security

02 HQ LAN & SECURITY

Gateways on firewall HA: 10.40.<VLAN>.1/24 • core/access switches are L2 trunks

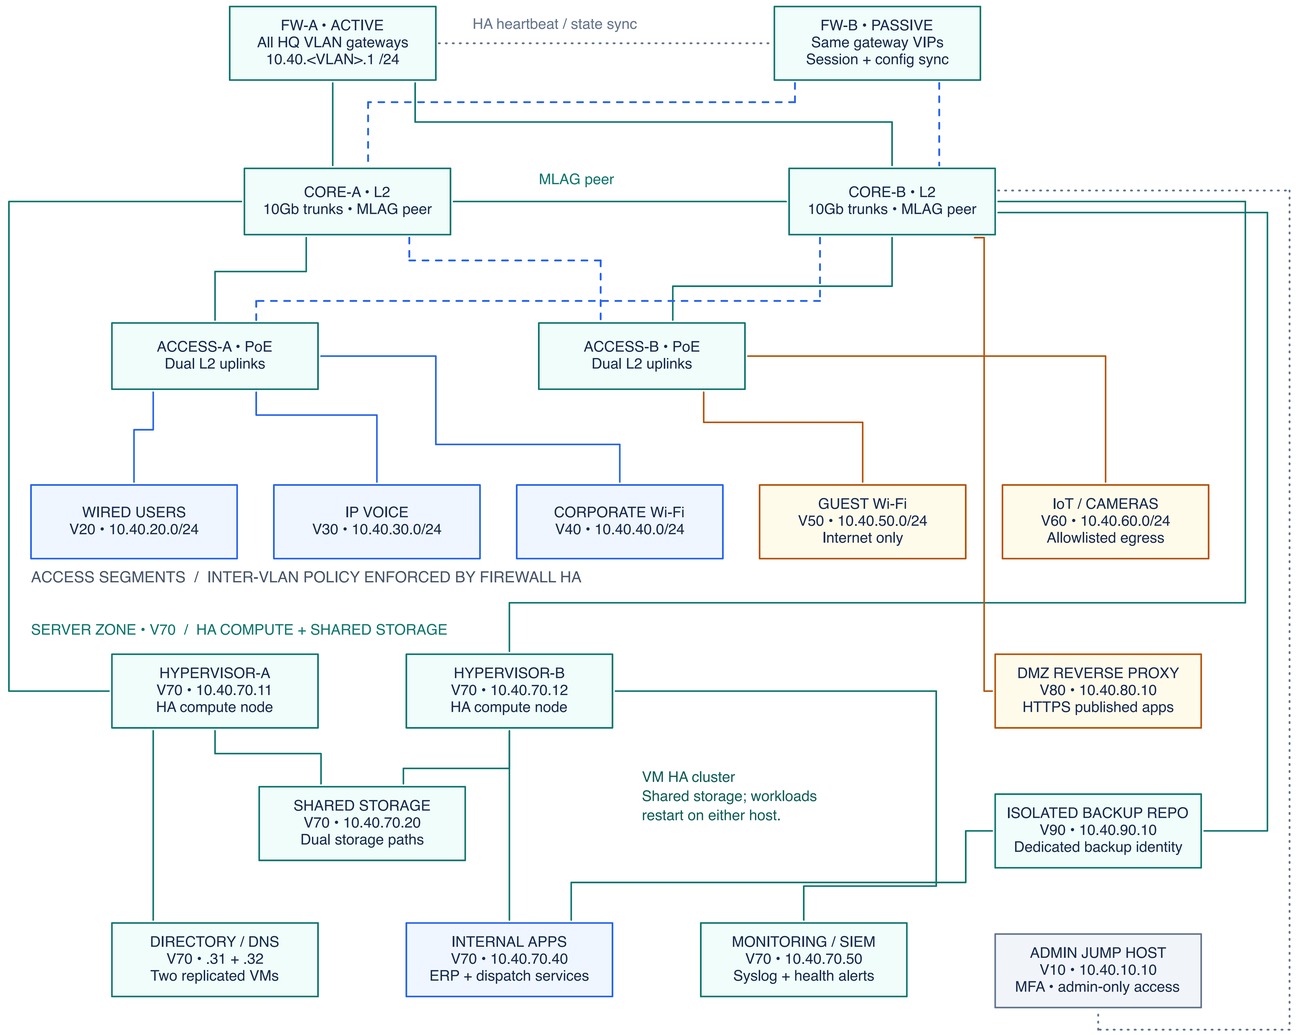

V80 DMZ, V90 backup and V10 management traverse tagged L2 trunks; all zone access is filtered at HA.

04 Addressing, legend & policy

04 ADDRESSING, LEGEND & POLICY

Illustrative architecture • private RFC1918 addressing • no real infrastructure

HQ VLAN	PURPOSE	SUBNET / GW .1
10	Management	10.40.10.0/24
20	Wired users	10.40.20.0/24
30	Voice	10.40.30.0/24
40	Corporate Wi-Fi	10.40.40.0/24
50	Guest Wi-Fi	10.40.50.0/24
60	IoT / cameras	10.40.60.0/24
70	Servers	10.40.70.0/24
80	DMZ	10.40.80.0/24
90	Backup	10.40.90.0/24

ZONE POLICY & OPERATIONS

GUEST: internet-only NAT; deny private prefixes.
IoT: deny lateral access; allow named services.
MANAGEMENT: admin jump + MFA only.
BACKUP: isolated V90; deny user access;
immutable offsite copy with separate identity.

Default deny between VLANs; explicit app rules.
Monitor HA, uplinks, VPN, DNS and backup jobs.
Quarterly restore tests; patch standby first.
Cloud DB accepts app-tier traffic only.

BRANCH 10.50.0.0/16 • same VLAN numbering; active segments 10/20/30/40/60.
CLOUD 10.60.10.0/24 mgmt • 10.60.70.0/24 app • 10.60.80.0/24 DB • 10.60.90.0/24 vault.

LINK LEGEND

Production / L2 trunk — Failover / standby — VPN / ZTNA — Management