
8-channel PROFET+2 12 V load switch with 3-position ATO fuse bypass

CHANNEL 1

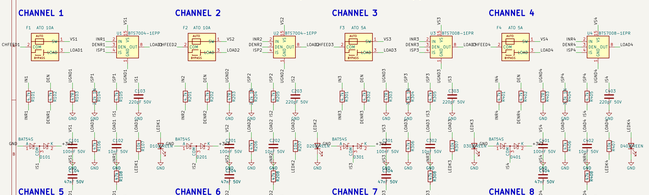


CHANNEL 2

CHANNEL 3

CHANNEL 4

CHANNEL 5

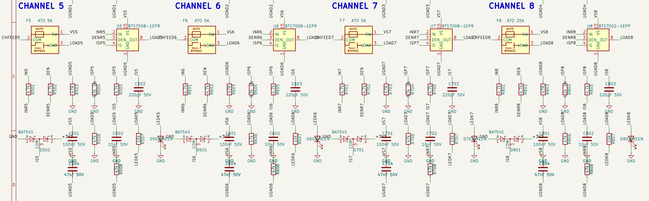


CHANNEL 6


CHANNEL 7

CHANNEL 8


MCU: IS1-8 -> ADC1 IO1,3,4,2,6,10,8,9; IN1 -> IO15; IMON -> IO5; BUS -> IO7; see pin map

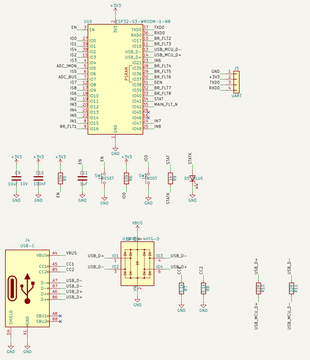

LOGIC: protected +12V -> FB -> D1 -> VIN; USB -> Q5 ideal diode -> VIN; TPSM63603V3 -> 3V3





INPUT: 9.5–16V; U12 reverse block; U14 current/power limit + latch-off; U12/U13 RTN FLOAT

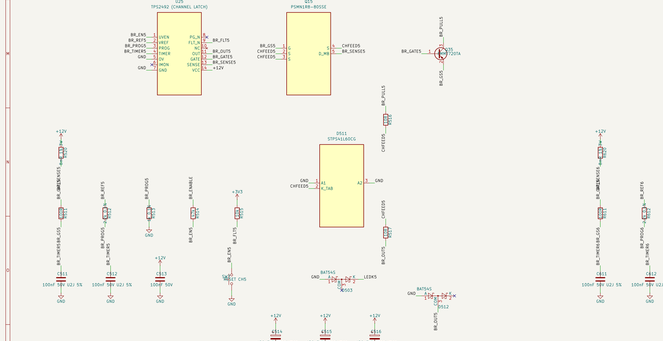



I/O: J1, J6–J12 direct-entry load terminals: pin 1=GND, pin 2=LOAD+


SUPPLY: 9.5–16V house bank via upstream fuse; USB initial programming only, battery disconnected




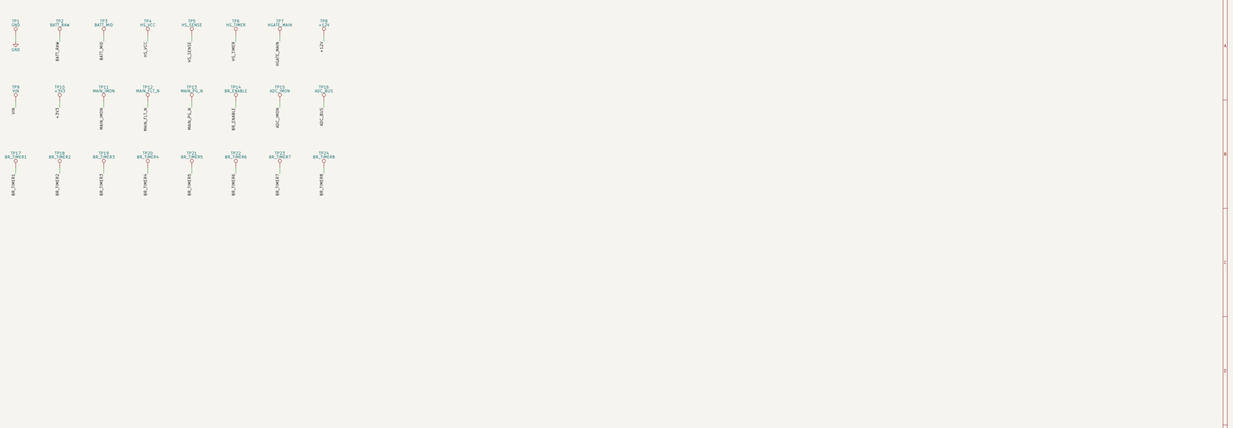


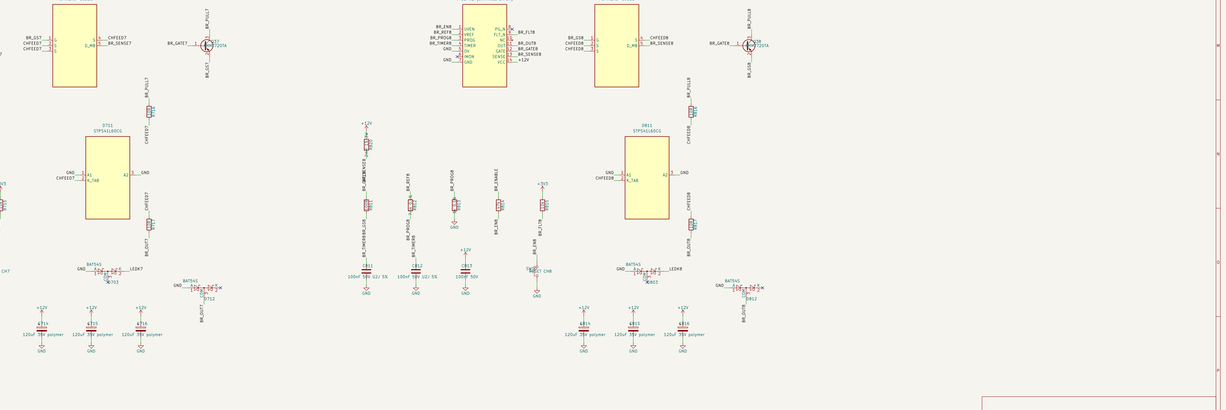


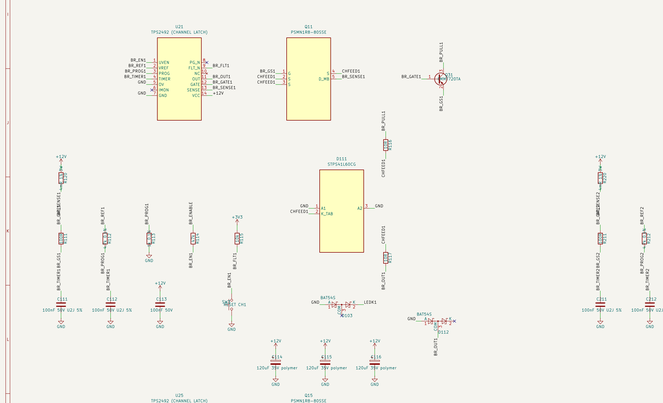

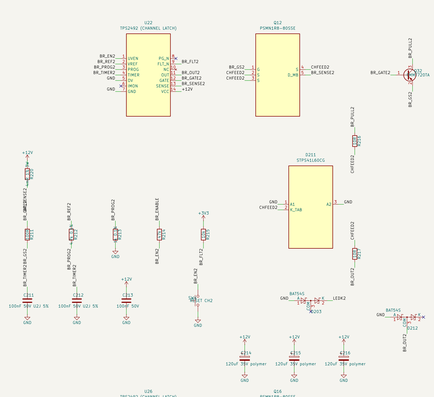

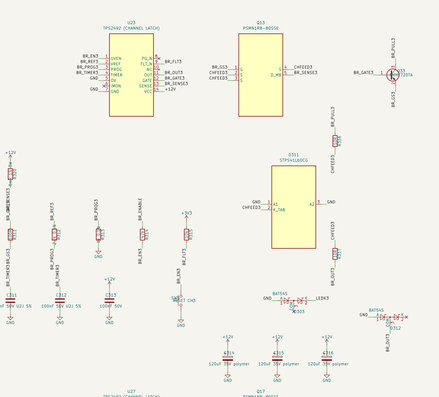

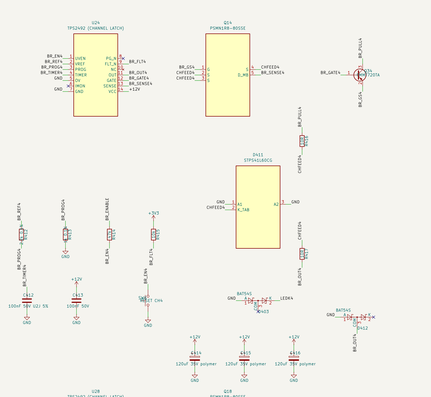

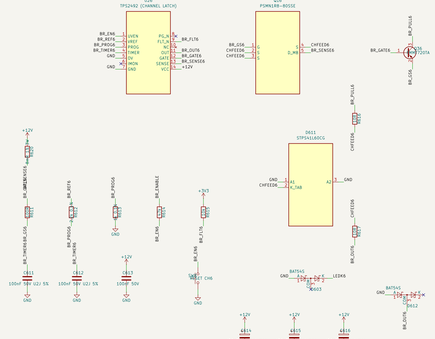

dpeckham

Sheet: /

File: eswitch_kicad_sch

Title: eswitch — 8 independent latching channels

Size: A0	Date: 2026-05-13	Rev: C
KiCad E.D.A. 10.0.0	Id: 1/1	