

A Survey of Range-Only SLAM Techniques and Sensors

David Grabowsky*, Samyak Shetty[†], Sam Shue[‡], James M. Conrad

Department of Electrical and Computer Engineering

University of North Carolina at Charlotte

Charlotte, NC, USA

*dgrabows@uncc.edu, [†]nshetty@uncc.edu, [‡]slshue@uncc.edu, §jmconrad@uncc.edu

Abstract—A common aspect in many autonomous robotics applications is addressing the problem of Simultaneous Localization and Mapping (SLAM). In most SLAM applications, the robot identifies distinguishable features in the environment, known as landmarks, within the environment through sensors such as cameras and laser rangefinders. Sensing these landmarks provide the robot with information such as range and bearing, which are used in the estimation processes of the robot's pose and the landmark locations within the map. However, some applications use landmarks which are only capable of providing range information, such as wireless and acoustic beacons. In this survey, the variety of techniques used to solve the SLAM problem with respect to range only sensors (RO-SLAM) is explored.

I. INTRODUCTION

The Simultaneous Localization and Mapping (SLAM) problem is a common aspect of many autonomous robotics applications. SLAM involves estimating the pose of a mobile robot and building a map of its environment with no a priori information. The SLAM problem is a chicken-and-egg type problem, where the pose of the robot is with respect to a global frame, or map, and building a map requires knowledge of the robot's location. There are many algorithms used to solve this problem, most using a landmark-based approach. Landmarks are distinguishable feature in the environment which can be observed through devices such as a camera or a laser rangefinder. Said devices are used to estimate the distance and orientation of the landmark relative to the robot. As the robot traverses the environment it continues to observe and collect landmarks. The sensed distance and angle from each landmark is combined with odometry readings to get an refined estimation of the robot pose and map. In most SLAM applications, references to the map is synonymous with the locations and features of the landmarks.

In outdoor SLAM applications, such as self-driving cars and autonomous farming equipment, global positioning satellite (GPS) readings are used in addition to the vehicle's odometry. While GPS has low resolution, it proves useful as it provides location information, which can help compensate for the accumulated error from drift in odometric sensors. However, GPS isn't available in all environments, such as indoors and underwater. Instead, wireless signals and sonar beacons are often used in indoors and underwater environments, respectively. These beacons provide distance estimations to the robotic vehicle, but do not inherently provide location information

as with GPS. However, these distances are often still useful as they can be used to compensate for the drift that occurs from measuring a vehicle's displacement through integration of inertial sensor readings. Most SLAM algorithms utilize these range values as a corrective measurement, the same way traditional algorithms use sensed landmarks. However, rather than using range and orientation to landmarks, beacons are only capable of providing range. SLAM algorithms which utilize these beacons are referred to as Range-Only SLAM (RO-SLAM).

While the loss of orientation from traditional, vision based landmarks prevents refinement of the robot's orientation, range only beacons solve two major problems encountered in traditional landmark-based approaches: landmark association and landmark scaling. The landmark association problem occurs when a detected landmark has similar features to previously recorded landmark and is mistaken for the other, generating huge errors in the estimation of both the robot and the landmark. This problem is avoided using beacons, as they have some kind of network address which is broadcast during transmissions, so there is no way to confuse which range is associated with which landmark. The scaling problem occurs when a SLAM algorithm runs for a long time and more and more landmarks are appended to the map. As more landmarks are added, the amount of memory needed to store the positions and distributions of these landmarks increases, as well as computation time. When using beacons, a finite number of landmarks exists, and the total size of the map is known before deployment. In addition, fewer landmarks are needed in beacon-based applications, as most beacons do not require line-of-sight to be measured, unlike visual landmarks. Since the robot can observe the landmarks more often, it doesn't need to add nearly as many to ensure accurate position estimation.

This paper surveys state of the art RO-SLAM applications. Before discussing RO-SLAM techniques, the different types of range sensors are introduced in Section II, followed by initialization of these beacons in Section III. Solutions to the RO-SLAM state estimation problem are covered in Section IV. Finally, the conclusion in Section V closes with final thoughts regarding the state of the field of RO-SLAM.

II. RANGE ONLY SENSORS

There are a variety of range sensors which can be utilized for RO-SLAM. These range sensors refer to any device which involves a signal transmission that can be used for the range estimation without line of sight. The most popular beacons can largely be broken down into two categories: acoustic based and radio frequency based. These beacons serve as landmarks within larger SLAM algorithms. The following section surveys the different types of sensors which can be utilized as range beacons.

A. Acoustic

Acoustic ranging systems are primarily used with autonomous underwater vehicles (AUV) and sonar beacons that operate in underwater locations. The reason for this that radio waves experience strong attenuations, especially in salt water environments. As [1] states, the issue of attenuations makes radio waves extremely impractical, thus making acoustics the logical alternative. Acoustic still suffer from a range of problems such as multipathing and propagation delays, but are one of the only meaningful alternatives. Papers such as those by [2] and [3] explore a wide variety of issues and possible solutions that relate to acoustic sensors, such as the added complexity of assuming a 2D environment versus a 3D environment, or the design challenges that accompany underwater deployment with regards to spatial correlation and power consumption.

A unique implementation of an underwater acoustic beacon is the Dive'N'Rise (DNR) beacon presented by [4]. These DNR beacons rise to the surface, receive their location through GPS, then sink into the water and transmit their coordinates. The distance to an agent and the transmitting beacon can be determined via time of flight from the transmissions. A localization implementation using these beacons was accomplished by [5].

B. Radio Frequency

Radio frequency encompass a massive spectrum of devices capable of transmitting or receiving transmission on the electromagnetic frequency. There are two methods primarily utilized to determine distance from radio frequency. One is by examining the received signal strength indicator (RSSI) and the other is the by measuring the time of flight of the signal. A system presented by [6] processes RF signal strength and utilizes nearest neighbors heuristics to achieve localization based on said signal strength. [7] describes a method for using very small RF tags as beacons throughout the environment. As a mobile robot moves throughout an environment it emits a query to which any RF tags that are within the transmission range respond. The robot then estimates the distance to the tag based on the delay. The response from the RF tags include a data tag which contains a unique ID number.

Wireless Fidelity (wi-fi) is the most popular beacon choice as existing networks are already prevalent in many indoor locations and they are generally low cost [9] [10] [11] [12]. [9] presents a Horus system with the aim of high accuracy and

low computation cost for wireless local area network location determining. [10] proposes a method named CUPID which extracts information from the physical layer to process information allowing it to avoid the impact of multipathing. [11] presents a design and implementation for its SpotFi system which can be deployed on top of existing wi-fi infrastructure. [12] designed a new method for filtering range measurement specifically designed with the large noise found in indoor WiFi radios in mind.

Ultra-wideband radios are another popular choice. One attractive feature of currently used ultra-wide band transmitters and receivers is the ability resolve multipath error, which is a common obstacle with indoor environments, without the use of extensive algorithms. [8] presents an analysis of time of arrival based localization estimations with ultra-wide band.

[13], [14], [15], and [16] each present surveys relating to wireless sensor networks. [13] and [15] both provide very well developed surveys that discuss hardware, protocols, standards, security, energy efficiency and much more. [13] specifically focuses on state of the art 802.15.4 and ZigBee standards. [16] examines the limitations of original IEEE 802.15.4 MAC and reviews adaptive methods that have been used to overcome these limitations. [14] specifically survey methods meant to improve the performance of IEEE 802.15.4 MAC protocol.

III. BEACON INITIALIZATION

The core motivation of SLAM algorithms is the exclusion of a priori knowledge of the operating environment. This includes locations of landmarks. Because of this, landmarks are appended to the map as they are discovered in traditional SLAM algorithms, using the robot's estimated pose and the sensed distance and orientation to estimate an initial position of the landmark. The landmark's positions is then refined as the algorithm continues to run.

The same process occurs in RO-SLAM, however, the landmark's initial position is not so easily determined, as the range-only beacon has an unknown orientation relative to the robot. Therefore, the landmark could reside approximately anywhere within the sensed distance radius. To compensate for this, most beacons go through an initialization phase before being appended to the map and utilized in the RO-SLAM algorithm. This initialization phase is usually performed over several iterations until the position converges to an acceptable degree.

One RO-SLAM complication in particular involves the issue of EKF-SLAM, which is used by many implementations, being sensitive to poorly initialized landmarks as they are used as the basis for the convergence of an accurate estimate. Poorly approximated landmarks results in the divergence of the filter.

Presented here are the most effective and commonly used methods to initialize range beacons. These methods are further divided into delayed and undelayed initializations.

A. Delayed/Offline initializations

These are methods that perform delayed localizations where initially the robot moves around offline collects some measurements and then initializes the location of the landmarks. This

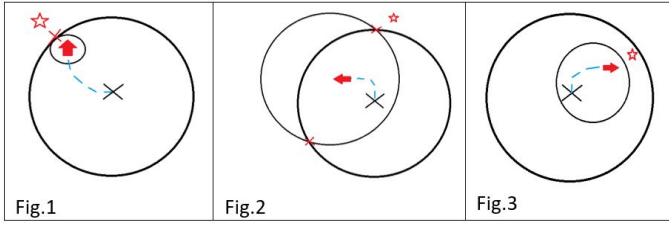


Fig. 1. The red arrow represents the robot. The 'X' represents the origin of the robot. The blue line shows the traversed path. The star represents the landmark.

can be undesirable as it causes a delay in the localization of the robot whenever there is an immediate real time application such as in autonomous vehicles. Localization can be performed only once accurate estimations of the beacons are made. There are several offline algorithms that perform localization such as the least squares approach in [17], a pose based ekf as mentioned in [18], a moving horizon estimation as mentioned in [19] etc. The most popular ones are mentioned below.

1) *Trilateration*: Trilateration refers to the process of using the distance to at least three devices at known locations in order to estimate the location of a fourth device. Methods generally utilize the geometry of circles and triangles in order to accomplish this. [20] mentions a basic trilateration technique involving geometric intersection. Rings are drawn at different points of the robot's path as shown in Fig[a], where the radius of the rings depend on the strength of the received signals from the beacons. This method of initialization is highly ambiguous as the rings can have more than 1 point of intersecting as shown in Fig[b] or no intersecting points as shown in Fig[c].

2) *Particle filter*: Particle filters take a probabilistic approach to estimating the initial location of the beacons. As mentioned in [21], initially the entire space is represented by particles. Particles refer to collection of sample states. These particles are resampled based on importance weights every iteration. There are several resampling methods mentioned in [22]. Eventually the particle set converges to the accurate location of the beacons. Although this method of localization can be computationally expensive it is preferred whenever the noise involved is non Gaussian.

B. Undelayed/Online initializations

With undelayed/online initializations simultaneously initializes and localizes itself and the beacons as it moves, as mentioned in [23]. A Gaussian Mixture Model is integrated into the EKF to create a multiple hypothesis filter. This multiple hypothesis approach is used to solve the RO-SLAM problem and its use allows for the un-delayed initialization of landmarks, however a large number of hypothesis can lead to increased computational burden. [24] presents a method that models a Gaussian mixtures for beacon initialization in EKF. This method only uses two hypotheses and a Cartesian plane. [25] proposes to reduce the computational burden of methods, such as the one proposed by [23], by introducing a novel state vector that eliminates the need for multiple

hypothesis landmark representation. The paper proposes that under different circumstances the landmark could be represented using different parameters. This representation would lead to reduced computation cost for large scale range only SLAM as opposed to the high computation cost of multiple hypothesis landmark representations. Four circumstances are presented in the paper and the method is tested in simulation using both the EKF and a least squares optimization approach. The results showed that when the circumstances can be clearly distinguished between, an increase in performance is seen.

IV. METHODS AND THEIR IMPLEMENTATIONS

A. EKF

The Extended Kalman Filter (EKF) is one of the most popular and widespread methods used to solve the SLAM problem. It is used to overcome the assumption of linear state transitions and measurements, which are rarely seen in practical environments [20]. The derivation of the EKF is very well documented, as such, detailed explanations can be viewed from a variety of sources such as: [20], [26], and [27]. Generally, EKF can be broken up into two phases, the prediction and the measurement phase. The prediction phase updates the state vector based on control inputs and additive Gaussian noise. The measurement phase updates the state vector based on observed landmarks with additive Gaussian noise.

When used to solve SLAM the map applied to the EKF is a feature based map, meaning it is composed of observable features (landmarks) which can be distinguished between during re-observation [20]. This distinction becomes important when examining range only SLAM where only the range to a landmark, or the range between landmarks, is known. In addition, the exact location of the landmarks, or even their initial existence, is not always known at startup. Initialization is a critical element in many algorithms that make use of the EKF. If the initialization is inaccurate then the convergence to a correct estimation becomes much more difficult for the filter. The EKF has seen a wide variety of implementation ranging from ground based robotics[28], to unmanned air vehicles [29], and to autonomous underwater vehicles [30]. This section will proceed to give a summary of the various ways EKF has been implemented in regards to RO SLAM, as well as examine improvements to the general RO SLAM problem that are applied via methods with EKF mind.

A system for robust range only localization was proposed by [30]. The system utilized an Autonomous Underwater Vehicle (AUV) and beacons without carefully surveyed locations. The paper notes that one of the major issues was noise present in the received data. A method for outliers rejection caused by the noise was accomplished via spectral graph partitioning. A voting scheme was implemented similar to a Hough transform to get approximate beacon locations [31]. The approximate locations were then incorporated into an EKF. It is noted by the paper that this method is particularly CPU intensive, however they state that since the rate at which data is acquired from a landmark is slow, every 5 or so seconds, that the AUV can afford the expensive computation since there will be an

adequate amount of time between readings for the data to process. The methodology was simulated using a dataset and can be seen in the paper.

[32] presents a comparison of how three methods process a collected data set. The methods are a EKF, a sliding batch, and a particle filter. The comparison considers the cross-track error, and along track error. The results state that the particle filter works well when used to acquire an initial pose estimate, and EKF works well with real-time localization. It is suggested that in the future that the two could be switched between when appropriate to improve the overall system.

[33] presents a solution utilizing a Sum of Gaussian (SOG) filter for a single range only beacon. It uses multivariate Gaussian mixtures to represent the probability distribution functions of the robot and beacon positions as Gaussian particles which each contain an EKF for vehicle position, velocity, and estimated beacon position. The paper presented experimentation where the method was used to map a beacon while correcting the navigation of the vehicle.

Several techniques have also been implemented that involve cooperative sensors. Traditionally sensors were used to only determine the range between themselves and the robot. The sensors in these cases provide the ability determine the range between themselves and other sensors and or the robot [34].

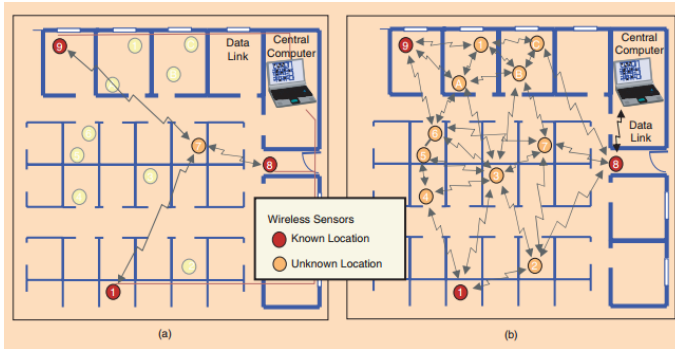


Fig. 2. Traditional(a) vs Cooperative(b) Sensors [34]

It is explained by [35] that methods utilizing inter beacon measurement should incorporate measurements with a configurable number of hops between beacons. This allows for the robot to gather range data from beyond the extent of the robots sensors. Experimentations was conducted utilizing this method via a particle filter EKF. The results showed that the more hops that were added the greater the performance of the system.

[36] presents a comparison of multiple RO SLAM methods utilized in two scenarios. One scenario involves the case where the robot only has access to range information between itself and beacons at unknown locations. In the second case the robot also has access to information about beacon to beacon distances. Several separate methods were compared in the given scenarios utilizing a data set and experimentation. The first method utilizes the Kalman filter in the case where only measurment between moving and stationary beacons are considered. Another method specifically uses the beacon to

beacon measurements with an online Kalman filter. An off line batch method is used to get an estimate of the beacon location and robot path. Finally an method that considers the robot as a virtual node for creating submaps to be solved with a multidimensional scaling algorithm is also considered. The paper gives experimental results and analysis for each of the methods.

An extension to EKF called relative-over parametrized (ROP) EKF is presented by [28]. This extension uses specific parameterization to better represent the range only data utilized in RO-SLAM. ROP EKF operates in polar coordinates as opposed to the Cartesian space that typical EKF operates. The method provided improved results over EKF when sparse range measurement or data association errors were present. [37] presents a comparison of the ROP-EKF method presented by [28], to a smoothing and mapping method presented by [38]. Experimentation conducted by [37] on and indoor and outdoor environment show an improvement in the results of the smoothing and mapping (SAM) method over ROP EKF.

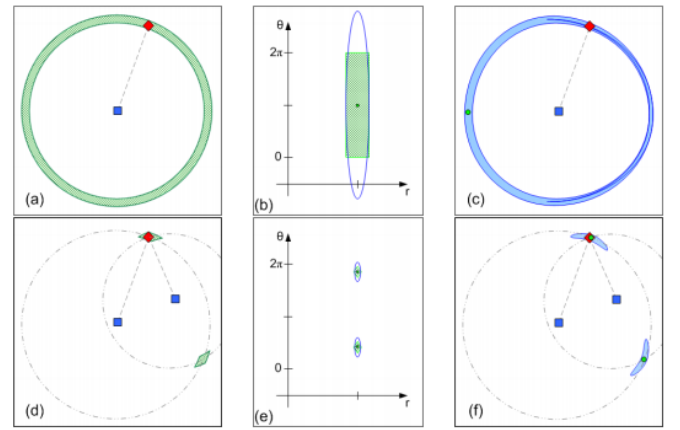


Fig. 3. Top Row: True and approximated distribution from one range observation. Bottom Row: True and approximated distributions with two observations from different locations. Left Column: Distribution in Cartesian Coordinates. Middle Column: True and Gaussian approximated distributions in Polar Coordinates, Right Column: Projection of the Gaussian approximated. [28]

A method proposed by [39] is geared towards improving map building speed and accuracy for unmanned aerial systems dealing with the 3D RO-SLAM problem. The 3D RO-SLAM problem refers to the added complexity that devices such as submersibles [17] and aerial vehicles experience when having to operate in an environment where three dimensions must be considered as opposed to the planar environment many robots are assumed to operate in. The method utilizes inter-beacon measurements and a novel mode selection which is used to select a measurement gathering method based on current conditions [39]. The first mode is noted as mapping (MS) and the second localization (LS). When in mapping mode the measurement are integrated with a high probability to quickly create a map, when in localization mode the probability is lowered to create higher accuracy localizations. Based on experimentation performed by [39] the method performed well

and a general increase in accuracy and map speed was noted, however it is stated that a wider variety of experimentation should be performed to validate the overall robustness and effectiveness of the method.

[40] explores how interpolation can be used to generate range data that is equally spaced over time as opposed to the irregular time intervals that range data is typically received at and then applied to solve the RO SLAM problem. The method is tested on the EKF and an batch optimization algorithm with a simulated and physical robot. The results provided by the paper show that the interpolation based algorithms gave better landmark estimation than those without, with the exception of the EKF in two datasets where EKF was already performing poorly.

[41] presents a solution for the 3D RO-SLAM problem. The solution reduces computational load through reduced spherical parametrization of map feature positions. The paper also proposes a new EKF update method which incorporates a reduced spherical representation of the state vector. In addition the paper describes how to efficiently integrate multi-modal belief of elevations angles and azimuth from a range sensor into the EKF utilizing two independent Gaussian Mixtures [41]. In addition [42] expands upon this by presenting a pre-filtering algorithm to be applied to range measurement before being used in the EKF in order to reduce the effect of noise generated by environmental issue such as multipath. It is then proposed by [43] that the above method can be utilized for decentralized multi-SLAM with range only sensors. This new method would allow for landmarks estimated by a robot to be incorporated into the estimation of another nearby robot, thus improving localization estimation. Based on experimental results obtained by [43] the integration of estimates from multiple robots of the same landmarks provides a benefit to landmark localization over a single robot. In [29] the author also validates and expands upon this method through indoor and outdoor experimentation with an Unmanned Aircraft System (UAS).

B. Sparse Extended Information Filters

Information filters work on same underlying Gaussian belief principle as that of EKF but vary in the way the Gaussian beliefs are represented. An information filter (IF) algorithm is mentioned in [44]. In EKF the Gaussians are represented in the form of their moments, mean and variance, whereas in a information filter the Gaussians are in their conical parameterization which comprises of an information matrix and information vector. Sparse Extended information filters are derived from the information filter but it maintains a sparse representation of the information matrix. This makes the SEIF more scalable and efficient as show in [44].

The information filter stores the relation between any two state elements in the information matrix also known as links. The higher the value of the link the stronger is the relationship between the two state variables and the more it is gonna effect the robots state. SEIF maintains a sparse information matrix

by eliminating weak links that are below a certain threshold thus reducing the computational complexity involved.

In [44] the computational complexity is reduced by utilizing the computational capabilities of the nodes or radio beacons. Here the robot computes the prediction stage of the iteration, sends the information to the beacons where the update process is completed. Hence the computation burden on the robot is reduced. In addition, inter-beacon measurements are factored in to reduce uncertainty even further. In [45] the SEIF method is evaluated and compared for 3d SLAM using an octorotor. In conclusion this method had better estimates and lesser computational burden than the traditional RO SLAM method using EKF.

C. Particle Filters

Particles filters are a category of monte carlo algorithms. they are used to estimate states in partially observable Markov chains as shown in [46]. In initial applications particle filters were used in the field of localization where it was used to estimate a robots pose from sensor data. It is considered better and more robust to conventional estimation methods because of its ability to solve the global localization (THIS IS A FIXED CITATION, PUT ACTUAL CITATION HERE)[2] and the kidnapped robot problem [47] which EKF ,in comparison, struggles with. At is core, EKF also has higher dimensional computation problems. Initially robot assumes global uncertainty through a set of particles that are distributed all over the map. Hence both the robot and the landmarks are uncertain. As the robot moves around and measures sensor data it resamples the particle set weighted according to the probability of the particle being the right one. There are several resampling methods depending on computational complexities [22] After some iterations only the particles which have a high degree of probability remain and eventually converge to the state of the robot and the landmarks. Assuming at time

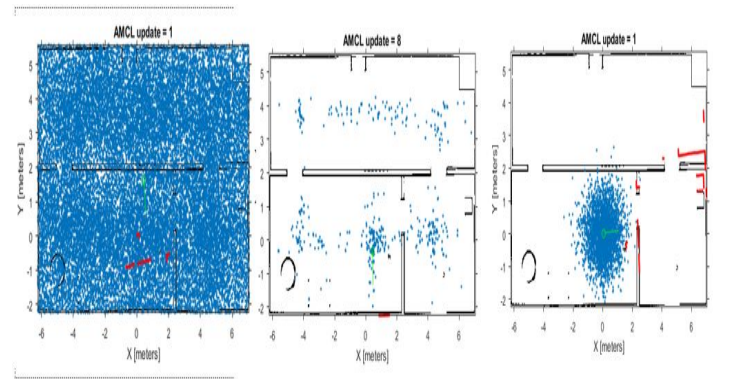


Fig. 4. The leftmost image describes the state of the robot when it just initializes the particle filter. The particles are uniformly distributed. The image in the center describes the particle filter after a couple of iterations. Only the particles which have a higher probability are re sampled. The image on the right shows the particle filter eventually converging to estimate the robot location.

$t=0$; we have N particles equally space in the environment that are drawn based on a uniform distribution $p(x_o a)$. re

sampling methods depending on computational complexities. After some iterations only the particle filter starts moving it collects measurements and at time $t > 0$ we sample a new particle set $x_t^{[i]}$ for each particle in $x_{(t-1)}^{[i]}$. It is sampled based on the probability of measurement $p(z_t|x_{(t-1)}^{[i]})$. Eventually the particle filter converges to give us the true positioning of the robot.

As mentioned in [21] particle filters outperform EKF in applications involving global localization (the kidnapped robot problem) where the robot is randomly picked up and placed in a unknown environment. EKF cannot process negative information, but since particle filters use raw sensor data without any processing they can process negative information [21]. As the number of particles increases the computational complexity of the filter too increases. In order to address this there were several new methods introduced that exploit the independence among state variables. For example the Rao-Blackwellized particle filters that exploit the independence of the landmarks with the robot path thereby reducing the computation complexity from [48]. It also solves the data association problem previously unsolved by EKF.

In [49] uses the particle filter to overcome the delayed initialization issue brought forward by RO SLAM. It uses the Rao-Blackwellized Particle filter to maintain a conditional distribution for each beacon which eventually is transformed into a EKF when the uncertainty becomes sufficiently small. This approach is validated for both simulated and real data sets. This approach is preferred in indoor applications where there is a high probability of multi path signal propagation.

V. CONCLUSION

REFERENCES

- [1] J. Partan, J. Kurose, and B. N. Levine, "A survey of practical issues in underwater networks," *ACM SIGMOBILE Mobile Computing and Communications Review*, vol. 11, no. 4, p. 23, 2007.
- [2] M. Erol-Kantarci, H. T. Mouftah, and S. Oktug, "A Survey of Architectures and Localization Techniques for Underwater Acoustic Sensor Networks," *IEEE Communications Surveys & Tutorials*, vol. 13, no. 3, pp. 487–502, 2011.
- [3] I. F. Akyildiz, D. Pompili, and T. Melodia, "Underwater acoustic sensor networks: Research challenges," *Ad Hoc Networks*, vol. 3, no. 3, pp. 257–279, 2005.
- [4] M. Erol, L. F. M. Vieira, and M. Gerla, "Localization with Dive-N-Rise (DNR) beacons for underwater acoustic sensor networks," in *Proceedings of the second workshop on Underwater networks - WuWNet '07*, 2007, p. 97.
- [5] M. Erol, L. F. M. Vieira, A. Caruso, F. Paparella, M. Gerla, and S. Oktug, "Multi stage underwater sensor localization using mobile beacons," *Proceedings - 2nd Int. Conf. Sensor Technol. Appl., SENSORCOMM 2008, Includes: MESH 2008 Conf. Mesh Networks; ENOPT 2008 Energy Optim. Wireless Sensors Networks, UNWAT 2008 Under Water Sensors Systems*, pp. 710–714, 2008.
- [6] P. B. Padmanabhan and V. N., "RADAR: An in-building RF based user location and tracking system," *Proceedings IEEE INFOCOM 2000. Conference on Computer Communications. Nineteenth Annual Joint Conference of the IEEE Computer and Communications Societies (Cat. No.00CH37064)*, vol. 2, no. c, pp. 775–784, 2000.
- [7] D. Kurth, G. Kantor, and S. Singh, "Experimental Results in Range-Only Localization with Radio," *Intelligent Robots and Systems, International Conference on*, no. October, pp. 974–979, 2003.
- [8] S. Gezici, Z. Tian, G. B. Giannakis, H. Kobayashi, A. F. Molisch, H. V. Poor, and Z. Sahinoglu, "Localization via ultra-wideband radios: A look at positioning aspects of future sensor networks," *IEEE Signal Processing Magazine*, vol. 22, no. 4, pp. 70–84, 2005.
- [9] M. Youssef and A. Agrawala, "The Horus WLAN location determination system," in *Proceedings of the 3rd international conference on Mobile systems, applications, and services - MobiSys '05*, 2005, p. 205.
- [10] S. Sen, J. Lee, K.-H. Kim, and P. Congdon, "Avoiding multipath to revive inbuilding WiFi localization," *Proceeding of the 11th annual international conference on Mobile systems, applications, and services - MobiSys '13*, p. 249, 2013.
- [11] M. Kotaru, K. Joshi, D. Bharadia, and S. Katti, "SpotFi: Decimeter Level Localization Using WiFi," *Sigcomm 2015*, pp. 269–282, 2015.
- [12] M. Rea, A. Fakhreddine, D. Giustiniano, and V. Lenders, "Filtering Noisy 802.11 Time-of-Flight Ranging Measurements From Commoditized WiFi Radios," *IEEE/ACM Transactions on Networking*, vol. 25, no. 4, pp. 2514–2527, 2017.
- [13] P. Baronti, P. Pillai, V. W. C. Chook, S. Chessa, A. Gotta, and Y. F. Hu, "Wireless sensor networks: A survey on the state of the art and the 802.15.4 and ZigBee standards," *Computer Communications*, vol. 30, no. 7, pp. 1655–1695, 2007.
- [14] M. Khanafar, M. Guennoun, and H. T. Mouftah, "A Survey of Beacon-Enabled IEEE 802.15.4 MAC Protocols in Wireless Sensor Networks," *IEEE Communications Surveys Tutorials*, vol. 16, no. 2, pp. 856–876, 2014.
- [15] I. Akyildiz, W. Su, Y. Sankarasubramaniam, and E. Cayirci, "Wireless sensor networks: a survey," *Computer Networks*, vol. 38, no. 4, pp. 393–422, 2002.
- [16] F. Xia, R. Hao, Y. Cao, and L. Xue, "A survey of adaptive and real-time protocols based on IEEE 802.15.4," 2011.
- [17] P. Newman and J. Leonard, "Pure range-only sub-sea SLAM," in *2003 IEEE International Conference on Robotics and Automation (Cat. No.03CH37422)*.
- [18] S. E. Webster, R. M. Eustice, H. Singh, and L. L. Whitcomb, "Advances in single-beacon one-way-travel-time acoustic navigation for underwater vehicles," *International Journal of Robotics Research*, vol. 31, no. 8, pp. 935–950, 2012.
- [19] G. Vallicrosa, P. Ridao, D. Ribas, and A. Palomer, "Active Range-Only beacon localization for AUV homing," in *IEEE International Conference on Intelligent Robots and Systems*, 2014, pp. 2286–2291.
- [20] S. Thrun, "Probabilistic robotics," *Communications of the ACM*, vol. 45, no. 3, 2002.
- [21] —, "Particle Filters in Robotics," *Proceedings of Uncertainty in AI*, vol. 1, pp. 511–518, 2002.
- [22] T. Li, M. Bolić, and P. M. Djurić, "Resampling Methods for Particle Filtering: Classification, implementation, and strategies," *IEEE Signal Processing Magazine*, vol. 32, no. 3, pp. 70–86, 2015.
- [23] F. Caballero, L. Merino, and A. Ollero, "A general Gaussian-mixture approach for range-only mapping using multiple hypotheses," *Proceedings - IEEE International Conference on Robotics and Automation*, pp. 4404–4409, 2010.
- [24] L. Geneve, O. Kermorgant, and E. Laroche, "A composite beacon initialization for EKF range-only SLAM," *IEEE International Conference on Intelligent Robots and Systems*, vol. 2015-Decem, pp. 1342–1348, 2015.
- [25] A. Ahmad, S. Huang, J. J. Wang, and G. Dissanayake, "A new state vector for range-only SLAM," *Proceedings of the 2011 Chinese Control and Decision Conference, CCDC 2011*, pp. 3404–3409, 2011.
- [26] M. I. Ribeiro, "Kalman and Extended Kalman Filters: Concept, Derivation and Properties," *Institute for Systems and Robotics Lisboa Portugal*, no. February, p. 42, 2004.
- [27] S. Haykin, *Kalman Filters*, 2001, vol. 5.
- [28] J. Djugash and S. Singh, "A robust method of localization and mapping using only range," *Proceedings of International Symposium on Experimental Robotics*, pp. 341–351, 2008.
- [29] F. R. Fabresse, F. Caballero, I. Maza, and A. Ollero, "Robust Range-Only SLAM for Unmanned Aerial Systems," *Journal of Intelligent and Robotic Systems: Theory and Applications*, vol. 84, no. 1–4, pp. 297–310, 2016.
- [30] E. Olson, J. J. Leonard, and S. Teller, "Robust range-only beacon localization," *IEEE Journal of Oceanic Engineering*, vol. 31, no. 4, pp. 949–958, 2006.

- [31] P. V. C. Hough, "Machine analysis of bubble chamber pictures," *2nd International Conference on High-Energy Accelerators and Instrumentation*, vol. 73, pp. 554–558, 1959.
- [32] D. Kurth, "Range-only robot localization and SLAM with radio," *Robotics Institute*, no. May, 2003.
- [33] G. Vallicrosa, P. Ridao, and D. Ribas, "AUV single beacon range-only SLAM with a SOG filter," *IFAC-PapersOnLine*, vol. 28, no. 2, pp. 26–31, 2015.
- [34] N. Patwari, J. Ash, S. Kyperountas, A. Hero, R. Moses, and N. Correal, "Locating the nodes: cooperative localization in wireless sensor networks," *IEEE Signal Processing Magazine*, vol. 22, no. 4, pp. 54–69, 2005.
- [35] A. Torres-González, J. R. Martínez-De Dios, and A. Ollero, "Exploiting multi-hop inter-beacon measurements in ro-slam," *Studies in Computational Intelligence*, vol. 604, pp. 101–119, 2015.
- [36] J. A. Djugash, S. Singh, G. Kantor, W. Zhang, and J. Djugash, "Range-Only SLAM for Robots Operating Cooperatively with Sensor Networks," no. May, pp. 2078–2084, 2006.
- [37] F. Herranz, A. Llamazares, E. Molinos, and M. Ocana, "A comparison of SLAM algorithms with range only sensors," *Proceedings - IEEE International Conference on Robotics and Automation*, pp. 4606–4611, 2014.
- [38] F. Dellaert and M. Kaess, "Square root SAM: Simultaneous localization and mapping via square root information smoothing," in *International Journal of Robotics Research*, vol. 25, no. 12, 2006, pp. 1181–1203.
- [39] J. R. M.-d. Dios and A. Ollero, "Accurate fast mapping Range Only SLAM for UAS applications," 2015.
- [40] A. Kehagias, J. Djugash, and S. Singh, "Range-only SLAM with Interpolated Range Data," no. May, pp. 1–23, 2006.
- [41] F. R. Fabresse, F. Caballero, I. Maza, and A. Ollero, "Undelayed 3D RO-SLAM based on Gaussian-mixture and reduced spherical parametrization," *IEEE International Conference on Intelligent Robots and Systems*, pp. 1555–1561, 2013.
- [42] —, "Robust range-only SLAM for aerial vehicles," *2014 International Conference on Unmanned Aircraft Systems, ICUAS 2014 - Conference Proceedings*, pp. 750–755, 2014.
- [43] F. Fabresse, F. Caballero, and A. Ollero, "Decentralized simultaneous localization and mapping for multiple aerial vehicles using range-only sensors," *2015 IEEE International Conference on Robotics and Automation (ICRA)*, pp. 6408–6414, 2015.
- [44] A. Torres-González, J. R. Martínez-De Dios, and A. Ollero, "Efficient robot-sensor network distributed SEIF range-only SLAM," *Proceedings - IEEE International Conference on Robotics and Automation*, pp. 1319–1326, 2014.
- [45] A. Torres-González, J. R. Martínez-de Dios, and A. Ollero, "Range-only SLAM for robot-sensor network cooperation," *Autonomous Robots*, pp. 1–15, 2017.
- [46] a. Doucet, N. De Freitas, and N. Gordon, "Sequential Monte Carlo Methods in Practice," *Springer New York*, pp. 178–195, 2001.
- [47] S. Engelson and D. McDermott, "Error correction in mobile robot map learning," in *Proceedings 1992 IEEE International Conference on Robotics and Automation*, 1992, pp. 2555–2560.
- [48] J. Yuan, Y. Huang, F. Sun, S. Huang, and H. Chen, "Mobile robot active observation and mapping based on factored method," in *Proceedings of the World Congress on Intelligent Control and Automation (WCICA)*, 2012, pp. 3577–3582.
- [49] J. L. Blanco, J. González, and J. A. Fernández-Madrigal, "A pure probabilistic approach to range-only SLAM," *Proceedings - IEEE International Conference on Robotics and Automation*, pp. 1436–1441, 2008.