




BLOC 2: cisco packet tracer

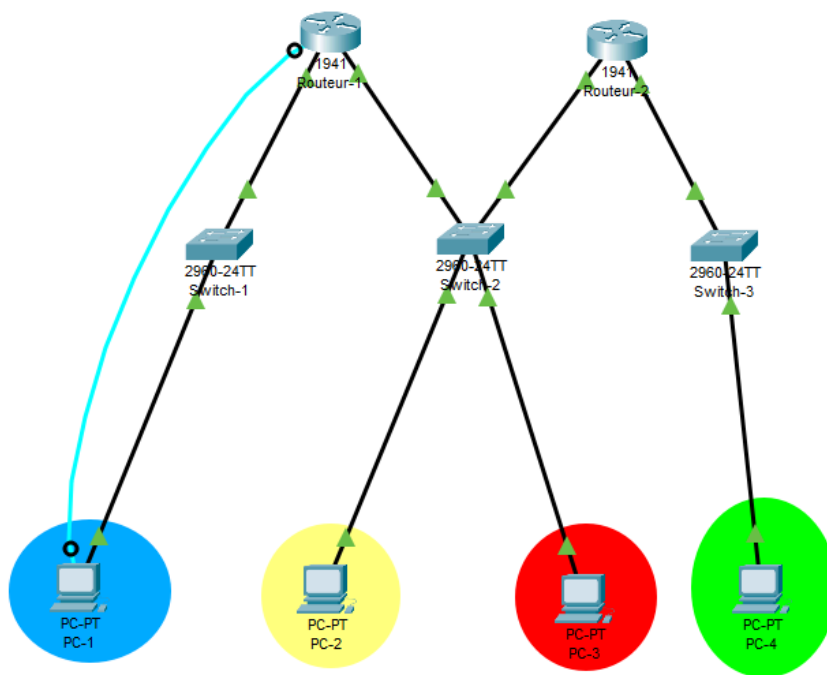



Questions:

1-test de ping entre un poste et la passerelle:

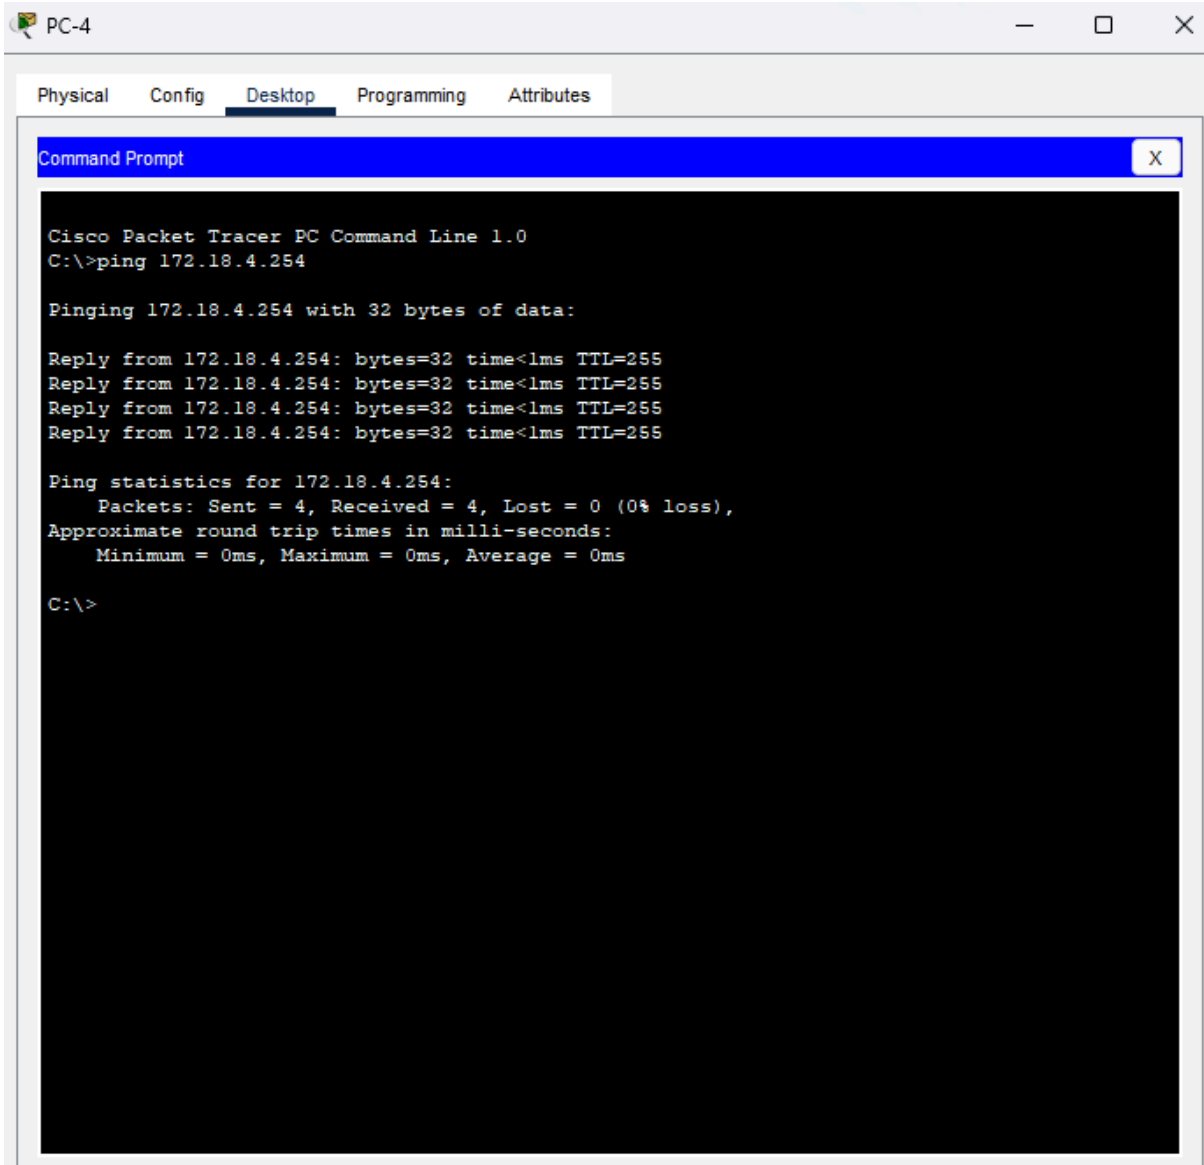

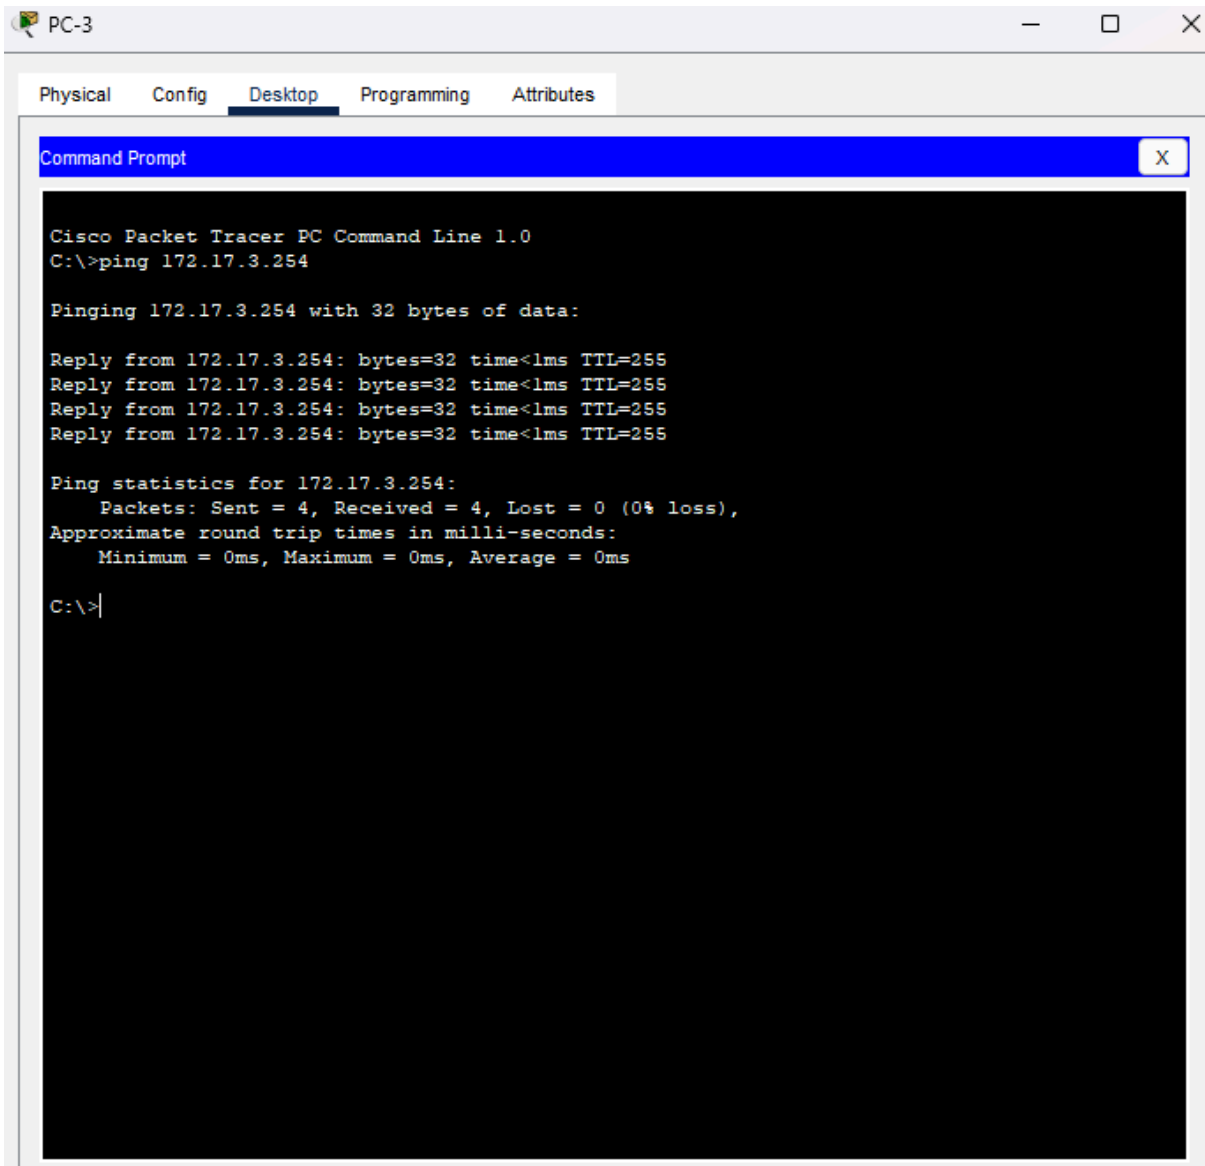

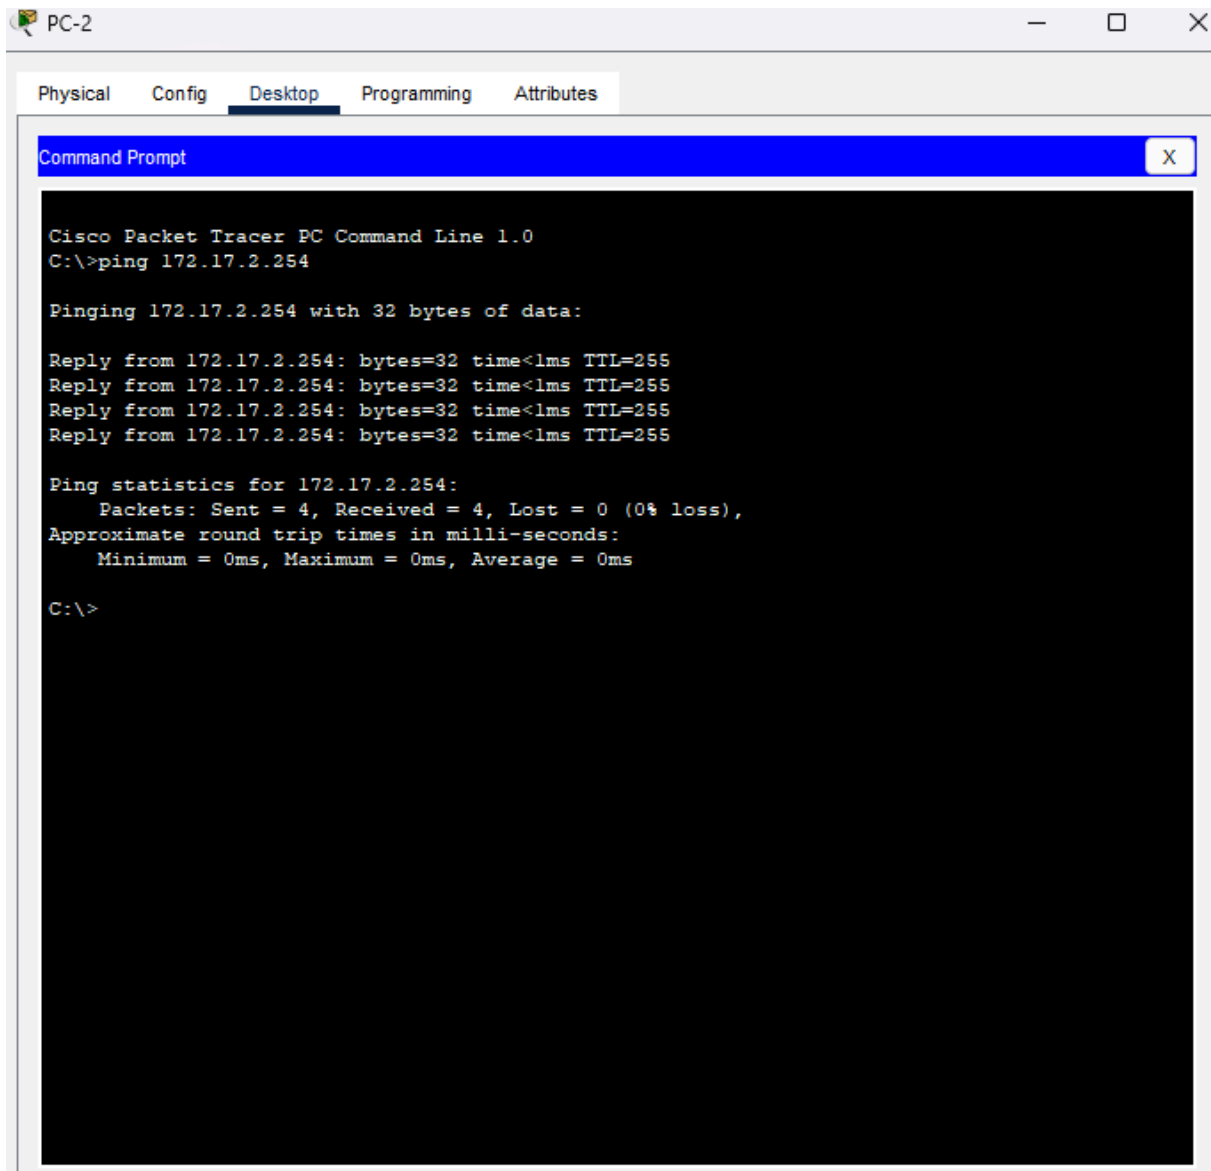

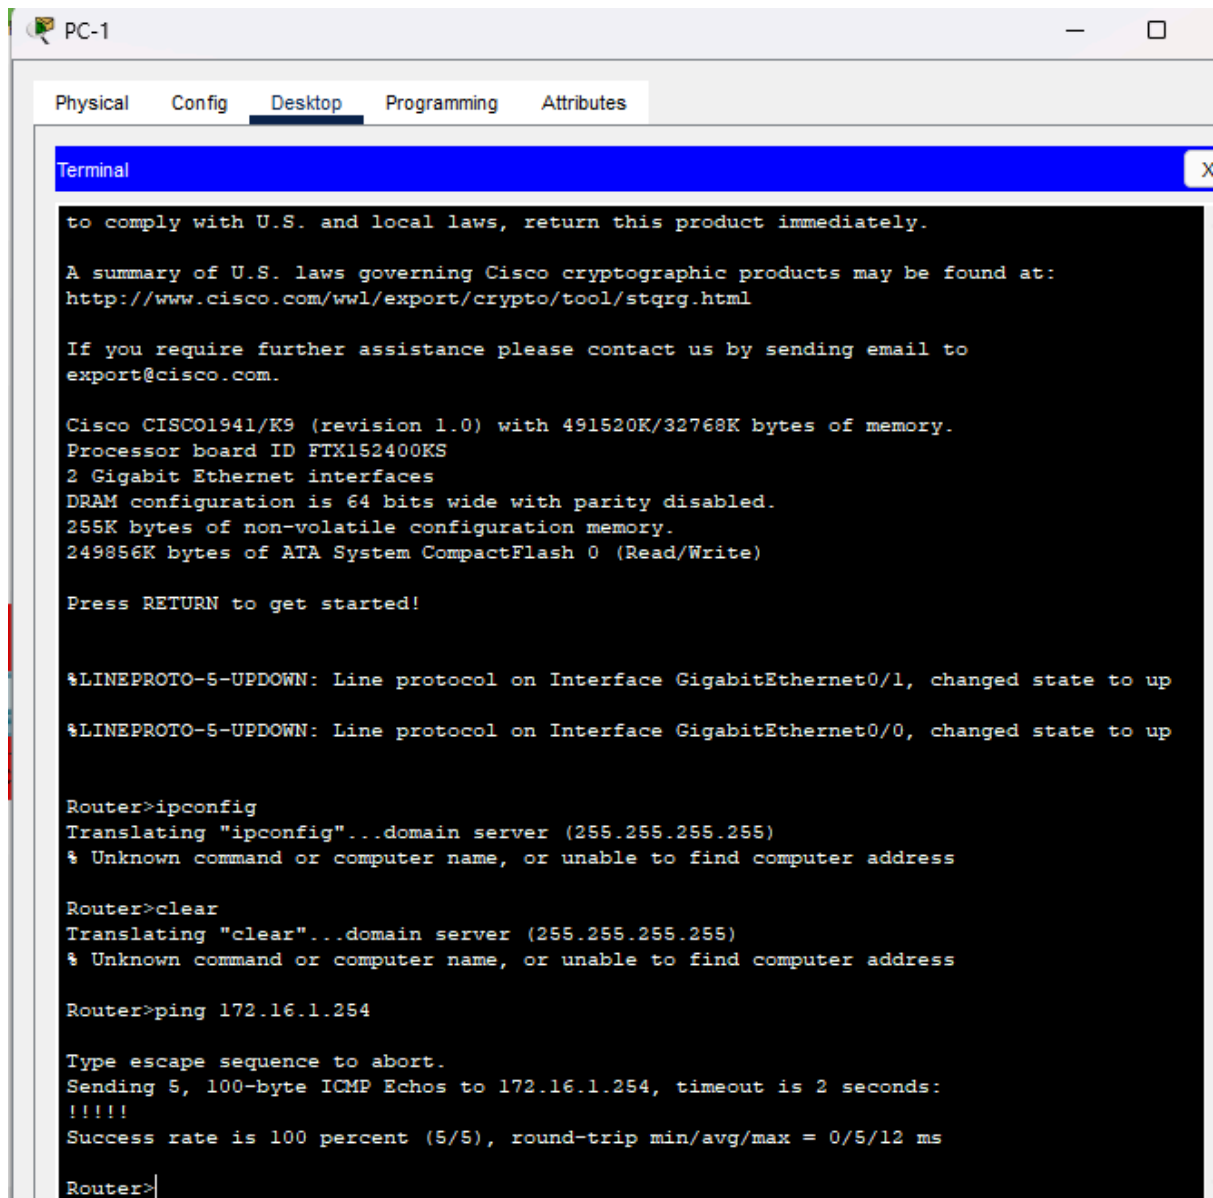

PC-1

Physical Config Desktop Programming Attributes

Terminal

```
to comply with U.S. and local laws, return this product immediately.

A summary of U.S. laws governing Cisco cryptographic products may be found at:
http://www.cisco.com/wwl/export/crypto/tool/stqrg.html

If you require further assistance please contact us by sending email to
export@cisco.com.

Cisco CISC01941/K9 (revision 1.0) with 491520K/32768K bytes of memory.
Processor board ID FTK152400KS
2 Gigabit Ethernet interfaces
DRAM configuration is 64 bits wide with parity disabled.
255K bytes of non-volatile configuration memory.
249856K bytes of ATA System CompactFlash 0 (Read/Write)

Press RETURN to get started!

%LINEPROTO-5-UPDOWN: Line protocol on Interface GigabitEthernet0/1, changed state to up
%LINEPROTO-5-UPDOWN: Line protocol on Interface GigabitEthernet0/0, changed state to up

Router>ipconfig
Translating "ipconfig"...domain server (255.255.255.255)
% Unknown command or computer name, or unable to find computer address


Router>clear
Translating "clear"...domain server (255.255.255.255)
% Unknown command or computer name, or unable to find computer address

Router>ping 172.16.1.254

Type escape sequence to abort.
Sending 5, 100-byte ICMP Echos to 172.16.1.254, timeout is 2 seconds:
!!!!
Success rate is 100 percent (5/5), round-trip min/avg/max = 0/5/12 ms

Router>
```

- Effectuer un test de communication (ping) entre PC-1 et PC-2.

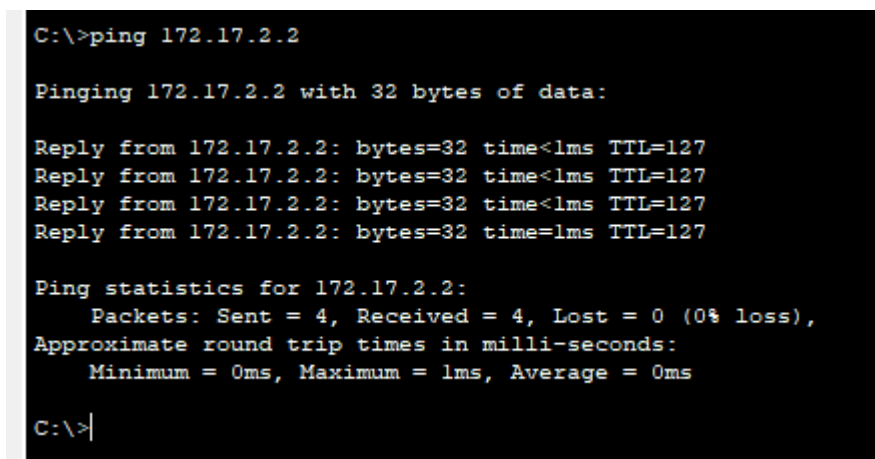

```
C:\>ping 172.17.2.2

Pinging 172.17.2.2 with 32 bytes of data:

Reply from 172.17.2.2: bytes=32 time<1ms TTL=127
Reply from 172.17.2.2: bytes=32 time<1ms TTL=127
Reply from 172.17.2.2: bytes=32 time<1ms TTL=127
Reply from 172.17.2.2: bytes=32 time=1ms TTL=127

Ping statistics for 172.17.2.2:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
    Approximate round trip times in milli-seconds:
        Minimum = 0ms, Maximum = 1ms, Average = 0ms

C:\>
```

- Effectuer un test de communication (ping) entre PC-3 et PC-4.

```
C:\>ping 172.18.4.4

Pinging 172.18.4.4 with 32 bytes of data:

Reply from 172.18.4.4: bytes=32 time<1ms TTL=127
Reply from 172.18.4.4: bytes=32 time<1ms TTL=127
Reply from 172.18.4.4: bytes=32 time<1ms TTL=127
Reply from 172.18.4.4: bytes=32 time<1ms TTL=127

Ping statistics for 172.18.4.4:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
    Approximate round trip times in milli-seconds:
        Minimum = 0ms, Maximum = 0ms, Average = 0ms

C:\>
```

- Effectuer un test de communication (ping) entre PC-1 et PC-3.

```
C:\>ping 172.17.3.3

Pinging 172.17.3.3 with 32 bytes of data:

Request timed out.
Request timed out.
Request timed out.
Request timed out.

Ping statistics for 172.17.3.3:
    Packets: Sent = 4, Received = 0, Lost = 4 (100% loss),

C:\>
```

Les pc ne peuvent communiquer ensemble car ils ne sont pas dans le même réseau.

- Effectuer un test de communication (ping) entre PC-2 et PC-4.

```
C:\>ping 172.18.4.4

Pinging 172.18.4.4 with 32 bytes of data:

Reply from 172.17.2.254: Destination host unreachable.
Reply from 172.17.2.254: Destination host unreachable.
Reply from 172.17.2.254: Destination host unreachable.
Reply from 172.17.2.254: Destination host unreachable.

Ping statistics for 172.18.4.4:
    Packets: Sent = 4, Received = 0, Lost = 4 (100% loss),

C:\>
```

Les pc ne peuvent communiquer ensemble car ils ne sont pas dans le même réseau.

- Effectuer un test de communication (ping) entre PC-1 et PC-4.

```
C:\>ping 172.18.4.4

Pinging 172.18.4.4 with 32 bytes of data:

Reply from 172.16.1.254: Destination host unreachable.
Reply from 172.16.1.254: Destination host unreachable.
Reply from 172.16.1.254: Destination host unreachable.
Request timed out.

Ping statistics for 172.18.4.4:
    Packets: Sent = 4, Received = 0, Lost = 4 (100% loss),

C:\>
```

Les pc ne peuvent communiquer ensemble car ils ne sont pas dans le même réseau.

Faites à nouveau les tests suivants et noter les réponses (la réponse peut prendre un certain temps) :

- Effectuer un test de communication (ping) entre PC-1 et PC-3.

```
C:\>ping 172.17.3.3

Pinging 172.17.3.3 with 32 bytes of data:

Request timed out.
Request timed out.
Request timed out.
Request timed out.

Ping statistics for 172.17.3.3:
    Packets: Sent = 4, Received = 0, Lost = 4 (100% loss),

C:\>
```

- Effectuer un test de communication (ping) entre PC-2 et PC-4.

```
C:\>ping 172.18.4.4

Pinging 172.18.4.4 with 32 bytes of data:

Request timed out.
Request timed out.
Reply from 172.18.4.4: bytes=32 time<1ms TTL=127
Reply from 172.18.4.4: bytes=32 time<1ms TTL=127

Ping statistics for 172.18.4.4:
    Packets: Sent = 4, Received = 2, Lost = 2 (50% loss),
    Approximate round trip times in milli-seconds:
        Minimum = 0ms, Maximum = 0ms, Average = 0ms

C:\>
```

- Effectuer un test de communication (ping) entre PC-1 et PC-4.

```
C:\>ping 172.18.4.4

Pinging 172.18.4.4 with 32 bytes of data:

Request timed out.
Request timed out.
Request timed out.
Request timed out.

Ping statistics for 172.18.4.4:
    Packets: Sent = 4, Received = 0, Lost = 4 (100% loss),

C:\>
```

Faites à nouveau les tests suivants et noter les réponses (la réponse peut prendre un certain temps) :

- Effectuer un test de communication (ping) entre PC-1 et PC-3.

```
C:\>ping 172.17.3.3

Pinging 172.17.3.3 with 32 bytes of data:

Reply from 172.17.3.3: bytes=32 time<1ms TTL=126
Reply from 172.17.3.3: bytes=32 time<1ms TTL=126
Reply from 172.17.3.3: bytes=32 time<1ms TTL=126
Reply from 172.17.3.3: bytes=32 time=1ms TTL=126

Ping statistics for 172.17.3.3:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
    Approximate round trip times in milli-seconds:
        Minimum = 0ms, Maximum = 1ms, Average = 0ms

C:\>|
```

- Effectuer un test de communication (ping) entre PC-2 et PC-4.

```
C:\>ping 172.18.4.4

Pinging 172.18.4.4 with 32 bytes of data:

Reply from 172.18.4.4: bytes=32 time<1ms TTL=127
Reply from 172.18.4.4: bytes=32 time<1ms TTL=127
Reply from 172.18.4.4: bytes=32 time<1ms TTL=127
Reply from 172.18.4.4: bytes=32 time<1ms TTL=127

Ping statistics for 172.18.4.4:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
    Approximate round trip times in milli-seconds:
        Minimum = 0ms, Maximum = 0ms, Average = 0ms

C:\>|
```

- Effectuer un test de communication (ping) entre PC-1 et PC-4.

```
C:\>ping 172.18.4.4

Pinging 172.18.4.4 with 32 bytes of data:

Reply from 172.18.4.4: bytes=32 time<1ms TTL=126
Reply from 172.18.4.4: bytes=32 time<1ms TTL=126
Reply from 172.18.4.4: bytes=32 time<1ms TTL=126
Reply from 172.18.4.4: bytes=32 time<1ms TTL=126

Ping statistics for 172.18.4.4:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
    Approximate round trip times in milli-seconds:
        Minimum = 0ms, Maximum = 0ms, Average = 0ms

C:\>
```

