

-5000kL

-4500kL

-4000kL

-3500kL

-2500kL

-1500kL

-1000kL

-500kL

-250kL

-100kL

-50kL

-25kL

-5kL



Zincalume Tanks

नए भारत का नया टैंक

1000+ successful installations



DPL Star-The Strength You Can Trust

DPL Star is the brand name of DPL Global Private Limited which is associated with Dadu Group of Companies incorporated in June 2008, the company became a force to reckon with in 2019, under the brand name DPL Star, manufacturing Galvanized Pipes, MS ERW Pipes Black Pipes, Hollow Sections, Steel Tubular Poles & Structures, Pump Fittings and Tube Well Fittings along with Zincalume Tanks.

Key Features of Zincalume Tanks

ZINCALUME TECHNOLOGY

The highest grade of zincalume steel, AZ150, is used in the fabrication of Zincalume Tanks. This grade is renowned for its durability and performance having a lifespan of up to 4 times that of galvanized steel. Our tanks are coated with hot galvanized AZ150 coating, which contains 43.5% Zinc, 55% Aluminium and 1.5% Silicon. This extensive research technology increases the corrosion resistance of our tanks by 30% to 40% compared to hot galvanized steel.

CORRUGATION TECHNOLOGY

The tanks are constructed with a robust corrugated profile, which is much stronger and more reliable than standard stiffeners. Our corrugation technology is uniform in pitch and depth making it a strong product, as it provides structural reinforcement and shock absorption in the event of earth movement or subsidence.

LINER

Our reinforced liner systems can handle water pressures up to 2kg/cm² and can hold a wide range of liquids. We have UV stabilized PVC liner which is made from reinforced multi-layered food grade anti-algae and is covered in woven multilayer nylon. Our liner is mainly used for installation in lightweight commercial and rural domestic tanks. Our PVC liner is composed of 3 bonded layers of polyvinyl chloride (vinyl chloride) fabric. Each layer bonds together to form one continuous layer. The PVC is inert which means that it does not affect the stored liquids.

PREFABRICATION

With our prefabrication approach, the tanks can be dismantled and moved as frequently as required.

Proudly Associated with Jal Jeevan Mission


DPL Star is manufacturing & installing Zincalume Tanks in far flung villages, supporting the Har Ghar Jal scheme by working with the Department of Drinking Water & Sanitation under the Jal Jeevan Mission of Government of India.



Why DPL Star Zincalume Tanks

TANK COMPARISON TABLE

Feature	Our Tank	MS Tank	RCC Tank	SS Tank	PVC Tank
Maintenance Required	✓ Not Required	✗ High	✗ Required	✓ Not Required	✗ High
Service Life	✓ 25+ Years	✗ 15+ Years	✓ 40+ Years	✗ 10+ Years	✗ 4+ Years
Painting Required	✓ Not Required	✗ Yes	✗ Yes	✓ No	✓ No
Corrosion Resistant	✓ Yes	✗ No	✓ Yes	✓ Yes	✓ Yes
Algae Resistant	✓ Yes	✗ No	✗ No	✓ Yes	✗ No
Easy To Relocate	✓ Yes	✗ Difficult	✗ Not Possible	✗ Difficult	✓ Yes
Lightweight	✓ Yes	✗ Heavy	✗ Very Heavy	✗ Heavy	✓ Yes
Food Grade Material	✓ Yes	✗ No	✗ No	✓ Yes	✗ No
Expandable / Modular	✓ Yes	✗ No	✗ No	✗ No	✗ No
Maintains Water Temperature	✓ Yes	✗ No	✗ No	✗ No	✗ No

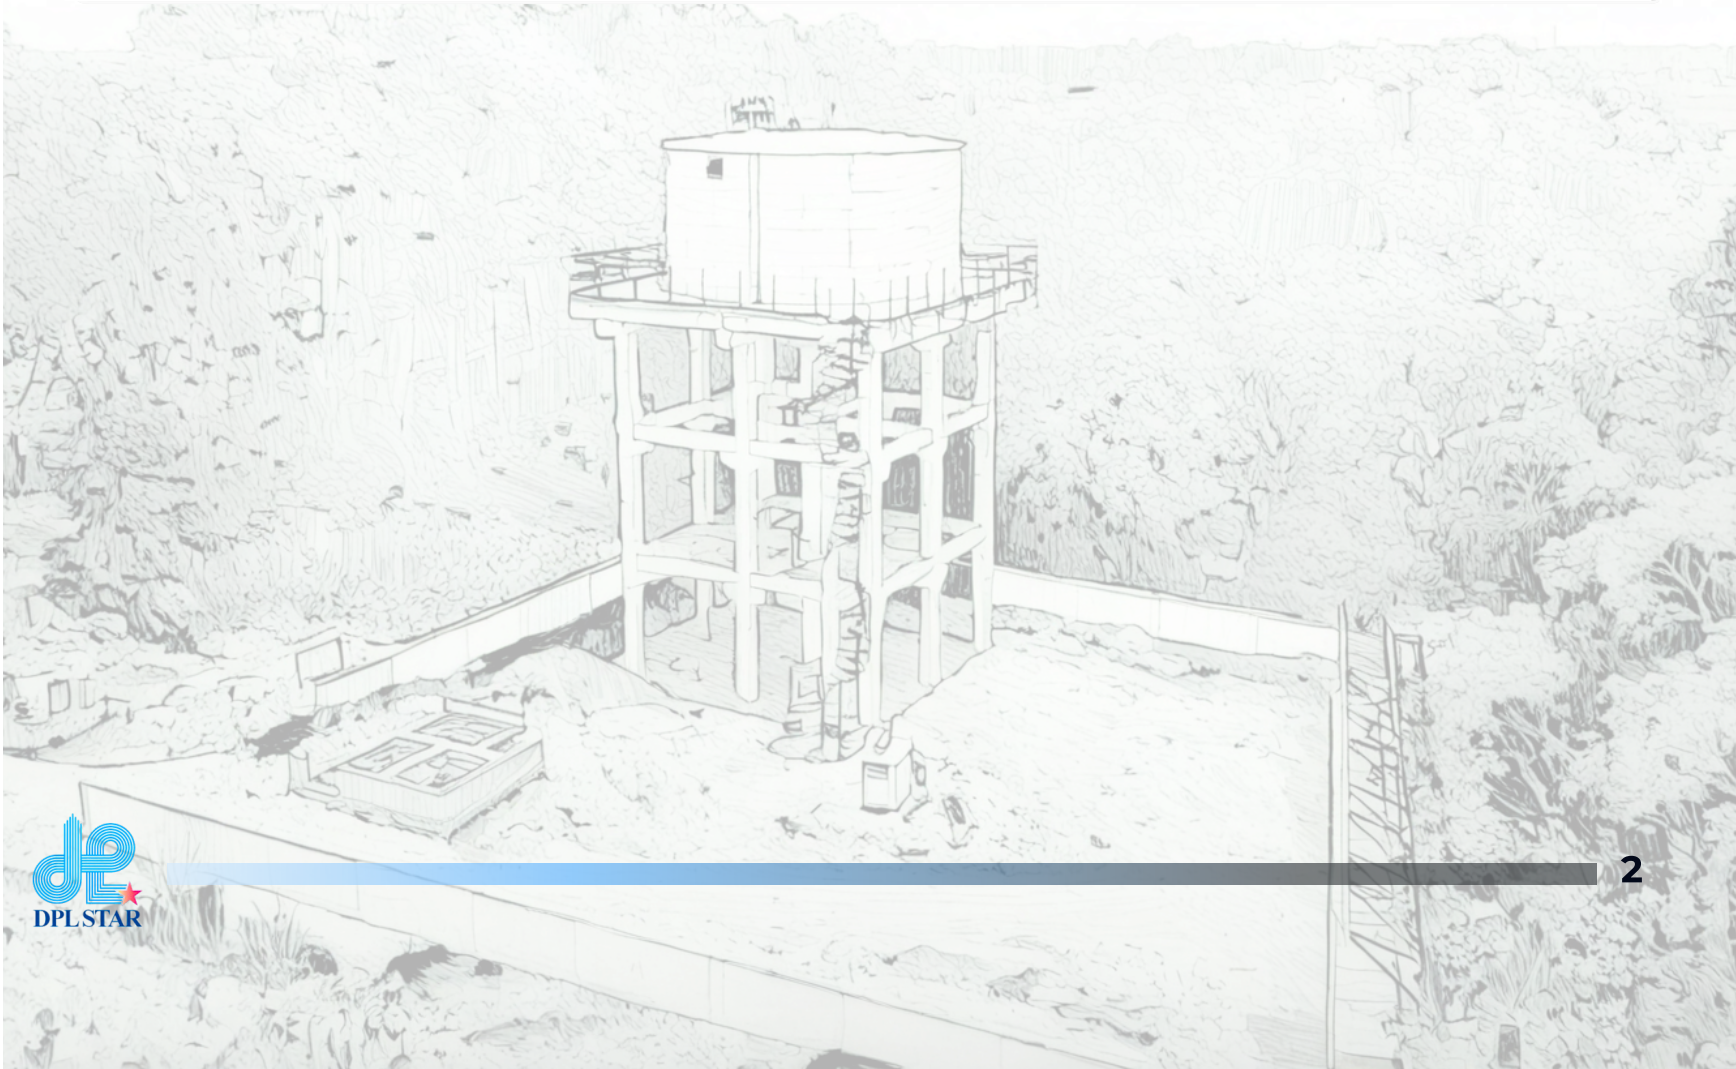

Zincalume Tank Part Description with Specifications

Sr.No	Parameter	Description
A	TANK BASIC DETAILS	
1	Design Life	Minimum 25 Years
2	Basic Wind Velocity	Average 50 m/sec as per IS: 875
3	Seismic Zone	ZONE II/III/IV/V
4	Specific Gravity	1.0
5	Temperature Range	-5 To + 70 Deg C.
6	Colors Available	Natural Silver
B	TANK WALL	
1	Type	Bolted Panelled Liner Tanks
2	Shape	Circular
3	Wind Load Bearing of Empty Tank	50m/sec
4	MOC of Tank Sheets	Zincalume/Galvalume (IS: 15961)
5	Composition of Coating	AL- 55%, Zn-43.5%, Si-1.5%
6	Coating Thickness	150 GSM (AZ150)
7	Color of Sheets	Natural Zinc Color
8	Thickness of Wall Sheet	Min 0.8mm and as per Design Standards
9	Mechanical Properties of Zincalume Sheet	Yield Strength-300 Mpa
10	Sheet Dimension (Wall & Roof)	3000x1120mm (Sheet Dimensions may changes as per detailed Designing)
11	Sheet Dimension (Wall & Roof)	Pitch 75mm Depth 17-18mm
12	Wall Sheet Tensile Strength	340 Mpa
C	ROOF SHEET	
1	Roof Type	Self-Supporting Dome Roof Conical Roof
2	MOC of Roof Sheet	Zincalume/Galvalume (IS:15961 AS:1397)
3	Thickness of Roof Sheet	Min - 0.47mm or As per requirement
4	Load Bearing Capacity of Roof	110 kg/m2
5	Roof Sheet Tensile Strength	500 - 550Mpa
6	Color of Sheets	Natural Zinc Color
7	MOC of Trusses for Roofing	MS Hot Dipped Galvanized 600 GSM
8	Sizes of Trusses for Roofing	As per design

Zincalume Tank Part Description with Specifications

Sr.No	Parameter	Description
D	TANK LINER	
1	MOC of Liner	Reinforced PVC, Food grade, UV Stabilized Anti Algae
2	Thickness of Liner	PVC-760 GSM or 890 GSM Depending on Capacity
3	Liner Strength	As per product Data Sheet (Min Warp 250 Kg/5cm & Weft 230 Kg/5cm)
4	Water Proofness Test	220 PSI for PVC
5	Method adopted for Liner Manufacturing and Testing	For Manufacturing : Leisure PVC welding Machine For Testing: Visual Inspection/Light Test & Hydro Test at Site. Hydro Test Shell be at Min 4 bar.
6	Bottom Protection Of Liner	Geo Textile
7	Thickness of Geo textile	0.3 Mm Compressed/3 Mm Non Compressed
E	NOZZLES	
1	MOC	MS HDG
2	NOZZLE Schedule	As Per IS 9523/IS 8329 (PN10 Flanges)
3	Nozzle Type	Plate Type
4	Nozzle Sizes and Quality	4 No's per Tank For 25-200 KL- 100 mmx2, 150 mmx2 for 250 KL onwards- 200mmx3, 100 mmx1 as per approved Design
F	NUT & BOLTS	
1	MOC	Hot Dipped Galvanized
2	GRADE	M-10 Grade 10.9
3	Protection of Nut & Bolts	PVC/Silicon Caps from Outside
G	FASTENERS	
1	MOC	Galvanized Iron
2	TYPE	Mechanical Type Chemical Type

Zincalume Tank Part Description with Specifications

Sr.No	Parameter	Description
H	TANK ACCESSORIES	
1	MOC Access Hatch on Doom Roof	Zincalume/Galvalume with lockable Lid (600 mm x 600 mm)
2	Ladder- Outside	External Straight Cage Ladder with Cage Starting at 2 Mtr Height
3	Internal Ladder	Nylone Rope Ladder With aluminium Steps
4	Air Vent	SS Turbine Vent
5	Level Indicator	Float & Board Type (Mechanical)
6	Gasket	According to flanges
I	TANKS ADDITIONAL ITEMS*	
1	Handrailing Posts	Vertical support members used to hold the handrailing system.
2	Handrailing Pipes (Top & Mid Rails)	Horizontal Pipes Provided For Personnel Safety Around Platforms.
3	Toe Guard	A protective plate at platform edges to prevent objects from falling.
4	Anodes	Sacrificial metal elements used for corrosion protection of steel tanks.
5	Lightning Arrestor	Device installed to protect the tank and equipment from lightning strikes.
6	Earthing Pit (Conventional Type)	Grounding system used to safely dissipate electrical fault current into the earth.
7	Radar / Ultrasonic Level Sensor	Instrument used to measure liquid level inside the tank without direct contact.
8	Manhole Railing	Safety railing provided around the manhole opening to prevent accidental falls.
9	Stiffeners	Structural members provided to increase strength and prevent deformation/buckling of tank panels or shell.
10	Wind Ring	Circular reinforcement ring provided to improve tank stability against wind loads.

TANKS ADDITIONAL ITEMS* The above items are outside the standard supply scope and may be offered additionally based on customer requirements and will be charged extra.

Benefits of Zincalume Tanks

High Capacity

The tanks manufactured by DPL Star have the water capacity ranging from 5kL to 5000kL.

Robust Fabrication

The tanks are also coated with hot galvanized AZ150 layers which contain 43.5% Zinc, 55% Aluminium & 1.5% Silicon.

Anti-Corrosion

The liner inside the tank has UV stabilized PVC sheet which have anti-algae & anti-corrosion properties.

Long Life Span


The pre-fabrication technology used in the manufacturing of Zincalume tanks gives it a long-life span of 25+ years.

No Maintenance


It is very interesting to know that Zincalume Tanks built by DPL Star need little or no maintenance.

Easily Expandable

These tanks are easy to expand, meaning that they can easily be dismantled for relocation, and then re-installed. The same tank can be expanded by adding extra layers of sheet over the existing structure.

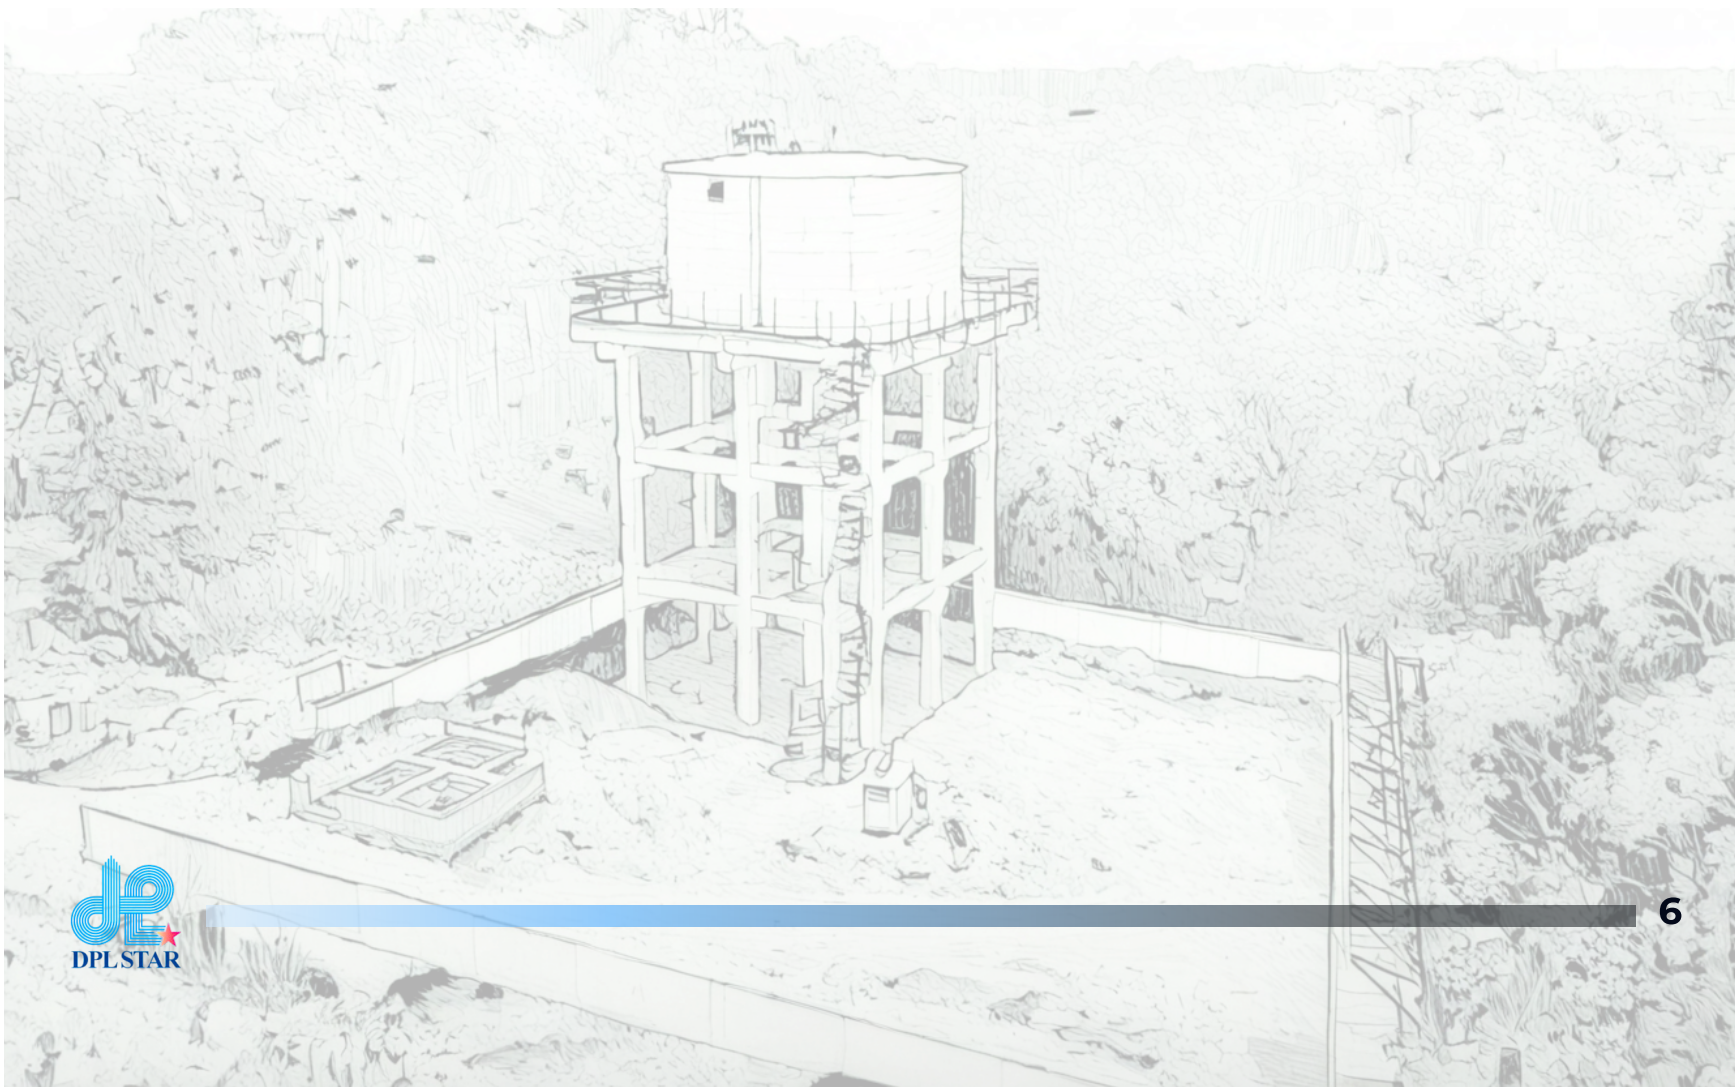

Our Presence

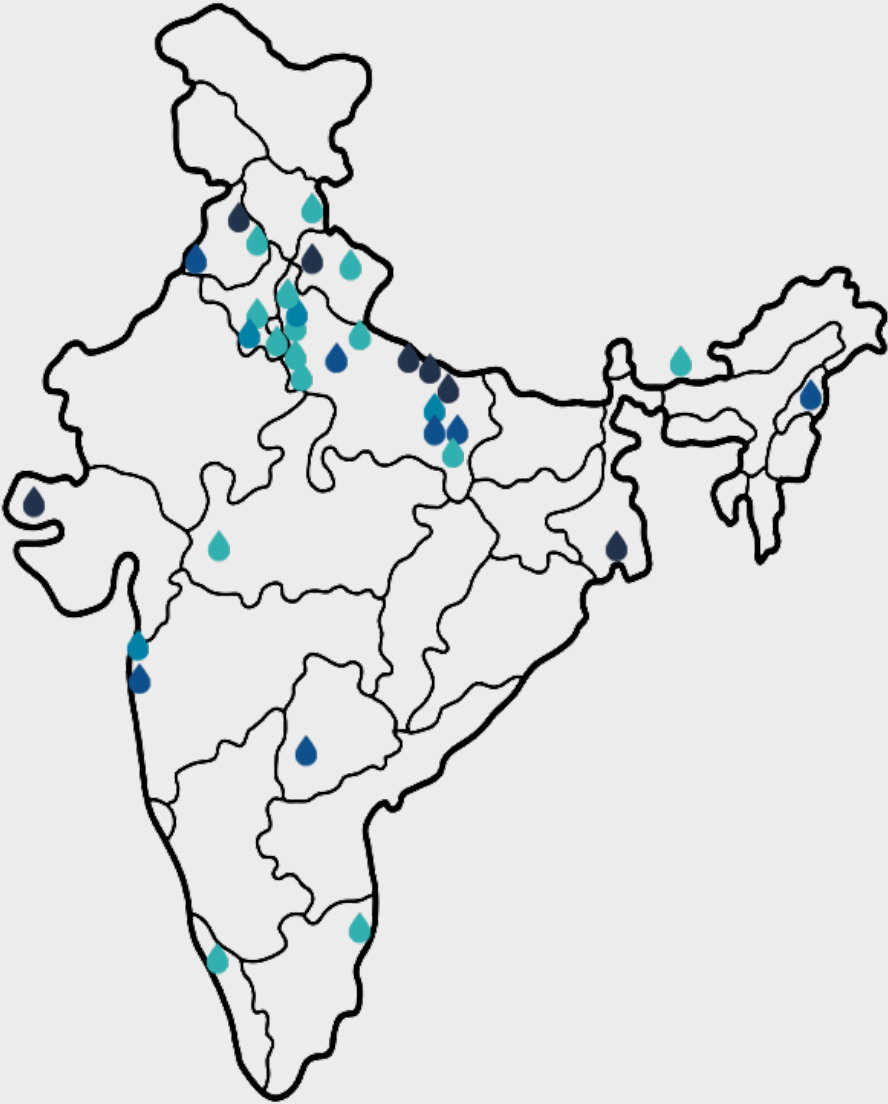

TANK CAPACITY	INSTALLATION LOCATIONS
 (5-100 KL)	Agra, Bareilly, Bhutan, Chennai, Faridabad, Ghaziabad, Gurugram, Indore, Joshimath, Kinnaur Kailas, Kozhikode, Mathura, Nagaland, Noida, Varanasi
 (101-200 KL)	Ayodhya, Dadar & Nagar Haveli, Greater Noida, Lalru, Rohtak
 (201-300 KL)	Abohar, Azamgarh, Hyderabad, Kanpur, Mumbai, Nizamabad
 (300+ KL)	Ambedkar Nagar, Balrampur, Hoshiarpur, Hyderabad, Kutch, Rudrapur, Shravasti

NOTE : The capacity mentioned for each location is the maximum volume of tank installed in that area.

Trusted Clients



Types of Products



Pre-fabrication bolted
Zincalume Tank



Grain Storage Silos`



GFS/GLS Tanks & Silos



Fusion Bond Epoxy Tanks
(FBEC Tanks)





Zincalume Tanks



Scan the QR code to watch video about the tank



टैंक के बारे में अधिक जानने के लिए QR कोड स्कैन करें

COMPLETE STORAGE SOLUTIONS



Website: www.zincalumetank.in

Phone: +91 9205600125

Email: info@dplstar.com

Factory Address: DPL Global Private Limited, A-58, Industrial Area, Sikandrabad, Bulandshahar, Uttar Pradesh – 203205

Office Address: Dadu Dayal House, C-101, RDC, Rajnagar Ghaziabad, Uttar Pradesh 201002