

A  
BACHELOR'S DEGREE IN TELECOMMUNICATION ENGINEERING

Bachelor's Thesis

ACADEMIC COURSE 2021/2022

# *Tree Inspection Kit*

## *handheld device*

AUTHOR:

Juan Del Pino Mena

SUPERVISED BY:

Sr. Andrés Roldán Aranda

DEPARTMENT:

Electronics and Computer Technology



UNIVERSIDAD  
DE GRANADA



Project title: TIK\_HandheldDevice.PrjPcb

Date: 2022-06-10 Revision: 0.6

Sheet 1 of 20

## A Introduction


The present project has as main objective the development of a handheld electronic device capable of measuring the MOE of wood from silviculture so its properties can be characterised.

The device is equipped with the electronics needed to measure the delay between two signals which come from two piezoelectric sensors nailed into a piece of wood. It can be a standing tree, a tree trunk or a wood board.

The transit time of a mechanic wave travelling through the longitudinal axis of the wood is related to the material rigidity and consequently with its MOE.


This device can also weight trunks to estimate its density by using a load cell.

At the right side you can see some renders of the PCB (version 0.5) which has been manufactured and tested.

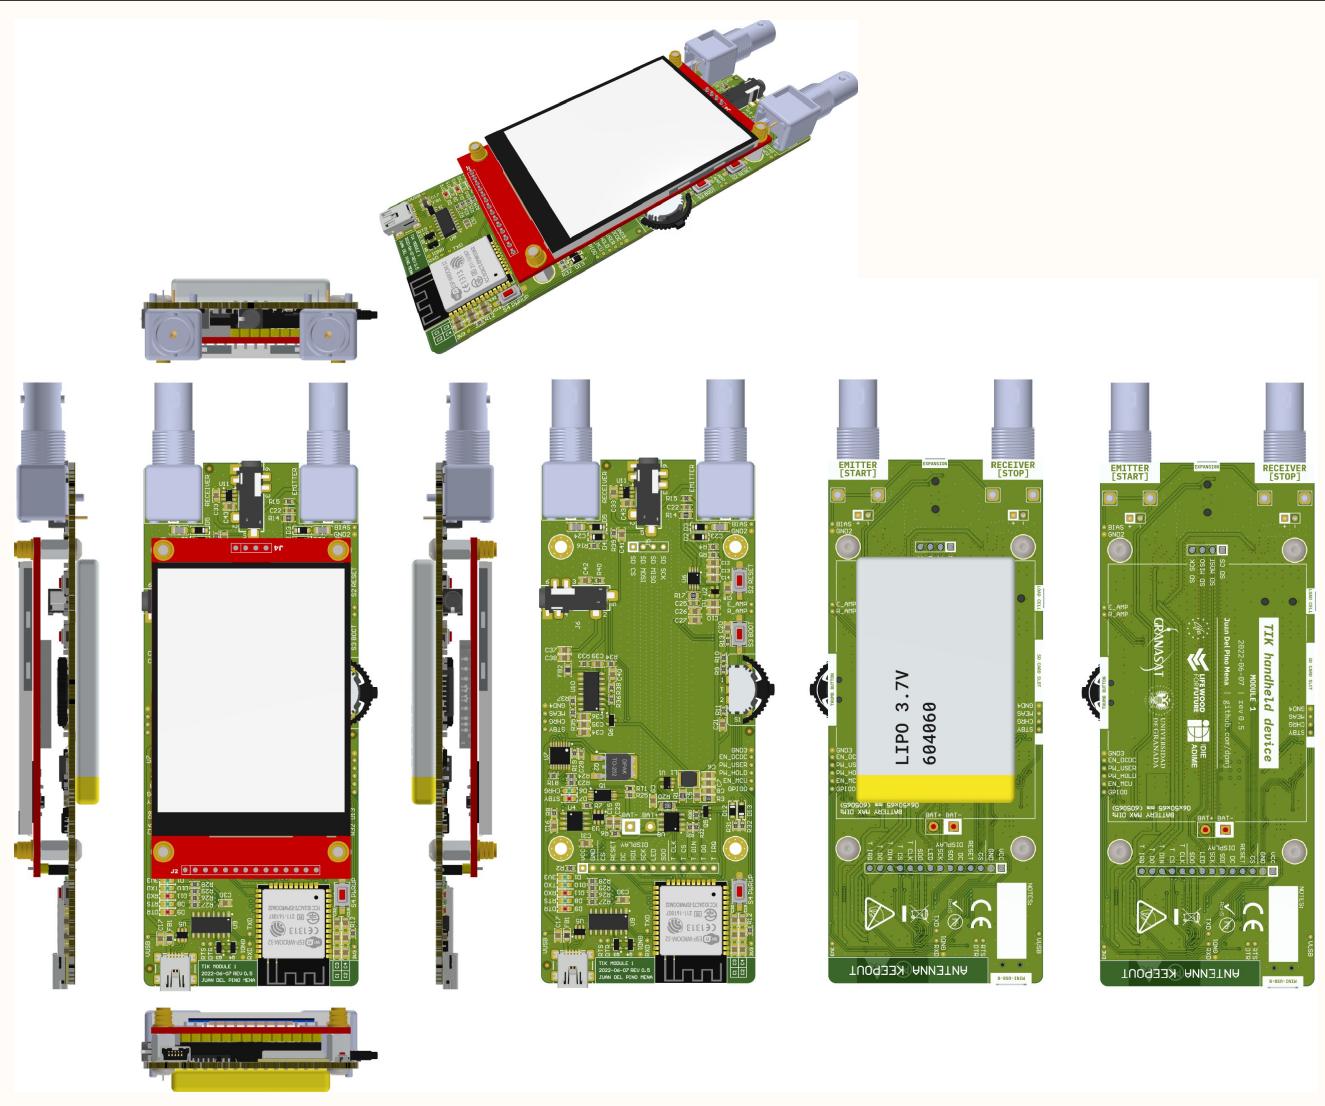

## D Tree Inspection Kit handheld device

A device capable of determining the microsecond delay between 2 signals coming from piezoelectric probes nailed into a tree, trunk or wood board. This allows the indirect calculus of the Modulus of Elasticity in a non-destructive way.

Designer's signature  
  
Supervisor's signature  


Sheet title: **Introduction and PCB renders**

Project title: **TIK\_HandheldDevice.PjPcb**

Designer: **Juan Del Pino Mena**

Date: **2022-06-10** Revision: **0.6**

Sheet 2 of 20

Supervisor:  
Sr. Andrés Roldán Aranda  
Dpto. Electrónica y Tecnología  
de Computadores  
University of Granada  
C/Fuente Nueva, s/n, 18001  
Granada, Granada, Spain



## Index

SECTION	SHEET
0. Cover .....	1
1. Introduction & PCB 3D renders .....	2
2. Changelog & Index .....	3
3. PCB characteristics, trace width & vias .....	4
4. System block diagram .....	5
5. ESP32 MCU .....	6
6. Power rails .....	7
7. Battery and current sense .....	8
7.1. Charger variant #1: Ni-MH .....	9
7.2. Charger variant #2: Li-Ion .....	10
8. USB port .....	11
9. Auto programming .....	12
10. Buttons .....	13
10.1. Bootsel, reset, multipurpose .....	13
10.2. Power-up button .....	14
11. TFT LCD Display .....	15
12. Signal conditioning .....	16
12.1. Conditioning circuit .....	16
12.2. Circuit simulations .....	17
14. Expansion port .....	18
13. Load cell amplifier .....	19
15. Power budget & battery selection .....	20
16. Bill of materials .....	21
17. 3D PCB (PDF3D) .....	22
18. PCB layout prints .....	23
18.1. Top .....	23
18.2. Bottom .....	23
19. Mechanical schematics .....	24
19.1 Isometric views .....	24
19.2 Part views & measurements .....	25
19.3 Layer stackup, top/bottom, drills ..	26

## Changelog

### # Revision 0.6 | 2022-06-08

#### NEW

- Completed documentation (final version)
- Added a DCDC converter substitute

#### FIXED

- Changed 3D models to fit the real board.

### # Revision 0.5 | 2022-06-07 [MANUFACTURED VER.]

#### NEW

- Added multilayer connector to the battery
- Added a power budget & battery selection
- Adjusted the charging current resistor value of the TP4056.
- Added a expansion port and load cell connectors footprints. (4-pole jacks).
- Added support for jack plug switches.
- Applied JLCPCB design rules via .rul file.
- All vias are tented to avoid corrosion.
- Added detailed explanation of trace design with Saturn PCB toolkit.
- Applied a nice format to the BOM.
- Added an introduction, updated renders.
- Added mechanical drawings with 3D isometric views, part drawing views, measurements, layer stackup, drills, etc.
- Added Gerber and NC Drills fabrication jobs for ordering PCB and its stencil.

#### FIXED

- Corrected LEDs' series resistors values
- Relocated the battery below the PCB. This makes the product wider, but solves a lot of space constraints.
- Removed VBIAS plane to avoid splitting planes, for EMI considerations.
- A lot of cosmetic improvements and corrections on PCB top & bottom overlays.
- Replaced logos and added new ones.
- Improved routing.
- A few cosmetic changes on the schematic sheets and cover.
- Removed rooms.
- NTC connector changed, now it's meant for soldering the NTC cable from a battery.

### # Revision 0.4 | 2022-05-22

#### NEW

- Added parameters for fabrication groups and fabrication order
- Added a Bill of Materials. The one in this document is simple. Refer to the manually configured BOM of this project.
- Added a PCB track legend and description for visible layers.
- Given more info about ESP32 pins.
- Added a precise block diagram.
- Added support for an extension port.
- Added a HX711-based load cell acquisition system.

#### FIXED

- Corrected I2C pins on the ESP32.
- Removed "same length" directive on UART and I2C nets.
- Improved routing.
- Removed via shielding on I2C traces.
- Solved all DRC warnings and errors.
- Avoided disrupting the ESP32's strapping pins default configuration during boot.
- Corrected a pin assignment error between the schematic symbol and the footprint of the MDJ210 PNP BJT transistor.
- Removed PCB cutouts.

### # Revision 0.3 | 2022-04-28

#### NEW

- Changed rotary encoder vertical for horizontal, side-placed, SMD type multipurpose 'thumb button'.
- Added a explanation of PCB trace widths.
- Adopted JLCPCB design rules.
- Full PCB component placement and routing, with no important DRC messages.
- Added silkscreen logos to the back of the PCB, as well as port markings, information and regulatory graphics: CE, WEEE, ESD sensitive warning and RoHS.

#### FIXED

- Changed numerical test point designators to net/rail names, to be quickly identified.
- Changed LEDs footprints.
- Corrected a faulty connection on the DW01A Lithium battery protection IC.
- The MCU has no longer the possibility to stop battery charging. This is because the ENABLE signals required by the chargers work on 5V and this could cause damage to the ESP32.

### # Revision 0.2 | 2022-04-23 [FIRST PCB]

#### NEW

- Schematic hierarchy and block diagram.
- Initial PCB layout
- Added a vertical rotary encoder. PCBLib contains a 90-degree alternative.
- Added an alternative Ni-MH charger.
- Added footprints for all neccessary components to the PCB Library.
- Added explanatory footprints and photos to schematic ICs.
- Added board mounting holes (making use of the TFT LCD module mounting hole positions)
- Added test points
- Added fiducials
- Added a power-up button
- Added net classes and parameter sets to most important nets: power, digital communications, analog signals, etc.

#### FIXED

- Removed errors in the lithium charger
- Removed errors in the adequation circuit
- Changed ESD USB Protection IC.
- Changed some adequation circuit values and made topology more clear.
- Revised all passive components values and sizes to match existing component disponibility.
- Corrected various pin definitions from the ESP32-WROOM-32D symbol

### # REVISION 0.1 | 2022-04-01 [FIRST VERSION]

#### NEW

- TFT LCD / SD card connections.
- First adequation circuit iteration
- LiPo battery charger with TP4056
- Auto programming circuit.


#### FIXED

--

## Revision history and document index


Detailed changelog and complete document sheets index.

All along the schematic pages, a sheet title and description will be written on this corner.



Sheet title: **Changelog and document index**

Project title: **TIK\_HandheldDevice.PxjPcb**



Desinger: **Juan Del Pino Mena**

Date: **2022-06-10** Revision: **0.6**

Sheet 3 of 20

Supervisor:  
Sr. Andrés Roldán Aranda  
Dpto. Electrónica y Tecnología  
de Computadores  
University of Granada  
C/Fuente Nueva, s/n, 18001  
Granada, Granada, Spain



## SPI traces (@ 80 MHz, digital)

**Er Effective**

Conductor Width (W)  
0,254 mm

Conductor Height (H)  
1,50 mm

Frequency (MHz)  
80

Note:  
This calculator uses a complex formula presented by E. Hammarstad and O. Jensen, not the simplified formula presented by the IEC-2141A.

10-mil "default" trace width

Er Effective Information

Er Effective  
2,8905

Wavelength Calculator

Input Method  
 Frequency  
Frequency  
80 MHz  
Er Eff  
2,8905

Wavelength Information  
 Period  
 Er Effective Information  
Speed of Light

Crossstalk Calculator

Signal Rise Time  
5 ns

Signal Voltage  
3,3 V

Coupled Length  
80 mm

Conductor Spacing (S)  
0,254 mm

Conductor Height (H)  
1,5 mm

5 ns as a possible rise time of the SPI signal

$\lambda = \frac{C}{f * \sqrt{(ErEff)}}$

Wavelength Divide  
1/20 Wave Length  
11.02083 cm

Er Eff Calculator

CrossTalk Coefficient  
0,24555 dB

Coupled Voltage  
3,20801 Volts

Send to Wavelength Calculator

Note:  
Enter an Er Eff of 1 for wavelength in air.

△ SPI traces should not be longer than this result to avoid a transmission line. Note that this is rather a pessimistic value, as we are dividing the real wavelength by 20. Er Eff has been estimated with the expected fabrication characteristics.

△ As you can clearly see, a 2-layer, 1-6 mm height PCB is not great for signal integrity. We have great crosstalk between SPI lines. A common solution is to include GND copper between SPI lines with good connection to ground. This can be achieved by via shielding.

## Sensor analog signals (1 MHz max BW)

**Wavelength Calculator**

Input Method  
 Frequency  
Frequency  
1 MHz  
Er Eff  
3,0260

Wavelength Information  
 Period  
 Er Effective Information  
Speed of Light

**Conductor Impedance**

Conductor Width (W)  
0,8 mm

Conductor Height (H)  
1,5 mm

Conductor Gap (G)  
0,254 mm

W/H = 0,533

$Z_0 = 60.6257 \text{ Ohms}$

$\lambda = \frac{C}{f * \sqrt{(ErEff)}}$

Wavelength Divide  
1/20 Wave Length  
861.70030 cm

**Crosstalk Calculator**

Signal Rise Time  
2000 ns

Signal Voltage  
3,3 V

Coupled Length  
150 mm

Conductor Spacing (S)  
0,254 mm

Conductor Height (H)  
1,5 mm

Estimated signal rise time. See simulations

CrossTalk Coefficient  
-0,19079 dB

Coupled Voltage  
0,03228 Volts

△ Er\_Eff calculated with a 0.8 mm wide trace. Trace length will not be a problem.

△ We cannot totally match the 50-Ohm impedance of the cable but are fairly close. Besides, this is not by any means critical in a low-speed design such as these, and there's no impedance control on the end of the lines

## Via characteristics

**Via Characteristics**

Via Hole Diameter  
0,3 mm

Internal Pad Diameter  
0,6 mm

Ref Plane Opening Diam  
1,016 mm

Via Height  
1,6 mm

Via Plating Thickness  
0,035 mm

IPC-2152 with modifiers mode

Via Capacitance  
0,5893 pF

Via DC Resistance  
0,00086 Ohms

Power Dissipation  
0,00326 Watts

Via Inductance  
1,2993 nH

Resonant Frequency  
5751,849 MHz

Conductor Cross Section  
0,0368 Sq.mm

Via Impedance  
46,956 Ohms

Step Response  
30,4373 ps

Via Current  
1,9514 Amps

△ We are using only one type of via. We are far from the resonant frequency and the step response is very fast. Parasites are very low. In DC it can stand the required amount of current. Nevertheless, it should be always used various in parallel to ensure a low resistance path for power and returning currents.

## 0.254 mm (10 mil) traces

**Conductor Characteristics**

Solve For  
 Amperage  
 Help  
 Conductor Width  
 Conductor Length  
 Parallel Conductors?  
 Yes

Plane Present?  
 No  
 Yes

Conductor Width  
0,254 mm

Conductor Length  
10 mm

Options

Units  
 Imperial  
 Metric

Substrate Options  
Material Selection  
FR-4 STD

Bare PCB  
18um  
32um  
53um  
70um  
106um  
142um  
160um  
180um  
200um

PCB Thickness  
1,6 mm

Frequency  
 DC  
80 MHz

Distance to Plane  
1,5 mm

IPC-2152 with modifiers mode  
Etch Factor: 1:1

Conductor DC Resistance  
0,01529 Ohms

Skin Depth  
7,37972 um

Power Dissipation  
0,03469 Watts

Conductor Cross Section  
0,0129 Sq.mm

Skin Depth Percentage  
21,08 %

Power Dissipation in dBm  
15,4023 dBm

Voltage Drop  
0,0230 Volts

Conductor Current  
1,5064 Amps

Plating Thickness  
0,5oz / 1oz  
0z

Temp Rise (°C)  
10

Temp in (°F)  
18,0

Ambient Temp (°C)  
25

Temp in (°F)  
77,0

Plane Thickness  
0,5oz / 1oz  
0z

Print  
Solve!

△ Trace AC/DC characteristics in one centimetre of trace for a given frequency/DC and for a trace temperature increase of 10 °C over a standard ambient temperature of 25°C in a FR-4 dielectric.

0.254 mm (10 mil) is the default trace width. It's thin so we can save space, but has the worst DC characteristics and should not be used for power. These are the kind of traces used by the SPI bus. The skin depth is not optimal but this will depend on frequency and again, AC current is not a critical aspect here. It's a "good enough" approach.

## 0.35 mm traces

**Conductor Characteristics**

Solve For  
 Amperage  
 Help  
 Conductor Width  
 Conductor Length  
 Parallel Conductors?  
 Yes

Plane Present?  
 No  
 Yes

Conductor Width  
0,35 mm

Conductor Length  
10 mm

Options

Units  
 Imperial  
 Metric

Substrate Options  
Material Selection  
FR-4 STD

Bare PCB  
18um  
32um  
53um  
70um  
106um  
142um  
160um  
180um  
200um

PCB Thickness  
1,6 mm

Frequency  
 DC  
1 MHz

Distance to Plane  
1,5 mm

IPC-2152 with modifiers mode  
Etch Factor: 1:1

Conductor DC Resistance  
0,01005 Ohms

Skin Depth  
66,00620 um

Power Dissipation  
0,03710 Watts

Conductor Cross Section  
0,0196 Sq.mm

Skin Depth Percentage  
100%

Power Dissipation in dBm  
15,6940 dBm

Voltage Drop  
0,0193 Volts

Conductor Current  
1,9218 Amps

Information  
Total Copper Thickness 70 um  
Via Thermal Resistance N/A

Print  
Solve!

△ 0.35 mm traces are used by connecting power pins to the power net in low-power components whose pins are very close together and cannot fit a trace of more width without breaking design rules.

This trace width has good properties and can be used even for low-speed analog signals if needed.

## 0.5 mm traces

**Conductor Characteristics**

Solve For  
 Amperage  
 Help  
 Conductor Width  
 Conductor Length  
 Parallel Conductors?  
 Yes

Plane Present?  
 No  
 Yes

Conductor Width  
0,5 mm

Conductor Length  
10 mm

Options

Units  
 Imperial  
 Metric

Substrate Options  
Material Selection  
FR-4 STD

Bare PCB  
18um  
32um  
53um  
70um  
106um  
142um  
160um  
180um  
200um

PCB Thickness  
1,6 mm

Frequency  
 DC  
1 MHz

Distance to Plane  
1,5 mm

IPC-2152 with modifiers mode  
Etch Factor: 1:1

Conductor DC Resistance  
0,00654 Ohms

Skin Depth  
66,00620 um

Power Dissipation  
0,03974 Watts

Conductor Cross Section  
0,0301 Sq.mm

Skin Depth Percentage  
100%

Power Dissipation in dBm  
15,9921 dBm

Voltage Drop  
0,0161 Volts

Conductor Current  
2,4647 Amps

Information  
Total Copper Thickness 70 um  
Via Thermal Resistance N/A

Print  
Solve!

△ This is an optimal width in terms of area/specs for power delivery as it can withstand a lot of current (more than the system will continuously need) with low losses.

## 0.8 mm traces

**Conductor Characteristics**

Solve For  
 Amperage  
 Help  
 Conductor Width  
 Conductor Length  
 Parallel Conductors?  
 Yes

Plane Present?  
 No  
 Yes

Conductor Width  
0,8 mm

Conductor Length  
10 mm

Options

Units  
 Imperial  
 Metric

Substrate Options  
Material Selection  
FR-4 STD

Bare PCB  
18um  
32um  
53um  
70um  
106um  
142um  
160um  
180um  
200um

PCB Thickness  
1,6 mm

Frequency  
 DC  
1 MHz

Distance to Plane  
1,5 mm

IPC-2152 with modifiers mode  
Etch Factor: 1:1

Conductor DC Resistance  
0,00385 Ohms

Skin Depth  
66,00620 um

Power Dissipation  
0,04325 Watts

Conductor Cross Section  
0,0511 Sq.mm

Skin Depth Percentage  
100%

Power Dissipation in dBm  
16,3599 dBm

Voltage Drop  
0,0129 Volts

Conductor Current  
3,3503 Amps

Information  
Total Copper Thickness 70 um  
Via Thermal Resistance N/A

Print  
Solve!

△ This trace width is employed by the analog signals to maintain good signal integrity at low line impedance.  
It can also be used as a power main bus for ensuring low power losses across a distance and for devices with a pulsed, aggressive power consumption such as the ESP32 and the LCD.

## Trace & via characteristics

Trace width based on results from PCB Toolkit by Saturn PCB Design INC.

Used JLPCB 2-layer, FR-4, 1.6 mm height, 35 um conductor height (1 oz/ft<sup>2</sup>) board characteristics as reference.


Designer's signature  
Juan Del Pino Mena

Sheet title: **Trace width design**  
Project title: **TIK\_HandheldDevice.PjtPcb**

Supervisor's signature  
Sr. Andrés Roldán Aranda

Dpto. Electrónica y Tecnología de Computadores  
University of Granada  
C/Fuente Nueva, s/n, 18001  
Granada, Granada, Spain



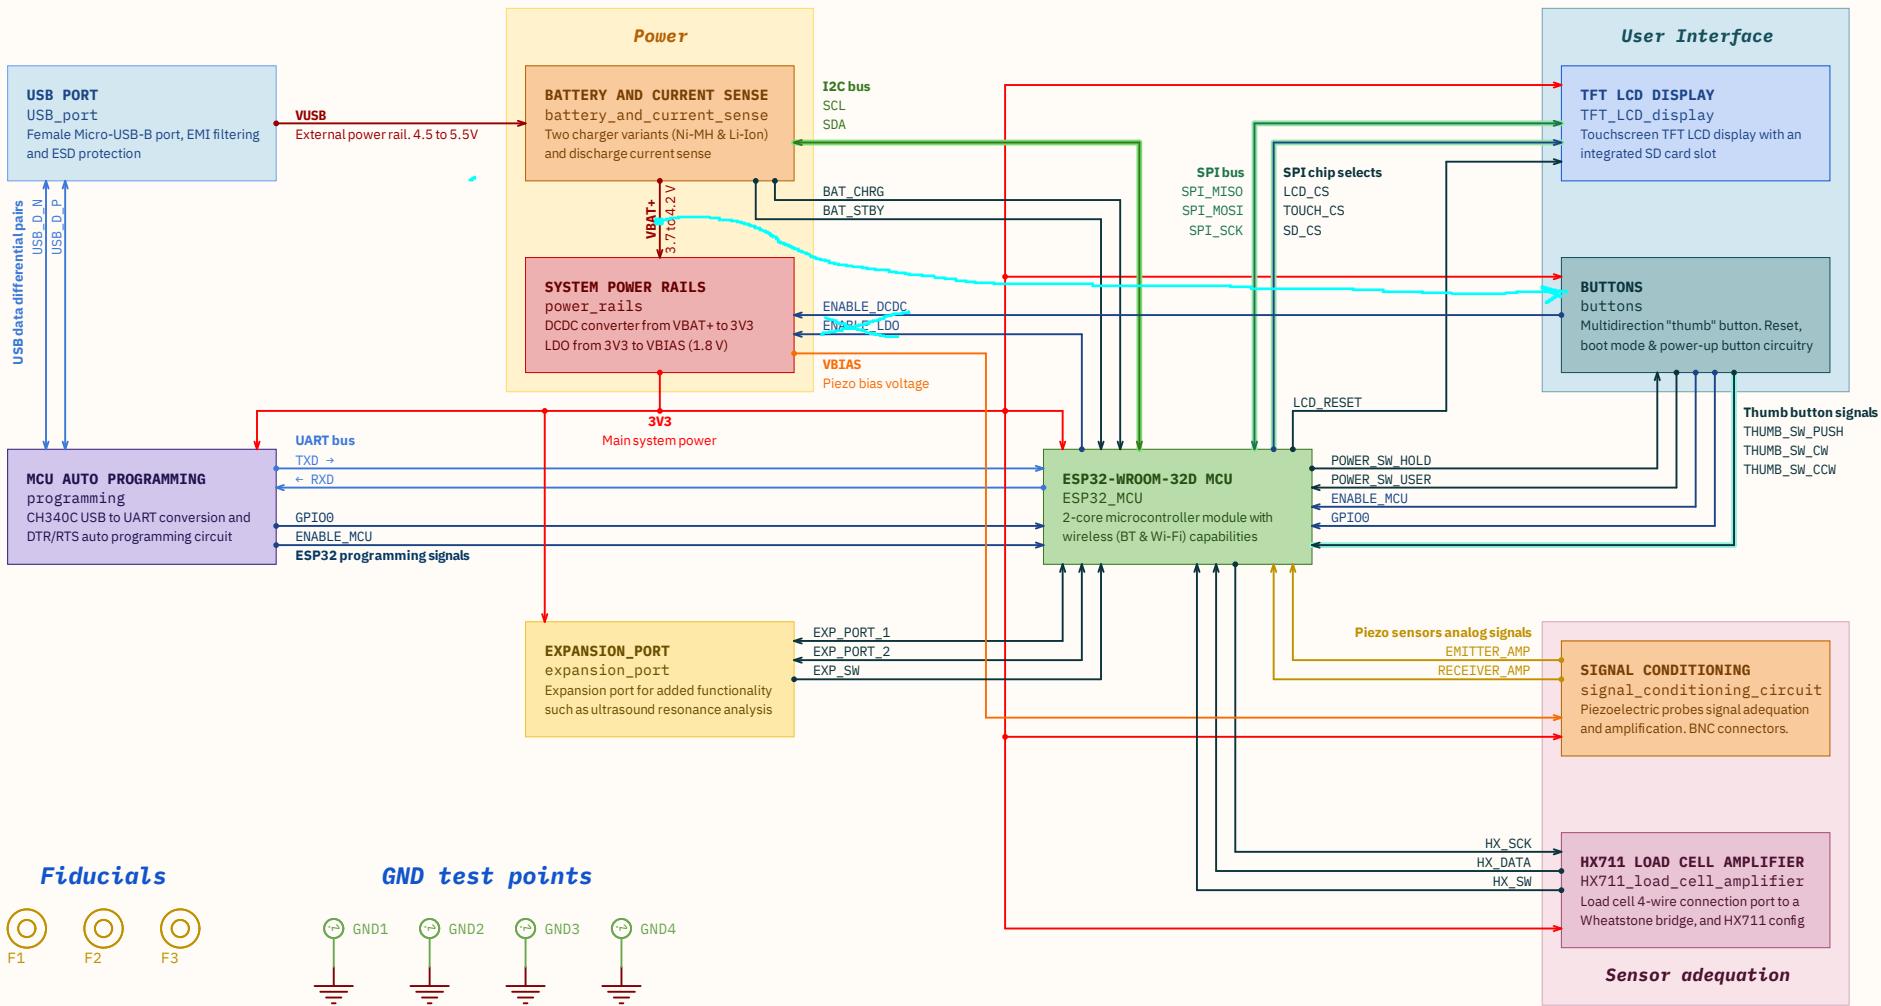

## System blocks organization and connections

The project's global block diagram. Arrows show how modules are interconnected and include net names. PCB includes 3 fiducials for fabrication purposes. GND test points are distributed along the PCB for easy access.

Designer's signature  
Supervisor's signature

Sheet title: System blocks organization and connections

Project title: TIK\_HandheldDevice.PjPcb

Designer: Juan Del Pino Mena


Date: 2022-06-10

Revision: 0.6

Sheet 5 of 20


Supervisor:  
Sr. Andrés Roldán Aranda  
Dpto. Electrónica y Tecnología de Computadores  
University of Granada  
C/Fuente Nueva, s/n, 18001  
Granada, Granada, Spain



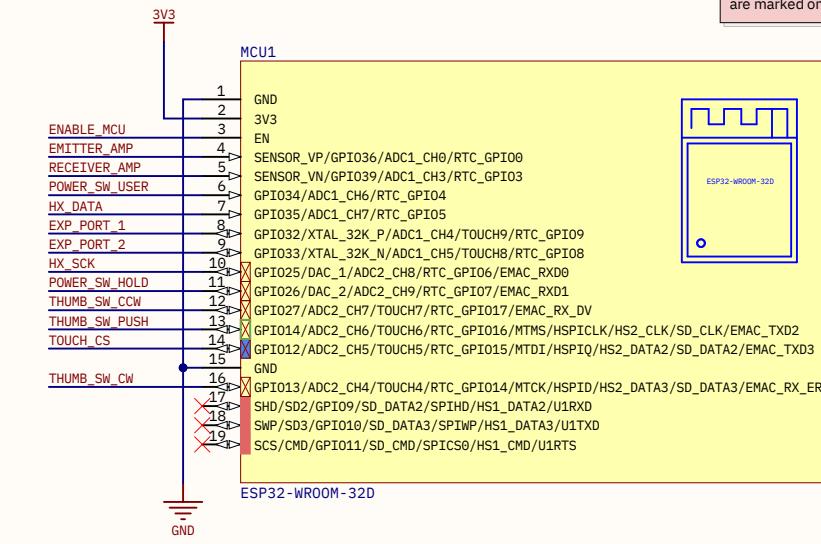

Some ESP32's pins behave in a way that prevent using them freely. They are marked on the legend below.

- Strapping pins (boot parameters selection)
- Connected to internal SPI flash
- [USAGE NOT RECOMMENDED]
- ADC2 peripheral unusable if Wi-Fi is ON
- Outputs PWM/debug info at boot

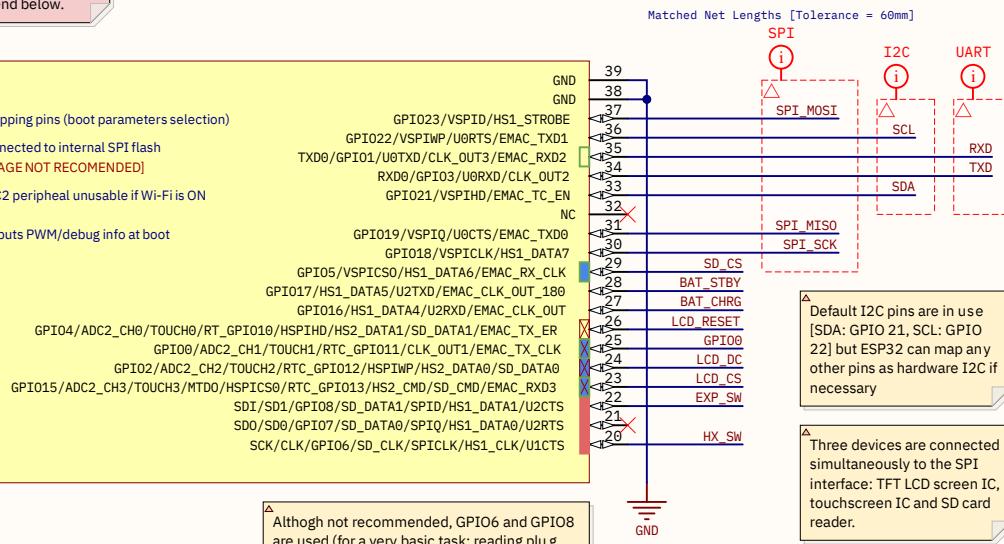

Strapping pins digital state are registered during reset and modify the boot sequence parameters according to the [ESP32 datasheet, table 5, page 21]. We must make sure that if pull-up/down resistors are connected to these pins (i.e for buttons) they do not alter the default configuration unintentionally.

Following the [ESP32-WROOM-32D datasheet, page 9] GPIO6 to GPIO11 (pins 17 to 22) will remain floating as they are connected to the integrated SPI flash memory and its usage is not recommended for other uses.

Voltage of Internal LDO (VDD_SDIO)			
Pin	Default	3.3 V	1.8 V
MTDI	Pull-down	0	1
Booting Mode			
GPIO0	Pull-up	1	0
GPIO2	Pull-down	Don't-care	0
Enabling/Disabling Debugging Log Print over UOTXD During Booting			
Pin	Default	UOTXD Active	UOTXD Silent
MTDO	Pull-up	1	0
Timing of SDIO Slave			
Pin	Default	FE Sampling FE Output	RE Sampling FE Output
MTDO	Pull-up	0 0	1 1
GPIO5	Pull-up	0 1	0 1

Also, the ADC2 peripheral is not usable while using Wi-Fi or Bluetooth and should be left unused if not necessary.  
Digital I/O on those pins while on Wi-Fi or BT is fine.



## ESP32-WROOM-32D MCU, Wi-Fi + Bluetooth module

This module integrates an ESP32-D0WD chip, a 240 MHz, dual-core processor with Wi-Fi and Bluetooth capabilities. This sheet describes its hardware configuration and I/O pins

Designer's signature  
Supervisor's signature

Sheet title: **ESP32-WROOM-32D MCU**  
Project title: **TIK\_HandheldDevice.PjPcb**

Designer: **Juan Del Pino Mena**

Date: **2022-06-10** Revision: **0.6** Sheet 6 of 20


Supervisor:  
Sr. Andrés Roldán Aranda  
Dpto. Electrónica y Tecnología de Computadores  
University of Granada  
C/Fuente Nueva, s/n, 18001  
Granada, Granada, Spain



### 3.3 V rail: main system power

Typical Application Circuit. [AP3429/A datasheet, page 2]  
with some values modified as needed and/or part availability.  
Capacitors should be placed close to the chip and circuit should be traced in short loops.  
Feedback voltage  $V_{FB}$  is regulated at 0.6 V.


Resistors are adjusted as a voltage divider. So, if 3.3V are needed at the converter output:  
 $V_{FB} = 0.6V = V_{out} \cdot (R2)/(R1+R2)$   
Thus,  $R2 = 2/9 \cdot R1$   
Resistor values must be high (kOhms) in order to maintain a low power consumption on the feedback circuit.

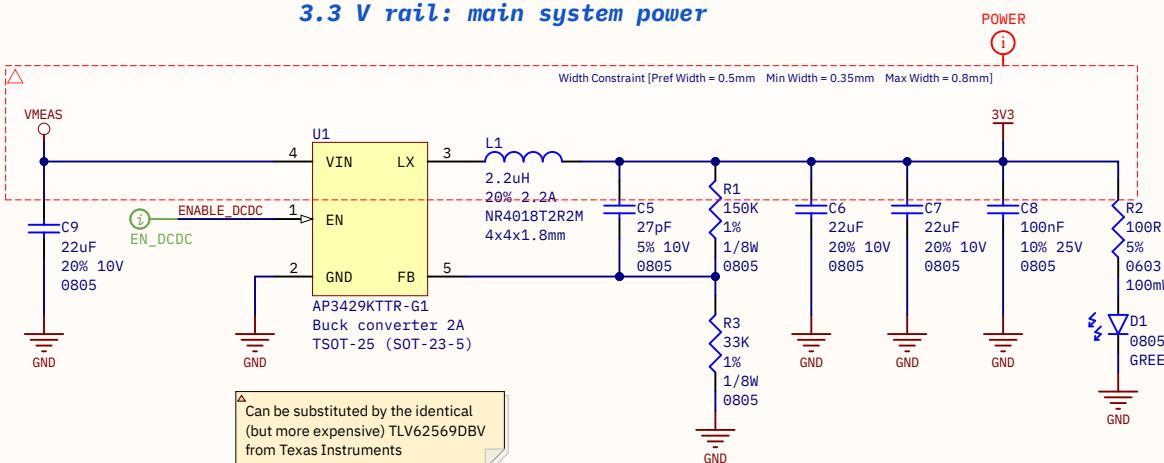



Real model:



Footprint:




### 1.8 V rail: Vbias for signal conditioning circuit

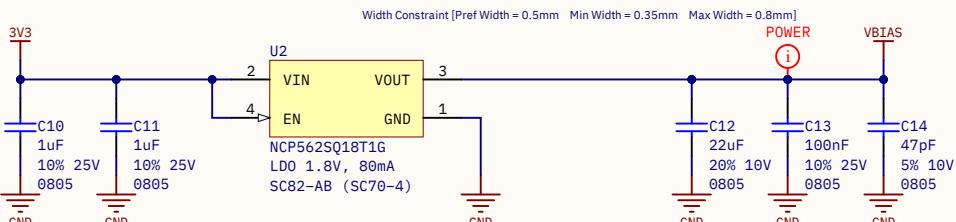

### Optional 1V8 rail bypass jumpers

IMPORTANT:  
1V8 rail is bypassable by soldering these optional 0-ohm resistors. This is for experimenting with different voltages and if it affects the overall performance of the acquisition circuit.

Do NOT connect both OR resistors at the same time or it will jump VCC and GND. And keep the LDO disabled at all times.

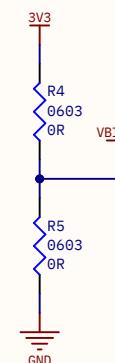

This can also be used to insert a voltage divider, i.e.: if you want to reduce the rail voltage to VCC/2 you only have to add two >= 10 KOhm 0603 resistors. Just keep in mind that voltage won't be as stable as in a LDO as it will be greatly dependent on the load impedance.

If you do this, populate the LDO's output caps, so VBIAS it behaves as a small-signal GND.

## Power rails

Battery DC/DC step-down converter and Vbias for signal conditioning circuit. 3V3 is the main system power and can deliver up to 2 amps. VBIAS is only for polarization of the probes and won't draw much current.

Designer's signature  
Supervisor's signature

Sheet title: Power rails

Project title: TIK\_HandheldDevice.PjPcb


Designer: Juan Del Pino Mena

Date: 2022-06-10 Revision: 0.6

Supervisor:  
Sr. Andrés Roldán Aranda  
Dpto. Electrónica y Tecnología de Computadores  
University of Granada  
C/Fuente Nueva, s/n, 18001  
Granada, Granada, Spain



## Battery output current sense and voltage monitor. Charger selection jumper. Battery thermistor

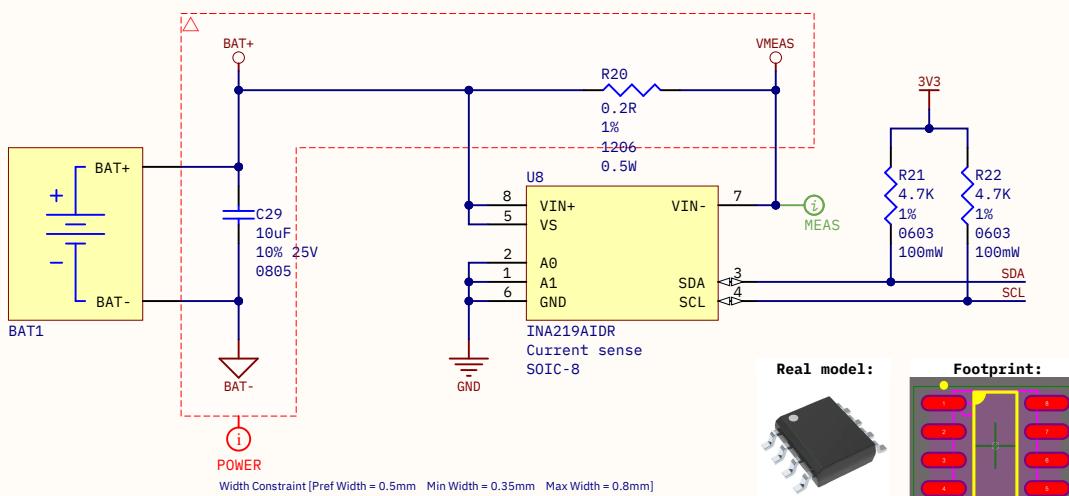


△ I2C bus termination resistors


△ Device's I2C address: 100000 (0x20) [INA219 datasheet, page 10, table 2]

△ All the current that passes by the battery also goes through the current sense resistor. When it's positive means that the battery is discharging and when it's negative means that it's charging. INA219 also reports the battery voltage.

This way we can monitor via software the energy the battery receives and supplies, building a BMS (Battery Monitoring System)



△ Battery NTC Thermistor, shared by both chargers. If not integrated onto the battery itself (third cable), short the pads.



△ IMPORTANT: jumper for charger selection.

The battery connector is shared by the two possible chargers. However, on the Lithium charger BAT- is NOT connected to the system's global GND; but in the NiMH charger it is.

So, jump these pads ONLY IF USING THE NiMH charger.

## Battery charging circuit variants

△ Two circuit variants are implemented BUT NOT USED SIMULTENEOSLY. Only one must be populated at a time.  
The usage of one over the other will come by component disponibility.

**CHARGER VARIANT #1: NiMH**  
**battery\_charger\_Ni\_MH**  
Charger to populate if battery chemistry is Nickel-Metal Hydride


**CHARGER VARIANT #2: Li-Ion**  
**battery\_charger\_Li-Ion**  
Charger to populate if battery chemistry is Lithium-Ion or Lithium-Polymer

## Charging status indicator

△ These signals come from both charging IC's.

△ They are status outputs that are normally on high impedance and they are pulled LOW when activated.

We can use these pins to turn on some LEDs and to notify the microcontroller of the charging status.

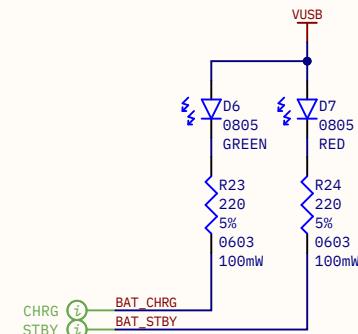

## Battery and current sense

Two circuit variants that will be implemented but not used simultaneously. The usage of one over the other will come by component disponibility. INA219 current sensor is independent and common for both systems.

Designer's signature   
Supervisor's signature

Sheet title: **Battery and current sense**

Project title: **TIK\_HandheldDevice.PjPcb**

Designer: **Juan Del Pino Mena**

Date: **2022-06-10**



Revision: **0.6**

Supervisor:  
Sr. Andrés Roldán Aranda  
Dpto. Electrónica y Tecnología de Computadores  
University of Granada  
C/Fuente Nueva, s/n, 18001  
Granada, Granada, Spain



## NiMH/NiCd battery charger IC


## External PNP BJT current driver

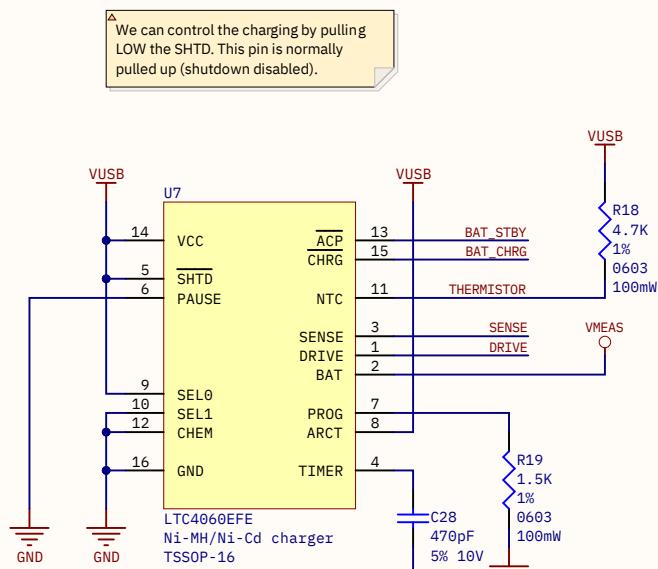


TIMER capacitor and PROG resistor program the charge T<sub>max</sub> (maximum charging time, a security measure). [LTC4060 datasheet, page 13]. These values should complete a full charge in at most 1 h 6'.

PROG resistor programs the maximum current that the battery will receive while charging. For 1.5 kΩ this is 0.93 A.

i.e.: a 1000 mAh battery will charge at approx 1C with this configuration, but can be insufficient time for a 3000 mAh one.

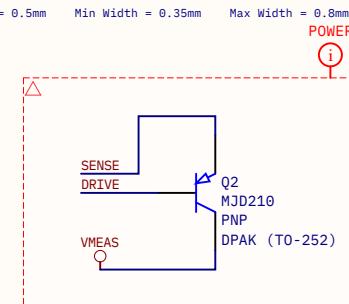

DRIVE pin on the LTC4060 provides a controlled sink current that drives the PNP base. So, it's not necessary to have a base resistor.

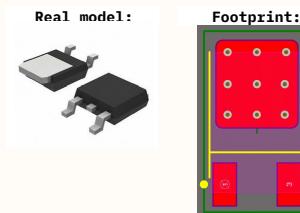

## Battery charging circuitry for Ni-MH

Battery charger circuit variant #1. By default the device uses a Nickel-metal hydride battery which are chemically and thermally more stable (and safer) than Lithium-based ones; at the cost of a lower charge/volume ratio.

Designer's signature  
Supervisor's signature

Sheet title: **Battery charger**  
Project title: **TIK\_HandheldDevice.PjPcb**

Designer: **Juan Del Pino Mena**



Date: **2022-06-10** Revision: **0.6** Sheet 9 of 20

Supervisor:  
Sr. Andrés Roldán Aranda  
Dpto. Electrónica y Tecnología  
de Computadores  
University of Granada  
C/Fuente Nueva, s/n, 18001  
Granada, Granada, Spain



## Lithium battery charger IC



- △ The TP4056 datasheet recommends to connect a resistor of 0.2 to 0.5 Ohm between VUSB and its VCC pin. It does not explain why, but probably for chip temperature concerns.
- △ The TP4056 is only specified for charging single-cell Li-Ion batteries on its datasheet. However, many sites, forums and online stores list TP4056-based modules as compatible with both Li-Ion and Li-Po given the chemistry similarity. Take this with caution.
- △ Resistor in PROG regulates the maximum battery charging current. At 2 kOhm, this is 580 mA. At 1 kOhm, it is > 1 A. Change according to battery capacity. [TP4056 english datasheet, page 3]
- △ TEMP expects a NTC thermistor (of unspecified value). On some Lithium-Ion batteries this NTC can be integrated on the package.

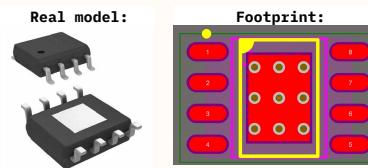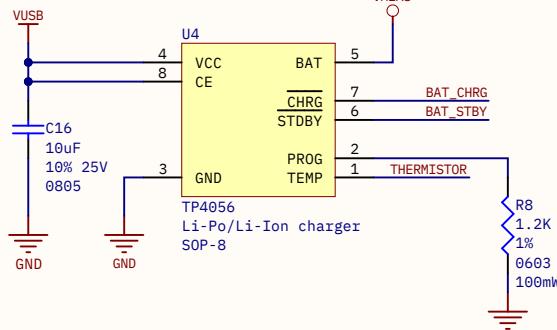

△ This device will get hot, and has a thermal pad to dissipate to PCB GND plane

## Lithium battery protection

Width Constraint [Pref Width = 0.5mm Min Width = 0.35mm Max Width = 0.8mm]

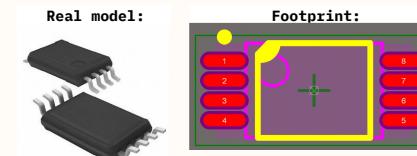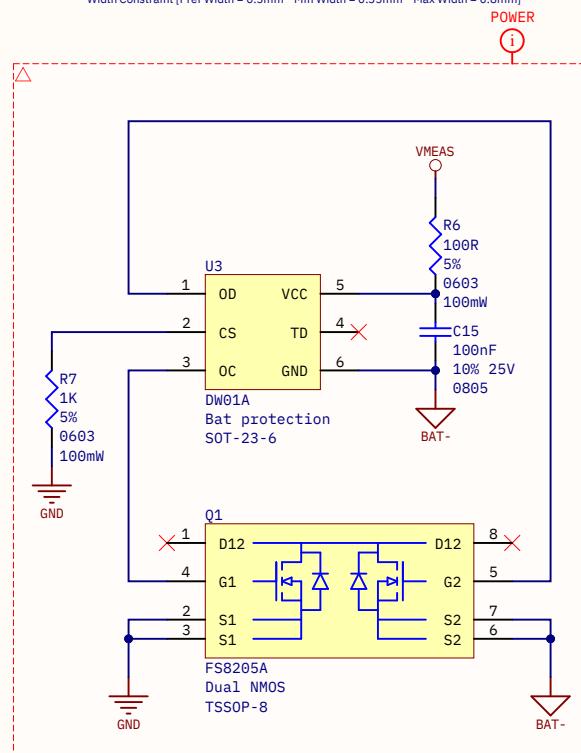

## Battery charging circuitry for Li-Po & Li-Ion

Battery charger circuit variant #2. Li-Ion and Li-Po batteries offer much more power density at the cost of instability. This circuit must NOT be placed if the Ni-MH charger is present on the board (and vice-versa).

Designer's signature  
Supervisor's signature

Sheet title: **Battery charger**  
Project title: **TIK\_HandheldDevice.PjPcb**

Designer: **Juan Del Pino Mena**




Date: **2022-06-10** Revision: **0.6** Sheet 10 of 20

Supervisor:  
Sr. Andrés Roldán Aranda  
Dpto. Electrónica y Tecnología de Computadores  
University of Granada  
C/Fuente Nueva, s/n, 18001  
Granada, Granada, Spain




△ 'SH' pads are the USB connector metal shield, which is structural. This particular connector has 4 which are not connected to any circuit traces, not even GND. In any case, it should be connected to the device's metal chassis (as a faraday cage).

△ An USB-Mini-B has been chosen for various reasons:  
 - Over an USB-micro: because of the structural robustness of the mini-B.  
 - Over an USB-Type-C: because of the ease of implementation, less pins, and to make clear this device is not a host.

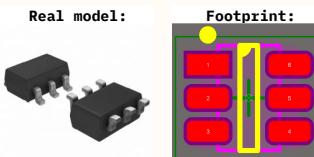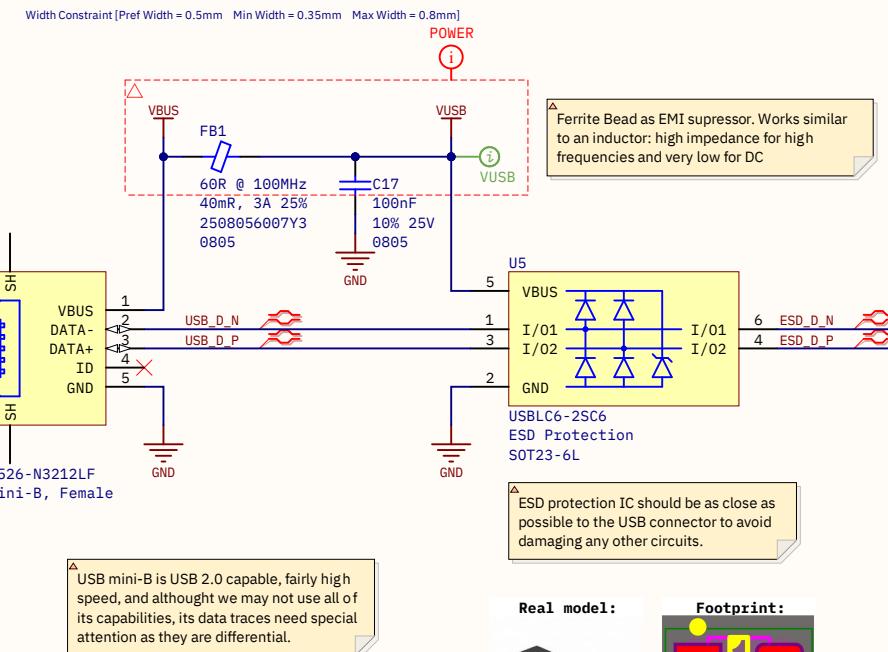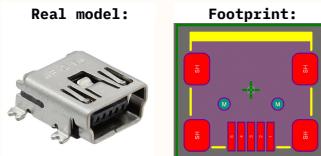

## USB connector and ESD protection circuit

USB is used as a programming interface, as well as a power source for the charging circuit. Since it's an external connector, it needs to have a protection circuit against electro-static discharge (ESD) and noise.

Designer's signature  
  
Supervisor's signature  


Sheet title: **USB connector and ESD protection circuit**

Project title: **TIK\_HandheldDevice.PxjPcb**


Desinger: **Juan Del Pino Mena**

Date: **2022-06-10** Revision: **0.6** Sheet 11 of 20

Supervisor:  
 Sr. Andrés Roldán Aranda  
 Dpto. Electrónica y Tecnología  
 de Computadores  
 University of Granada  
 C/Fuente Nueva, s/n. 18001  
 Granada, Granada, Spain




## USB to UART conversion

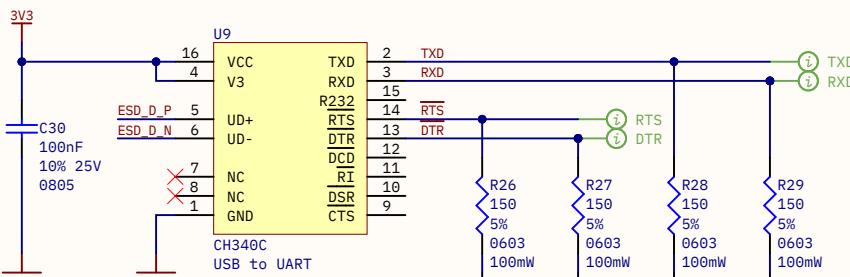

Real model:



Footprint:




These LEDs serve as a visual testimony of UART communication and help during debugging.

If they drag too much current they can be used with 1 kΩ resistors or be completely disconnected.

Should not be present on a commercial product.

## Auto programming circuit

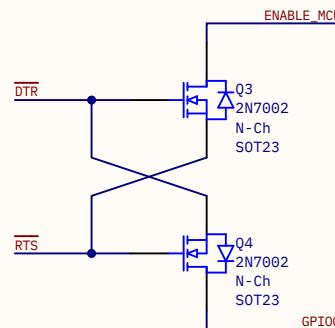

ESP32 GPIO00 is a Strapping pin. Strapping pins modify the device's boot mode during chip reset. GPIO00 is pulled up during reset by default. ENABLE\_MCU is pulled up by an external pullup resistor

When GPIO00 is HIGH, it boots from internal SPI memory, but when it's LOW the boot sequence changes to 'Download' and we can upload a program to the MCU.

[ESP32 Datasheet, section 2.4, pages 19-20]

## Circuit truth table

DTR	RTS	ENABLE_MCU	GPIO00
0	0	1	1
0	1	1	0
1	0	0	1
1	1	1	1

\*(DTR, RTS active low)

## USB to UART and MCU programming

This circuit allows a computer to reprogram the ESP32 via USB so it can be reprogrammed. This is possible by sending RTS and DTR signals with a determined timing so the device enters an alternative boot mode.

Designer's signature  
Supervisor's signature

Sheet title: **USB to UART and MCU programming**  
Project title: **TIK\_HandheldDevice.PxjPcb**

Desinger: **Juan Del Pino Mena**


Date: **2022-06-10** Revision: **0.6** Sheet 12 of 20

Supervisor:  
Sr. Andrés Roldán Aranda  
Dpto. Electrónica y Tecnología  
de Computadores  
University of Granada  
C/Fuente Nueva, s/n, 18001  
Granada, Granada, Spain




## Reset

To ensure power stability to the microcontroller during powerup, this RC filter introduces a delay on the ENABLE pin. Usual values are  $10\text{ k}\Omega$ ,  $1\text{ }\mu\text{F}$  ( $\tau = 10\text{ ms}$ ,  $t_{\{10-90\}} = 22\text{ ms}$ ). [ESP32-WROOM-32D datasheet, page 22]

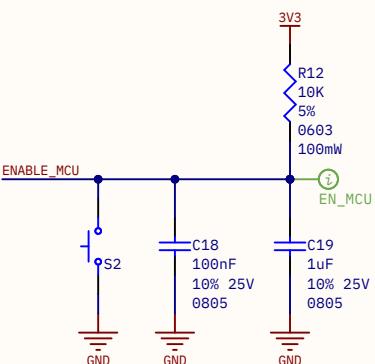


## Boot mode selection (debug)

Allows to force 'Download' boot sequence  
Same design as in ESP32 DevKit boards.  
100 nF cap are for debouncing and should be placed close to the buttons

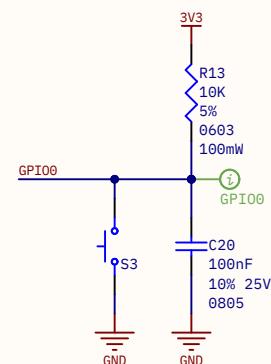

## Multidirection 'thumb' button (UI navigation)

Horizontal SMD device, multi-directional / muti-function rotary slider button. Accessed from the right side.

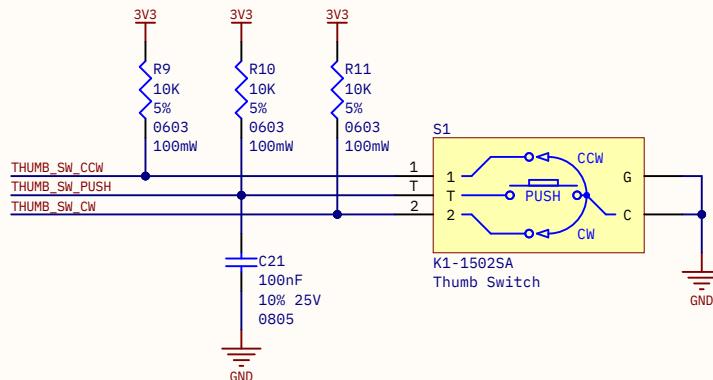

## Buttons

TIK buttons. Some of them are meant for debugging like boot mode selection and reset, and will not be accessible to the end user. The power-up button and the "thumb" button are meant to be part of the UI.

Designer's signature  
Supervisor's signature

Sheet title: **Buttons**  
Project title: **TIK\_HandheldDevice.PjxPcb**

Desinger: **Juan Del Pino Mena**

Date: **2022-06-10** Revision: **0.6** Sheet 13 of 20

Supervisor:  
Sr. Andrés Roldán Aranda  
Dpto. Electrónica y Tecnología de Computadores  
University of Granada  
C/Fuente Nueva, s/n. 18001  
Granada, Granada, Spain



A

B

C


D

A

B

C

D

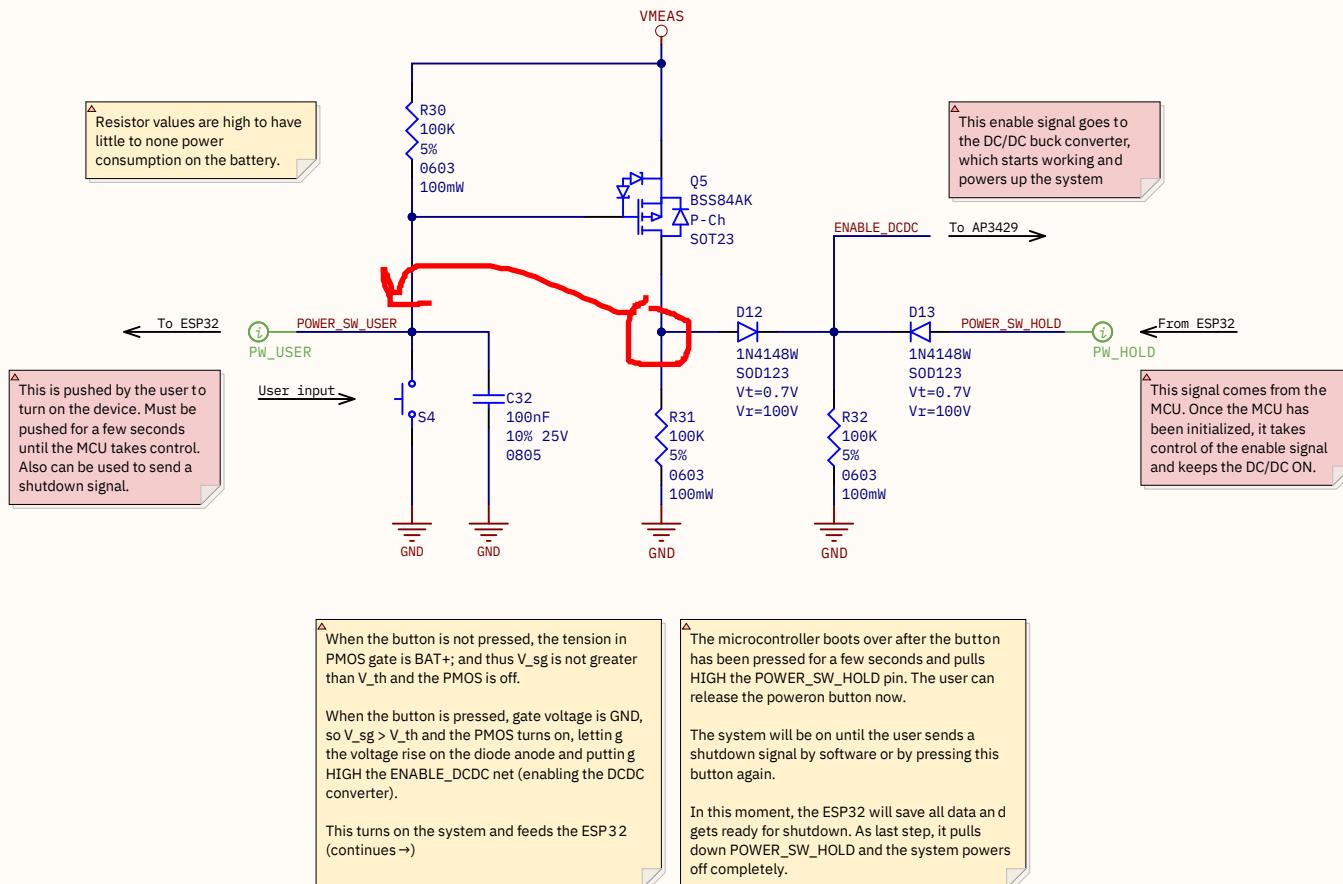

## Powerup button

This circuit avoids using a power-up switch, which can shutdown the device without prior warning. The user pushes a button during a couple of seconds, in which the ESP32 will boot and keep the system on until a shutdown signal is sent.

Designer's signature  
Supervisor's signature


Sheet title: **Powerup button**  
Project title: **TIK\_HandheldDevice.PjPcb**

Desinger: **Juan Del Pino Mena**


Date: **2022-06-10** Revision: **0.6** Sheet 14 of 20

Supervisor:  
Sr. Andrés Roldán Aranda  
Dpto. Electrónica y Tecnología de Computadores  
University of Granada  
C/Fuente Nueva, s/n. 18001  
Granada, Granada, Spain

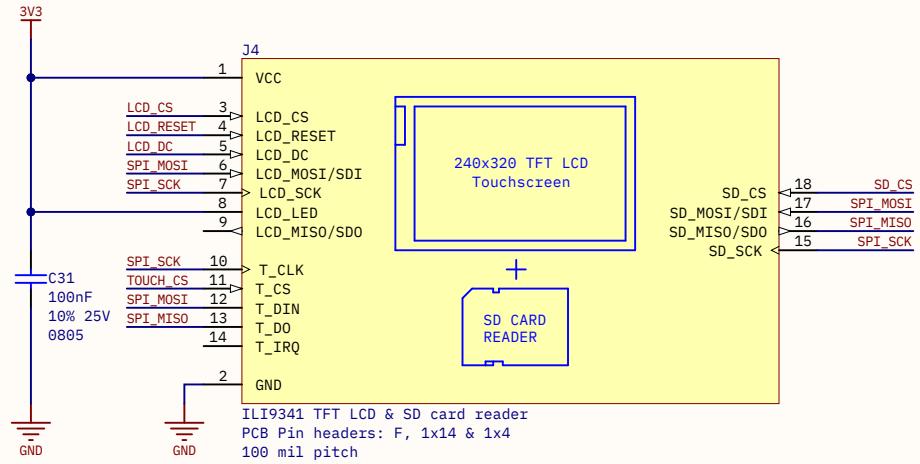


**Real model:****Footprint:**

As ILI9341 2.8" TFT LCD module has the bigger footprint t and needs mechanical support. Our PCB inherits its mounting holes position.

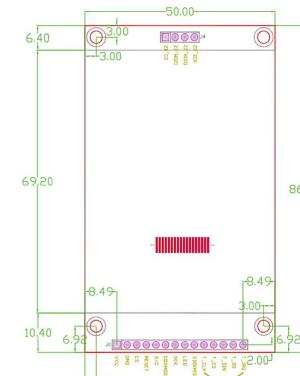

## LCD TFT touchscreen & SD card reader

TIK uses an ILI9341 2.8" TFT LCD display module as a graphic user interface. This module has touchscreen capabilities and also integrates a SD card reader on one of its sides. All three elements are managed via SPI.

Designer's signature   
Supervisor's signature 

Sheet title: **LCD TFT touchscreen & SD card reader**

Project title: **TIK\_HandheldDevice.PjPcb**



Designer: **Juan Del Pino Mena**

Date: **2022-06-10** Revision: **0.6**

Sheet 15 of 20

Supervisor:  
Sr. Andrés Roldán Aranda  
Dpto. Electrónica y Tecnología  
de Computadores  
University of Granada  
C/Fuente Nueva, s/n. 18001  
Granada, Granada, Spain

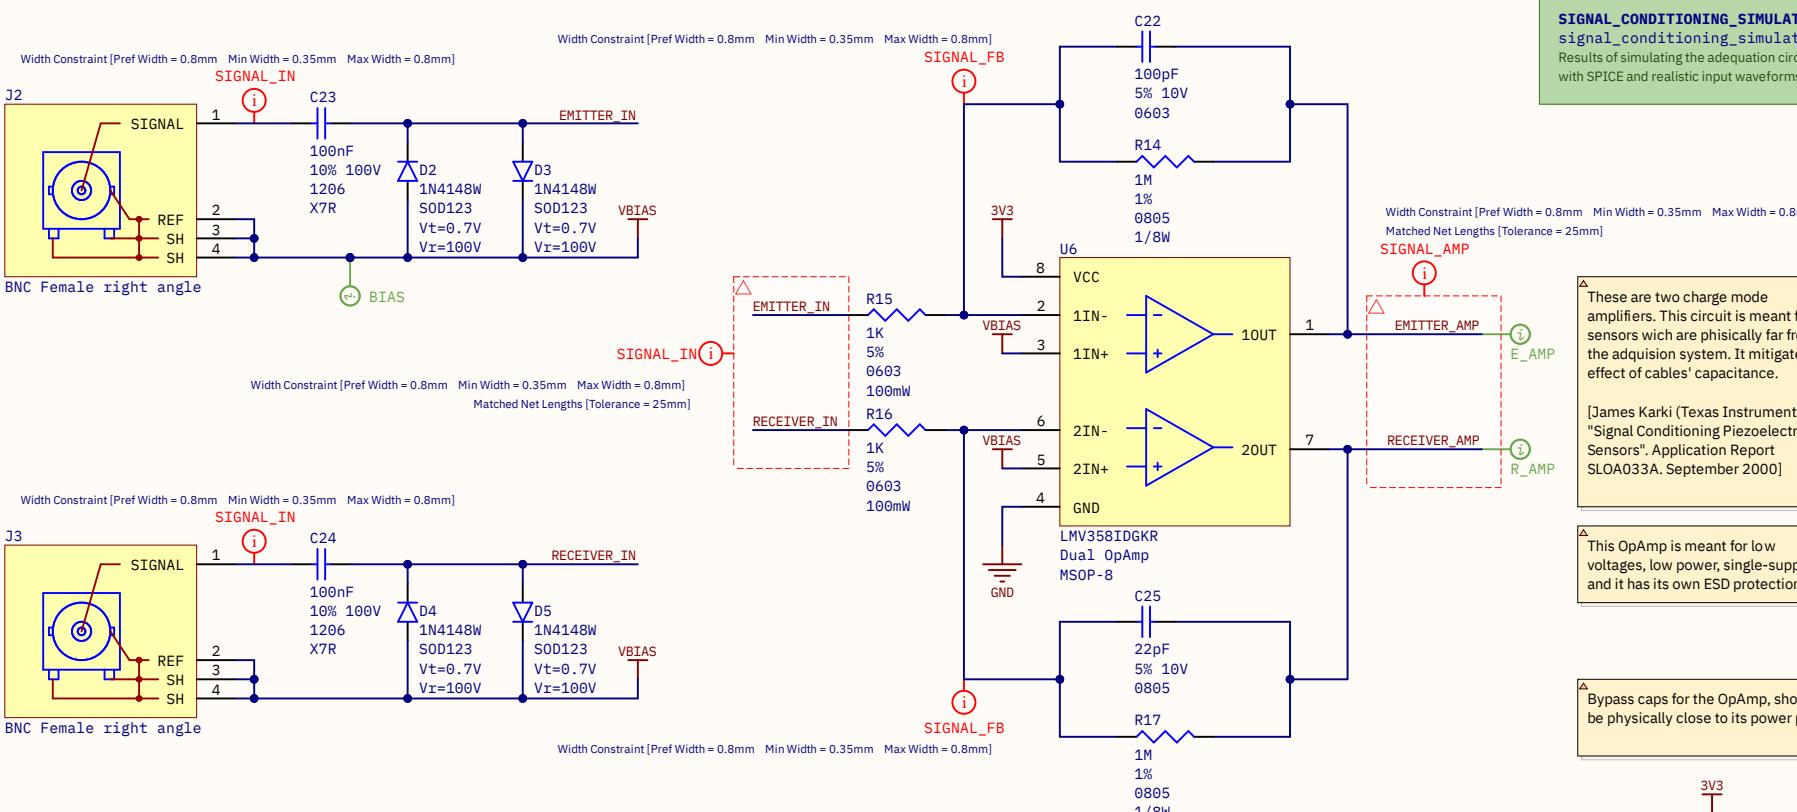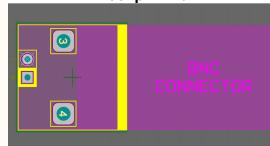

**Real model:****Footprint:**

Emitter signal will be in the range of 15 V to 100 V and need to be clipped by the diodes. Then, the OpAmp will amplify to saturation so the emitter can be perceived by the instrument as a flank; whereas the receiver signal will most likely be amplified without any clipping.

## Piezoelectric sensors conditioning circuit

Two analog signals come from two piezoelectric sensors nailed into a tree or trunk. The way piezos work force us to use this circuit to convert charge into voltage. The piezo sensors used generated up to -100 V peak, so it needs clipping

Designer's signature  
Supervisor's signature

Sheet title: **Piezoelectric sensors conditioning circuit**  
Project title: **TIK\_HandheldDevice.PjPcb**

Designer: **Juan Del Pino Mena**

Date: **2022-06-10** Revision: **0.6**



Sheet 16 of 20

Supervisor:  
Sr. Andrés Roldán Aranda  
Dpto. Electrónica y Tecnología de Computadores  
University of Granada  
C/Fuente Nueva, s/n, 18001  
Granada, Granada, Spain




## Trunk signal's Voltage Spectral Density

Example VSD of a generic trunk signal captured by the piezoelectric sensors

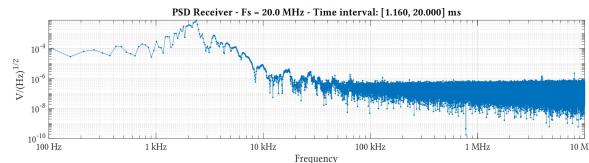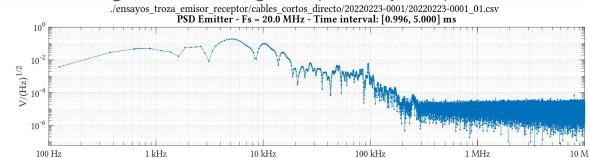

## Simulated circuit


Circuit from a subproject inside ./SIMULATIONS

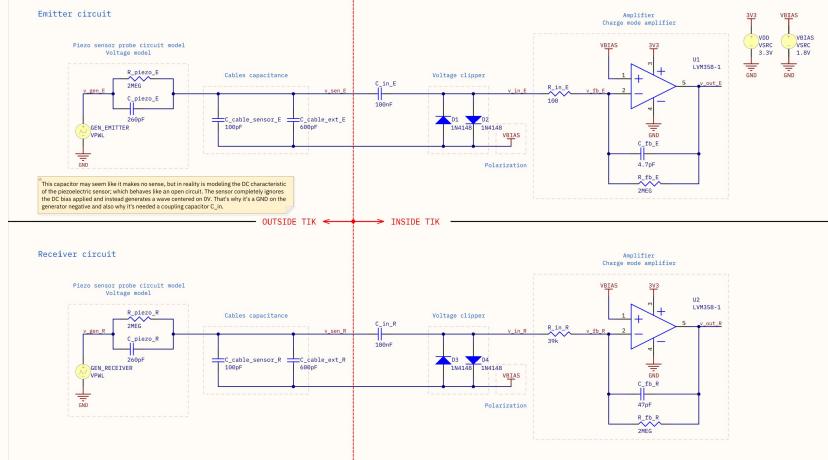


A piezoelectric is commonly modeled as a charge source in parallel with a resistor and a capacitor (charge model). This, however, is not practical for simulated analysis. Instead, we resorted to the voltage model, which is a voltage source in series with a resistor and a capacitor in parallel.

Nevertheless, in empirical analysis we found that our probes are far more complex than this simple model: They behave like an open circuit for DC (thus ignoring VBIAS). They have a great resistance and capacitance dependency on frequency, and a resonance around 100 kHz.

## Expected frequency response

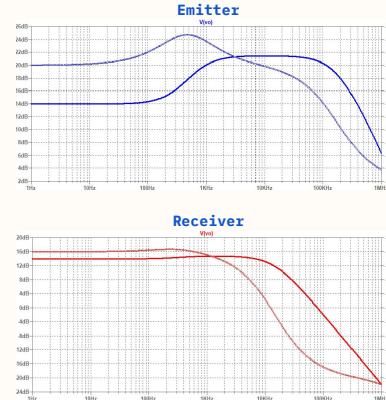


## Expected transient behavior

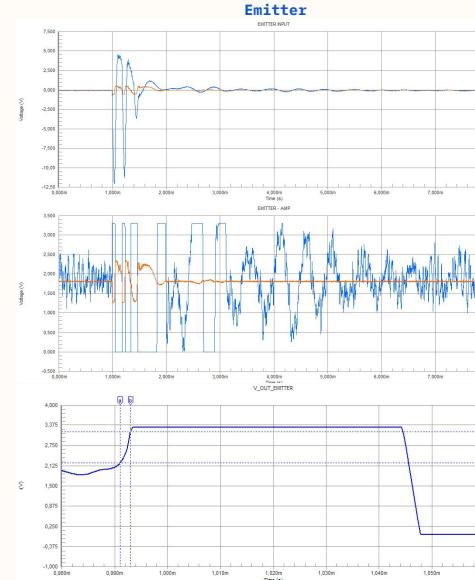

The emitter input signal can be of 10 to 20 V if the piezoelectric probe is hit very hard. This voltage can damage electronics. As a countermeasure we use two 4148 diodes on the input that clip the signal to ±0.7 volts around VBIAS, allowing us to manipulate it without risk.

The adequate circuit for the emitter has more gain than it needs, so the output of the OpAmp is saturated. This gives us a very step flank where the signal clearly begins and it's very easy to identify. In this simulation it's clear that maybe it's not needed so much gain as the output is very noisy and could be easily false-triggered.

Zoom over the first pulse. The expected rise time will be around 2 us, so the delay is of 1 sample (Fs = 500 kHz)

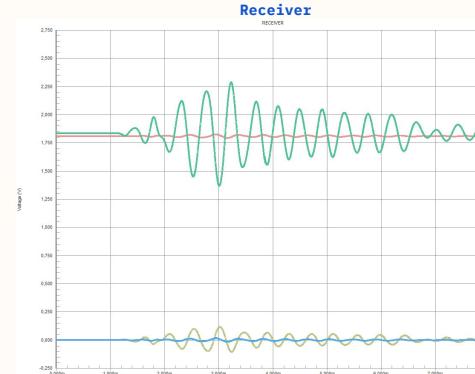

The receiver on the other hand has a very weak signal that needs to be amplified and centered over 1.8V. We have to be more cautious in this case so we don't distort it as we have to sample and process it with precision.

The adequate circuit for the emitter has more gain than it needs, so the output is saturated. This gives us a very step flank where the signal clearly begins and it's very easy to identify.

## Signal conditioning circuit simulations

SPICE simulations of the adequation circuit. These are only the results. You can find the simulation circuit and models on the ./SIMULATIONS/ folder inside this project.

Designer's signature  
Supervisor's signature

Sheet title: **Signal Conditioning Theoreticals**  
Project title: **TIK\_HandheldDevice.PjPcb**


Designer: **Juan Del Pino Mena**

Date: **2022-06-10** Revision: **0.6** Sheet 17 of 20

Supervisor:  
Sr. Andrés Roldán Aranda  
Dpto. Electrónica y Tecnología de Computadores  
University of Granada  
C/Fuente Nueva, s/n, 18001  
Granada, Granada, Spain




## Current limiter and ESD protection

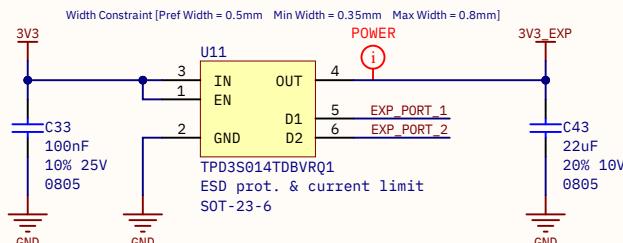

Since this is an external connector directly connected to the 3V3 rail, this will have a current limit switch and ESD protection IC to avoid damaging the device.

## Expansion port connector

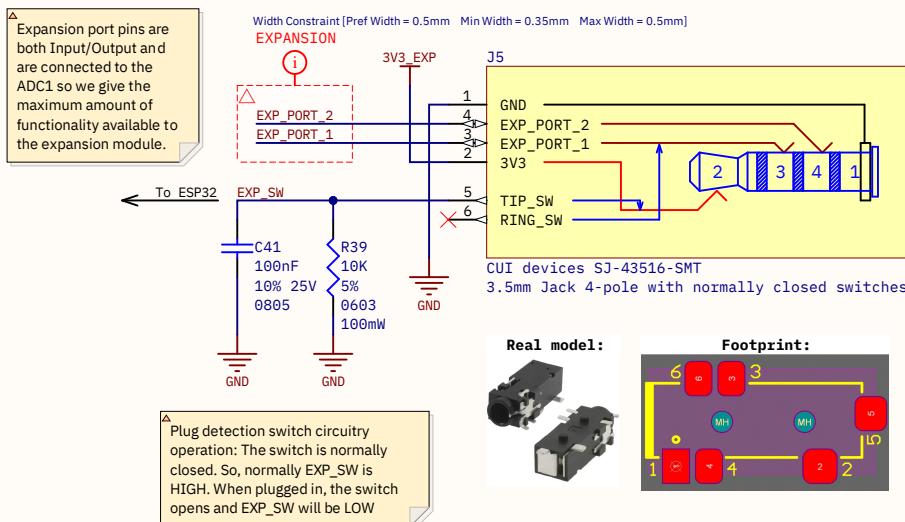

## Expansion port & jack connector

Expansion port for added functionality, such as an ultrasound resonance analysis for wood boards.  
Also, this sheet includes a description of the jack connector properties.


## 3.5mm jack connector considerations

For both the expansion port and the load cell connector

We are using the 3.5mm jack connector in a non-standard application, as we are not transferring audio but power and/or analog and digital signals of different nature.

Nevertheless, we have adjusted the connector to somewhat fit the OMPT convention (GND in sleeve, signals in rings).

The mating socket and plug are connected as follows. In this connector series there is the possibility of up to 6 pads, the additional 2 pads being connected to switches for detecting the plug insertion. We only use the tip switch (pin 5) to allow using both the SJ-43516 as well as the SJ-43515 models. We prefer the 6-pad version as it offers more mechanical integrity.  
[CUI Devices SJ-4351X-SMT Datasheet, page 2]

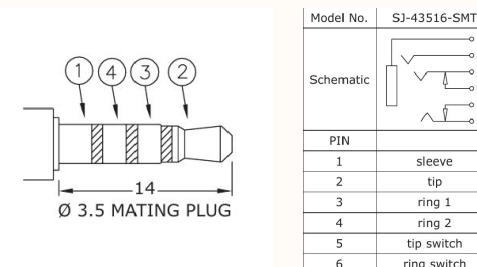

To avoid shorting GND and VCC, the 3V3 rail is located at the tip, so it will make contact last. This also allows us to easily add the tip switch circuitry.

Designer's signature

Supervisor's signature

Sheet title: Expansion port



Project title: TIK\_HandheldDevice.PxjPcb

Designer: Juan Del Pino Mena


Date: 2022-06-10 Revision: 0.6 Sheet 18 of 20

Supervisor:  
Sr. Andrés Roldán Aranda  
Dpto. Electrónica y Tecnología de Computadores  
University of Granada  
C/Fuente Nueva, s/n. 18001  
Granada, Granada, Spain



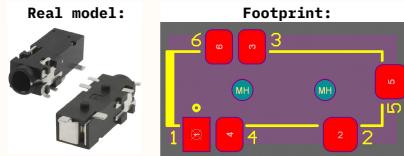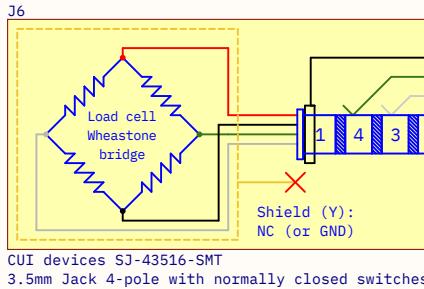


There's no "standard load cell connector". We have selected a 3.5mm jack 4-pole connector and organized the pins in the usual order and with usual colors. Note that the shield is unconnected. A more appropriate alternative could be a RJ-11 6-pin connector, but was discarded because of the large socket size.

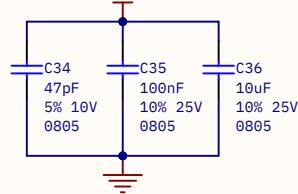

VCC/VDD bypass caps for noise filtering and voltage stabilization for the HX711.


Width Constraint [Pref Width = 0.5mm Min Width = 0.35mm Max Width = 0.5mm]

LOAD\_CELL\_SIGNAL

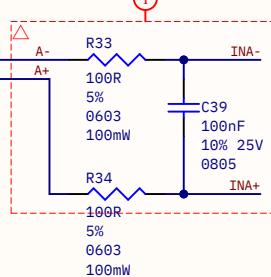

Width Constraint [Pref Width = 0.5mm Min Width = 0.35mm Max Width = 0.5mm]


POWER

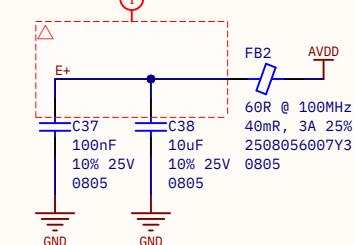

Noise/EMI filtering on AVDD. Sparkfun's design uses a 2.2 uH chip inductor. Instead we use a ferrite bead.

Width Constraint [Pref Width = 0.5mm Min Width = 0.35mm Max Width = 0.5mm]


POWER

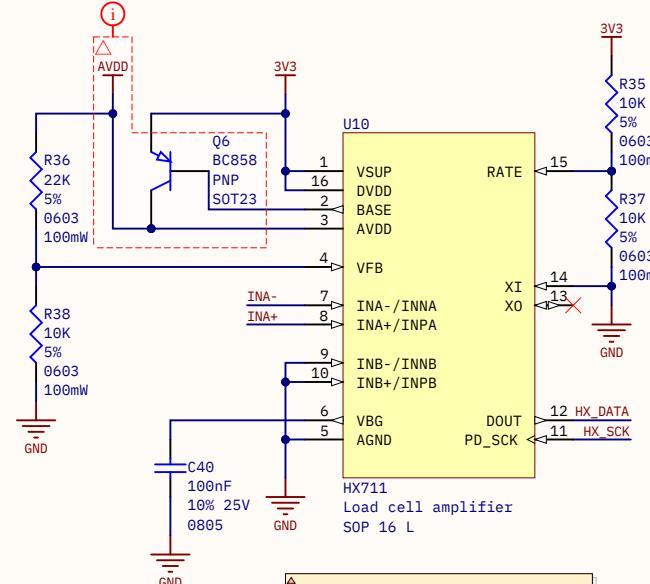

"Reference PCB Board schematic" from the [HX711 Datasheet, figure 4, page 6]

**Real model:**

**Footprint:**



## HX711 load cell amplifier

This circuit is used to get weight measurements out from load cells in order to estimate the density of a trunk or board.  
This design is based on the Sparkfun HX711 module by N. Seidle and A. Wende.

Designer's signature

Sheet title: **HX711 load cell amplifier**

Project title: **TIK\_HandheldDevice.PjPcb**

Supervisor's signature

Desinger: **Juan Del Pino Mena**

Date: **2022-06-10**

Revision: **0.6**

Sheet 19 of 20


Supervisor:  
Sr. Andrés Roldán Aranda  
Dpto. Electrónica y Tecnología de Computadores  
University of Granada  
C/Fuente Nueva, s/n, 18001  
Granada, Granada, Spain



A	Block	Component	Description/Conditions	Units	Supply voltage (V)	Current consumption per unit ( $\mu$ A)		Total dissipated power ( $\mu$ W)		Notes
						Typical	Maximum	Typical	Maximum	
	MCU	ESP32-WROOM-32D	MCU + wireless comm. Module	1	3.3	500 mA		1.7 W		Current spikes during wireless TX
Power rails		AP3429	DC/DC Buck converter IC	1	4.2	90 $\mu$ A		378 $\mu$ W		
		NCP562SQ18T1G	Low-Dropout regulator IC	1	3.3	3 $\mu$ A		9.9 $\mu$ W		
		150 k $\Omega$ + 33 k $\Omega$ voltage divider	FB pin feedback. Fixed consumption	1	3.3	18 $\mu$ A		59.4 $\mu$ W		
		[Optional] bypass voltage divider	Assuming 3V3/2 with 10 k $\Omega$ resistors	1	3.3	165 $\mu$ A		544.5 $\mu$ W		Consider only if populated
		Generic 0805 green LED	Assuming Vf = 3V & 39 $\Omega$ series resistor	1	3.3	7.7 mA		25.4 mW		Consider only if populated
Battery & current sense		INA219	Voltage & current sense IC	1	4.2	0.7 mA	1 mA	3 mW	4.2 mW	
		Generic 0805 green LED	Assuming Vf = 3V & 220 $\Omega$ series resistor	1	5.5	11.4 mA		62.5 mW		Consider only if populated
		Generic 0805 red LED	Assuming Vf = 2V & 470 $\Omega$ series resistor	1	5.5	7.5 mA		41 mW		Consider only if populated
		I2C pull-up resistor	Assuming line level is LOW, with 4.7k $\Omega$ resistors	2	3.3	0.7 mA		4.6 mW		
B		LTC4060EFE	NiMH/NiCd charger IC	1	5.5	2.9 mA	4.3 mA	16 mW	23.7 mW	
	[Optional] NiMH charger	MDJ201	Power PNP BJT. Ice=0.95 A, Ibe=120mA, Vce=1.8V, Vbe=0.7 V	1	--	--		1.71 W + 84 mW $\approx$ 1.8 W		Consider only if populated. For charging ICs and BJT: consider only when charging the battery (else they are off). In this case power consumption comes from external supply not from the internal battery.
		4.42 k $\Omega$ + NTC voltage divider	NTC pin. Assuming NTC at 50°C (3.54 k $\Omega$ )	1	5.5	691 $\mu$ A		3.8 mW		
[Optional] Li-Ion/Li-Po charger		TP4056	Li-Ion/LiPo charger IC, Vbus-Vbat=1.8 V, Ibat=1 A	1	5.5	150 $\mu$ A	500 $\mu$ A	1.8 W + 2.8 mW $\approx$ 1.8 W		
	DW01A	Battery protection IC		1	4.2	3 $\mu$ A	6 $\mu$ A	12.6 $\mu$ W	25.6 $\mu$ W	
	FS825A	Dual power NMOS, Rds(on)=25 m $\Omega$ , Ibat=1 A		1	--	--		50 mW (both NMOS)		
USB connector	USBLC6-2SC6	USB ESD protection IC		1	5.5	10 nA	150 nA	55 nW	825 nW	Consider only when USB is plugged
	CH340C	USB to UART converter IC		1	3.3	12 mA	30 mA	39.6 mW	99 mW	Worst case when programming
Programming	2N7002	G.P. NMOS. Ib=0 A, Vds=3.3 V, Ids=330 $\mu$ A (during conmutation)		2	--	--		1 mW		Consider only when programming
	Generic 0805 green LED	Assuming Vf = 3V & 39 $\Omega$ series resistor		2	3.3	7.7 mA		50.8 mW		Consider when programming, using UART and if populated.
	Generic 0805 red LED	Assuming Vf = 2V & 150 $\Omega$ series resistor		2	3.3	8.7 mA		57.4 mW		
Buttons	Pull-up resistors	Assuming line level is LOW, 10k $\Omega$ resistors		5	3.3	0 (not pushed)	330 $\mu$ A	0 (not pushed)	5.4 mW	Worst case: all pressed at once
	BSS84AK	G.P. PMOS. Rsd(on) = 7.5 $\Omega$ , Ib=0, Isd = 77 $\mu$ A		1	--	--		45 nW		
Power-up button	1N4148W	Small signal diode. Vf=0.7 V, If=26 $\mu$ A		2	--	--		36.4 $\mu$ W		Worst case: both ON
	100 k $\Omega$ pull-up resistor	100 k $\Omega$ pull-up resistor		1	4.2	42 $\mu$ A		176.4 $\mu$ W		
TFT LCD display	LCD TFT ILI9341 module	320x240p LCD (Measured)		1	3.3					Worst case: all pixels white, 60 FPS
Signal conditioning	LMV358DGKR	General purpose dual OpAmp, with no load		1	3.3	140 $\mu$ A	340 $\mu$ A	462 $\mu$ W	1.1 mW	Both OpAmps, high Z load
	1N4148W	Small signal diode. Vf=0.7 V, If= $\mu$ A (Measured)		4	--					Consider only when measuring
Load cell amplifier	HX711	Load cell amplifier & ADC IC		1	3.3	1.4 mA		4.6 mW		Enters sleep if the data clock stops
	BC858	General purpose PNP BJT. Vce=1.8V, Ice=? $\mu$ A (Measured)		1	--					Consider only when HX711 is awake
	22 k $\Omega$ + 10 k $\Omega$ voltage divider	VFB pin feedback for AVDD=1.82 V regulation.		1	1.82	57 $\mu$ A		103.7 $\mu$ W		Consider only when HX711 is awake

## Power budget

Detailed estimation of typical and worst-case power consumption per component in order to define battery requirements. Choosing a battery.


Designer's signature  
  
Supervisor's signature  


Sheet title: **Power budget**  
Project title: **TIK\_HandheldDevice.PjPcb**  
Desinger: **Juan Del Pino Mena**  
Date: **2022-06-10** Revision: **0.6** Sheet 20 of 20

Supervisor:  
Sr. Andrés Roldán Aranda  
Dpto. Electrónica y Tecnología de Computadores  
University of Granada  
C/Fuente Nueva, s/n, 18001  
Granada, Granada, Spain





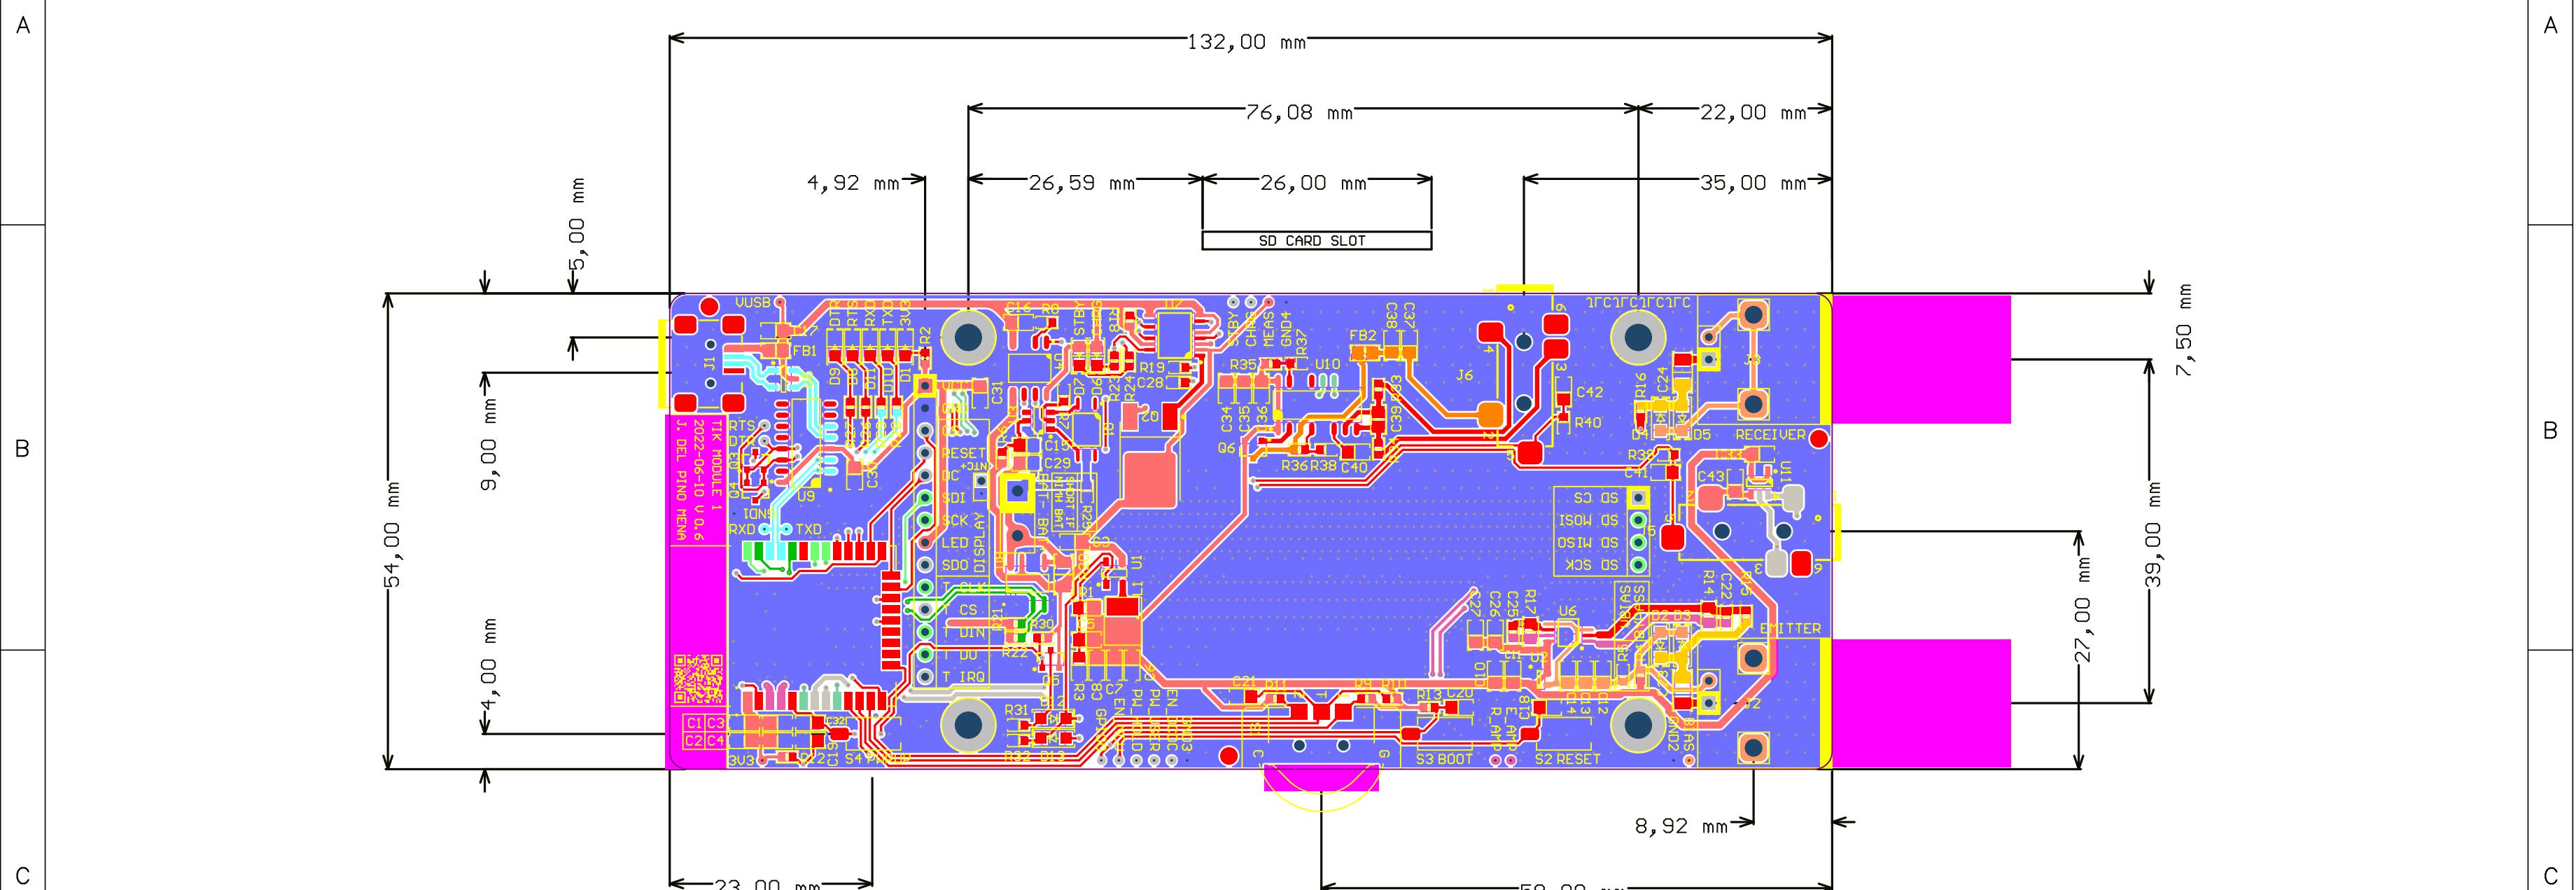

#### VISIBLE LAYERS:

Board outline + Multilayer + Top overlay + Top layer + Keep-out + dimensions

#### TRACKS & POLYGONS COLOR LEGEND:

EMITTER/RECEIVER ANALOG SIGNALS	POWER REFERENCE GND/BAT-	SPI
GENERIC NET ON TOP LAYER	POWER RAIL 3V3/BAT+/VUSB+ / VMEAS/VSENSE	I2C
GENERIC NET ON BOTTOM LAYER	POWER RAIL VBIAS	SERIAL UART/USB

## TIK handheld device PCB

PCB orientation: vertical. Screen facing front, BNCs on top, USB at the bottom, SD Card reader at the left, powerup button at the bottom front right, and multipurpose button on the right side.

Designer's signature:

Sheet title: TIK Handheld Device PCB

Dpto. Electronica y Tecnologia  
de Computadores  
University of Granada  
C/ Fuente Nueva, s/n, 18001  
Granada, Granada, Spain  
Sr. Andres Roldan Aranda


Supervisor's signature:

Project title: TIK\_HandheldDevice

Date: 2022-06-10  
Revision: 0.6 Sheet 1 of 1



A

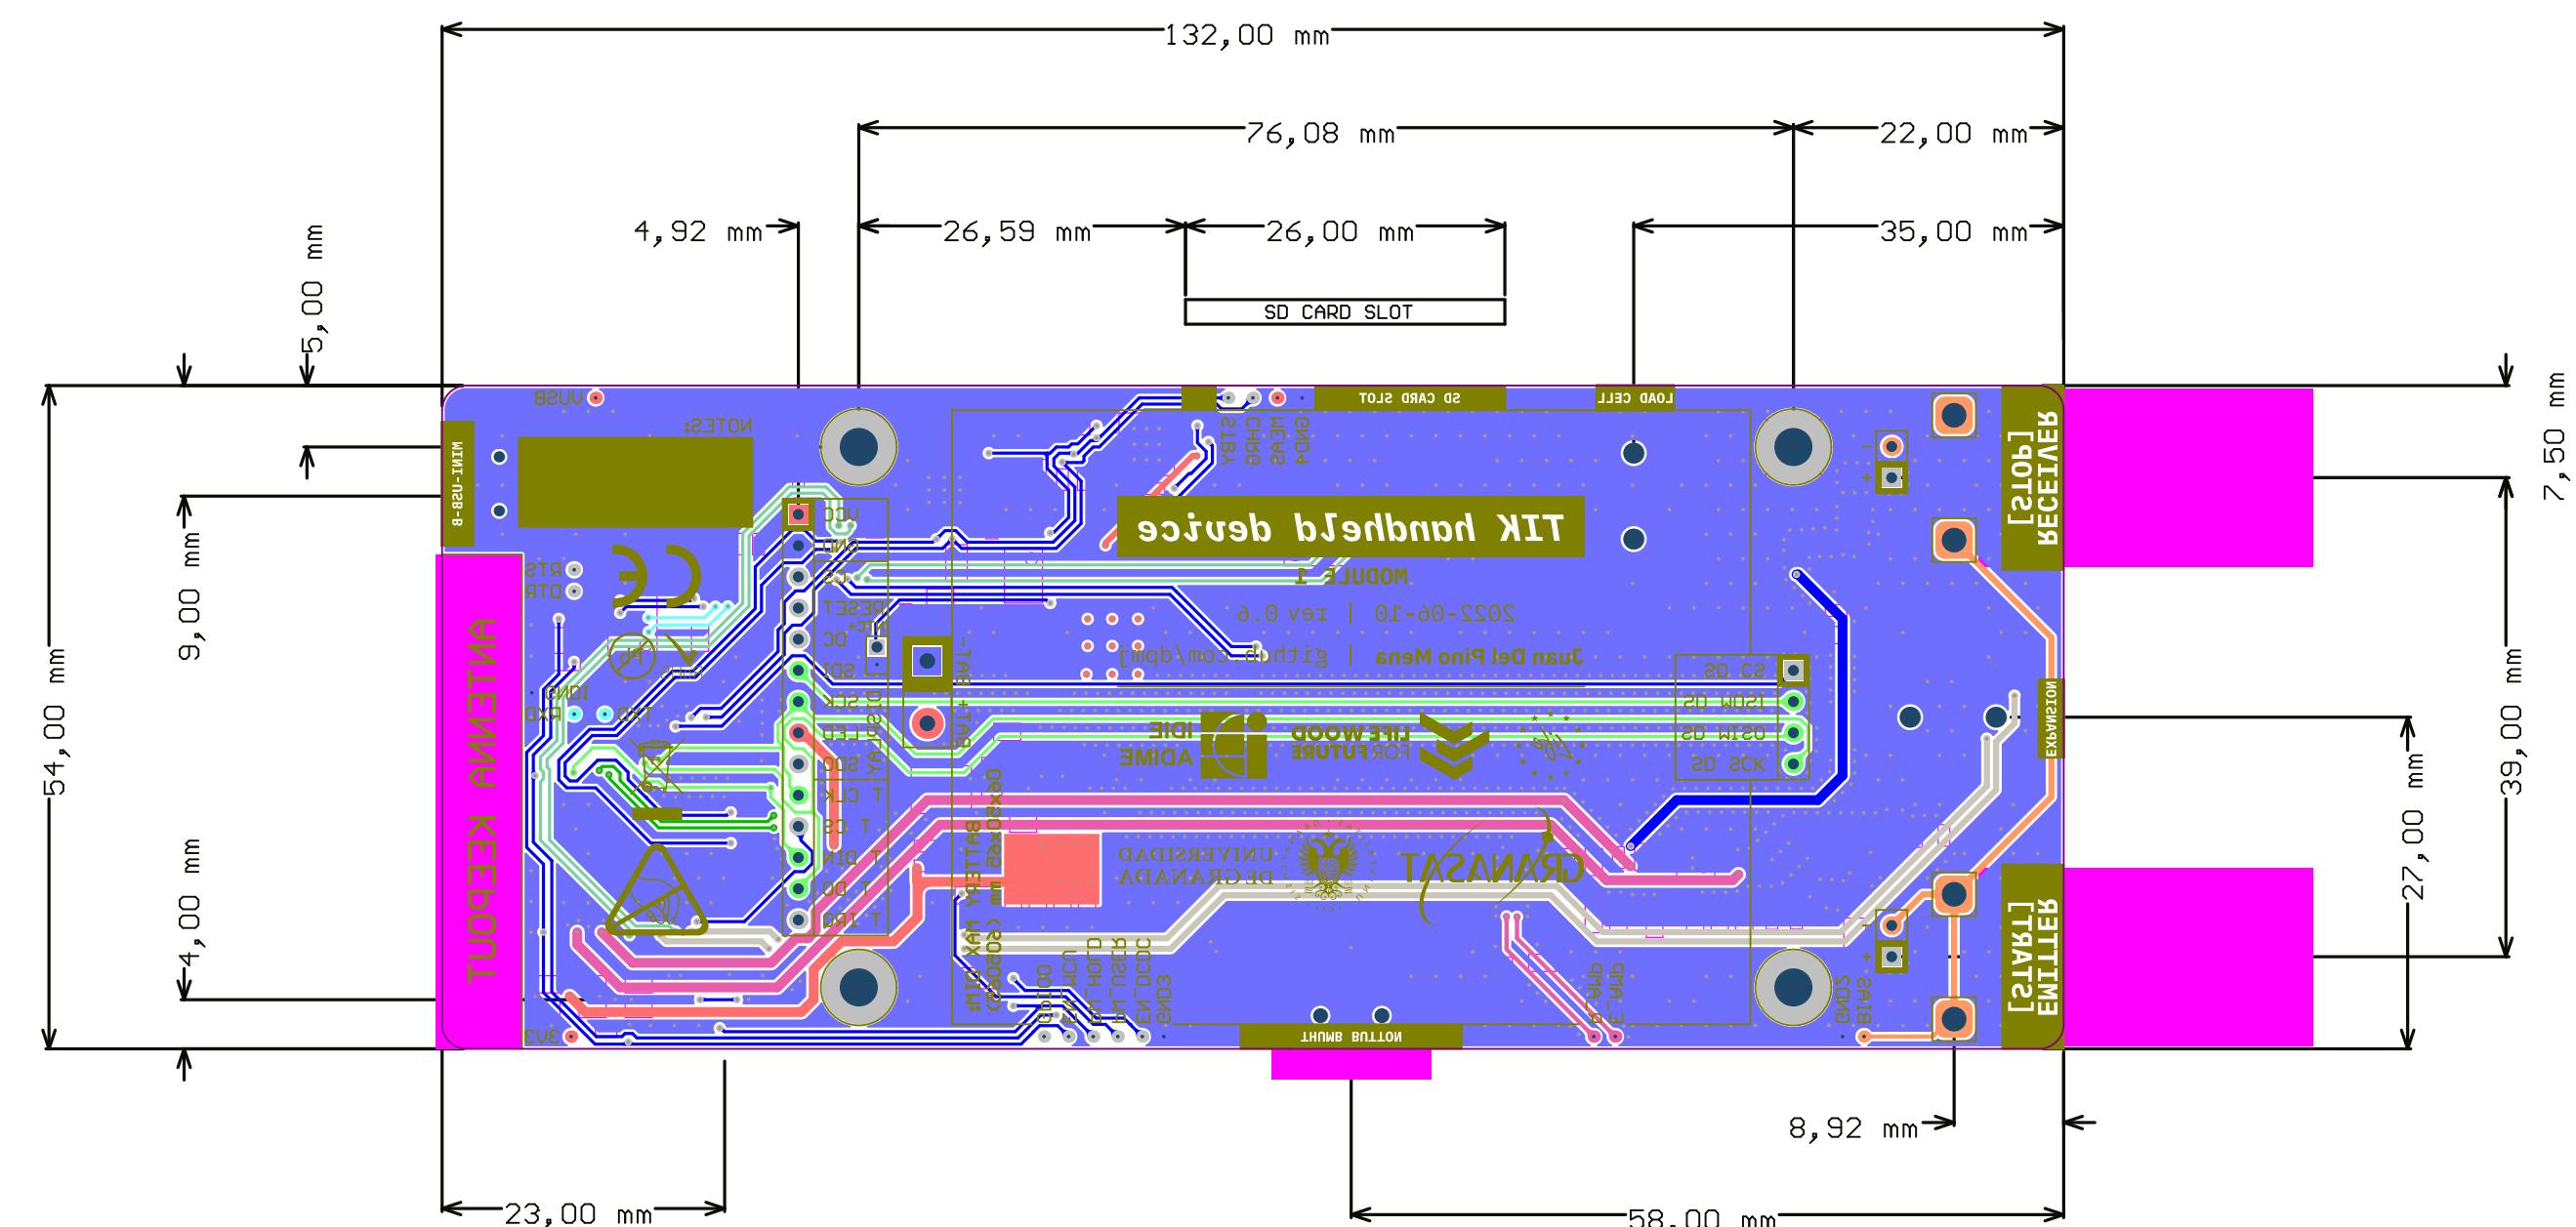

B

C

D

A

B

C

D

#### VISIBLE LAYERS:

Board outline + Multilayer + Bottom overlay + Bottom layer + Keep-out + dimensions

#### TRACKS & POLYGONS COLOR LEGEND:

EMITTER/RECEIVER ANALOG SIGNALS	POWER REFERENCE GND/BAT-	SPI
GENERIC NET ON TOP LAYER	POWER RAIL 3V3/BAT+/VUSB/VMEAS/VSENSE	I2C
GENERIC NET ON BOTTOM LAYER	POWER RAIL VBIAS	SERIAL UART/USB

## TIK handheld device PCB

PCB orientation: vertical. Screen facing front, BNCs on top, USB at the bottom, SD Card reader at the left, powerup button at the bottom front right, and multipurpose button on the right side.

Designer's signature:

Supervisor's signature:

Sheet title: TIK Handheld Device PCB


Project title: TIK\_HandheldDevice

Designer: Juan Del Pino Mena

Supervisor: Andres Roldan Aranda

Dpto. Electronica y Tecnologia  
de Computadores  
University of Granada  
C/ Fuente Nueva, s/n, 18001  
Granada, Granada, Spain  
Sr. Andres Roldan Aranda

Date: 2022-06-10  
Revision: 0.6 Sheet 1 of 1

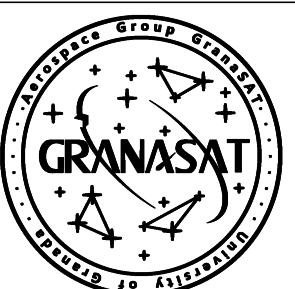

A

B

C

D

E


F

G


H

REV STATUS OF SHEETS		REV					DWG NO.		G	REV	REVISIONS		
SHEET									ZONE	REV	DESCRIPTION	DATE	APPROVED


View from Top side (Scale 1:1)

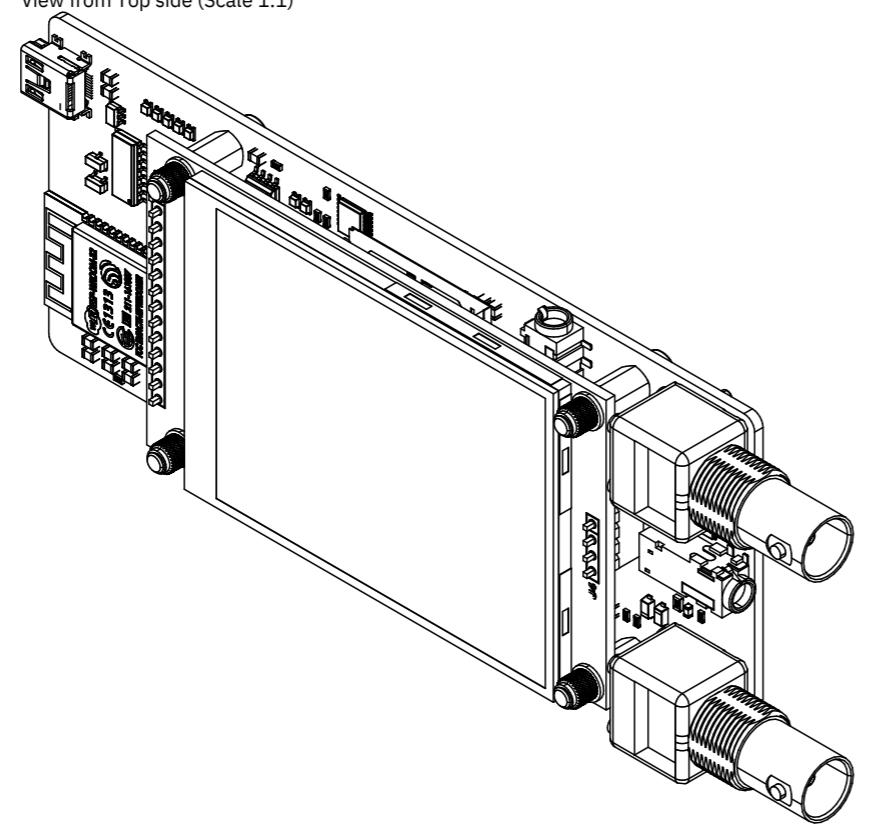


View from Bottom side (Scale 1:1)

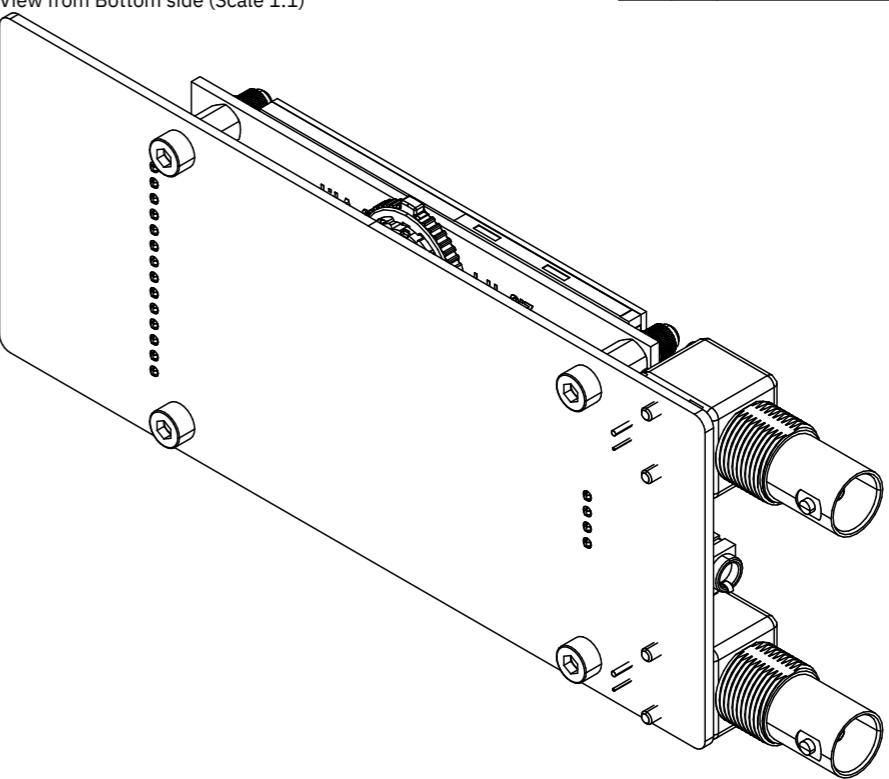

View from Front side (Scale 1:1)

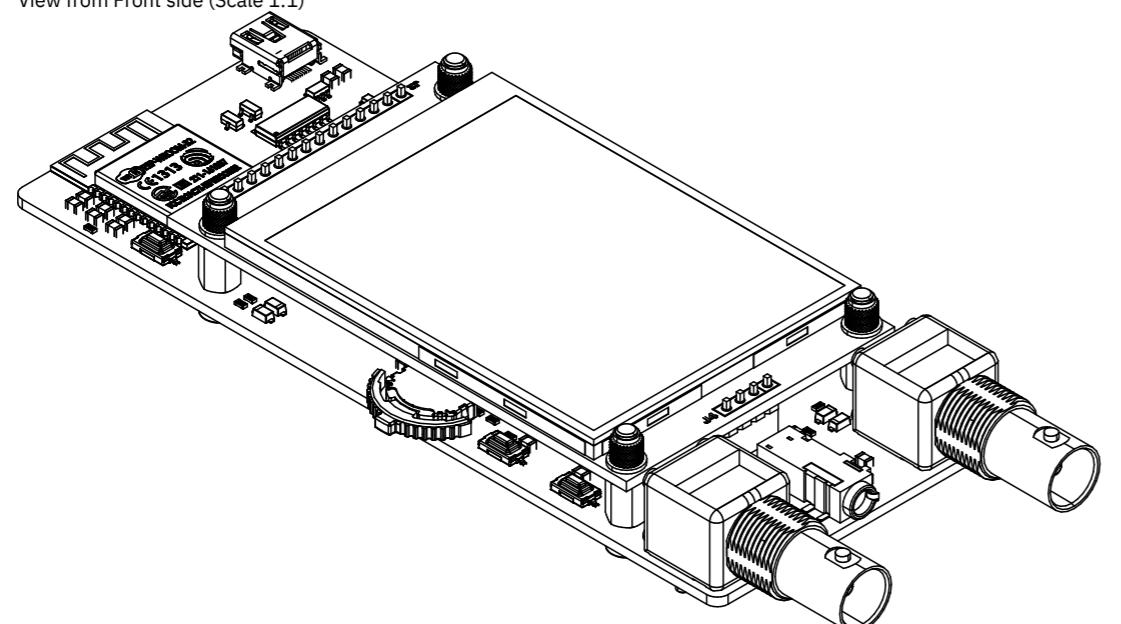

View from Back side (Scale 1:1)

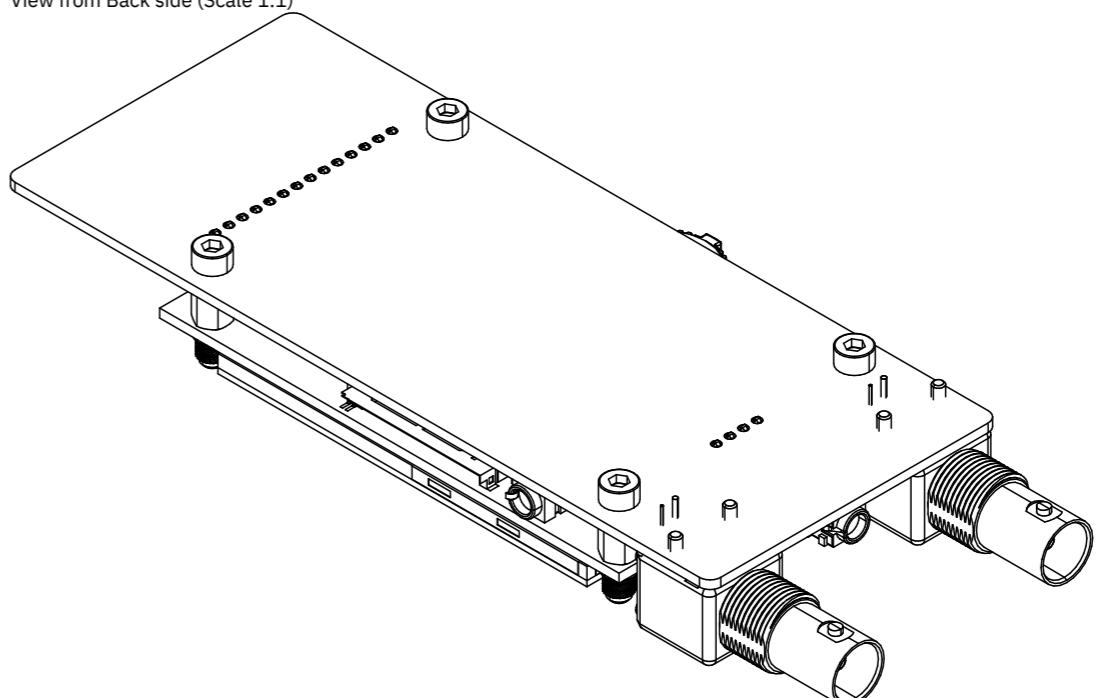

PART NO: =PCB\_PART\_NUMBER

APPROVALS DATE

ENGINEER: Juan Del Pino Mena 2022-05-14

DESIGNER: Juan Del Pino Mena 2022-05-14

CHECKER: Juan Del Pino Mena 2022-05-14

Reference Documents

BOM DOC: BOM/bill\_of\_materials

ASSY DOC: --

SCH DOC: SCH/\*

NEXT ASSY

USED ON

PCB DOC: PCB/TIK\_PCB.PcbDoc

APPLICATION

**GRANASAT**  
 Dpto. Electrónica y  
 tecnología de computadores  
 University of Granada, Spain  
 C/ Fuente Nueva, s/n, 18001

DESIGN ITEM: Item

TITLE: TREE INSPECTION KIT MECHANICAL DRAFTS

DESIGN ITEM REVISION: 6

SIZE: A3

CAGE CODE: --

DWG NO: 1

REV: 6

SCALE: 1:1

FILE NAME: TIK\_PCB.PCDBdwf

SHEET: 1 OF 3

A

B

C

D

E

F

G

H

A

B

C

D






E

F

DWG NO: 1 G REV: 6

REVISIONS

REV STATUS OF SHEETS	REV											
SHEET												
1												
2												
3												
4												
5												
6												

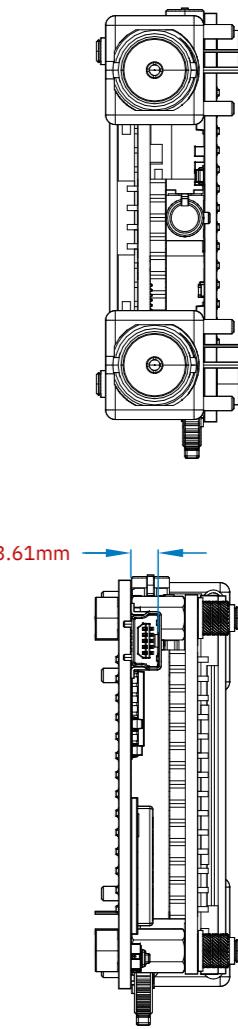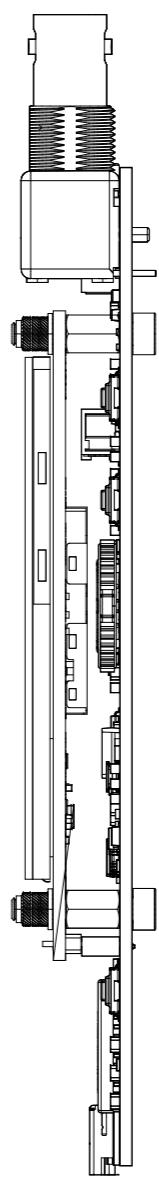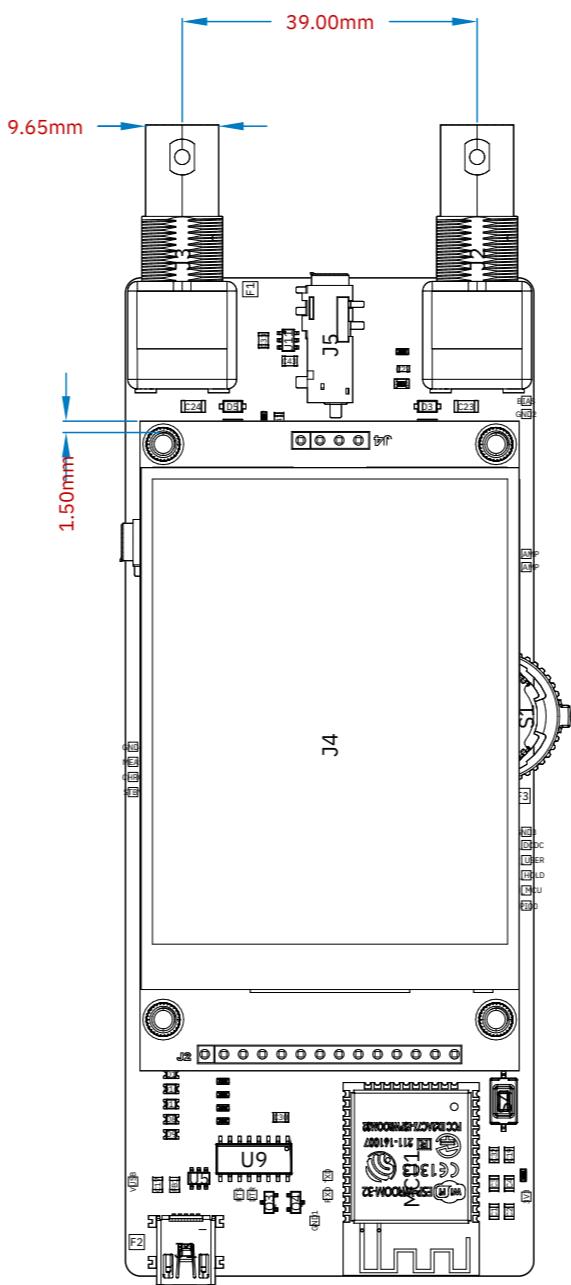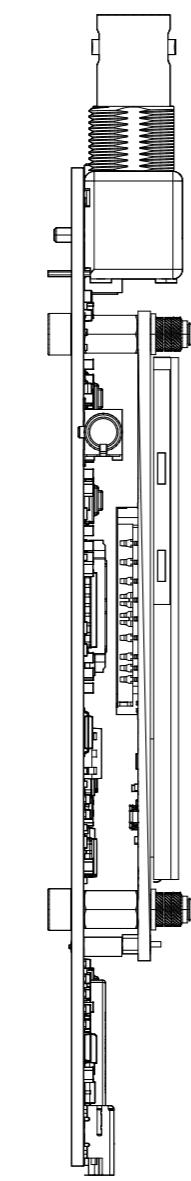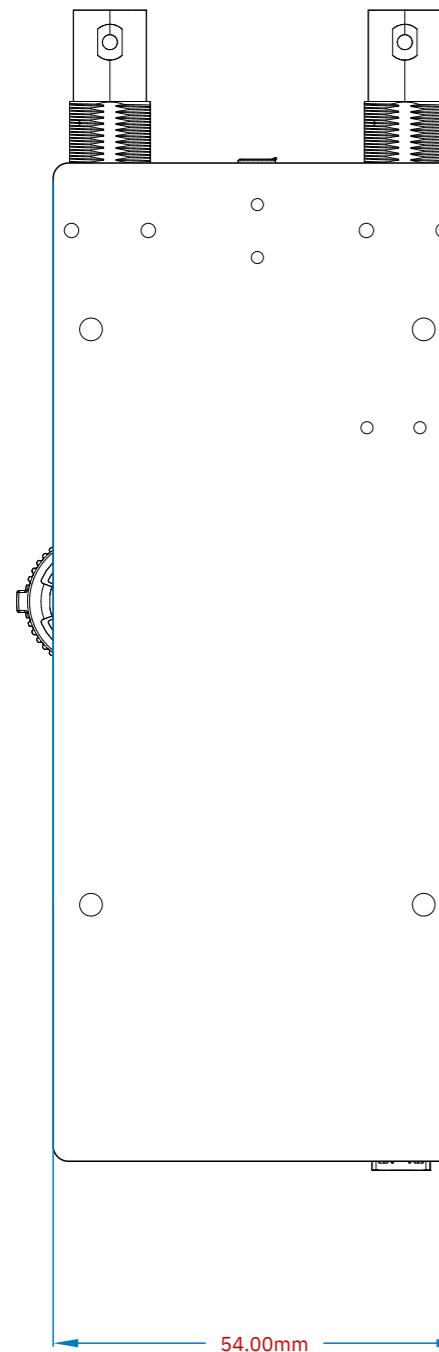

ON DRAWING

9

10

11

12

13

14

15

PART NO: =PCB\_PART\_NUMBER

APPROVALS DATE

ENGINEER: Juan Del Pino Mena 2022-05-14

DESIGNER: Juan Del Pino Mena 2022-05-14

CHECKER: Juan Del Pino Mena 2022-05-14

Reference Documents

BOM DOC: BOM/bill\_of\_materials

ASSY DOC: --

SCH DOC: SCH/\*

NEXT ASSY PCB DOC: PCB/TIK\_PCB.PcbDoc

USED ON APPLICATION


**GRANASAT**  
 Dpto. Electrónica y  
 tecnología de computadores  
 University of Granada, Spain  
 C/ Fuente Nueva, s/n, 18001

 DESIGN ITEM: Item  
 DESIGN ITEM REVISION: 6  
 TITLE: TREE INSPECTION KIT MECHANICAL DRAFTS

SIZE: A3 CAGE CODE: -- DWG NO:

REV: 6

SCALE: FILE NAME: TIK\_PCB.PCDBdwf SHEET: 2 OF 3



PART NO: =PCB\_PART\_NUMBER

APPROVALS DATE

ENGINEER: Juan Del Pino Mena 2022-05-14

DESIGNER: Juan Del Pino Mena 2022-05-14

CHECKER: Juan Del Pino Mena 2022-05-14

Reference Documents

BOM DOC: BOM/bill\_of\_materials

ASSY DOC: --

SCH DOC: SCH/\*

NEXT ASSY PCB DOC: PCB/TIK\_PCB.PcbDoc

USED ON APPLICATION

**GRANASAT**  
 Dpto. Electrónica y  
 tecnología de computadores  
 University of Granada, Spain  
 C/ Fuente Nueva, s/n, 18001

 DESIGN ITEM: Item  
 DESIGN ITEM REVISION: 6  
 TITLE: TREE INSPECTION KIT MECHANICAL DRAFTS

SIZE: A3 CAGE CODE: -- DWG NO:

REV: 6

SCALE: FILE NAME: TIK\_PCB.PCDBdwf SHEET: 2 OF 3

A

B

C

D

E

F

G

H

A

B

C

D

E

F





DWG NO: 1 G REV: 6

REVISIONS

REV STATUS OF SHEETS	REV				
SHEET					

ZONE	REV	DESCRIPTION	DATE	APPROVED

H

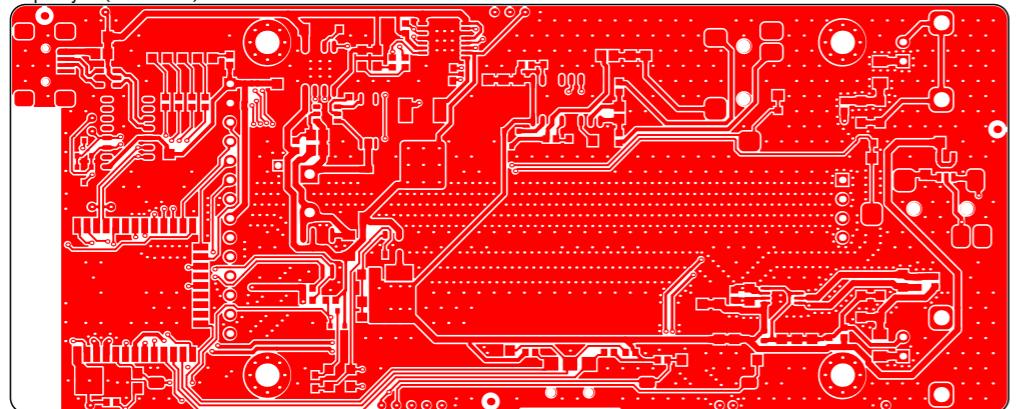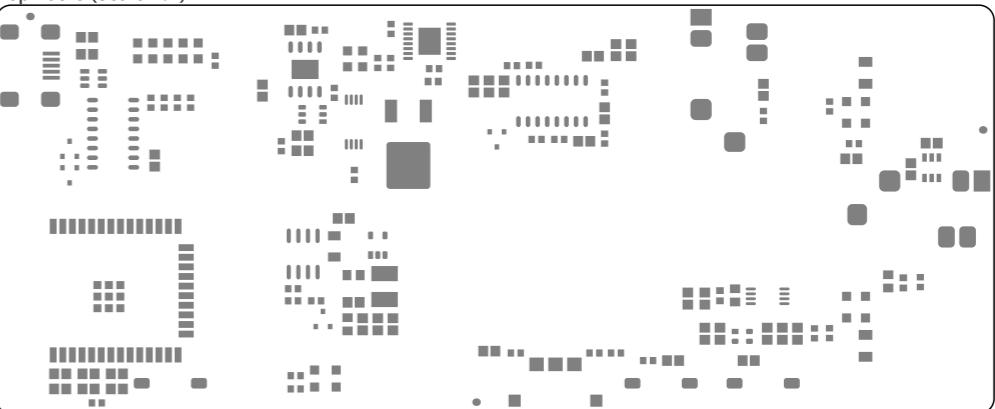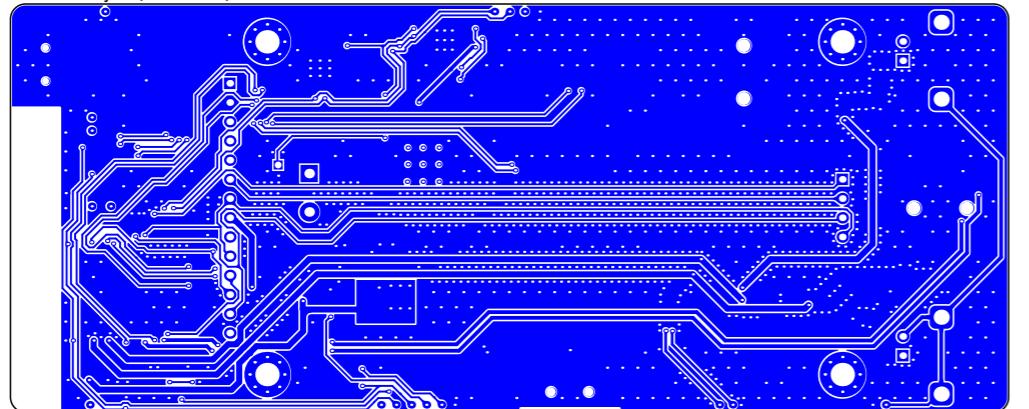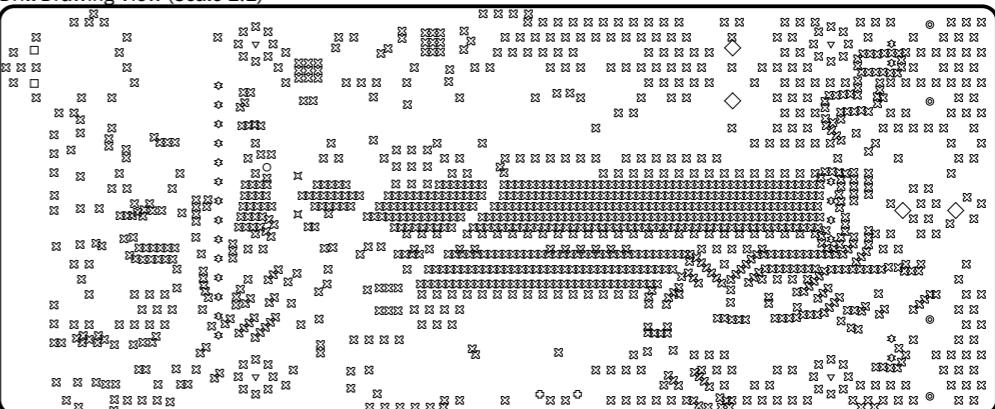1  
Top Layer (Scale 1:1)2  
Top Paste (Scale 1:1)3  
Bottom Layer (Scale 1:1)4  
Drill Drawing View (Scale 1:1)5  
Layer Stack Legend5  
Drill Table

Symbol	Count	Hole Size	Plated	Hole Tolerance
☒	1330	0.30mm	Plated	
☒	22	0.89mm	Plated	
□	2	0.90mm	Non-Plated	
○	1	0.90mm	Plated	
○	2	1.20mm	Non-Plated	
☒	2	1.27mm	Plated	
◇	4	1.70mm	Non-Plated	
◎	4	2.01mm	Plated	
▽	4	3.10mm	Plated	
1371 Total				

PART NO: =PCB\_PART\_NUMBER

APPROVALS	DATE
ENGINEER: Juan Del Pino Mena	2022-05-14
DESIGNER: Juan Del Pino Mena	2022-05-14
CHECKER: Juan Del Pino Mena	2022-05-14
Reference Documents	
BOM DOC: BOM/bill_of_materials	
ASSY DOC:	--
SCH DOC: SCH/*	
PCB DOC: PCB/TIK_PCB.PcbDoc	
APPLICATION	

Dpto. Electrónica y  
tecnología de computadores  
University of Granada, Spain  
C/ Fuente Nueva, s/n, 18001

GRANASAT

DESIGN ITEM: Item DESIGN ITEM REVISION: 6

TITLE: TREE INSPECTION KIT MECHANICAL DRAFTS

SIZE: A3 CAGE CODE: -- DWG NO: --

SCALE: FILE NAME: TIK\_PCB.PCDBdwf SHEET: 3 OF 3

REV: 6

## Bill of Materials

Project Title: Bill of Materials for BOM Document [bill\_of\_materials.BomDoc]  
 Project File Name: TIC\_HandheldDevice.Pcb  
 Assembly Variant: None

**Altium**

2175 San Jose Avenue  
 Suite 200  
 Campbell, CA 95008  
 USA

Part Number	Description	Designator	Manufacturer	Manufacturer Part Number	Supplier	Supplier Part Number	Supplier Unit Price	Quantity
IC AP3429 A.duo	1.0mA, 2A STEP-DOWN DC-DC CONVERTER, with latch-off protection	U1						1
Cap_cer_0603_2	Ceramic cap size 0603	U2						1
Cap_cer_0603_18	Ceramic cap size 0603	U22						1
Cap_cer_1904_M12V300mA10kTAC1TU	1.5V 300mA 10kΩ 1A	C23, C24						1
CON EXPANSION	0.5mm Jack 4-pole with normally closed switches	S5						1
CON LOAD CELL	0.5mm Jack 4-pole with normally closed switches	S6						1
Ferrite Bead Ch.	0805, 400, 3A, 25% SMT	B1, F12						1
Dual N-channel MOSFET	Enhanced power mode power	G1						1
IC HK711 load cell	HK711 load cell amplifier	J10						1
IC LM324N	Opamp: low voltage rail to rail opamps, 2.7V to 5V Vcc; ESD protection; MSOP-8	J11						1
IC UVM2900ER	Fixed output lowdropout linear regulator	J16						1
IC NC1P62Q501-10V-B7	1.0V 8mA 10V LDO	J2						1
IC TPS03014current	Current & current limit	J11						1
Ind 2uH, Wire	5A 4038 4x4x1.8mm	A1						1
NTC 10K-th	NTC THERMISTOR 10k for reading temperature from the battery NTC	R11						1
PNP-BJT BC368	60 V, 100 mA PNP general purpose transistor	S6						1
PNP-BJT MJD210	PNP-BJT MJD210	S4						1
Res size 0603 SMD	Res size 0603 SMD	S2						1
Res_0603_1.2K	mounting, low power	S8						1
Res_0603_2.2K	mounting, low power	R36						1
Res_0603_150K	mounting, low power	R26, R27, R28, R29						1
Res_0603_220K	mounting, low power	R21, R24						1
Res_0805_150K	mounting, low power							1
Res_0805_1M	mounting, low power	R14, R17						1
Cap_cer_0805_4	Ceramic cap size 0805	C1, C14, C31						1
Cap_cer_0805_10	Ceramic cap size 0805	C2, C8, C13, C15, C17, C19, C20, C21, C23, C26, C31, C32, C33, C34, C37, C39, C40, C41, C45						1
Cap_cer_0805_18	Ceramic cap size 0805	C3, C16, C26, C29, C36						1
Cap_cer_0805_20	Ceramic cap size 0805	C5						1
Cap_cer_0805_22	Ceramic cap size 0805	C6, C7, C9, C12, C43						1
Cap_cer_0805_34	Ceramic cap size 0805	C10, C11, C19						1
Cap_cer_0603_4	Ceramic cap size 0603	C49						1
CON BNC-F	BNC coaxial female connector	J2, J3						1
DIYRJ17P100D Jumper pin header, plus SD card reader pins	DIYRJ17P100D Jumper pin header, plus SD card reader pins	J4						1
MOD ILI0341 TT	I-transceiver: 802.11b/g/n I-Wi-Fi, I-Wi-Fi, I-Wi-Fi Bluetooth Smart Ready 4.0 Dual Mode For Use With MCU ESP32 WRL ESP-32WROOM-32							1
MCU ESP32 WRL ESP-32WROOM-32		MCU1						1
PMIC_BSS844K	PMIC BSS844K	J3, J4						1
Res_0603_10K	Res size 0603 SMD mounting, low power	R25, R27, R28, R29, R40						1
Res_0603_100K	Res size 0603 SMD mounting, low power	R2, R4, R23, R24						1
Res_0603_1K	Res size 0603 SMD mounting, low power	R7, R15, R16						1
Res_0603_1.5K	Res size 0603 SMD mounting, low power	R19						1
Res_1206_02K	Res size 1206 SMD mounting, high power	R20						1
Res_0603_10K	Res size 0603 SMD mounting, low power	R30, R31, R32						1
SWITCH/Multidir	3DIOCH Multidirection Slide-Push Button SMD TS-003	S1						1
Button	Generic 2 pin button	S2, S3, S4						1
IC DW01 bat pr	IC DW01 bat pr							1
IC TP4056 BAT CH	Very low capacitance ESD protection	J4						1
IC U1881Cz-25/A	Zero Drift Bi-Directional DC-DC Power Regulator with 12C SOIC-8	J5						1
IC U14219 current	USB to serial chip CH340C	J8						1
IC U1340T udo to integrated oscillator	IC U1340T udo to integrated oscillator	J9						1

Approved	Notes