


Phase II reciprocal validation - 110-170 GHz

Corrected reciprocal-thru transmission



Hold-out DIAG reciprocity residuals

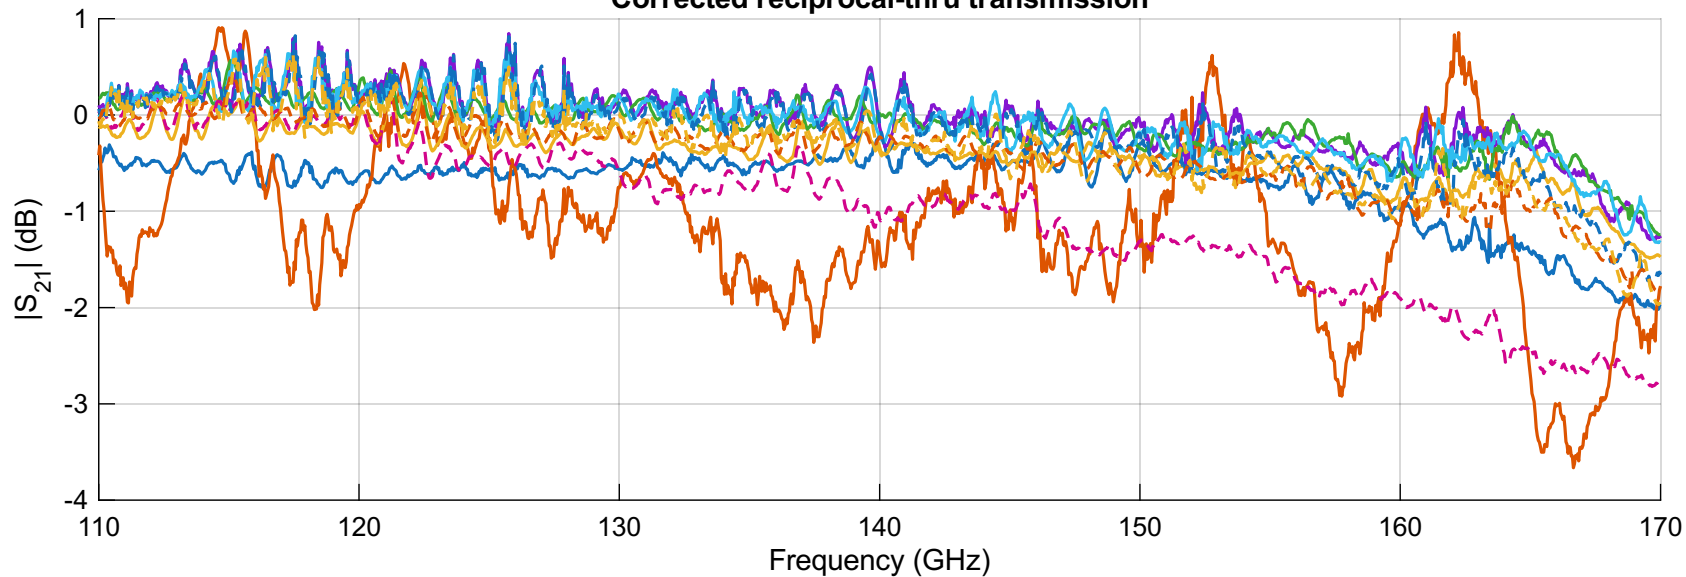