


Taper point 1"
Stop point 7"
Bury Point 8.25"
1" Eye Splice- 31.5" from center of loop

Need about 31ft of amsteel

## Bridge Hammock Build

End caps 43" arc length

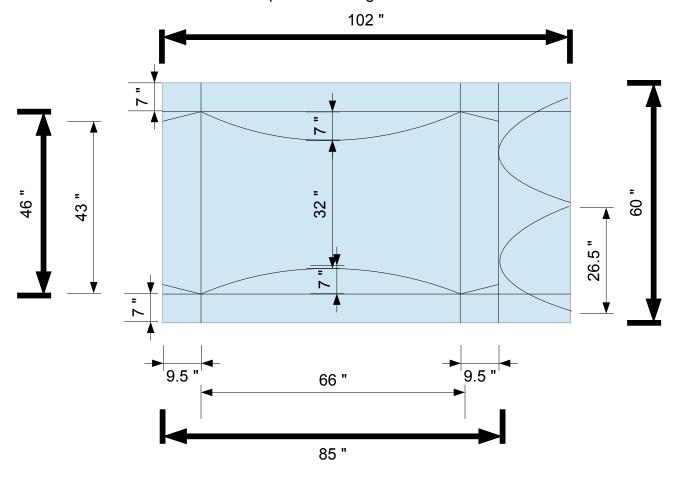

Create template for the side cat cuts and end pieces using poster board


Cut fabric to dimensions above

Sew endcaps to hammock body with  $\frac{1}{2}$ " seam allowance then close exposed seam with  $\frac{1}{2}$ " double fold bias tape Using 3" Grosgrain ribbon cut 8" strips (x4) and 2" strips (x4) centering and sewing on the corners and before the ends respectively Carefully measure and create 1" and  $\frac{3}{8}$ " button holes at the corners and ends respectively for the suspension Pin the binding to the hammock generously starting from the middle of the head end and sew a seam  $\frac{1}{2}$ " from the edge Leave approximately  $\frac{3}{8}$  to  $\frac{1}{2}$ " on the end to fold under for a hem.

Install the suspension and center at the appropriate points

Using a zipper foot sew close to the suspension

Sew the suspension to the binding about 4" on each side of the loops and 2" from the ends. (leave about 5/8" from loops)

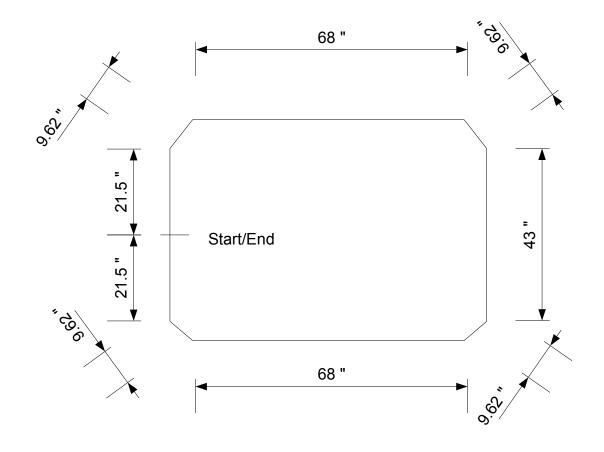

0> 21 ½"> \*31 5/8"> \*99 1/8">108 3/4"> 151 3/4"> \*161 3/8> \*229 3/8"> 239>260 1/2" + 1/2" hem=

## 261" Total or 21.75' or 71/4 yds

Cut Insulation to width of hammock body at narrowest

Cut bottom layer to length desired. (Recommend length of spreader bar attachments 66")

Pin bottom layer to hammock and test prior to cutting width. (Approx 54-55". Make ½" longer for loss when sew on insulation)

Center insulation on bottom layer and sew quilt lines about 8.5" wide

Use the template from hammock to create the cat cuts

Cut end binding to width of hammock and create button holes 1 1/2" from ends then sew to ends of quilt with button holes to outside Pin the underquilt generously to the hammock then sew with inside of hammock facing up and underquilt on bottom

Insert shock cord through ends and secure with mini cord lock

