



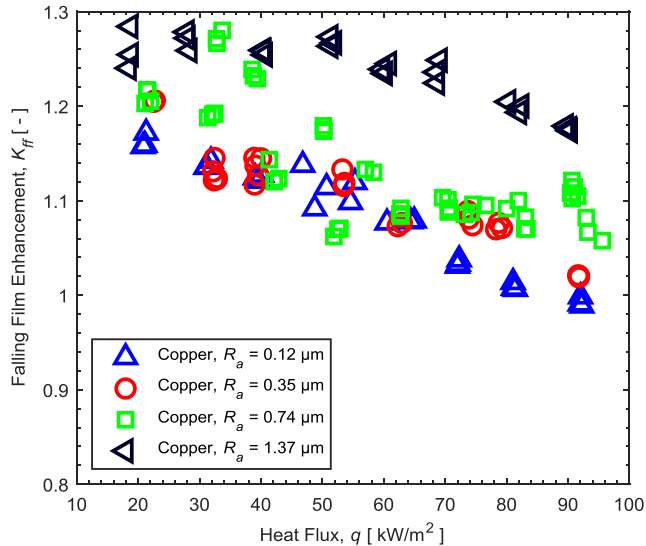

(a) 5°C

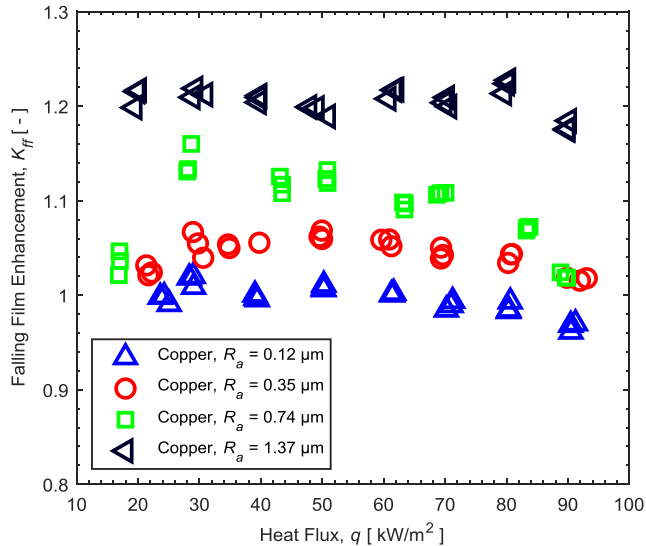

(b) 25°C

Fig. 16. Falling film enhancement, K_{ff} , with different roughnesses of copper tube at a film Reynolds number of approximately 2100 at different saturation temperatures.

which outperforms stainless steel. At lower heat fluxes the mild steel has comparable heat transfer to the copper tubes, but as the heat flux

changes in heat flux.

The difference in tube materials did not significantly influence the