

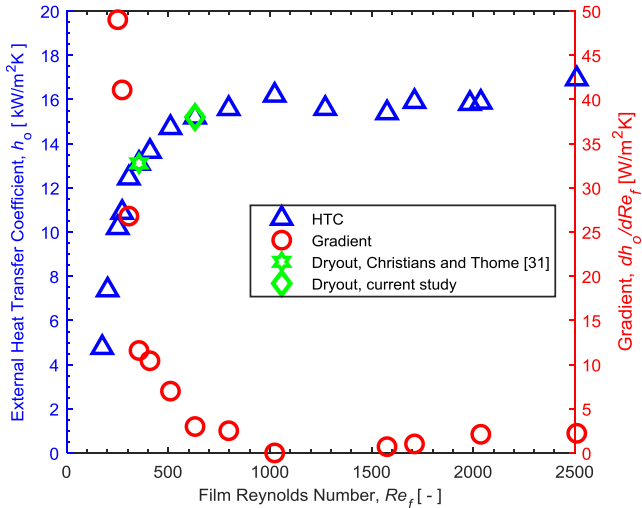


Fig. 7. Falling Film boiling HTC on a copper tube with a surface roughness of $0.74 \mu\text{m}$ as a function of film Reynolds number Re_f at 25°C at a heat flux of 50 kW/m^2 illustrating the dryout point selection method as per Christians and Thome [31] and the current study.