

micropillars
 of 30-
 electron
 realized
 d). Also,
 e of the
 ion beam
 thick layer
 e silicon
 amples to
 projected
 gh to be
 for water
 heat flux
 mance of
 using an
 n Fig. 3
 sed, high
 ldrich) to
 e surface

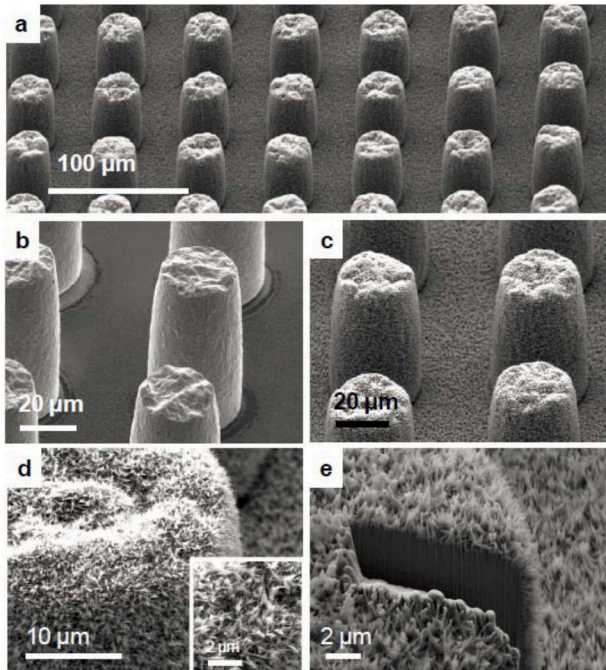


Figure 2: Scanning electron micrographs (SEMs) of the representative, fabricated CuO-based hierarchical surfaces. (a) CuO micropillar array in a square array with heights of 61 μm, diameters of 30 μm, and spacings of 30 μm. (b) Electroplated Cu micropillars, and (c) micropillars with CuO nanostructures formed on the surfaces. (d) Magnified view of the CuO micropillar and CuO nanostructures formed on the surfaces (inset). (e) Cross-sectional view of the CuO micropillar obtained using FIB milling.

Silicon
 /SiO₂
 Copper
 /CuO
 Titanium
 PR

icated as
 a silicon