

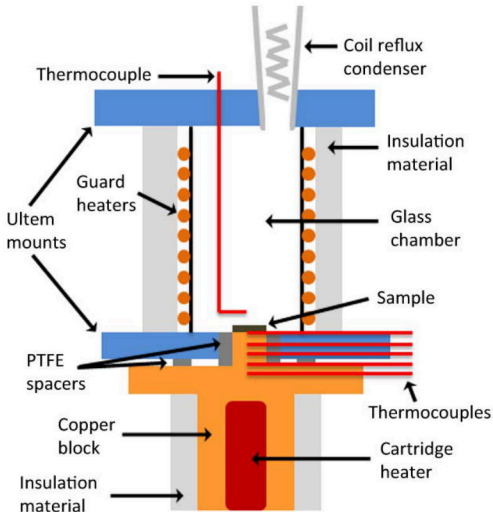


Figure 3: Schematic of the experimental pool boiling setup [12]. The setup consists of a copper block and a glass chamber fixed at both ends by Ultem mounts. Cartridge heaters were imbedded in the copper block allowing for a maximum power of 1400 W. Five in-line thermocouples were inserted into the center axis of the copper block to measure the heat flux and surface temperature.

Experimental Results