



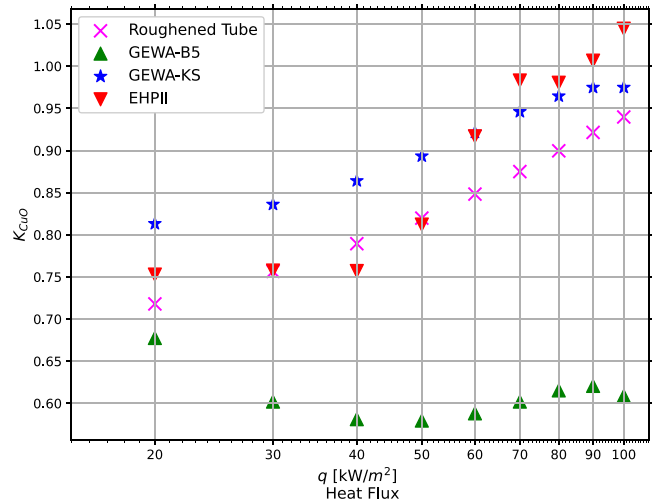

(a) 5°C

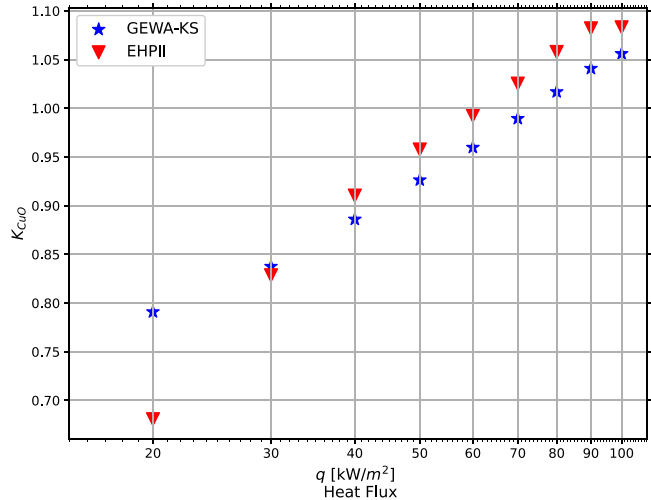

(b) 25°C

Fig. 4-4. Coating heat transfer influence ratios of the plain and micro-enhanced tubes in R134a.