

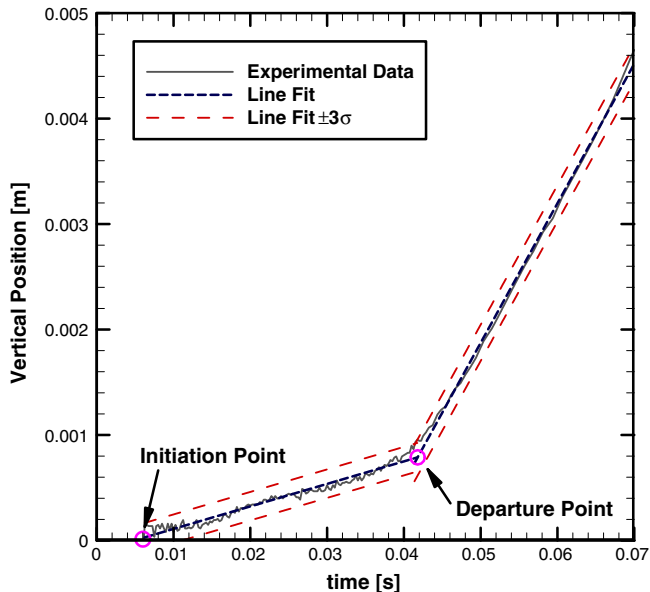


Fig. 10. Illustration of the calculation procedure for bubble initiation and departure times, by analysis of the vertical position of the bubble over time (polished surface at 2.06 W/cm^2).

focus. The instantaneous image of the still frame was generated by counting the number of sites $N_{A,cum}$ that were active during the time periods (Pinto et al., 2015). The frames chosen arbitrarily were those with a greater than one bubble. The analysis, using the pixel-logging method, consisted of nucleation sites logging the instantaneous number of nucleation sites active in any of the frames of ± 3 pixels in the image. This, however, did not prevent the detection of bubbles being retained if they were not detected in the

The area of the surface was determined by the scale in the lateral direction. The effective nucleation sites were determined by the counted number of active sites in the image. The area of the surface was estimated to be 20% for the polished surface. The fluxes where the field

4.4. Terminal velocity

The bubble terminal velocity was determined by a straight-line fit to the data points of the