

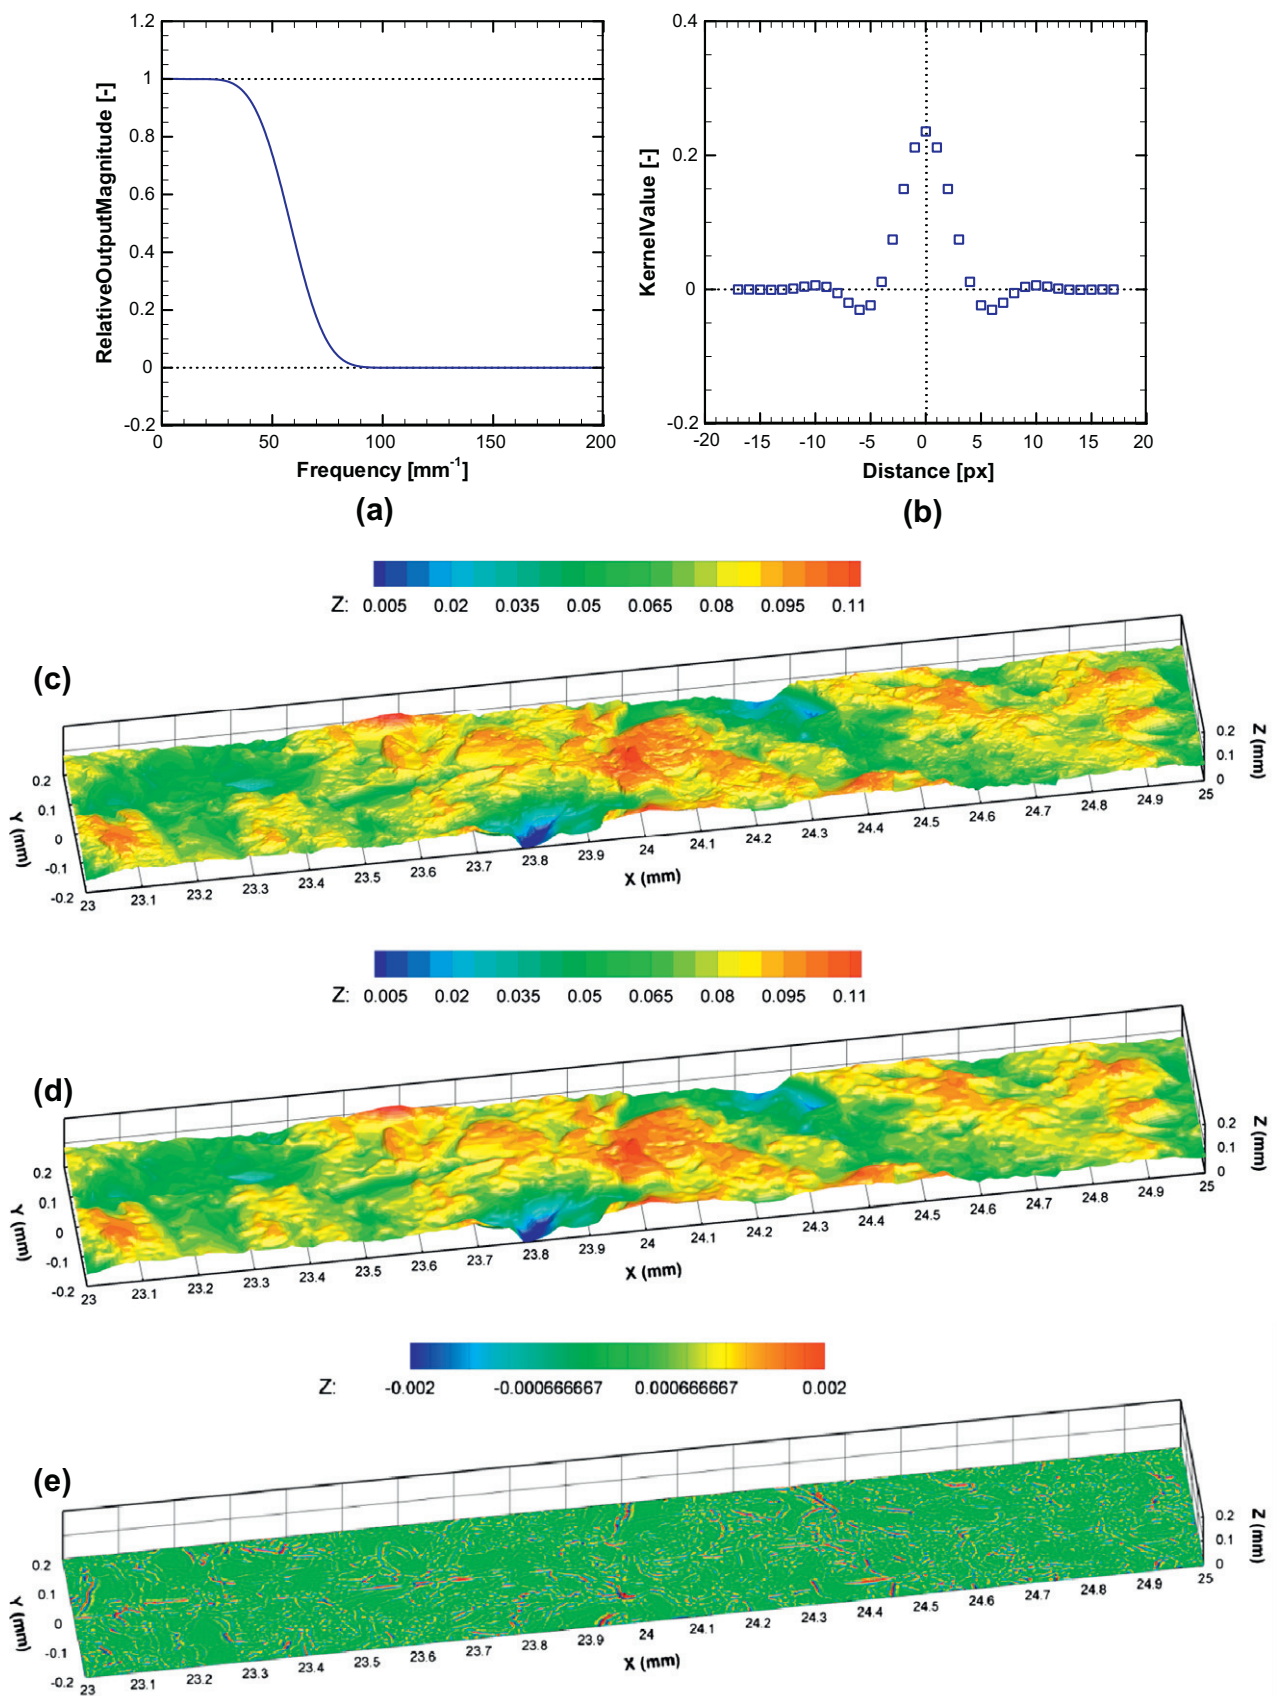


Fig. 1. Surface maps were filtered with cutoff frequency determined by the predicted bubble base diameter: (a) frequency response of the filter for FC-72, (b) Blackman-windowed 1-D sinc filter, (c) unfiltered section for surface 5, (d) surface 5 after low-pass filtering, and (e) high-frequency surface roughness features remaining after subtracting (d) from (c).