

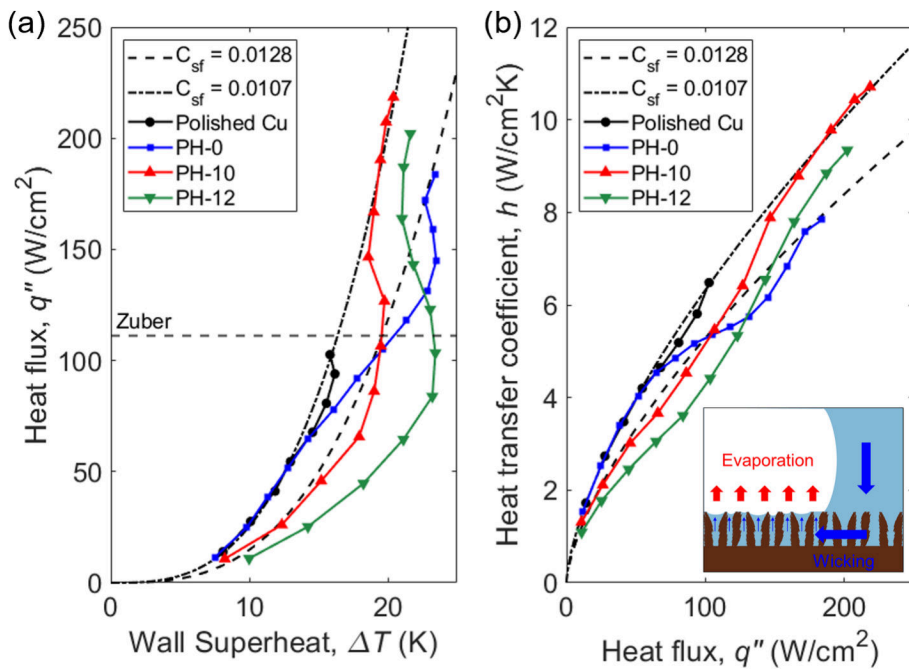


Fig. 7. Pool boiling heat transfer performance of the polished copper surface and copper foams deposited at pH 0, 10, and 12 showing (a) boiling heat flux as a function of the wall superheat with the Rohsenow correlation at different liquid surface combinations (C_{sf}) for water on polished copper and (b) Heat transfer coefficient as a function of the boiling heat flux with the Rohsenow correlation. The inset illustrates the wicking-based boiling enhancement mechanism.