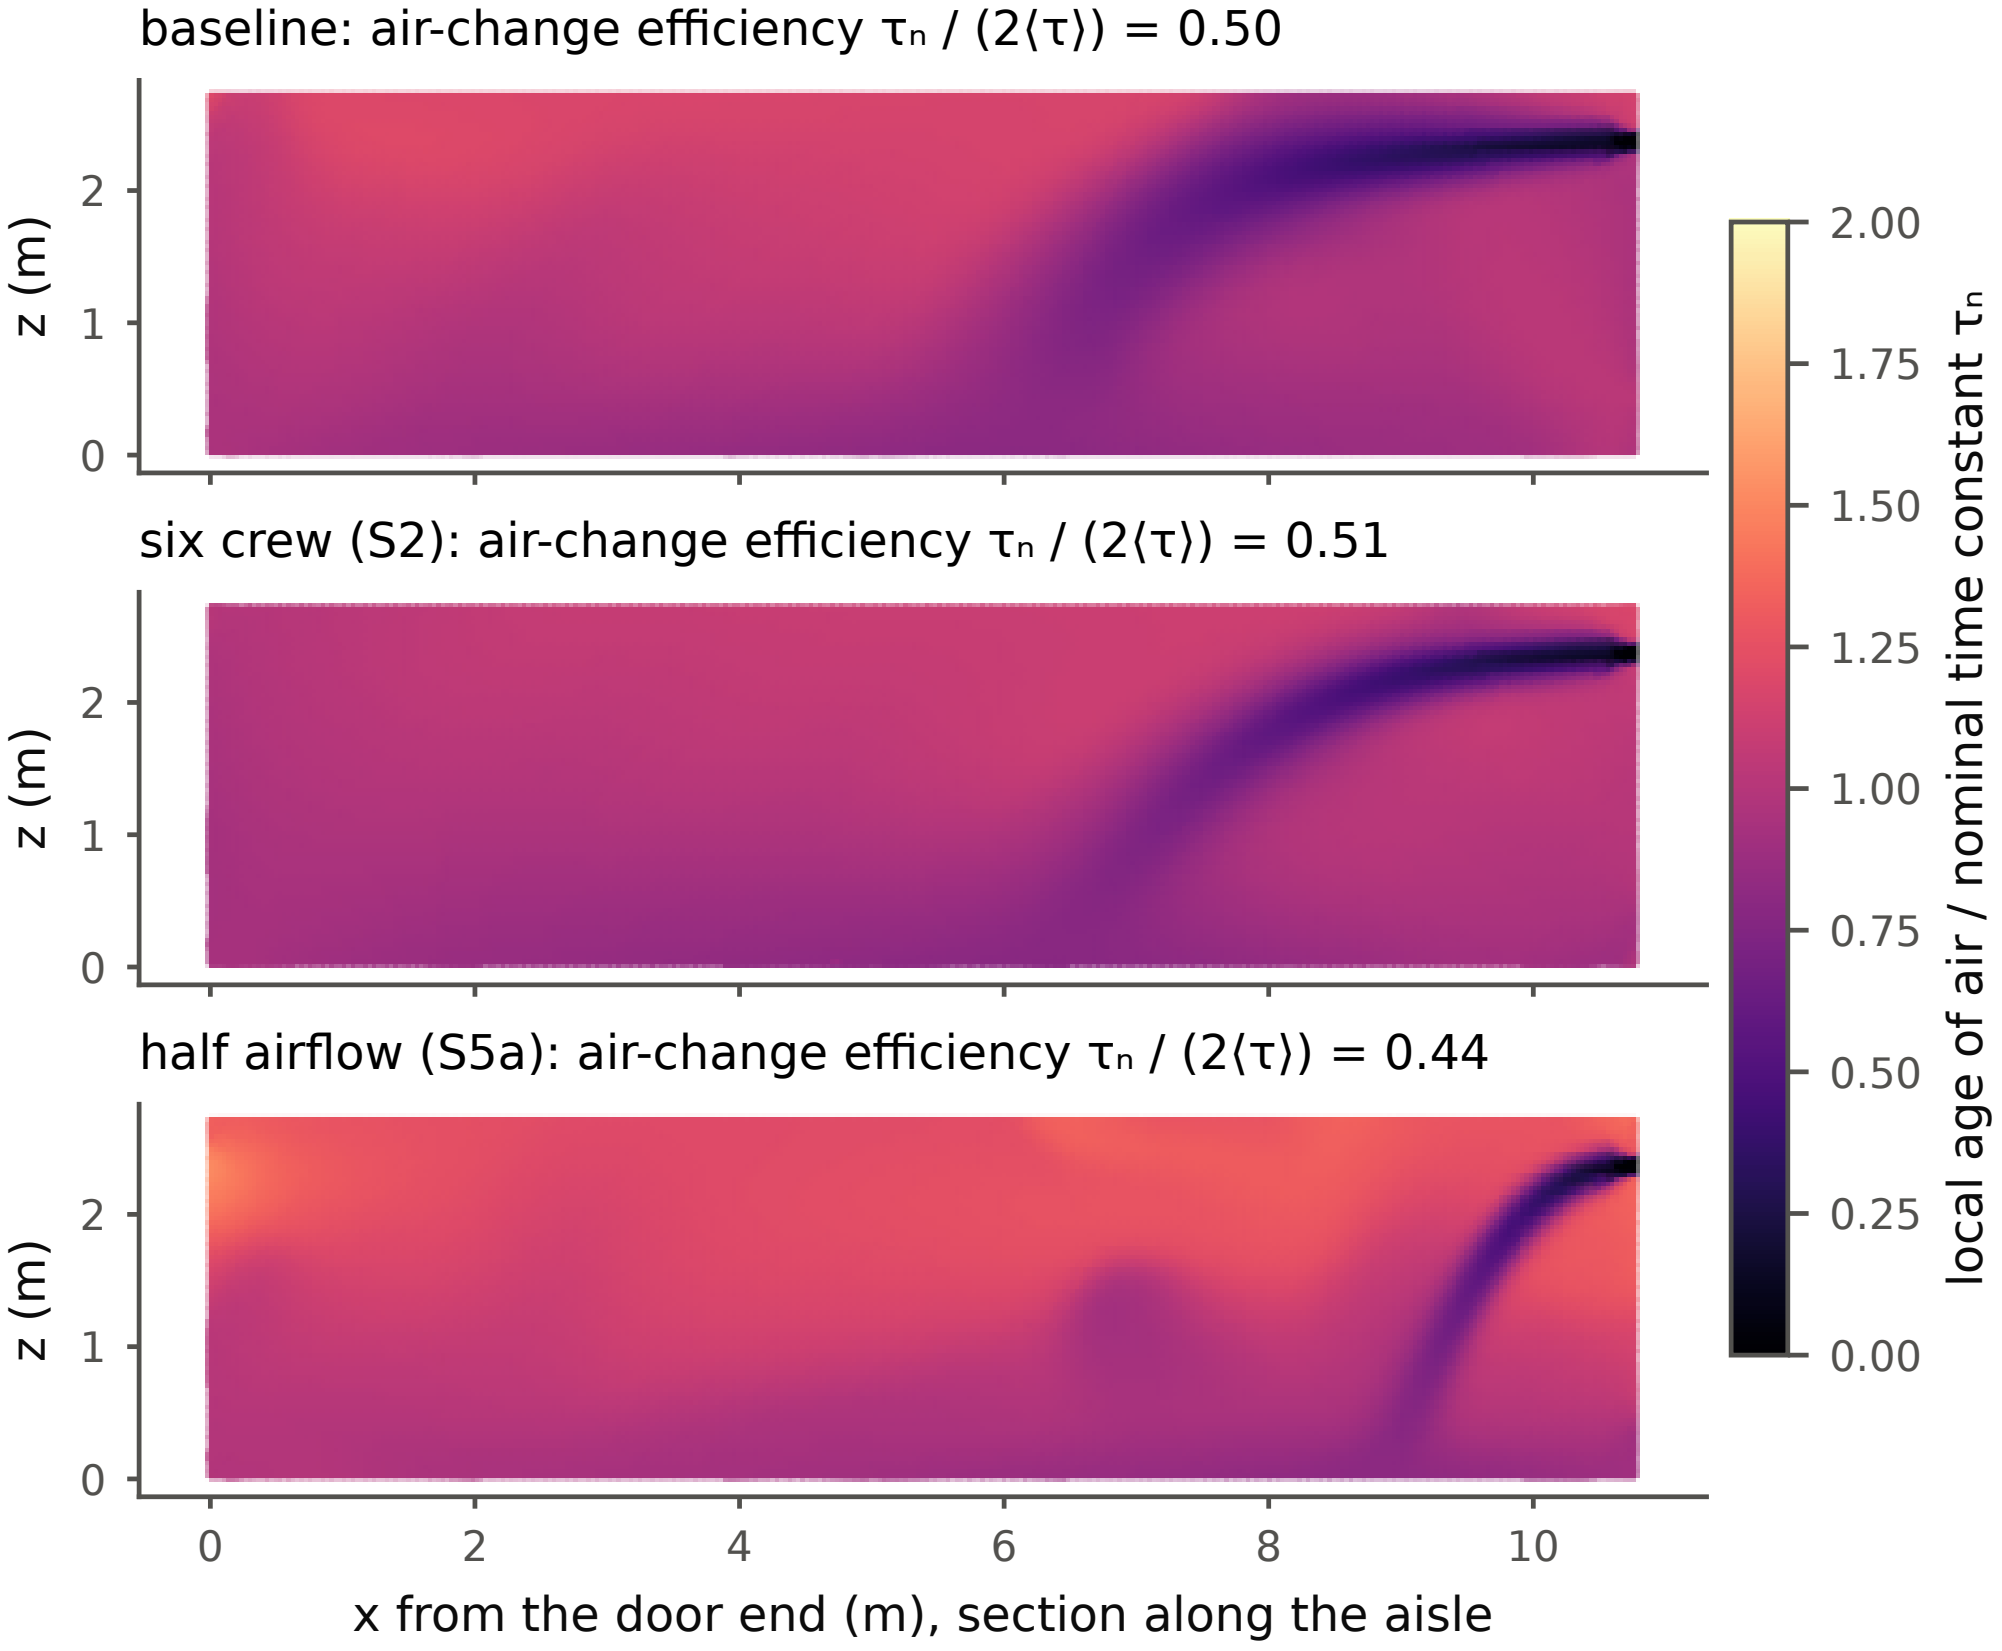

baseline: air-change efficiency τₙ / (2⟨τ⟩) = 0.50
six crew (S2): air-change efficiency τₙ / (2⟨τ⟩) = 0.51
half airflow (S5a): air-change efficiency τₙ / (2⟨τ⟩) = 0.44
z (m)
0
1
2
0
2
4
6
8
10
x from the door end (m), section along the aisle
local age of air / nominal time constant τₙ
0.00
0.25
0.50
0.75
1.00
1.25
1.50
1.75
2.00