

REAL TIME KINEMATIC
GLOBAL NAVIGATION SATELLITE SYSTEMS
IN RAILROAD TRANSPORTATION

by
Peter Joseph Dailey

Dissertation Submitted to the
College of Engineering and Mineral Resources
at West Virginia University
in partial fulfillment of the requirements
for the degree of

DOCTOR OF PHILOSOPHY
IN CIVIL ENGINEERING

Approved by
David R. Martinelli, PhD, Committee Chairperson
Darrell R. Dean, PhD
Jim French, PhD
Andrew Nichols, PhD
Avinash Unnikrishnan, PhD

Morgantown, West Virginia
2010

Keywords: transportation engineering rail railroad infrastructure track trackway railway
inspection freight GPS GNSS NDGPS real time kinematic RTK VRS positive train control PTC
location determination system LDS yard class classification hump survey profile alinement
alignment occupancy FRA USDOT

© 2010 Peter J. Dailey

REAL TIME KINEMATIC
GLOBAL NAVIGATION SATELLITE SYSTEMS
IN RAILROAD TRANSPORTATION

by PETER JOSEPH DAILEY

A Dissertation Submitted to the Graduate
Faculty of West Virginia University
in Partial Fulfillment of the
Requirements for the Degree of
Doctor of Philosophy
Major Subject: Civil Engineering

COMMITTEE

David R. Martinelli, PhD, chair

Darrell R. Dean, PhD

Jim French, PhD

Andrew Nichols, PhD

Avinash Unnikrishnan, PhD

Abstract

Real time kinematic global navigation satellite systems in railroad transportation.

by Peter J. Dailey

Transportation of freight by rail is an exceptionally fuel efficient mode. Rail's exceptional efficiency comes with a high cost for inspection and maintenance of the railway to insure train safety at design speed. The Federal Railroad Administration imposes operational safety by requiring compliance with regulations which rely on timely track inspection.

Further, new standards for train movement authority, known collectively as positive train control, require knowledge of a train's exact location on the railway. This knowledge has traditionally relied on wired track circuits due to the need to distinguish a train's location on two or more parallel tracks.

The research examines a technology to augment signals from navigation satellites in real time, available from many state governmental agencies at little or no cost, yet proclaimed by the US Department of Transportation in 2008 as "unsuitable for transportation applications". The successful application of this technology may enable rail companies to inspect the trackway with greater safety at lower cost, and enable train location determination systems in positive train control independent of wired track circuits.

The results of three experiments conducted within the safety and access constraints of a Class I railroad are presented. The first surveys a 58 track hump yard by locomotive during production operations. The second determines horizontal track alignment over 29 miles of mainline track using inspector's Hi-Rail. The third experiment tests the hypothesis that RTK GNSS technology can meet the FRA's stringent requirement as a reliable indicator of track occupancy. The research outcome suggests more efficient techniques for selected track inspection tasks, as well as a wireless method to determine track occupancy.

Acknowledgements

The author wishes to thank the following organizations and individuals for their guidance and assistance.

West Virginia University

Dr. David Martinelli, Dr. Darrell Dean

Nick Joe Rahall Transportation Center

Robert Plymale, Dr. Richard Begley, Dr. Dianna Long, Alejandro Sanchez, Carlos Ramirez, Salvador Djeukeng

Marshall University

Dr. Anthony Szwilski, Dr. William Pierson, Dr. Rick McCormick

CSX Transportation

Michael Ward, John West, Bernie Sanders, Mike Nall, Gil Barnes, Don Vanwormer, Ron Bright, Les Miller, Bill Kelly, Rodney VanPelt, JR McCloud

Ohio Department of Transportation, Aerial Engineering

Dave Beiter

Funding provided through the office of Senator Robert C. Byrd.

Dedication

This is dedicated to the men and women of the railroad industry that go to work thinking of their own and of their coworker's safety; perform their duties while remembering to work safely; and at the end of each shift, return safely home to their loved ones. Then, wake up and do it all again, every day.

Contents

List of Tables

List of Figures

Chapter 1

Introduction

The shipment of freight by rail is an exceptionally efficient transportation mode. The average freight train consumes one gallon of diesel fuel to move one ton 423 miles [?]. The outstanding efficiency of rail freight comes with a high price in inspection and maintenance of the railway. Rail car loading forces, weather, and time act on the railway and substructure to distort the track geometry. Distortions to the track geometry¹ must be identified and maintenance resources brought to bear to insure safe operation at the design track speed.

FRA² mandated visual track inspections rely on a rail company inspector's training, skill, and diligence. Conversely, track geometry car inspections provide an objective, detailed record of relative track position but are performed infrequently due to the limited availability of these specialized measurement systems. The thesis of this research is that, given a sufficiently accurate and reliable augmentation system, railway infrastructure measurement can be performed quickly, with greater safety, and at less cost by determining absolute track position using global satellite positioning systems. Survey-grade track measurement using GNSS³ instrumentation will remove ground-based surveyors from the hazards inherent to active rail yards; enable monitoring of rail position changes during routine visual inspections; and determine the track occupancy of a train in parallel multi-track segments in signalized or dark territory, independent of wired track circuits.

The research results present an investigation into the use of Real Time Kinematic (RTK) augmentation to global satellite navigation systems in the measurement of absolute track position. Survey quality track positions enable the development and demonstration of solutions to rail measurement in an active hump yard and across 29 continuous miles of parallel mainline track.

Space vehicles (SV) that comprise the GPS⁴, as well as other global navigation satellite systems:

¹i.e., gage, profile, alignment, crosslevel, superelevation, and warp.

²Federal Railroad Administration

³Global Navigation Satellite Systems

⁴Sponsored by the United States Department of Defense (USDOD)

GLONASS⁵; Galileo⁶; and the future CNSS⁷, are orbiting reference beacons enabling autonomous geo-spatial positioning and timing across the globe. The geo-spatial positioning accuracy of these systems can be improved by augmenting the identifiable distortions to SV signal transmissions through the ionosphere and troposphere with corrections from ground based facilities.

The use of GPS positioning for rail infrastructure measurement has depended on federal government supplied augmentation. The United States Department of Transportation (USDOT) has selected the National Differential GPS (NDGPS) augmentation system to increase accuracy in transportation applications. NDGPS has been promoted by the FRA as a means to achieve reliable track occupancy, however no NDGPS equipment demonstrating the requisite accuracy or reliability to insure track occupancy has been publicly demonstrated [?]. The FRA reports that “When [track occupancy is] viewed as a two dimensional area problem, it is unlikely that any economically feasible [GPS] system could achieve this accuracy to the required 0.95 probability [?, pp.6-7].”

Railway Measurement Problems

Track course smoothness must be held within specific tolerances to avoid undesirable lateral accelerations that lead to additional railway distortions and derailment. A system for track surveying should be cost-effective, provide relative accuracy without interfering with train traffic, and minimize exposure to railway hazards. Historically, North American railways use relative measurement methods for track inspection based on the idea that track curvature (D_c) irregularity can be determined by the versine⁸.

The research applies a RTK augmented GNSS to measure track position in hump yard for the purpose of track profile measurement; determining D_c mainline track across a wide area; and determining track occupancy probability independently of wired track circuits. Three railway measurement opportunities were investigated during the research.

1. An automatic classification yard uses the force of gravity to propel cars through a complex of tracks to the intended destination in the yard. Environmental factors⁹ act on the motion of a railcar from its release, through a transit of specific yard tracks, to a final rest position. Profile deviation from the design grade due to settlement occurs over time from railcar loading forces and the effects of weather [?]. Conducting a differential level survey across a 60 track, thousand car per day yard, places workers in harms way. Yard production delays are unavoidable to accommodate the safety of the survey party. The difficulty and expense in

⁵GLObal'naya NAVigatsionnaya Sputnikovaya Sistema sponsored by the Russian Space Forces

⁶Sponsored by the European Union

⁷Compass Navigation Satellite System proposed by the Peoples Republic of China

⁸In rail transportation, versine refers to relationship between the distance (v) measured at right angles from the midpoint of a chord (L) to the arc, with the instantaneous D_c determined from $\lim_{L \rightarrow 0} 8 \frac{v}{L^2}$

⁹Wind speed, direction, and ambient temperature

conducting a yard survey to quantify production delays attributable to grade irregularities are rare [?].

A hump yard profile survey was conducted by locomotive equipped with RTK GPS survey instruments. The survey was conducted during production and inclement weather. The survey resulted in the production of 58 track profiles.

2. Track superintendents rely on routine visual inspections to identify track defects for directing maintenance resources. RTK GNSS instrumentation holds the promise of recording track alignment during routine visual inspections by Hi-Rail. Track alignment history could provide insight into the identification of track shift or compliance irregularities attributable to car loading, weather, or geologic processes.

Commercial off-the-shelf (COTS) RTK GNSS surveying instruments and a Virtual Reference Station server (VRS) were used during a track inspector's normal visual inspection by Hi-Rail to determine degree of curvature D_c . RTK instruments mounted to a Hi-Rail processed correctors from a VRS server, recording track position observations. A software modeling the string lining method [???(hereafter referred to as *the model*) determined D_c and mile post reference locations. The RTK Hi-Rail D_c were compared against rail company track charts to verify the model. The accuracy of the RTK Hi-Rail method for determining D_c was compared against measurements by a specialized track inspection vehicle.

3. Locating a train in a parallel, multi-track segment by means of GNSS requires a priori knowledge of each track segment's location. The present US rail transportation system inventory of 95,000 mainline track miles makes monumenting the absolute location of each track centerline to a high degree of accuracy a formidable task. Most rail company's have chosen LiDAR overflights to monument the position of track and wayside assets.

Position of a mobile track vehicle using RTK GNSS determined a track reference position against which subsequent traverses by the mobile track vehicle were compared. Subsequent track positions by mobile track vehicle over met the FRA positioning requirements for a location determination system (LDS) as might be used for positive train control (PTC) [?, pp.3].

Research Questions

The researcher sought to determine the viability of RTK GNSS augmentation to assess railway infrastructure and act as a reliable track vehicle locator capable of meeting the requirements of a location determination system as defined by the FRA.

The solution to many track measurement and rail vehicle location problems requires absolute track and vehicle position measurement over wide areas. The research integrated RTK augmented GNSS measurement within the operational and safety constraints of a Class I rail company for the purpose of developing a method to survey track location with common track vehicles. The

rail transportation problems addressed by the research seek to decrease on-track worker hazard exposure, increase track inspection efficiency, and reduced the cost of track measurement. The research employed locomotives and HiRail vehicles equipped with COTS GNSS survey equipment to evaluate the relative vertical precision, horizontal accuracy, and position reliability of RTK augmentation. The research attempted to use an RTK GNSS measurement system to meet the "...high integrity, and high reliability for safety-critical train control applications [?, pp.11]."

Objectives of the research developed procedures and supporting models for assessment of RTK augmented GNSS integration within a Class I railroad environment.

1. A literature review of previous rail survey experimental results as well as intellectual property claims were used to investigate factors that indicated the need for research into the use of RTK augmented GNSS over railways.
2. Experts in the field of hump yard engineering were interviewed, and a review of the literature was used to identify methods of increasing humpyard efficiency and throughput. Railcar motion was studied through a humpyard in an effort to identify operational problems that may be related to profile degradation.
3. A method was developed and demonstrated to safely and precisely determine track grades across the bowl area of an automatic classification yard. The use of COTS RTK GPS instruments were evaluated aboard a locomotive during humping operations. Individual profiles for each bowl track in the yard were produced. The relative vertical precision of the mobile receiver and the signals recorded by a reference station in the yard were evaluated for evidence of signal distortions due to the radio-reflective environment of a hump yard.
4. Experts in the field of track inspection and wide area RTK augmentation delivery were interviewed to identify methods for measuring rail position over wide areas of mainline track.
5. A method was developed and demonstrated for safely determining horizontal track alignment across a wide area.
6. A model was developed to determine horizontal track alignment based on the string lining method using RTK GNSS observations. Factors affecting GNSS measurement over mainline track were analyzed.
7. A methodology was developed to assess RTK GNSS as part of a location determination system suitable for supporting positive train control. COTS RTK GNSS VRS infrastructure and instrumentation were evaluated in parallel multi-track mainline segments for the ability to meet FRA tolerances [?, 4-5].

Development and demonstration of RTK augmented GNSS is significant to providing the rail industry with a practical and reliable standard of absolute rail position measurement over a wide area. Several tools were developed enabling railway infrastructure measurement and monitoring that has not been demonstrated with US government provided GPS augmentation. Intelligent rail transportation initiatives will benefit from survey-quality positioning in the command, control, communications, and track information domains. Freight transportation will derive benefit from

improved power and braking systems which will result in improved energy efficiency and decreased emissions; improved systems for track defect detection and track movement prediction; improved efficiency in the deployment of maintenance assets; examination of track substructure through determination of the track modulus between lightly loaded (as with a HiRail) and loaded (as with a locomotive) track measurements; and safety improvements derived from Positive Train Control (PTC) systems with the potential to significantly reduce the probability of collisions between trains, casualties to roadway workers, damage to equipment, and reduction in the occurrence of overspeed accidents through the wireless differentiation of track vehicle location over parallel multi-track segments.

Reliable wireless measurement of track position, when contrasted with the present use of dedicated track circuits¹⁰, provides an opportunity to use RTK GNSS to enhance railway infrastructure management practices. Track vehicle location and control benefits from RTK GNSS coupled with utilization of existing wayside wireless infrastructure has the potential to provide economic benefit by reducing a rail company's dependence on existing hard-wired infrastructure¹¹ and attendant labor costs.

Other cited benefits of accurate train location may include:

- Higher quality service, through continuous tracking of car movements.
- Reduced fuel consumption, through better pacing of trains (avoiding the need to take away momentum through braking and restore it through use of diesel power).
- More efficient use of existing physical plant, increasing effective capacity while avoiding further outlays to build additional tracks or sidings. [?, pp.12-13]

Operational Definitions

1. Hump yard: This study specifically refers to the Hamlet Terminal, owned by CSX and located in Hamlet, North Carolina.
2. Mainline track: A track extending through yards and between stations which must not be occupied without authority or protection. This study refers to mainline track as C&O Ohio Subdivision from mile post (MP) 211 to MP 207 (Guyendotte, West Virginia), and C&O Kanawha Subdivision from MP494 to MP 523 (Barboursville, WV to Russell, KY).
3. Mapping-grade accuracy: An observed position within 3-16 feet (1-5 meters) horizontally and 6-33 feet (2-10 meters) vertically of the true value with 95% confidence.
4. Survey-grade accuracy: The combined measurement errors from instrumentation and the measurement process producing a position to within 0.1 feet or less in the horizontal and vertical plane of the true value with 95% confidence.

¹⁰i.e., insulated track circuits, loop detectors, magnetic proximity switches, transponders

¹¹Estimated replacement mainline cost of \$125,000 per mile × 95,000 miles = \$12 billion [?]

5. Track occupancy: FRA LDS specification for differentiating between parallel tracks with a 11.50 foot centerline-to-centerline track spacing using GPS. The FRA track spacing requirement is interpreted in this study as a point obtained from a mobile track vehicle no greater than $\pm \frac{11.50}{2}$ feet left or right of a track reference point (i.e., centerline), with 99.999% confidence [?, pp.6-7].

Research Questions

The research conducted in this investigation was an analytical study supplemented by the acquisition of RTK GPS/GNSS track observations. The research focused on the integration of RTK augmented GNSS within the operational constraints of a Class I railroad. As a result of this research, a methodology for the assessment of railway infrastructure was developed.

The problems solved by the determination of absolute track location to a high degree of accuracy in a hump yard and over mainline track answered these questions.

- 1) *Hump Yard Profile:* Can a locomotive use RTK augmented GPS to measure the vertical profile of bowl tracks in an automatic classification yard during production activities?
- 2) *Horizontal Track Alignment:* Can a common track vehicle use RTK augmented GPS/GNSS to determine the horizontal degree of curvature (D_c) comparable with specialized track geometry vehicles?
- 3) *Track Occupancy:* Can a common track vehicle use RTK augmented GPS/GNSS to meet the positioning requirements for track occupancy outlined by the FRA [?, pp.6-7] for a location determination system?

Chapter 2

Literature Review

The literature review supported answering these research questions:

- 1) *Hump Yard Profile*: Can a locomotive use RTK augmented GPS to measure the vertical profile of bowl tracks in an automatic classification yard during production activities?
- 2) *Horizontal Track Alignment*: Can a common track vehicle use RTK augmented GPS/GNSS to determine the horizontal degree of curvature (D_c) comparable with specialized track geometry vehicles?
- 3) *Track Occupancy*: Can a common track vehicle use RTK augmented GPS/GNSS to meet the positioning requirements for track occupancy outlined by the FRA [?, pp.6-7] for a location determination system?

Manifest Freight and Hump Yard Efficiency

Car load freight traffic requires a systematic method for handling the distribution of car destinations, the return of empties, and redirecting cars to their originating industry. On-time delivery in carload service requires minimizing delay during a series of independent car handling events. Beshers notes that each transit through a terminal decreases the probability of an on-time delivery, and provides a statistical determination of overall freight service reliability as the product of the probability-of-delay each time a car is handled along the way to its destination [?]. Moorman points to the difficulty rail freight carriers have in achieving acceptable carload service levels in retaining market share [?].

Automated classification yards¹, are facilities engineered to continuously process incoming freight cars into outbound trains. Car processing in a hump yard uses the force of gravity to propel cars through a complex of tracks to the intended destination in the yard.

Beshers point to the degradation of car-load service quality and movement away from boxcars to inter-model freight as factors that have resulted in a clear trend towards rail company closure or

¹Commonly referred to as hump yards.

repurposing of hump yards rather than investing in new facilities [?]. Several older hump facilities remain in use but have been repurposed as flat switching yards, as in Russell, KY, Dewitt, NY, and Enola, PA. Others have been converted into intermodal facilities, such as Norfolk Southern Atlanta, GA and Rutherford, PA yards [?].

Dr. Edwin Kraft in a patent claiming to increase yard throughput through a multi-stage sorting algorithm, points out that surviving hump yards operate at close to maximum throughput and operate under a state of constant congestion, to the point that they often cannot accept newly arriving trains. In these circumstances cars are parked on main line track and wait to be processed. Hump yard congestion affects rail service reliability across the network, which in turn contributes to further loss of rail traffic to the trucking industry [?].

A hump yard's profile deviation and settlement away from the design grade can be attributed to the effects of car loading forces and weather. Szwilski and Kerchof's observation that yard delays attributable to grade irregularities are difficult to identify due to limited yard profile data available to the hump yard engineer [?]. When interviewed, Barnes echoed Szwilski and Kerchof in noting that the limited availability of profile data is due primarily to the difficulty in conducting a survey to profile track [?].

Szwilski and Kerchof estimated a differential level survey across a 72-track hump yard would take 4 to 6 weeks of field work by a three-person survey crew. A differential level survey point density is typically measured on 100' stations, resulting in the observation of approximately 3,000 points within the bowl area of the yard. An estimated 480 to 720 man-hours of exposure to rolling stock in an active yard evidences the need to insure the survey party's safety by closing groups of tracks to production activity. Extended track closures require rerouting railcars away from the yard to prevent yard congestion. The associated cost to reroute railcars is difficult to estimate [?]. Safety consideration for the survey party require the yard manager to dedicate specifically trained workers from the yard's labor pool to act as a safety escort. The specter of six continuous weeks of negative production due to track survey activity limits a manager's tolerance for obtaining track profiles, no matter how well intentioned the survey intrusion [?].

The hump end of an automatic classification yard controls the motion of a railcar through the yard. Hump end yard operations are described visually in [this video](#)² and provide a graphic understanding of railcar pacing, car variety, and braking [?]. The video follows several railcars from release by the pin puller, through the main, intermediate, and group retarders, passing lead and group switches into the bowl to couple at a controlled speed intended to be no greater than 4 mph. The requirement for personal protective equipment in or near a hump yard is obvious from the retarder/wheel flange squeal in the audio track.

Anecdotal inference of yard infrastructure problems is the usual mechanism by which grade renewal is scheduled. An experienced observer might use the reaction of a car's truck and bolster

²<http://www.youtube.com/watch?v=ndryMwF41Kk>

as an aid in revealing underlying track irregularities.

Modern hump yard control systems, such as the ProYard and ProYardII systems, are able to count car transits through the yard network as cars pass wheel detectors (magnetic proximity switches) linked to PLCs³ programmed with timing logic. Misroutes and car stalls recorded by modern hump control systems are metrics used to gauge overall yard performance as well as distinguishing individual track irregularity.

A [time lapse video](#)⁴ [?] shows a series of stalled flatcars. The opening frames show a flatcar moving away from the hump, striking a group of stalled flatcars. As a result of insufficient coupling speed, the flatcar rolls back toward the hump, with the car's final rest position blocking the group switch. The blocked switch prevents any additional railcars from classification into the blocked group. The stall effectively shuts down humping operations when the next car sequenced for the blocked group reaches the pin puller. The time-lapse sequence from stall to the trim locomotive kicking the cars into the alley represents 21 minutes of delay, indicative of the cumulative effects from profile-induced delay affecting the on-time quality of car load service.

An FRA sponsored study examined the effects of locomotive electromagnetic fields on the NDGPS signal, finding a reduction of some 10db in particular antenna configurations [?]. Radio-reflective structures and the metal railcars may affect GPS signals in a hump yard. GPS signal reflections from fixed and moving surfaces present an opportunity to introduce complex multipath distortion to GPS receiver, in addition to the effect of electromagnetic fields generated by a locomotive from the generator and traction motors.

Absolute Track Location Measurement Systems

The “other supplemental techniques” referenced in the USDOT NDGPS Assessment are reflected in patents that integrate differential GPS, inertial systems, and wheel mounted tachometers to produce optimal estimators for determining locomotive track occupancy [?]. Supplemental techniques were demonstrated across a wide area of mainline track in an asset mapping system demonstrated by Allen, Mason, and Stevens.

Allen, Mason, and Stevens developed a rail borne track-mapping system as a cost saving alternative to remote sensing from an aerial platform. Their survey platform consisted of a HiRail vehicle equipped to utilize publicly available real time correctors from the NDGPS in addition to post processed observations from a cooperative⁵ Continuously Operating Reference Station (CORS). The GPS instrument was augmented with tachometer and inertial measurement unit (IMU) inputs. Allen reported that an initial calibration on a dedicated survey vehicle took two days.

Rail positions measured by Allen’s HiRail were compared against 26 centerline targets previously

³Programable Logic Controllers

⁴<http://www.youtube.com/watch?v=yglx9RER70>

⁵<http://www.ngs.noaa.gov/CORS/Coop/>

surveyed using RTK GPS. NDGPS correctors were available during 80% of the 120 mile traverse of Norfolk Southern mainline track. Two Post-Processed Kinematic (PPK) positions were divided into two categories by distance to the CORS. A first category of observations was processed against a CORS at under 65 miles distant from the survey vehicle, with a second category of PPK positions processed against a CORS between 65 and 130 miles distant from the survey vehicle.

Table 2.1: Track Measurement Results [?]

Measurement	Cross-Track*	Along-Track*	Elevation*	Absolute*
NDGPS	5.2418	5.4766	13.5308	8.0834
PPK < 65 mi.	1.5758	1.4766	4.4049	1.8917
PPK 65–130 mi.	2.9084	2.5003	10.2528	3.8505

* Feet, 95th percentile. Significant figures reported by Allen.

The cross-track differences between previously surveyed RTK track locations and those measured by HiRail summarized in table ???. No determination for LDS suitability was reported.

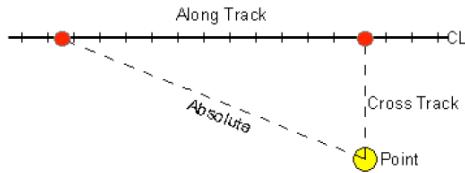


Figure 2.1: Track Centerline Accuracy Parameters [?]

Other track asset mapping systems exist for determining the location and type of assets held by railroads. The Union Pacific Railroad has developed and markets a HiRail-based measurement vehicle built on a SUV chassis and referred to as the Precision Measurement Vehicle (PMV). The PMV is used to provide location and description of all assets that can be measured from the railway. While occupying active mainline track, PMV operators use several measurement technologies to determine asset location. Four independent encoded wheels provide linear referenced track position inputs by accumulating the slope distance between wayside monuments. A differential GPS receiver provides mapping-grade absolute position, while a fiber optic gyroscope (OG) is used to measure grade. The OG also serves to dampen the elevation observations from the DGPS receiver. A video interface provides the operator with a view through optical distance measuring instruments. A video recorder provides a record for milepost tracking and a survey log. Comparative positions generated by the PMV were not available for examination [?].

Glaus details the development of a lightweight multi-sensor track surveying platform. The 99-pound (45 kg) hand-propelled device, nicknamed the *Swiss Trolley*, tested several sensors and the development of a rigorous mathematical model for calculating kinematic track location. Close tolerance rail alignments are required for high speed passenger rail service. The *Swiss Trolley* fills the need for precision track surveying by demonstrated the ability to determine absolute track axis⁶ position to a high degree of precision. The *Swiss Trolley* sensor suite is summarized in table ??.

Table 2.2: Swiss Trolley Instruments [?]

Measurement	Sensor	Range/Resolution
Absolute position	RTK GPS Total Station	1 mm [sic]
Absolute/relative position	Tracking Total Station	1 mm
Linear distance	Odometer	0.08 mm
Cross level/Grade	Inclinometer	$\pm 15^\circ$
Asset location	Laser scanner	180°
		1 mm @ 32 m
		10 mm @ 80 m
Gauge	Angular transducer/rail contact	0-45°

Analog sensors on the *Swiss Trolley* are linked to a control and data acquisition computer by means of an analog to digital multiplexor. Sensors are synchronized with 1 pps timing pulses generated by the GPS receiver. The sensor suite provides inputs to the model to calculate track axis, grade, cross level, and gauge. Points of concern are raised by the author in dealing with thermal and electrical noise on the analog-to-digital (ADC) converter inputs from a variety of sensors. Electromagnetic compatibility interaction between instruments was addressed by reducing the length and attention to the orientation of cables between sensors and ADCs. Two fluid-damped pendulum sensors provide cross-level and grade inputs. These inclinometers are subject to errors from nuisance vibrations, temperature, and collimation (axis alignment) error. Thermal instability errors were reduced by installing the sensors in an instrument oven to maintain a constant temperature regardless of ambient conditions. Grade and cross-level sensor vibration is modeled as a pendulum and applied to track position corrections. Significant is Glaus's method of integrating auxiliary instruments using Kalman filtering techniques to produce spatial accuracies in the range of several millimeters in a complex dynamic application.

The *Swiss Trolley* is capable of producing exceptional track position accuracies, but the hand propelled sensor suit is limited to a maximum speed of 3.3 mph. Survey speeds are intentionally kept at a minimal to reduce sensor synchronization uncertainty for the platform. The reduced rate also aids in providing an accurate absolute time tag for kinematic data collection [?]. In its

⁶Referred to here as centerline top-of rail.

present form, the tight instrument integration and slow survey speed of the *Swiss Trolley* make this approach impractical for track inspections across wide areas.

Mainline Track Horizontal Alinement

Mainline railways are periodically inspected with specialized “track geometry cars” for compliance with FRA mandated track alinement criteria or to meet more stringent rail company specifications [?] [?]. Alinement data recorded by a track geometry car determines position by use of an odometer for track location within a linear reference system relative to wayside monuments. Wayside references commonly referred to as mile posts range from permanent cast concrete to steel signposts inserted into the ballast. Mile markers are subject to destruction or displacement from routine track maintenance and vandalism. Resetting mile posts is many times a best guess effort. Track geometry car measurements are typically referenced to these reference marks. Track defects referencing offsets from these marks are sometimes difficult to locate by Hi-Rail odometer. [?].

The linear measurement system of a track geometry car produces accurate relative positions in the search to alinement defects. A geometry car will use GPS to provide a global reference frame to map alinement exceptions, however the accuracy of these GPS measurements are not adequate for use as a primary alinement tool. Track geometry vehicle inspections are limited in frequency due to the number of vehicles available, with those focused on higher traffic segments. [?].

Track Occupancy

The FRA has established that any location determination system suitable for supporting positive train control must establish track occupancy with a very high degree of certainty. In a given parallel, multitrack segment, an LDS must be able to determine which track a given train is on without error. The FRA therefore requires a LDS to demonstrate track position that assumes a minimum track separation (center to center spacing) of 11.5 feet with 99.999% confidence [?, 4-5].

A method of autonomous locomotive location referenced by US patent 6,641,090 and follow on 7,209,810 *Locomotive Location System and Method* disclose an apparatus integrating inertial navigation, GPS, and a wheel mounted odometer as a method by which track occupancy can be determined by a train traveling proximal to a turnout. The patent claims teach that the method is able to determine track occupancy when a locomotive travels through a turnout by engaging a Kalman filter to process noisy inputs from accelerometers orthogonal to the direction of travel as the locomotive is diverted from the tangent track into a turnout. The output is compared with predefined track parameters by computing the location and corresponding estimated error states derived from the inertial navigation system until the estimated error state matches a pre-determined feature, indicating the track for that instance is not the track occupied by the locomotive. The method does not teach how to distinguish track occupancy between parallel trackways [?].

Improving the USDOD⁷ guarantee of 12.8 meter horizontal accuracy from the Global Positioning System Standard Positioning Service requires that positions calculated by a GPS receiver be augmented to correct for delays induced in the SV⁸ signal's travel through the ionosphere and troposphere and a variety of instrument errors [?]. Correctors transmitted to and processed by a capable receiver are able to compensate for errors and improve the position determined at the receiver's antenna. Correctors are derived from the difference between the instantaneous position calculated at a stationary reference receiver antenna and the actual location of the stationary antenna. The reference receiver determines the signal error for each SV in view of the antenna. The position differential is the product of all "signals in space" errors induced in the signal, zeros the clock error between the reference and mobile receiver. SV signal errors accumulate from orbit irregularities (i.e. gravitational effects, solar wind, or outdated ephemerides); satellite and receiver clock errors; ionospheric and tropospheric delay; and other identifiable factors [?]. The reference and mobile receivers must receive the same SV signals for correctors to have an effect on the mobile receiver position accuracy [?].

Current federal government augmentation systems, the Wide Area Augmentation Systems (WAAS) sponsored by the Federal Aviation Administration and the National Differential GPS (NDGPS) sponsored by the US Coast Guard, provide civilian users with mapping-grade⁹ position accuracy. The USDOT¹⁰ was given presidential authority to develop and promote the use of civilian GPS augmentation systems.

Presidential Decision Directive National Science and Technology Council (NSTC-6), designating USDOT to serve as the lead agency within the U.S. Government for all Federal civilian GPS matters. NSTC-6 commissioned the USDOT to:

"Develop and implement U.S. Government augmentations to the basic GPS for transportation applications.

- In cooperation with the Departments of Commerce, Defense and State, take the lead in promoting commercial applications of GPS technologies and the acceptance of GPS and U.S. Government augmentations as standards in domestic and international transportation systems.
- In cooperation with other departments and agencies, coordinate U.S. Government-provided GPS civil augmentation systems to minimize cost and duplication of effort [?]."

Federal government provided GPS¹¹ signal augmentation can be categorized by the augmenting signal transmitter location into 1) Space Based Augmentation Systems (SBAS) which use geosynchronous satellites to relay corrections from ground reference stations to the user, and 2) Ground

⁷United States Department of Defense

⁸Space vehicle

⁹Defined here and generally accepted as 1 to 3 meter horizontal accuracy

¹⁰United States Department of Transportation

¹¹Non-GPS augmentation to GNSS systems is not provided by federal government systems

Based Augmentation Systems (GBAS) which transmit corrections from ground reference stations directly to the user.

Space-Based Augmentation Systems

Government sponsored and privately funded SBAS are available to civilian and commercial users. The FAA¹² sponsors WAAS¹³ for aviation users and consists of an integrity reference monitoring network, processing facilities, geostationary satellites, and control facilities. The central data processing sites generate navigation messages for retransmission to users by geostationary satellites. The information is modulated on the GPS-like signal and broadcast to the users from geostationary satellites. WAAS corrections result in horizontal accuracies of 0.481 to 1.521 meters with 95% confidence across the continental United States [?].

WAAS is limited to broadcasting differential corrections for only GPS SVs. As with any SV signal, the reception of correctors broadcast from a geostationary SBAS satellite can be adversely affected by foliage, terrain, and building shadowing along the signal path from the SBAS SV to the user. The USDOT cites signal shadowing effects from a single geostationary point source as an objectionable characteristic for the use in railroad applications. The signal shadowing characteristic is a primary objection to the use of an SBAS as part of an LDS by the FRA [?].

Commercial SBAS subscription services enable horizontal accuracies to 6 cm @95% and are used primarily in precision agriculture applications which, due to their use in open fields, are relatively unaffected by loss of the correction signal on the north side¹⁴ of tree lines or terrain, and under heavy foliage cover [?].

Ground-Based Augmentation Systems

The National Differential GPS (NDGPS) is a GBAS that uses terrestrial Low Frequency (LF) radio in the 285-325 kHz band for transmitting correctors to NDGPS capable receivers. A desirable aspect of long wavelength¹⁵ LF radio is ground wave propagation. LF digital signals are favored by the USDOT for communicating correctors due to signal reception at distances up to 250 miles distant from a terrestrial reference station transmitter and LF.

The accuracy of NDGPS augmentation degrades at a rate of ± 6.6 parts per million (ppm) distant from the reference receiver¹⁶ [?]. A USDOT report recognizes other problems in addition to the low data rate of the NDGPS signal, in that the signal

“...is further degraded by computational and other uncertainties in user equipment and the ability of user equipment to compensate for other error sources such as multi-

¹²Federal Aviation Administration

¹³Wide Area Augmentation System

¹⁴SV orbits viewed from the ground, are not present in northern segments.

¹⁵ $\lambda=922$ to 1052 m (3,025 to 3,451 ft)

¹⁶At a distance of 250 miles, a user could expect an additional horizontal error of ± 8.7 feet ($6.6 \cdot \frac{250-5,280}{1,000,000}$)

path interference and propagation distortions” [?].

With these considerations, the USDOT selected NDGPS as the GBAS for transportation applications. The USDOT promotes NDGPS as the augmentation system of choice for enabling positive train control location determination systems. The FRA qualifies its support for NDGPS use in PTC by understanding the need for “other supplemental techniques” to meet the high degree of confidence required of an LDS [?]. The USDOT *2008 NDGPS Assessment Final Report* states that “NDGPS with its current level of accuracy has not proven adequate for safety-level track separation information [?].”

Real Time Kinematic Technology

Augmentation technologies such as Real Time Kinematic (RTK), provide the capability of centimeter-level GPS positioning in real time while the receiver is in motion. RTK technology was assessed in the USDOT Final Report on NDGPS as poorly suited for positive train control. The report states that

“As railroads continue to deploy CBTC¹⁷ and similar GPS-based train management and asset management systems, they must survey the railroad in GPS coordinates. Railroads cover too much territory to practically employ mobile survey-grade reference stations for these surveys [?, pp.12].”

Transmitting RTK correctors to mobile users was characterized as requiring

“. . . their own wireless link between the reference station and the user receiver, which is typically limited to line-of-sight. If the user moves out of range (radio range or line of sight) of the reference station, the reference station must be re-positioned, and the user must again wait for the reference station to achieve “lock” with the GPS satellites required for high accuracy [?].”

The USDOTs summary disclaims the use of RTK augmentation as “not usable for general transportation applications”[?, ES-7].

This research disputes the 2008 USDOT assessment as failing to acknowledge the convergence of several technological factors enabling survey-grade absolute position measurement over wide areas. Demand for high quality positioning from satellite systems has lead to a growth in the availability of public and private alternatives to mapping-grade federal augmentation services. A number of state transportation and geodetic survey departments are building their own GPS/GNSS reference networks, providing survey-grade augmentation at no or nominal cost ?????. Unlike federal systems, state and private systems are not limited to providing augmentation for only GPS SVs. State government systems provide correctors for both US and Russian SVs, as well as future GNSSs like Galileo and Compass.

¹⁷Communications Based Train Control

Private investment in networked reference systems provides a market opportunity to profit from the need for survey quality GNSS. Delivering real time correctors to a mobile receiver is enabled by the increased capacity to transmit data to users in the field by a number of means. Wireless data transmission comes at a reasonable price, with data transmission rates several orders of magnitude greater than NDGPS. Data rates are an important consideration in planning for the increase in corrector quantity due to new GPS signals¹⁸, an increase in the number of modernized GLONASS SV launches, and future signals from Galileo and Compass.

CORS networked within in a geographic area deliver observations as real time inputs to a virtual reference station server (VRS), which provides the capability of continuously estimating the distortions of SV carrier phase observables and supply correctors to mobile receivers. Mobile receivers are capable of applying VRS server transmitted correctors to instantaneously refine local observations to an accuracy of several centimeters. Mobile RTK users can expect to achieve position accuracies of 1-2 centimeters horizontal and 2-3 centimeters vertical across an entire regional VRS network with 95% confidence.

Literature Review Summary

Recent negative reports by the USDOT regarding the use of Real Time Kinematic satellite navigation systems to determine track location indicate a gap exists between the use of US government sponsored GBAS and regional state government sponsored RTK systems. There also exists a gap between dedicated inspection systems such as track geometry cars; NDGPS augmented IMUs like Allen's Hi-Rail; and sophisticated, multi sensor arrays like the *Swiss Trolley*. Review of intellectual property claims indicate addition work exists in industry that seeks to integrate federally provided augmentation with IMUs. It is unclear if intellectual property claims have been incorporated into commercial products to provide wireless locomotive location.

RTK infrastructure receivers networked to a VRS server combined with ubiquitous wireless data form a relatively new technology that enable absolute position measurement to within a centimeter over wide areas. It is the unexplored capability of RTK GNSS over the railway that establishes the need for this research in railroad transportation.

The research bridges a gap between mapping-grade track asset surveys that rely on mapping-grade US government provided GPS correctors, and complex track survey systems. This study examined the ability of RTK augmentation to bridge the gap to enable track measurement in applications not achievable through US government supplied augmentation services.

¹⁸L2C and L5

Chapter 3

Methodology

The researcher sought to determine the viability of RTK GNSS augmentation to assess railway infrastructure and act as a reliable track vehicle locator capable of meeting the requirements of a location determination system as defined by the FRA by answering these questions:

- 1) *Hump Yard Profile*: Can a locomotive use RTK augmented GPS to measure the vertical profile of bowl tracks in an automatic classification yard during production activities?
- 2) *Horizontal Track Alignment*: Can a common track vehicle use RTK augmented GPS/GNSS to determine the horizontal degree of curvature (D_c) comparable with specialized track geometry vehicles?
- 3) *Track Occupancy*: Can a common track vehicle use RTK augmented GPS/GNSS to meet the positioning requirements for track occupancy outlined by the FRA [?, pp.6-7] for a location determination system?

The researcher evaluated the capability of Real Time Kinematic (RTK) augmentation applied to Global Navigation Satellite Systems (GNSS) to safely, rapidly, and precisely measure track position employing common track vehicles such as Hi-Rails and locomotives as a survey platforms. Figure ?? describes the major goals and their relationship in meeting the research objectives. Rail transportation needs were identified from interviews with rail company experts; an assessment of current railroad process and capabilities; observation of yard operations in light of the expert interviews; and the identification of a statewide CORS network accessible to researchers. Interviews with subject matter experts has led to the design of experiments that were performed within the safety and access constraints of a Class I railroad.

This chapter contains the method for how:

1. A hump yard was profiled by an RTK GPS equipped locomotive to measure track position during humping operations.
2. A RTK GNSS equipped Hi-Rail was used to define D_c across 29 continuous miles of mainline track.
3. Multiple traverses by a RTK GNSS equipped Hi-Rail were evaluated for the statistical likeli-

hood of reliably determining track occupancy in parallel multitrack segments.

Research Design and Data Collection

The research investigated the use of RTK augmentation to the GPS and to GPS plus GLONASS (Referred to collectively as GNSS). The research investigated the capabilities of RTK GPS/GNSS

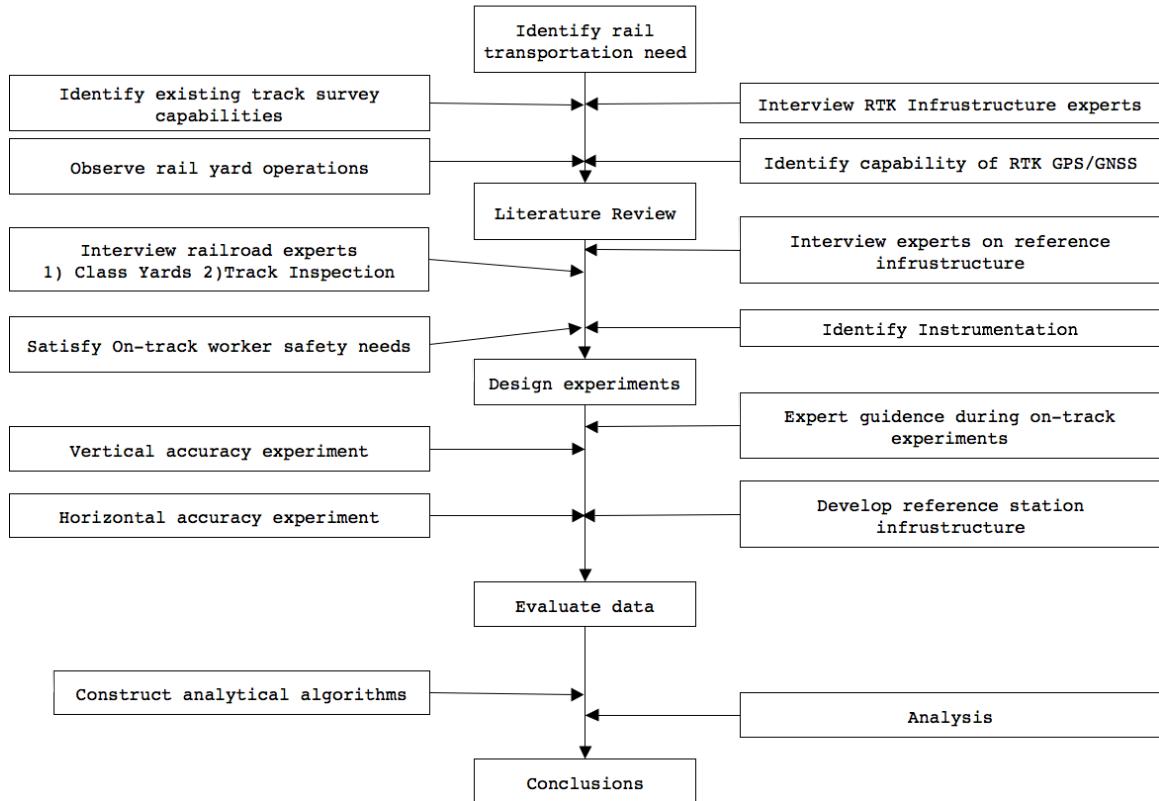


Figure 3.1: Research Plan

over active track. Due to federal and private property laws restricting access to active track, all research activities were performed adhering to the provisions of 49 CFR §214 railroad workplace safety regulations, subpart C *Roadway Worker Protection* [?] and subpart D *On Track Roadway Maintenance Machines and Hi-Rail Vehicles* [?] as well as specific rail company rules and procedures set out by the employee in charge during job safety briefings.

Track location of bowl tracks in a hump yard was determined from single epoch track observations from a GPS mounted on a locomotive traversing an active hump yard. The track positions were used to produce profiles for each bowl track in the yard. Relative vertical precision and base station observations were used to evaluate the yard environment for RTK GPS surveying by locomotive.

An evaluation of RTK augmented horizontal performance was made by single epoch observations of track position by RTK GNSS receivers mounted to a track inspector's Hi-Rail traversing active mainline track. Horizontal track alinement was evaluated by means of a software modeling the string lining method to determine the degree of curve from single epoch RTK GNSS track position observations. Degree of curve (D_c) determined by the RTK GNSS string line model was compared with D_c determined by a track geometry car over an identical tangent segment.

An evaluation of RTK GNSS to determine track occupancy was made by multiple Hi-Rail traverses with RTK GNSS instruments across multiple parallel segments of mainline track. Positions observed over identical and parallel segments of tangent and circular track were evaluated for cross-track error¹ for the likelihood of determining track occupancy by an RTK GNSS equipped mobile rail vehicle.

The electrical point of reference for a GPS/GNSS antenna is the phase center. The phase center is offset some distance from a physical reference location on the antenna housing. The physical antenna reference for each of these experiments was the mounting surface or antenna reference point (ARP). The survey controller contains a table of offset distances between phase center and ARP for the antennas used during each experiment. A procedure to align the ARP on the track vehicle to a selected railway reference location² was performed as part of the mobile track vehicle setup.

Estimates for the relative horizontal and vertical precision³ are calculated by the *Survey Controller* software in the Trimble TSC2 controller. *Trimble Survey Controller* software uses a algorithm to compute vertical precision:

$$VerticalPrecision(m) = ErrorScale * VDOP * ScaleFactor \quad (3.1)$$

Where:

$$ErrorScale = \frac{\sqrt{ErrorE+ErrorN+ErrorU}}{PDOP}$$

$$ErrorE = CovENU[x][x]$$

$$ErrorN = CovENU[y][y]$$

$$ErrorU = CovENU[z][z]$$

Where CovENU is the aposteriori covariance matrix of the RTK solution from the RTK engine in the GNSS receiver.

ScaleFactor is either 1 or 1/3 depending on whether the RTK engine is giving *Survey Controller* 1-sigma or 3-sigma precisions, which depends on the version of RTK engine. The *Survey Controller* display shows 1-sigma precisions.

¹per Allen et al., ??

²i.e., Track centerline, left (port) gauge side or right (starboard) rail.

³Relative errors are errors and precisions expressed for and between pairs of network adjusted control points.

The observation procedure for these experiments progress from setup of an ad hoc reference station in the case of experiment 1, or accessing a VRS reference network as in experiments 2 and 3; establishing a means of communication between the reference station/VRS and the track vehicle; aligning the antenna with a track reference point; and configuring the mobile receiver onboard the track vehicle.

Experiment One: Hump Yard Profile Survey

Experiment one asked whether RTK augmented GPS mounted to a locomotive could measure the vertical profile of bowl tracks in an automatic classification yard without the need for track closures.

The objective of experiment one was to use RTK GPS instrumentation mounted to a locomotive to survey an active hump yard in order to produce track profiles. The survey data was used to create information products which were handed off to the rail company sponsor in preparation for a yard-wide resurfacing project.

The hump yard survey used a single RTK reference station transmitting correctors via UHF radio to a mobile receiver onboard a locomotive. The ad hoc reference station components are listed in table ???. A fixed-height tripod at 1.5 meters supported the GPS and UHF antennas. The ad hoc reference station was set on top of a two story masonry structure to maximize height above average terrain (HAAT) for UHF data reception by the roving receiver aboard the locomotive as shown in figure figure ???. The elevated location provided sufficient HAAT to enable reception of correctors across the yard and to NGS benchmark EB1559 located 8,500 feet from the 25 watt UHF transmitter.

The autonomous horizontal position of the reference station (CP1) was adjusted by using the results of NGS OPUS from observations recorded during two sessions. The first session was 2008/05/26 14:21:00 to 21:44:00 UTC with the second session 2008/05/27 12:12:00 to 18:50:00 UTC. The compressed observation files were converted⁴ to the Receiver INdependent EXchange (RINEX) format and submitted to the National Geodetic Survey Online Position User Service (NGS OPUS) for position determination. The autonomous horizontal position of the ad hoc reference station (CP1) was adjusted to the mean northing and easting of the two NGS OPUS reports exhibited in Appendix A, pages ?? and ??.

The autonomous vertical position of the reference station was adjusted using RTK observations on a NGS benchmark, permanent identifier (PID) EB1559. The benchmark was located 8,508 from the ad hoc RTK reference station. The elevation of CP1 was adjusted to minimize the difference between the observed and the published NAVD88 elevation for the first order class II benchmark. The PID datasheet for EB1559 is exhibited in Appendix A, page ??.

Multipath concerns were examined at the reference stations by generating a full TEQC [?]

⁴Using Trimble *runpkr00* under Unix.

(Translation, Editing, and Quality Check) report from the reference station RINEX observation and navigation files. The TEQC reports are exhibited in Appendix A.



Figure 3.2: Ad hoc Reference Station

An EMD SD60 yard locomotive was equipped with the mobile#1 instrument indicated in table ???. The mobile GPS antenna mount was collocated with an omnidirectional UHF antenna and secured to a SECO magnetic base as illustrated in figure ???. The antenna mount was fitted with a wire rope safety lead to secure the antenna assembly to a fixed member on the locomotive cab to prevent injury to locomotive operators or ground personnel in the event the antenna was dislodged by handling rail cars. The antenna was aligned with the track centerline in an area designated by the yardmaster and blue flagged during installation to insure the safety of research and railroad company personnel working around the locomotive. The generalized procedure for aligning a GPS/GNSS antenna mounted to a track vehicle with a horizontal track reference and determining the antenna reference point from the top-of-rail elevation is described following and



Figure 3.3: GPS/UHF Antenna Setup on Locomotive

referencing figure ??.

Antenna Alignment Procedure

1. A job safety briefing is conducted by the rail company employee-in-charge.
2. A frequency in the 450 Mhz band is selected by monitoring voice traffic on available channels, as data is a secondary use of this spectrum. The ad hoc reference station is programmed with an autonomous position, and corrector transmission initiated.
3. A section of tangent track approximately 300 feet long is blue flagged and made safe by setting a derail and locking out the track switch as discussed during the job safety briefing.
4. Track centerline points are measured on either end of the calibration area, figure ?? points A and A'. The centerline points are observed with a Trimble R8 instrument for 180 epochs.
5. A line feature representing the track centerline is created in the survey controller between points A and A'.
6. The center point of the line feature is determined. Two points, referenced in figure ?? as points B and B', are observed at the top of each rail for 180 epochs.
7. A second line feature between points B and B' is created in the survey controller.
8. A point located by intersecting lines A-A' and B-B', figure ?? point C, is determined by the *Survey Controller* software.
9. The mean elevation of the top of rail observations is calculated and assigned to point C.
10. The GPS/UHF antennas and magnetic base mount are placed in the approximate center of the top of the locomotive cab. A wire rope safety harness connecting the antenna mount to the locomotive horn or other suitable anchor point is secured.

11. The survey controller is connected to the GPS receiver in the track vehicle. The previously created data file with the alignment features described above is opened.
12. Blue flags are removed from the locomotive by the persons that placed them. Derails are stowed and facing point track switch operators are unlocked. Movement authority is obtained from the yardmaster by the locomotive engineer.
13. The locomotive is moved to locate the GPS/UHF antenna mount over point C.
14. The locomotive is secured and the antenna mount moved in small increments to intersect the centerline by observing the instantaneous antenna location in the map view of the controller. A period of ten seconds between movements is allowed for the position to settle in the map display.
15. The survey controller antenna height is set to zero. Figure ?? point D is observed for 180-epochs. An inverse calculation is performed between points C and D. The elevation difference is recorded as the antenna height.
16. A survey style is created in the *Survey Controller* software containing the antenna height above the top-of-rail elevation. Due to variation in cab height above top-of-rail, the survey style is named for the particular locomotive unit number used in the antenna alignment. Likewise for individual Hi-Rail vehicles.

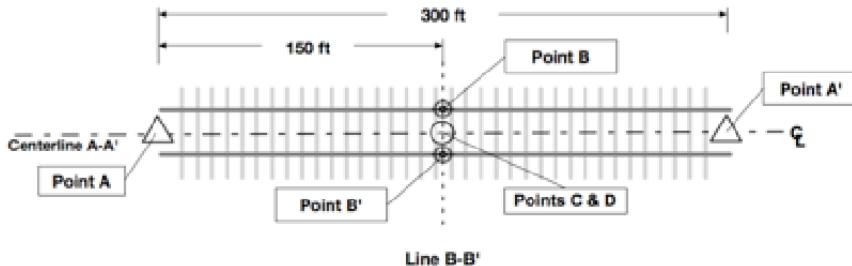


Figure 3.4: Track Vehicle Antenna Alinement Procedure

RTK correctors were broadcast from the single reference station by UHF data radio and used to augment the GPS receiver aboard the locomotive. A survey controller connected to the receiver managed and automated data collection by recording single epoch observations with a nominal horizontal separation of ten feet. Track profiles originated at a common reference point at the hump end of the bowl and terminated at the pullout-end switch for each track.

The pullout end of the bowl was surveyed first, from pullout switch to foul point⁵. The hump end of the bowl was surveyed during a shift change, from the hump to foul point, to minimize disruption to humping operations. Locomotive movement across the pullout end of the yard was coordinated between the locomotive operator and pullout end humpmaster⁶. Track traverses began

⁵The track foul point is the demarcation between hump and pullout end movement authority.

⁶Responsible for outgoing train makeup and movement.

at the pullout end switch and progressed to the foul point. The automatic numeric sequencing of the survey controller was used to produce unique point identifiers. The controller sequence was constructed by concatenating: 1) the two digit track number; 2) a single digit traverse counter; 3) a three digit point sequence beginning at 000 and incremented by one at each observation in sequence. Points recorded onboard the locomotive were feature coded as centerlines.

The hump end survey was performed in coordination with the hump end humpmaster⁷ during the yard shift change to minimize the impact of the survey interrupting yard production. The locomotive traverse of the hump end began at the hump, through the retarder and track leads, finishing at the track foul point. The unique point identification scheme previously described was not performed due to time constraints. The hump, leads, and track points were separated post survey.

Points of interest (POI) were surveyed on the ground with the static module referenced in table ???. The static receiver was mounted to a 2 meter range pole. Multiple epoch observations (3-6) were recorded at each point of interest. Feature codes distinguished switch points, wheel detectors, retarder inlet/outlet, and foul points. Switch points and retarders were identified by rail company reference number. Wheel detectors were identified by track and sequence number. Ground point safety was superintended by a rail company employee.

Variables of analysis: The mobile instrument #1, table ?? produced these variables:

Horizontal coordinates : US State Plane, North Carolina 3200, US survey feet.

Vertical datum : NAVD 88, height above ellipsoid 2003, in US survey feet.

Estimated Vertical Precision : Determined by *Survey Controller* software, US survey feet.

Time & Date : Local, EST of observation.

Count : SVs in view of the mobile#1 GPS antenna.

Vertical Dilution of Precision : VDOP, A unit-less figure of merit expressing the relationship between error in user position, and the error in satellite position.

Yard observations were exported from the *Survey Controller* software and separated into layers organized by lead, group, and track. Deconstructing the aggregate observations enabled individual tracks to be configured as a continuous series of points by activating the particular layers in TGO.

- Hump lead
- Main retarder
- Intermediate retarders
- Group retarders
- Group leads
- Bowl tracks

A properly configured track was apparent as a continuous series of points extending from the hump through the desired track to the pullout end switch.

⁷Responsible for railcar sequencing and switching into the bowl.

Locations of track POI (i.e., track switch points, retarder inlet and outlet, wheel detectors) were associated with a position nearest a particular rail. The POI was observed at the center top-of-rail nearest the POI physical location using the static survey instrument. The position of each POI was adjusted post survey to be coincident with the track centerline.

Continuous track observation names were renumbered in the TGO software, in series progressing from hump to pull out. Feature codes enabled separation by feature. The *TGO* software was used to create line work by connecting consecutive centerline points. The line work and observation data were exported from TGO in the ESRI⁸ shapefile format. The point data was also exported as a comma delimited (CSV) format and imported to a *Google Docs* spreadsheet. A linear reference was determined for each point according to equation ???. Elevations and linear references were scaled and input as an overlay to a CAD drawing containing the track design grade⁹.

Each track profile was plotted as an overlay to the provided CAD drawing. The design profile in the CAD drawing is relevant to the rail company in a making a volumetric assessment of surfacing material required to bring the relief of each track into vertical alignment with the design grade. Calculation of surfacing material quantity is outside the scope of the experiment. The design grade and locomotive survey result will be used as a comparative tool, limited to providing track profile deviation from design grade.

The shapefiles will be added to ESRI ArcMap software where a plan view of the bowl area track elevation and vertical precision estimate will be represented in plan view. The vertical precision map will show lower quality vertical precision for points > 0.1 feet in a contrasting color to those of greater precision. The plot will be examined for the distribution of lower quality data patterns.

Acceptable elevation quality will be apparent as a smooth track profile. Poor quality observations will appear with greater variation between points, resulting in a jagged or sawtooth profile. Poor quality elevations will be identified and correlated with: observation time; vertical precision estimated by the receiver; and reference station observations during the period.

The vertical precision calculated by the *Survey Controller* software was used to determine descriptive statistics and to plot a histogram for analysing the quality of GPS observations by the mobile instruments.

$$stak = \text{match point offset} + \sum_{k=2}^n \sqrt{(x_k - x_{k-1})^2 + (y_k - y_{k-1})^2} \quad (3.2)$$

Where k = a point in the ordered sequence of observations, and n = the number of observations in the track segment, and the match point offset is the horizontal distance from the top of the hump to switch point 1574.

Experiment one:

⁸Environmental Systems Research Institute, Inc.

⁹Provided by the rail company sponsor.

1. Produced an alignment procedure for alignment of the GPS antenna with the centerline top-of-rail location.
2. Collected continuous single epoch observations on a nominal 10 foot horizontal spacing with RTK augmented GPS onboard a locomotive in an active hump yard.
3. Resulted in the production of a plan-view color-map of track elevation for the bowl area of a hump yard.
4. Resulted in the production of a plan-view color-map of relative vertical precision as determined by the *Survey Controller* software for points measured in the bowl area of the yard.
5. Resulted in the production of a two-dimensional profile drawings for each track in 1:1 and 1:5 vertical scale.
6. Determined the descriptive statistics of the relative vertical precision as determined by the *Survey Controller* software for the locomotive mounted GPS .
7. Resulted in the production of TEQC reports for two ad hoc reference station observation sessions.

Experiment Two: Determining Horizontal Track Alinelement

This research asks whether RTK augmented GPS and GNSS instruments mounted to a common track vehicle can determine horizontal track alinement comparable those acheived by specialized track geometry vehicles. The objective of the experiment was to perform multiple mainline track surveys with RTK instruments mounted to a Hi-Rail vehicle; the development and demonstration of a software model using the string lining procedure in order to produce horizontal track alinement. The track alinement survey employed a series of CORS RTK reference stations along the survey route, networked to the Ohio Department of Transportation, Aerial Mapping Virtual Reference Station (ODOT VRS) server.

The ODOT VRS was used to minimize the ± 1 ppm error incurred as distance increases from a reference station. The VRS creates a new virtual reference station when the baseline between the track vehicle and the previous VRS created reference station increased beyond a distance programmed in the VRS. A public cellular data service was used to exchange security credentials with the ODOT VRS server, receive correctors, and apply them to a mobile receiver onboard a track inspector's Hi-Rail. A survey controller connected to the mobile receiver recorded single epoch observations with a nominal horizontal point separation of five feet with mobile instrument#2 (table ??) and ten feet with mobile instrument#1. Nominal point separation was based on the receiver processing speed for Hi-Rail traverses in the range of 10 to 30 mph.

Two mainline track segments of different character were traversed during this experiment. The first segment can be characterized as multiple parallel track, signalized, Class 4, with a maximum allowable track speed between 30 and 50 mph, carrying a freight volume of 25 to 35 MGT/yr¹⁰.

¹⁰Million Gross Tons per year

This segment is referenced as C&O Kanawha subdivision, from mile post 494 to 523 (MP494-523). Continuous observations over this segment demonstrates the capability of an RTK VRS over a wide area.

A second segment, characterized as single track, dark territory, Class 3, with allowable track speed between 10-30 mph, carrying a freight volume of less than 10 MGT/yr, is referenced as C&O Ohio River subdivision from mile post 210 to 207 (MP210-207). This segment was selected for study as the segment had been examined previously by Szwilski [?]. Additionally, data was made available from CSX's Gauge Restraint Measurement System¹¹ (GMRS) across this segment. Degree of curvature (D_c) from the GMRS was compared with the horizontal alinement model by selecting a tangent segment for comparision. An ideal measurement across a tangent segment would result in a D_c of zero. Therefore, the D_c deviation from zero across the tangent segment was used to compare the GMRS measurement with RTK modeled D_c measurements.

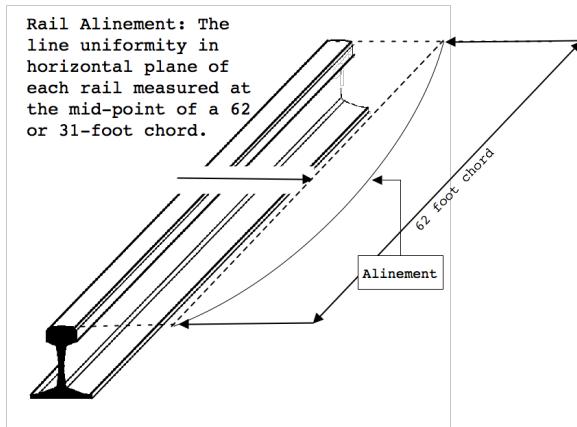


Figure 3.5: Horizontal Alinement

The track observations were used as inputs to a software to determine the D_c modeling the FRA guidance manual instructions for using the string line method. Experiment two objectives sought to:

1. Collect continuous single epoch observations with RTK augmented GPS/GNSS mounted to a track inspector's Hi-Rail over at least 29 continuous miles of mainline track. Point spacing was a nominal 10 foot for mobile configuration #1 and 5 foot horizontal spacing for mobile configuration #2 (see table ??).
2. Develop a software model for calculating degree of curvature (D_c) from RTK augmented GPS/GNSS track vehicle observations. The software model replicated the string lining

¹¹A specialized, self-propelled, track geometry car.

method described in FRA *Track Safety Standards Compliance Manual* [?, pp.26-30] using a 62 foot chord length and 15.5 foot stations.

3. Compare two methods of measuring D_c over tangent track. The first method utilized data from a specialized track geometry car, CSX's GMRS. The self propelled GMRS was designed specifically for the purpose of obtaining D_c (and other track alignment parameters¹²) from the string lining method. The second method utilized data obtained from an RTK GNSS instrument mounted to a track inspector's Hi-Rail and a software to model the string line method from the Hi-Rail data. A traverse of identical tangent track segments was compared for cross-track¹³ centerline deviation using descriptive statistics. Identical segments were determined by selecting beginning and ending mile post reference locations.
4. The D_c was determined and track elevation measured using RTK survey equipment mounted to a track inspector's Hi-Rail across a continuous 29 mile track segment. The modeled D_c was compared with company supplied track charts to correlate the location and magnitude of curves. Structures responsible for loss of signal (LOS) were identified.

Variables of analysis: The mobile instrument #1 and #2, table ?? produced these variables:

Horizontal coordinates : UTM, Zone 17 North, US survey feet.

Vertical datum : NAVD 88, height above ellipsoid 2003, US survey feet.

Time & Date : Local, EST.

Variables of analysis: The CSX GMRS produced these variables of analysis:

MP : Mile post offset distance, decimal miles.

D_c : Degree of curve, 62 foot chord.

The mobile antenna (table ?? mobile #2) was aligned using the generalized procedure listed on page ??, and mounted to a track inspector's Hi-Rail vehicle as illustrated in figure ???. The receiver was programmed to process observations in "low latency" mode, which uses approximately 20 milliseconds to compute each observation, degrading the manufacturer's stated horizontal accuracy of ± 1 cm by an additional centimeter [?, pp.8] [?, pp.9].

The controller was programmed to collect observations on a nominal 5 foot spacing. Mile post centerline locations were determined during a traverse of the research area. Mile post centerline locations were determined by positioning the Hi-Rail perpendicular with a mile post and observing the location for five seconds, resulting in 3 to 6 epoch observations.

The observations recorded by survey controller were transferred to *Trimble Geomatic Office* (TGO) software. Observations were separated into centerline and mile post layers, then exported in an ASCII comma delimited text format that included observation ID, feature code¹⁴, northing, easting, elevation, time and date, and number of observed SVs.

Mainline track locations are reported as a linear reference from a wayside mile post monument. A track reference reports the mile post number plus the offset from the monument in decimal miles.

¹²Gage, crosslevel, profile, D_c

¹³See Allen, et al., figure ??, page ??

¹⁴centerline, mile post



Figure 3.6: GNSS Antenna Mount, Hi-Rail

Mile post references are typically measured by odometer, therefore the offset distance from a mile post is the accumulated slope distance. An additional novelty of mile post distances in the United States is the inconsistent measure between reference marks. To determine a mile post reference location, the accumulated slope distance between observations from a mile post to the location of interest is divided by the distance between mile posts in feet, then added to or subtracted from the mile post number depending on the direction of travel¹⁵. The calculation is illustrated in equation ??.

Track position variables processed by the model to determined the degree of curve (D_c), following the string lining method described in FRA *Track Safety Standards Compliance Manual for Track Classes 1-5* per 49CFR§213.55 [?].

$$MP_k = MP_{num} \pm \frac{\sum_{k=1}^n \sqrt{(x_k - x_{k-1})^2 + (y_k - y_{k-1})^2 + (z_k - z_{k-1})^2}}{\sum_1^n \sqrt{\Delta x_n^2 + \Delta y_n^2 + \Delta z_n^2}} \quad (3.3)$$

Where n = the total number of observations between mile monuments.

¹⁵Milepost offset is added to the mile post when the direction of travel is with increasing mile post numbers, offset is subtracted with decreasing mile post numbers.

The string lining method as practiced by track inspectors and superintendents as described in the FRA *Track Safety Compliance Manual* determines points of greatest alignment deviation by moving a 62 foot string along the track in increments until the point with maximum deviation is found. The software model uses a similar approach, incrementally moving a chord along lines connecting an ordered series of RTK track observations. The distance from a chord's middle ordinate to a line segment determines the mid-chord offset (MCO). The software model determination of MCO from RTK observations as represented by figure ??.

End point coordinates for a 62 foot chord are determined by extending a 62 foot radius circle originating from the beginning station coordinate, represented by figure ?? station (x_o, y_o) and intersection a line segment defined by:

- An endpoint defined by the farthest point from the chord circle origin inside the chord circle.
- An end point defined by the the nearest point outside the circle.

The intersection is indicated at point (x_{int}, y_{int}) in figure ??, lying between points D and E.

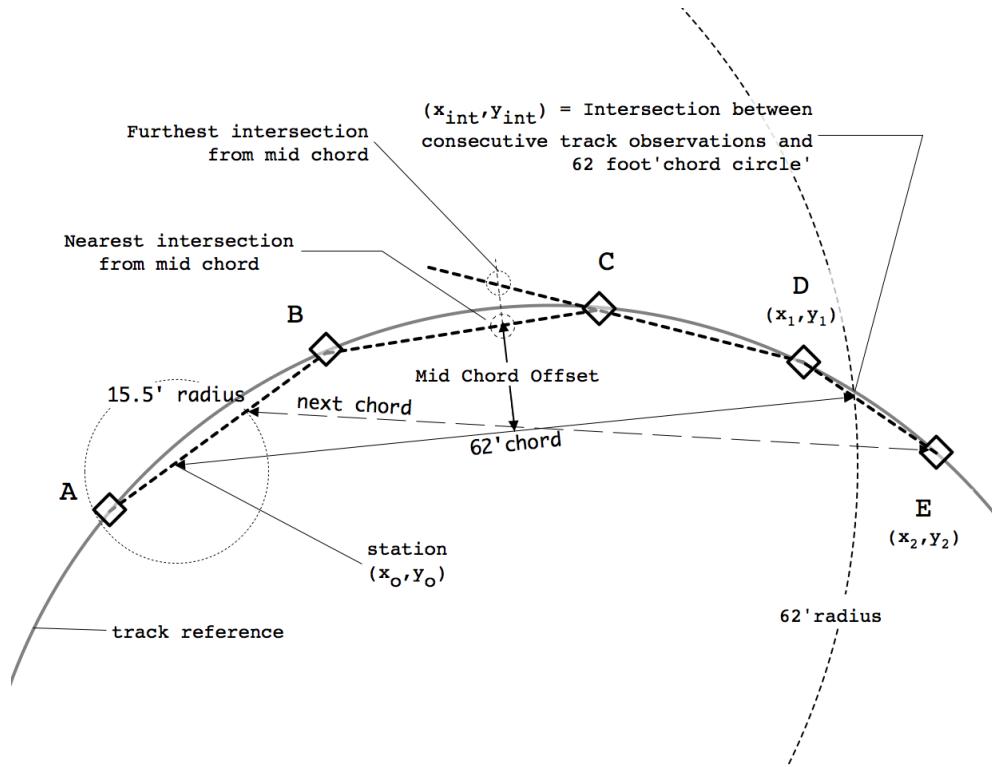


Figure 3.7: Modeling the String Line Method from RTK Track Observations

The MCO is determined from a line orthogonal with the mid point of the chord, and the mean of the intersection with the nearest and farthest of two lines projected from the three observations nearest to the middle ordinate (figure ?? points B, C, and D). The distance from the chord mid point and the mean intersection determines the MCO. The degree of curve (chord definition) is

then found from the MCO and chord length in feet by the relationship [?].

$$D_c = \frac{45840 \times MCO}{chord^2} \quad (3.4)$$

The model assigns a mile post reference to D_c using the location of the mean intersection and equation ??.

The coordinates of the next station are found by intersecting the stationing distance in a similar fashion to the chord circle intersection. Figure ?? illustrates determination of a 15.5 foot station.

A railway can be described as a smooth, continuous shape. As an aid to exploring the D_c , a smoothing algorithm is applied to the D_c verses mile post reference. The *rlowess*¹⁶ method of the *smooth* function in the Matlab *Curve Fitting Toolbox*TM was selected as a data exploration tool.

Experiment two:

- Compared RTK observations by Hi-Rail with company track charts. The comparison between the model and track charts was examined to verify curve location, magnitude, and location of infrastructure affecting SV reception. Mile length was compared to the published track chart length.
- Determined descriptive statistics for D_c across a tangent segment for a geometry car and a RTK equipped Hi-Rail.
- Constructed a graphic solution for comparing D_c measured by geometry car and RTK equipped Hi-Rail by plotting D_c vs. mile post reference concurrently.
- Determined the variability between D_c measured by geometry car and RTK equipped Hi-Rail across tangent track.

Experiment Three: Determining Track Occupancy

This experiment asked whether a common track vehicle using RTK augmented GPS/GNSS was able determine track occupancy by obtaining position accuracy defined by the FRA for a location determination system. The FRA LDS requirement stated in *Differential GPS: An Aid To Positive Train Control* [?] page 6, establishes the criteria to

“...determine which of two tracks a given train is occupying with a very high degree of assurance (an assurance that must be greater than 0.99999 or (0.95)). The minimum center-to-center spacing of parallel tracks is 11.5 feet...” [?]

The FRA specification is interpreted here to mean an observation must have a cross-track error no greater than $\pm \frac{11.5}{2}$ feet within a confidence interval $100*(1-\alpha)\%$, with $\alpha = 0.00001$ or 99.999% .

Variables of analysis: The mobile instrument #2, table ?? produced these variables:

¹⁶The *rlowess* method is a local regression using weighted linear least squares and a 1st degree polynomial model that assigns lower weight to outliers in the regression. The method assigns zero weight to data outside six mean absolute deviations [?].

Horizontal coordinates : UTM, Zone 17 North, US survey feet.

Time & Date : Local, EST.

Several traverses of a parallel multitrack segment were made by RTK GNSS equipped Hi-Rail. A track segment was selected based on the length of the tangent or curve and existence of adjacent parallel track traverses. The first traverse was designated as a reference centerline, and the centerline coefficients for tangent track determined by regression using the Matlab function *regress*, taking the general form:

$$[b, bint, r, rint, stats] = regress(y, X) \quad (3.5)$$

where;

y is a n by 1 vector of observed Northings for each of n observations.

X is a n by 2 matrix of observed Northings of the form [*Northing*, 1] for each of n observations.

The function output b contains the coefficient estimates, and $bint$ contains the upper and lower confidence bounds of the coefficient estimates. The residuals r and residual intervals $rint$ that have no meaning in the analysis as physically, the residuals represent the distance from the track centerline to the observation along the Northing axis. The statistics in $stats$ contain the R^2 statistic, the F statistic and its p-value, and an estimate of the error variance.

The slope is converted to an azimuth and back bearing by the function *slope2Az*, listed in Appendix B. The azimuth of the tangent was verified using a graphical solution in the *TGO* software.

The cross-track¹⁷ distance between subsequent observations and the baseline was determined by the Matlab function *perpDist2line*, listed in Appendix B, page ???. The function determines the cross-track distance for subsequent traverse observations using the equation ??.

$$d_t = \left| \frac{ax + by + c}{\sqrt{a^2 + b^2}} \right| \quad (3.6)$$

where;

a, b, c are the reference centerline coefficients.

x, y are the Easting and Northing coordinates of the observations.

For the circular curve case, the coefficients of the centerline reference origin and radius are determined from Northing and Easting observations using Matlab function *regress*. *Regress* in the circular curve case takes the general form:

$$[b, bint, r, rint, stats] = regress(y, X) \quad (3.7)$$

where;

¹⁷See Allen, et al, Figure ??, page ??

y is an n by 2 matrix of observed Eastings of the form [Easting², Northing²] for each of n observations..

X is an n by 3 matrix of observed Northings of the form [2 * Easting, 2 * Northing, -1] for each of n observations.

The cross-track distance is determined by the difference between the circular curve radius and coordinate distance from the origin, simply:

$$d_c = r - \sqrt{(x_p - X_o)^2 + (y_p - Y_o)^2} \quad (3.8)$$

The null hypothesis statement is the reference track is occupied if the distance between an RTK GNSS observation and the reference centerline is less than or equal to $\frac{11.5}{2}$ feet at a confidence of $100(1-\alpha)\%$. The Matlab function *ztest* was used for the z-test of the null hypothesis. The function output indicates whether the null hypothesis is a random sample from a normal distribution with mean distance ≤ 5.75 feet and standard deviation σ , against the alternative that the mean is not ≤ 5.75 feet. The result of the test is indicates a rejection of the null hypothesis at the $100*(1 - 0.00001)\%$ significance level.

$$h_0 : \mu_d \leq \frac{11.5}{2} \quad (3.9)$$

$$h_1 : \mu_d > \frac{11.5}{2} \quad (3.10)$$

The null hypothesis asserts that the cross-track error population parameter is equal to or less than half the FRA minimum allowable centerline-to-centerline track spacing. Rejection of the null hypothesis indicates insufficient statistical evidence exists to assert same track occupancy to the confidence interval specified by the FRA [?, pp. 6].

The Z-test hypothesis procedure assumes that the RTK GNSS position data represents independent samples from the same normal distribution. The standard deviation determined from the observations reflect the manufacturer's stated system accuracy, therefore the researcher **** additional explanation here, maybe T-test? ****

The Matlab *Statistics Toolbox* function *ztest* performs a z-test of the null hypothesis, testing whether the cross-track error data is a random sample from a normal distribution with mean m and standard deviation σ , against the alternative that the mean is not m . The result of the test indicates a rejection of the null hypothesis at the $(1-\alpha)$ significance level. The *ztest* function is called using the general form:

$$[h, sig, ci, zval] = ztest(d_t, m, \sigma, \alpha, tail) \quad (3.11)$$

where;

d_t is the population of distances between the reference centerline and subsequent observations.
 m is the test mean.

σ is the known standard deviation of the population.

α is the significance level.

tail specifies whether to apply one or two-tailed test. In the tangent case, since the cross-track error distance of equation ?? is always positive, the right tail is specified. For the circular curve case the cross-track error can be positive and negative, both tails are specified.

Experiment three:

- Observed track positions of three parallel tracks by RTK GNSS equipped Hi-Rail.
- Determined the coefficients for a reference tangent and circular track centerlines from an initial traverse.
- Determined the cross-track error between subsequent RTK Hi-Rail observations and the reference tangent curve centerline.
- Determined by a hypothesis test if statistical evidence exists to indicate if RTK GNSS is capable of determining track occupancy meeting FRA performance standards for a location determination system.

Instrumentation

Instruments used in the research are summarized in table ??.

Table 3.1: Instrumentation and Software

Designation	Instrument	Description	Experiment
Ad hoc Reference Station	Trimble 5700 Zephyr Geodetic Trimmark III UHF radio	24 ch. GPS receiver GPS antenna 450Mhz band, 25 watt	1
CORS	NetRS/NetR5 Trimble Zephyr Geodetic /2	24/72 ch. GPS [†] /GNSS [‡] GPS/GNSS antenna	2, 3
VRS	Trimble Network Infrastructure <i>VRS</i> Net	Virtual Reference Station version 2.83 [†]	2, 3
Static Module	Trimble R8 Trimble TSC2	24 ch. GPS w/int. radio Survey Controller	1
Mobile#1	Trimble 5700 Trimble TSC2 Trimble Zehyr	24 ch. GPS w/int. radio <i>Survey Controller</i> v12.1x GPS antenna	1
Mobile#2	Trimble R7 Trimble TSC2 Trimble Zephyr 2	72 ch. GNSS receiver <i>Survey Controller</i> v12.1x GNSS antenna	2, 3 1, 2, 3 2, 3
Software	National Geodetic Survey Trimble <i>Geomatic Office</i> Google Docs ESRI <i>ArcMap</i> Matlab 32-bit (maci)	Online User Positioning Service version 1.63 Collaborative spreadsheet version 9.2 version 7.8.0.347 (R2009a)	1 1, 2, 3 1 1 1, 2, 3

[†] Owned and operated by the Ohio Department of Transportation, Aerial Mapping

[‡] Owned and operated by the N.J. Rahall Appalachian Transportation Institute

- An ad hoc reference station (AhRS) as listed in table ?? is a stationary antenna mounted to a fixed height tripod for reception of SV signals for manipulation by a GPS receiver. The receiver produces correctors for transmission over UHF data radio to a capable mobile GPS receiver.
- A single *continuously operating reference station* (CORS) is a permanently mounted antenna providing continuous data for RTK surveying.

- A *Virtual Reference Station* (VRS) server provides RTK positioning services across a wide area defined by the extent of numerous CORS networked and synchronized by infrastructure software. Observations from each CORS in the network are pre-processed to generate models of the distance-dependent biases. Based on the model parameters and the user's approximate position, individual corrections can then be predicted, which enables RTK positioning. The differential errors caused by ionospheric and tropospheric refraction, in addition to satellite orbit errors, are precisely estimated within the network. RTK model parameters are determined to allow the prediction of the differential errors for the baseline between a master reference station and the user's position. Applying these corrections to code and carrier phase observations of the master reference station, VRS measurements are generated for RTK positioning of the rover receiver.
- A *static survey unit* is an RTK enabled GPS or GNSS receiver used by a surveyor to determine the coordinate of a position by recording multiple-epoch observations while occupying the point of interest.
- A *mobile survey unit* is an RTK enabled GPS orGNSS receiver used to determine the coordinates of a position while in motion by recording single epoch observations.

Data Validity and Integrity

Validity

Insuring the the validity of RTK GPS/GLONASS data relied on the quality control performed by the data collector software. A field notebook was kept to record various instrument and initial values (i.e., antenna height from top of rail, locomotive number, track points of interest) found during antenna alinement. The recorded values were programmed into the controller as a specific survey style to insure the use of identical calibration values between observation files during multi-day surveys and spanning months using a particular Hi-Rail.

The survey controller was programmed to reject observations that fell outside a threshold relative horizontal and vertical precision as determined by the receiver. A threshold value of 0.15 feet horizontal and 0.50 feet vertical was selected for the hump yard survey, and 0.10 feet horizontal and 0.20 feet vertical was selected for the alinement surveys. The threshold values were selected based on the manufacture's stated accuracy, the expected degradation due to reference station distance, the receiver type, plus overhead. Receivers designated as GPS are capable of receiving and decoding only GPS SVs, while a GNSS receiver is capable of receiving GPS and GLONASS SVs. In all cases, the vertical threshold allowance is twice the horizontal value.

The hump yard observations were plotted using ESRI ArcMap software to produce color-mapped plan views of the yard. The color-mapped plot is similar to a contour map. However, where a contour map utilizes a triangulated irregular network to provide elevations over an area feature,

the centerline top-of-rail line feature is of interest in a hump yard. Elevations were plotted as colored dots indicating an elevation range.

Color mapping relative vertical precision provides a graphical method of analysis for time-related SV reception quality. RTK GPS quality is dependent on satellite geometry, so serial observations of lower quality would be expected to appear together.

The track alinement model processes observations that are determined to be sequence by the software model. Changes in bearing between any two observations that approached 180° indicated the Hi-Rail reversed direction while recording of track observations. Points recorded in the reverse direction were not used.

Integrity

A check on point sequencing in the alinement model plots the sequence in three dimensions. The ordered sequence for each mile can be verified graphically by examining the 3D plot.

Summary

The research method explores track measurement using commercial off-the-shelf RTK augmented GPS and GNSS instrumentation in railway measurements.

Experiment 1 traverses an active hump yard with a locomotive equipped with RTK GPS instruments. Recorded positions are used to produce a profile for each track. The relative vertical precision of the locomotive observations as well as the reference station observations were analyzed for the influence of multi-path signal reflections.

Experiment 2 traverses a 29 mile segment of mainline track by a track inspector's Hi-Rail equipped with RTK GNSS instruments. A model was used to determine the D_c . The model was verified against rail company track charts for location, magnitude, and direction of track features. The model was used to evaluate the performance of RTK GNSS against a specialized track geometry car across tangent track.

Experiment 3 evaluated the ability to determine track occupancy by RTK GNSS. Five surveys traversed a parallel multitrack segment. The cross-track error between a baseline survey and subsequent surveys was evaluated in both a tangent and circular curved segment. The statistical likelihood of estimating track occupancy meeting FRA guidelines for a location determination system was determined.

Chapter 4

Results

The researcher sought to determine the viability of RTK GNSS augmentation to assess railway infrastructure and act as a reliable track vehicle locator capable of meeting the requirements of a location determination system as defined by the FRA by answering these questions:

1) *Hump Yard Profile*: Can a locomotive use RTK augmented GPS to measure the vertical profile of bowl tracks in an automatic classification yard during production activities?

2) *Horizontal Track Alignment*: Can a common track vehicle use RTK augmented GPS/GNSS to determine the horizontal degree of curvature (D_c) comparable with specialized track geometry vehicles?

3) *Track Occupancy*: Can a common track vehicle use RTK augmented GPS/GNSS to meet the positioning requirements for track occupancy outlined by the FRA [?, pp.6-7] for a location determination system?

These experiments used common track vehicles equipped with survey-grade RTK GPS/GNSS instrumentation across yard and mainline track. The research examined three absolute positioning applications using RTK augmented GPS/GNSS in the context of a Class I railroad. The experiments addressed these questions:

1. *Hump Yard Profile*

Can a locomotive equipped with RTK GPS instrumentation be used to measure the vertical profile of bowl tracks in an automatic classification yard during humping operations? The question was answered through the completion of several objectives:

- A method was developed for measuring track profiles in the bowl area of an active hump yard.
- The method was demonstrated by use of an ad hoc GPS reference station transmitting correctors to a RTK GPS receiver aboard a yard locomotive.
- A relative vertical precision distribution was determined from the RTK GPS observations.
- Track profiles were developed from the locomotive survey data.

2. *Horizontal Track Alignment*

Can a common track vehicle use RTK augmented GPS/GNSS observations to determine the horizontal degree of curvature over tangent track comparable with specialized track geometry vehicles? The question was answered through the completion of several objectives:

- A method was developed for measuring track horizontal position from a track inspector's Hi-Rail vehicle.
- A software model was developed to determine the degree of curvature using the string lining method.
- A parameter estimation of the D_c variability of the model and a track geometry car was determined for selected tangent track segments.

3. Track Occupancy

Can a common track vehicle using RTK augmented GPS/GNSS instrumentation meet the positioning requirements for track occupancy outlined by the FRA for a location determination system? The question was answered through the completion of several objectives:

- An analytical method was developed to determine the variance in a series of RTK GNSS measured track positions from specific geometric segments.
- A hypothesis test was used to determine the likelihood of RTK GNSS position measurements to meet the FRA criteria for reliable track occupancy.

Hump Yard Profile Results

The objective of experiment one was to use a locomotive to survey an active hump yard producing track profiles from RTK track observations. Individual track profile thumbnails are exhibited in Appendix A. Profile drawing are hyperlinked to the track number in table ??, Appendix A, page ???. The human effort expended during the yard survey is presented in table ??.

Table 4.1: Hump Yard Survey Human Resource Utilization

Classification	Labor Hours	Task Description
Surveyor, locomotive	5 shifts of 8 hours	manage locomotive GPS
Locomotive operator	5 shifts of 8 hours	manage locomotive, switches
Surveyor, ground	2 sessions of 3 hours	collect POI, set bench marks
Watchmen lookout	2 sessions of 3 hours	safety lookout for ground surveyor
Company escort	5 hours	safety briefings, guide
Total hours	97 hours	

Adjustments to the autonomous horizontal and vertical GPS position of the ad hoc reference station (CP1) are listed in table ???. OPUS output generated from two reference station observation sessions are exhibited in Appendix A, pages ?? and ??.

Table 4.2: Reference Station Adjustment

Point	Northing	Easting	Elevation
CP1 autonomous	426094.534	1802674.100	462.354
OPUS 89691472	426095.398	1802677.668	464.944
OPUS 89691491	426095.376	1802677.685	465.107
mean OPUS	426095.387	1802677.677	465.026
EB1559 published	422425.72	1795001.00	389.537
CP1 to EB1559 vector	-3721.022	-7653.073	-77.070
CP1 adjusted	426095.387	1802677.677	465.081
residuals			
Δ OPUS	0.000	0.000	+0.055
Δ EB1559	+0.068	-0.045	+0.000

TEQC reports generated from the reference station sessions are exhibited in Appendix A. The reports indicate cycle slips due to multi-path effects at the reference station. The first page ASCII time plot provides a visual summary¹ of various types of quality indicators for each satellite as a function of time.

Table 4.3: Relative Vertical Precision Summary

$\alpha = 0.01$		conf.int.			conf.int.	
Tracks	N	μ	μ	σ	σ	
58	9,570	0.07753	0.07640 to 0.07866	0.0429	0.04213 to 0.04373	

Track workbooks track group with individual worksheets for each track are exhibited by hyperlink in Appendix A, page ???. Algorithms for determining horizontal linear reference and elevation scaling are available in the worksheet formula cell.

Track profiles were plotted with a drawing provided by CSX as the result of a January 2001 survey by others. Attempts at recovering the 2001 benchmarks during the GPS profile were unsuccessful.

The horizontal axis of each drawing represents the horizontal linear track reference, and the vertical axis representing the NAVD88 elevation. A reference mark on the drawing was matched with the track structure observed during the survey. Linear references from the supplied drawing were assigned to the match mark in the spreadsheet, and the linear reference of each track observation was determined by horizontal stationing equation ???. Elevations were similarly assigned to the drawing match mark.

¹See <http://facility.unavco.org/software/teqc/tutorial.html> section 11 for symbology.

Elevations were plotted twice, first in a 1:1 scale with the previously provided design grade. A second plot, exaggerated 5:1, provided sufficient relief to better discern profile differences. Entries in table ?? Appendix A, page ?? are hyperlinked to pdf format profile drawings.

The relative vertical precision of each point observed calculated by mobile#1 was recorded. The descriptive statistics for the relative vertical precision for all track observations is listed in table ??.

Appendix A figure ?? presents a histogram of the vertical precisions in addition to descriptive statistics for the aggregate observations.

A TEQC report for base station observations between 2008 May 26 14:21:30 and 21:44:00 UTC is exhibited in Appendix A. Values of interest are the MP1 and MP2 cycle slips between an elevation of 10 and 45 degrees above the horizon.

Table 4.4: Reference Station Multipath Cycle Slip Summary

MP	Elev(deg)	Total Obs.	Slips	MP rms, m
1	10-15	1,542	23	0.68209
1	15-20	1,642	24	0.47830
1	20-25	1,206	14	0.42167
1	25-30	1,408	15	0.37891
1	30-35	1,082	16	0.33576
1	35-40	1,207	17	0.30466
1	40-45	1,025	12	0.27952
	total:	9,112	121	1.32%
2	10-15	1,542	21	0.99321
2	15-20	1,625	24	0.67395
2	20-25	1,206	14	0.59764
2	25-30	1,408	15	0.56963
2	30-35	1,082	16	0.52258
2	35-40	1,207	17	0.41814
2	40-45	1,025	12	0.45189
	total:	9,112	119	1.30%

Summary

An RTK survey of the Hamlet Terminal by locomotive was completed in five, eight hour shifts. The first day was consumed by yard safety, yard facility familiarization, and antenna alignment. Four eight hour shifts were sufficient to complete a traverse of every open track in the bowl. The survey strategy first traversed the pullout end to the foul point. The pull-out end humpmaster preplanned and coordinated runs through alley² track with the locomotive engineer, though the survey locomotive was also sporadically used to pull cars during the survey.

The hump end was surveyed during the last day's shift change. During shift change, the

²A clear track.

pin puller and other hump end personnel undergo a transition period of exchanging relevant yard information, with the oncoming shift receiving a current safety briefing. The hump-end yard master took advantage of the staggered shift change to switch the survey locomotive through each hump and group lead track on the hump end. The brief period between shift changes did not allow time for individual group lead and tracks to be renamed in the survey controller. Consequently the data was separated manually during post-survey office work.

Post survey work consisted of adjusting the reference station position by reference to OPUS and NGS benchmarks; recalculating point positions from point vectors after reference station adjustment; deconstructing the aggregated points by track and lead; separating points into layers based on track and lead; adjusting ground points so as to be coincident with track centerlines; renaming point sequences and exporting each sequence to a spreadsheet; applying a linear reference to each point; scaling the elevations in preparation to plot on an existing CAD drawing; plotting and printing the CAD generated profiles; and processing base station observations with TEQC software.

Horizontal Track Alinelement Results

Mainline track was surveyed by using the instruments listed in table ??, mobile#2. The antenna was mounted to a track inspector's Hi-Rail and aligned as previously described in chapter 3, [antenna alignment](#).

Continuous data recording during the 20 January 2010 survey was impeded by unexpected receiver operation. The receiver was unable to initialize with a new VRS without cycling receiver power after each VRS update. The problem lead to numerous unexpected data gaps during the traverse. The problem was identified and corrected by updating the receiver firmware. The receiver performed as expected during subsequent surveys. Mainline surveys traversing the Kanawaha Subdivision from mile post (MP) 494 to 523 are summarized in table ??.

Table 4.5: RTK Surveys By Hi-Rail

Ref.	Date	Traverse	Track(s)	CL Observations	Note
A	20 January 2010	MP494 to 523	1,2	18,095	f/w 1.02
B	5 February 2010	MP495 to 512	2,1,2	15,225	f/w1.13, traffic
C	14 February 2010	MP495 to 523	1, 2	22,866	f/w1.13
D	3 March 2010	MP495 to 522	2,3,2	19,993	f/w1.13
E	18March 2010	MP494 to 523	1	21,001	f/w1.13

Output generated from processing RTK observations with the model are cataloged in Appendix B. The rail company provided track chart precedes each segment between MP494 and 523 traversed

by a RTK equipped HI-Rail. Correlation between model output and charted features is produced in table ??.

Two discrepancies between the track chart values and model output were discovered.

- The track chart indicates the curve beginning at MP508.9 is a curve to the right³. The model determined the a curve was to the left. The model determined value is verified by examination of a plan view of the track observations between MP 508 and 509, figure ??.

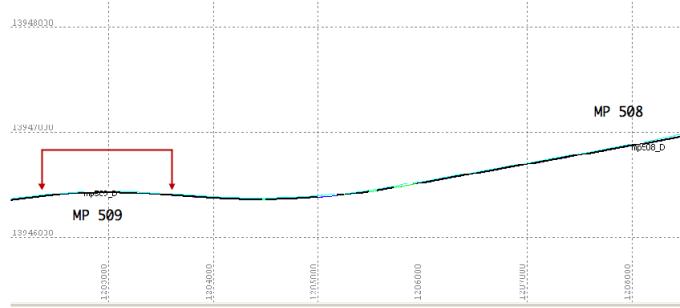


Figure 4.1: Plan View MP 508-509

- The track chart indicates the 1 degree curve to the right at mile post 521.15 extends approximately 0.15 miles. The model determined the curve extends from MP 521.15 to 521.83, or one half mile longer than indicated on the track chart. The model determined value is verified by examination of a plan view of the track observations between MP 521 and 522, as illustrated by figure ??.

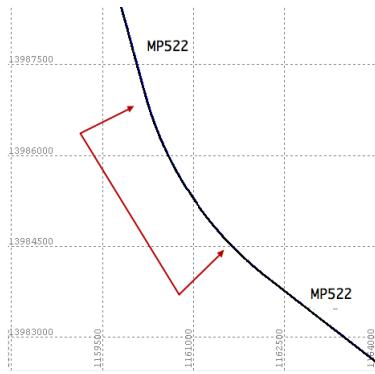


Figure 4.2: Plan View MP 521-522

Features causing loss of GNSS signal (LOS) were documented by referencing the location to the track chart. When not evident from the track chart, the geodetic coordinates of a point before LOS was entered into Google Maps, and the aerial image examined. This method aided in determining the location of signal bridges and several overpasses not indicated on track charts.

³When the direction of travel references increasing mile post numbers.

Table ?? also references rail company track chart (TC) values for D_c and mile length for comparison with the model output. Track charts do not provide exact values for individual tracks, therefore the comparison serves only to verify the quantity and magnitude of alinement features.

Table 4.6: RTK Hi-Rail Traverse MP 494-523

MP Reference	Feature	TC Value	Note
494-495	mile length	8,858'	Hi-Rail: 8,949'
494.05	curve	3°03'R	
494.46	curve	2°45'L	
494.65	curve	2°30'R	
495-496	mile length	5,295'	Hi-Rail: 5,414'
495.05	curve	2°30'R	
495.46	curve	2°30'L	
495.6-495.7	I-64 overpass		LOS
496-497	mile length	5,255'	Hi-Rail: 5,323'
496.05	curve	3°45'L	
496.25	curve	1°00'L	
497-498	mile length	5,276'	Hi-Rail: 5,340'
497.3	curve	0°45'L	
497.61			LOS, VRS update
498-499	mile length	5,290'	Hi-Rail: 5,342'
498.6	curve	2°00'R	
499-500	mile length	5,283'	Hi-Rail: 5,342'
500-501	mile length	5,280'	Hi-Rail: 5,356'
500.4	curve	2°32'R	
501.03-501.12	cross over		cross over, track 1 to 1
501.15-501.35	Guyandotte River Bridge		LOS
501.35	curve	4°14'L	
501.6-501.67	29th Street overpass		LOS
501.9	curve	1°33'L	
501.95	curve	1°33'R	
501-502	mile length	5,266'	Hi-Rail: 5,316'
502.62-502.69	cross over		track 2 to 1
502-503	mile length	5,383'	Hi-Rail: 5,208'
503.4	curve	1°15'L	
503.55	curve	1°33'R	

Continued next page...

Table 4.6 – Continued

MP Reference	Feature	TC Value	Note
504-505	mile length	5,196'	Hi-Rail: 5,281'
504.05	curve	2°56'R	
504.15	curve	4°30'L	
504.52	curve	0°55'R	
504.6	curve	1°05'L	
504.85	curve	2°00'L	
504.92-504.96	signal bridge		LOS
505-506	mile length	5,286'	Hi-Rail: 5,335'
505.0	spiral	from 2°00'L	
505.5	curve	1°00'R	LOS@505.55
506-507	mile length	5,189'	Hi-Rail: 5,256'
506.24	curve	0°32'L	
506.34-506.41	17th Street interchange		LOS
506.7-507.78	signal bridge		LOS
506.78	curve	1°55'R	
507-508	mile length	5,255'	Hi-Rail: 5,327'
507.95	curve	0°23'R	
508-509	mile length	5,262'	Hi-Rail: 5,337'
508.37-508.57	Spring Valley Road overpass		LOS
508.57	curve	0°45'R	
508.65	signal bridge		LOS
508.9	curve	1°18'R	TC error, left
509-510	mile length	5,280'	Hi-Rail: 5,355'
509.0	spiral	1°18'R	TC in error, left
509.21	curve	0°18'L	
509.56	curve	0°28'L	
510-511	mile length	5,280'	Hi-Rail: 5,336'
510.2	curve	1°05'R	
510.7	curve	3°23'R	
510.95	signal bridge		LOS
511-512	mile length	5,231'	Hi-Rail: 5,319'
511.72-511.8	Norfolk Southern overpass		LOS
512-513	mile length	5,249'	Hi-Rail: 5,349'
512.52-513	Big Sandy River Bridge		LOS

Continued next page...

Table 4.6 – Continued

MP Reference	Feature	TC Value	Note
513-514	mile length	5,264'	Hi-Rail: 5,408'
513.0	curve	4°51'R	
513.31	signal bridge		multipath
513.6	curve	6°23'L	
513.7	curve	3°00'R	
513.92	curve	3°00'L	
514-515	mile length	5,263'	Hi-Rail: 5,293'
514.0	curve	3°00'L	
514.2	curve	2°00'R	
514.8	curve	2°00'L	
514.55	signal bridge		LOS
515-516	mile length	5,240'	Hi-Rail: 5,318'
515.0	curve	0°45'L	
515.2	curve	1°30'R	
515.5	curve	1°15'R	
515.6	signal bridge		LOS
515.8	curve	0°45'L	
516-517	mile length	5,047'	Hi-Rail: 5,110'
516.12	curve	3°00'R	
516.78-517	curve	1°00'L	LOS
517-518	mile length	5,432'	Hi-Rail: 5,530'
517.0	curve	1°00'L	to 3°00'L
517.43	curve	1°30'L	
517.6	curve	4°15'L	
518-519	mile length	5,733'	Hi-Rail: 5,821'
518.05	curve	1°00'R	
518.23	curve	1°15'L	
518.4	curve	0°00'	<sic>
518.41	signal bridge		multipath
518.5	curve	0°45'R	
519-520	mile length	4973'	Hi-Rail: 5,059'
519.1	curve	1°30'L	
519.15-519.34	2 signal bridges		LOS
519.2	curve	1°00'R	

Continued next page...

Table 4.6 – Continued

MP Reference	Feature	TC Value	Note
519.6	curve	2°00'L	
519.65	curve	2°00'R	
519.8	curve	2°30'L	
519.9	curve	1°45'R	
520-521	mile length	5,322'	Hi-Rail: 5,431'
520.5	curve	2°15'R	
520.55-520.69	Armco overpass		LOS
521-522	mile length	4,972'	Hi-Rail: 5,357.6'
521.12-521.82	curve	1°00'R	TC curve length error
522-523	mile length	5,023'	Hi-Rail: 5,099'
522.1-522.25	AK Steel Entrance Rd		LOS
522.6	curve	1°00'L	
522.9	curve	0°30'L	

Measurements obtained from CSX for a GMRS inspection vehicle were compared with the output from the string line model using observations from a RTK GNSS equipped Hi-Rail. The two methods traversed CSX C&O Ohio Subdivision between mile post 211 and 207. Illustration ?? provides a graphic solution to the smoothed D_c vs. mile post values obtained from both methods across the tangent segment.


Table 4.7: GMRS & RTK Hi-Rail Comparision, MP 211-207, Alinement Annotation

MP Reference	Feature	TC Value	Note
211-210	mile length	5,328'	GMRS:5,018' Hi-Rail:5,368'
210.7	curve	2°15'L	
210-209	mile length	5,263'	GMRS:4,973' Hi-Rail:5,314'
209.6	curve	1°15'L	
209.15	curve	1°00'L	
209-208	mile length	5,252'	GMRS:5,027' Hi-Rail:5,318'
208.8	curve	3°15'R	
208.45	curve	1°15'L	
208.0	curve	3°00'R	
208-207	mile length	5,678'	GMRS:5,384' Hi-Rail:5,586'
207.5	curve	5°00'R	

Table 4.8: GMRS and RTK GNSS Hi-Rail Comparison, MP210.4-209.75 tangent

Vehicle	Stationing	N	μ_{D_c}	95% CI	σ_{D_c}	95% CI
GMRS	1 ft	3,253	-0.02637	-0.0307 -0.0219	0.1306	0.1275 0.1339
Hi-Rail	15.5 ft	222	-0.00417	-0.04106 0.03271	0.2789	0.2551 0.3076

The longest tangent portion of the segment under study extends from MP 210.4 to 209.75, and was selected to determine the D_c variance for the GMRS and the Hi-Rail RTK methods. An ideal measurement over an ideal tangent would result in an instantaneous D_c value of zero at each point of measurement. The 201.4-209.75 tangent segment was assumed ideal. The variation from zero D_c was determined for each method. Table ?? provides descriptive statistics for D_c values derived from each method.

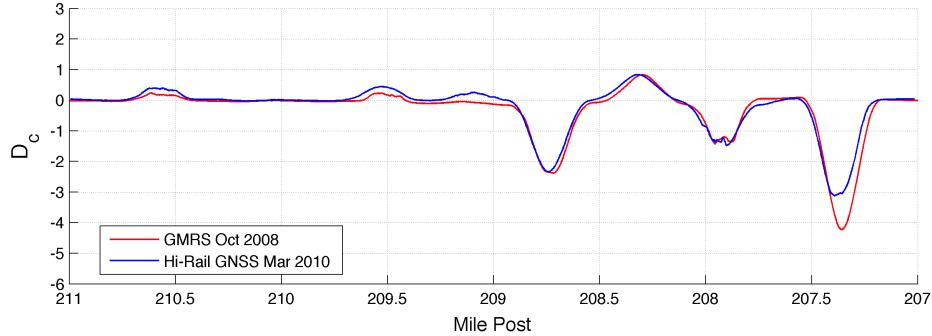

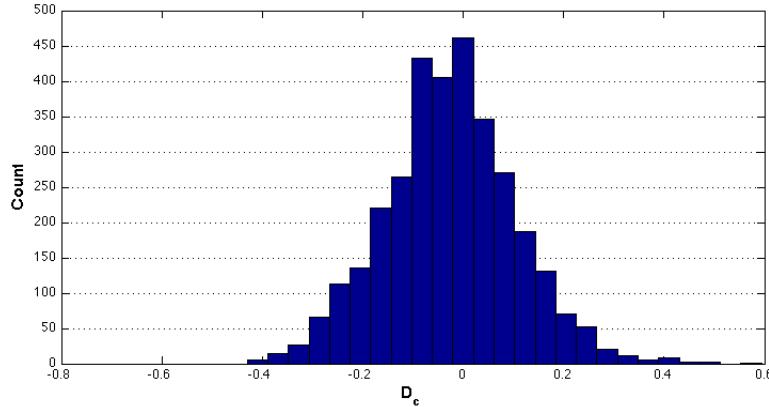


Figure 4.4: GMRS D_c Histogram, 210.4 to 209.75 tangent

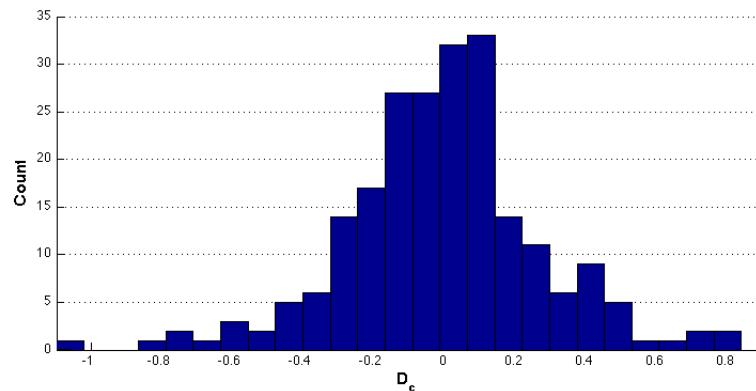


Figure 4.5: Hi-Rail D_c Histogram, 210.4 to 209.75 tangent

Table ?? presents the result of a simple linear least squares regression performed on (Easting, Northing) coordinate pairs between mile post reference 498.9 and 500.2 for each of five surveys. Track position observations traversing three parallel tangent track of the same approximate length were recorded during five separate surveys. The correlation statistic R^2 for each regression was 0.99998 or better.

The cross-track error was determined between each point surveyed between mile post reference 498.9 and 500.2 and a centerline described from the regression coefficients of the tangent of survey A. Descriptive statistics for the distance from each point to the reference centerline for each survey is presented in table ??.

Table 4.9: Tangent Regression Coefficients, MP 498.9 to 500.2

Survey	Track	N	Slope	Y Intercept	Variance	Azimuth°
A	2	1,189	0.1022017	13825809.25	0.02259	264.164536
B	2	1,244	0.1021967	13825815.49	0.02208	264.164821
C	3	1,152	0.1020843	13825969.10	0.05664	264.171193
D	1	1,158	0.1021396	13825873.25	0.02432	264.168057
E	3	1,156	0.1020995	13825950.11	0.05338	264.170332

Table 4.10: Tangent Cross-Track Hypothesis Test

Track Comp.	N	μ_d	Lower Upper		Reject h_0 ?
			Conf.Int.	μ_d	
2→2	1,189	0.1185		0.13	0.075 no
2→2	1,244	0.1184		0.13	0.080 no
3→2	1,152	13.013 13.094		13.10	0.347 yes
1→2	1,158	13.483 13.535		13.51	0.203 yes
3→2	1,156	13.014 13.094		13.05	0.313 yes

Table 4.11: Curve Regression Coefficients, MP 500.5 to 500.7

A radius = 2276.11							
Survey	Track	N	Origin E	Origin N	μ_r	σ_r	
A	2	85	1245217.14	13955358.41	-0.0001	0.03274	
B	2	98	1245215.55	13955352.03	0.0252	0.03733	
C	3	98	1245203.52	13955318.38	-14.53	0.16276	
D	1	97	1245207.64	13955326.35	13.93	0.09517	
E	3	92	1245206.38	13955328.18	-14.57	0.14161	

Table ?? provides the result of the tangent case hypothesis test for each survey between M 498.9 and 500.2.

Table ?? provides the result of the circular curve hypothesis test for each survey between MP500.5 and 500.7.

$$h_0 : \mu_r \leq \frac{11.5}{2} \quad (4.1)$$

$$h_1 : \mu_r > \frac{11.5}{2} \quad (4.2)$$

Table 4.12: Circular Curve Cross-Track Hypothesis Test

$\alpha = 0.00001$						
Track Comp.	N	μ_r	Conf.Int.	μ_r	σ_r	Reject h_0 ?
2→2	85	-0.02 to 0.02	-0.00	0.033	no	
2→2	98	0.01 to 0.04	0.03	0.037	no	
3→2	98	-14.61 to -14.46	-14.53	0.163	yes	
1→2	97	13.89 to 13.98	13.93	0.095	yes	
3→2	92	-14.64 to -14.51	-14.57	0.142	yes	

Summary

Experiment 1 traversed an active hump yard with a locomotive equipped with RTK GPS instruments to observe track positions. The recorded positions were used to produce a profile for each track. Reference benchmarks, evaluation of GPS signals at the reference station, a plan view of the yard with color-mapped elevations, a plan view of the relative vertical error, and 58 track profiles are exhibited in Appendix A. The relative vertical precisions of locomotive and reference station observations were examined for the influence of multipath reflections.

Experiment 2 traversed a continuous 29 mile segment of mainline track by a Hi-Rail equipped with RTK GNSS instruments. A model of the string line method was used to determine the D_c for each mile, evaluate the model against rail company track charts for location, magnitude, and direction of curves. The model was used to evaluate the model output against a specialized track geometry car over a comparable segment of tangent track. Company track charts, the output of the string line model for each mile, and the model script is exhibited in Appendix B.

Experiment 3 evaluated the ability to determine track occupancy by RTK GNSS. Five surveys traversed a parallel multitrack segment. The cross-track error between a baseline survey and subsequent surveys was evaluated in a tangent and circular curved segment. The statistical likelihood of estimating track occupancy meeting FRA guidelines for a location determination system was determined.

Chapter 5

Conclusions

This chapter contains a summary of the purpose, procedures, major findings, conclusions and discussion, recommendations, and implications of the research.

Purpose

The research explores track measurement using commercial off-the-shelf RTK augmented GPS and GNSS instrumentation to observe railway positions. The research examines a system for track surveying minimizes exposure to railway hazards, is cost-effective, and produces accurate repeatable measurements without burdening train movement authority or disrupting yard operations.

Procedures

These experiments used common track vehicles equipped with COTS GPS and GNSS survey instruments. To observe track position, a single RTK antenna and receiver were mounted to a locomotive in the case of the hump yard, or to a Hi-Rail in the case of mainline track. Correctors output from a single ad hoc reference station in the humpyard case, or a commercial Virtual Reference Station server in the mainline case, were transmitted to the mobile receiver. No auxiliary instruments were used to modify observations or fill expected data gaps.

1. Experiment 1 traverses an active hump yard with a locomotive equipped with RTK GPS instruments. Recorded track positions were used to produce a profile of each track. The relative vertical precision of the locomotive observations and the reference station observations were analyzed for the influence of multi-path signal reflections.
 - Developed a procedure for aligning a GPS antenna mounted to a locomotive with the track centerline top-of-rail location.
 - Collected continuous single epoch observations on a nominal 10 foot horizontal spacing with RTK augmented GPS onboard a locomotive in an active hump yard.

- Produced a plan-view color-map of track elevation for the bowl area of a hump yard.
 - Produced a two-dimensional profile drawings for each track in 1:1 and 1:5 vertical scale.
 - Produced a plan-view color-map of relative vertical precision as determined by the *Survey Controller* software for points measured in the bowl area of the yard.
 - Determined the descriptive statistics of the relative vertical precision estimate as determined by *Survey Controller* software for the locomotive mounted GPS.
 - Produced a TEQC report for each of two ad hoc reference station observation sessions.
2. Experiment 2 traversed a 29 mile segment of mainline track by a track inspector's Hi-Rail equipped with RTK GNSS instruments. A model was used to determine the D_c . The model was verified against rail company track charts for location, magnitude, and direction of track features. The model was used to evaluate the performance of RTK GNSS against a specialized track geometry car across tangent track. Experiment 1:
- Developed a procedure for aligning a GNSS antenna mounted to a Hi-Rail with the track centerline top-of-rail location.
 - Developed a procedure for RTK measurement by Hi-Rail across mainline track.
 - Developed a software model of the string line method as described by the FRA *Track Safety Standards Compliance Manual*. [?]
 - Compared the model output from RTK Hi-Rail inputs with company track charts. The comparison between the model and track charts was verified for curve location, magnitude, and location. Mile length determined by the model was compared with the published track chart length.
 - Produced descriptive statistics for D_c variation across a tangent segment for a geometry car and RTK Hi-Rail modeled D_c .
 - Produced a graphic solution for comparing D_c measured by geometry car and RTK equipped Hi-Rail by plotting D_c vs. mile post reference.
 - Determined the variability of D_c as measured by a geometry car and RTK equipped Hi-Rail across tangent track.
3. Experiment 3 evaluated the ability of RTK GNSS to determine track occupancy. Five surveys traversed a parallel multitrack section of mainline track. The cross-track error between a baseline survey and subsequent surveys was evaluated in both a tangent and circular curved segments. The statistical likelihood of estimating track occupancy meeting FRA guidelines for a location determination system was determined.
- Observed track positions of three parallel tracks by RTK GNSS equipped Hi-Rail.
 - Determined the coefficients for a reference tangent and circular track centerlines from an initial traverse.
 - Determined the cross-track error between subsequent RTK Hi-Rail observations and the reference tangent curve centerline.

- Determined by hypothesis test if statistical evidence exists to indicate if RTK GNSS is capable of determining track occupancy meeting FRA performance standards for a location determination system.

Major Findings

The research answered the questions:

1. Can a locomotive use RTK GPS to measure the vertical profile of bowl tracks in an automatic classification yard during production activities?

RTK GPS using a single reference station located at the rail terminal was successful in defining grades over 58 tracks in an automatic classification yard during production activity.

- The hump yard profile survey resulted in a ground hazard exposure of six man-hours.
- The hump yard profile survey resulted in ten thousand single epoch observations.
- The hump yard profile survey was completed in 5 working days.
- The hump yard profile survey cost 100 man hours and 4-1/2 locomotive shifts.
- The hump yard profile survey interrupted humping operations for less than 2 hours.
- Signal distortion from multi-path signal reflection was not in evidence.

2. Can a common track vehicle use RTK GNSS to determine the horizontal degree of curvature (D_c) comparable with specialized track geometry vehicles?

Measurements from track inspector's Hi-Rail equipped with RTK GNSS instruments, receiving correctors from a state sponsored VRS network, was input to a software model to determine the D_c across 29 miles of mainline track.

- Five traverses of multiple parallel track resulted in 97,180 single epoch observations.
- The software model determined D_c by 62 foot chords and 15.5 foot stations. The model output compared favorably with published rail company track charts.
- Data gaps in the model output were identified. Each obstruction was identified as a fixed overhead structure such as a highway overpass, bridge superstructure, or signal bridge.
- RTK D_c measurements by Hi-Rail across a tangent track segment were found to have a 2σ mean between -0.041 and 0.033 feet with a standard deviation of 0.279 feet. A track geometry car across the same tangent segment was found to have a 2σ mean between -0.031 and -0.022 feet with a standard deviation of 0.131 feet.

3. Can a common track vehicle use RTK GNSS to meet the positioning requirements for track occupancy outlined by the FRA for a location determination system? [?, pp.6-7]

RTK GNSS was successful in meeting the requirements for a location determination system as defined by the FRA. Measurements between parallel tracks, in both tangent and circular curve segments, were able to determine track occupancy well within the significance level specified by the FRA.

- Track occupancy was determined between three parallel tracks by a RTK GNSS equipped Hi-Rail.
- The coefficients describing the reference tangent on track 2 between MP498.9 and 500.2 were determined to have a slope of 0.1022017 (azimuth = 264.164536°) and a Y-intercept of 13825809.25. The R^2 statistic for the regression was determined to be 0.99998.
- The mean cross-track error for a traverse of track 2 referencing the track 2 tangent between between MP498.9 and 500.2 was found to be 0.13 feet with a standard deviation of 0.080 feet. The alternate hypothesis $h_1 : \mu_d > \frac{11.5}{2}$ was rejected at a 99.999% confidence level.
- The mean cross-track error for a traverse of track 3 referencing the track 2 tangent between between MP498.9 and 500.2 was found to be 13.10 feet with a standard deviation of 0.347 feet. The null hypothesis $h_0 : \mu_d \leq \frac{11.5}{2}$ was rejected at a 99.999% confidence level.
- The mean cross-track error for a second traverse of of track 3 referencing the track 2 tangent between between MP498.9 and 500.2 was found to be 13.05 feet with a standard deviation of 0.313 feet. The null hypothesis $h_0 : \mu_d \leq \frac{11.5}{2}$ was rejected at a 99.999% confidence level.
- The mean cross-track error for a traverse of a track of track 1 referencing the track 2 tangent between between MP498.9 and 500.2 was found to be 13.51 feet with a standard deviation of 0.203 feet. The null hypothesis $h_0 : \mu_d \leq \frac{11.5}{2}$ was rejected at a 99.999% confidence level.
- The coefficients describing the reference circular curve on track 2 between MP500.5 to 500.7 were determined to have an origin located at Northing 13955358.41, Easting 1245217.14 and a radius of 2276.11 feet.
- The mean cross-track error for a traverse of track 2 referencing the track 2 circular curve between between MP500.5 to 500.7 was found to be 0.03 feet with a standard deviation of 0.037 feet. The alternate hypothesis $h_1 : \mu_r > \frac{11.5}{2}$ was rejected at a 99.999% confidence level.
- The mean cross-track error for a traverse of track 3 referencing the track 2 circular curve between between MP500.5 to 500.7 was found to be -14.53 feet with a standard deviation of 0.163 feet. The null hypothesis $h_0 : \mu_r \leq \frac{11.5}{2}$ was rejected at a 99.999% confidence level.
- The mean cross-track error for a second traverse of track 3 referencing the track 2 circular curve between between MP500.5 to 500.7 was found to be -14.57 feet with a standard deviation of 0.142 feet. The null hypothesis $h_0 : \mu_r \leq \frac{11.5}{2}$ was rejected at a 99.999% confidence level.
- The mean cross-track error for a traverse of track 1 referencing the track 2 circular curve between between MP500.5 to 500.7 was found to be 13.93 feet with a standard deviation

of 0.095 feet. The null hypothesis $h_0 : \mu_r \leq \frac{11.5}{2}$ was rejected at a 99.999% confidence level.

Conclusions and Discussion

1. The RTK survey of the Hamlet Yard was successful in proving a safe, quick, and accurate method of determining yard profiles.

- Use of a locomotive to survey the yard considerably reduced on-track worker exposure to hazards when compared with a differential level survey. The method of using an RTK locomotive resulted in a ground exposure of 6 man-hours compared with an estimated 500 man-hours for a differential level survey.

The safety aspects of a yard survey by RTK has implications for yard managers, hump yard engineers, and on-track workers. Personnel safety is improved by removing them from potentially hazardous situations. Track closures and railcar reroutes are not mandatory to determine yard grades.

- The observation density obtained by the RTK locomotive method was greater by a factor of 10 when compared with a traditional differential level survey.

Increased observation density has implications in improving material take-offs estimates and the finished grade quality for yard resurfacing projects.

Increased observation density, combined with a diligent attention to as-build grades during resurfacing, has implications for reducing variability during the humping process.

- Survey time to completion was reduced from an estimated 4-6 weeks to one week. An additional finding was that the survey was unaffected by a full day of torrential rain which would negatively impede ground-based surveys.

Reducing time-to-completion for a yard survey is of importance to planners and hump yard engineers in estimating yard survey costs.

- When compared to a comparable differential level survey, labor costs were reduced from 500 man-hours to 100 man hours. Equipment costs were increased by the use of a locomotive for 36 hours. However, an additional finding was that the RTK equipped yard locomotive could be used to pull cuts of cars, kick stalls, and attend to normal duties assigned to a yard engine without affecting track observations.

The use of a yard trim locomotive is of importance to yard managers in estimating the demand on yard resources in supporting a profile survey.

- Interruptions to hump operations were negligible when compared with track closures and car reroutes necessary for a ground-based survey.

The low impact to yard operations is of importance to traffic planners, managers, and hump yard engineering management in eliminated unidentifiable costs caused by track closures and car rerouting.

- The perceived radio-reflective environment of a hump yard had no meaningful influence on RTK track observations.

The inability to detect anomalous track position due to multi-path signal reflections is of importance to hump yard engineers by eliminating a potential measurement error source.

2. The use of RTK by Hi-Rail during an inspector's routine visual track inspection provided an opportunity to monitor and study track behavior with a greater frequency than available with specialized track geometry cars.

Implications for track engineering and maintenance is that track alignment deploying commercial off-the-shelf products provides an immediately accessible proven method for continuous track behavior monitoring. With few exceptions, every state within the continental US has some dense network of CORS stations available for public use.

- Track observations over mainline track during the normal course of a track inspector's duties had no impact on train operations.

Increased track position monitoring frequency has implications for track engineering managers and superintendents in studying the behavior of track and as a method for establishing track asset change management procedures.

- The model was successfully verified by reference to the location, direction, and D_c in company track charts.

The model relies on establishing fixed locations for mile post reference positions when processing track observations between mile posts. Establishing "virtual mileposts" has implications for track engineering managers and superintendents in considering how to bridge legacy track reference marks with modern absolute positioning.

3. Track Occupancy

- Track occupancy can be determined quickly and reliably by single epoch RTK GNSS observations of a mobile track vehicle over wide areas receiving correctors from a VRS server.

RTK and/or VRS services are presently available from almost every state, either as a free state service or private for-profit. The growing availability of wireless data and the use of localized VHF/UHF data removes the usefulness of the NDGPS in all but the most remote locations. The wide availability of RTK services has implications for the continued funding of NDGPS.

- Track location transmitted by rolling stock combined with accurate yard centerlines has implications for hump control systems using continuous rail car occupancy rather than timers and switches or video analytics in determining "right track, right train" consist¹ makeup.

¹aka clean consist

Recommendations

Additional research questions and recommendations regarding the use of RTK GNSS in railroad transportation as a result of research outcomes.

1. Hump Yard Profile

- Can track surfacing equipment be adapted to use automated machine guidance methods? It is not unusual in industry to rely on operator skill and judgment to establish grade. These visual methods are not data driven, and do not fully take advantage of available technologies, such as RTK GNSS.
- Do improvement in track grade lead to increased yard throughput? In general, grades closer to design reduce the need to resurface as frequently; reduce retarder maintenance; and produce closer to the design coupling speed, in turn reducing damage to draft gear and yard derailments leading to a decrease in yard delay.
- How do grade issues affect car handling in flat yards, particularly in light of increasing reliance on remote control locomotive? Flat yards typically handle lower quantities of rail cars than hump yards but share a similar reliance on track grade quality for predictable rail car movement.

2. Track Alignment

- Is a string line model the correct method for determining D_c ? String lining is accepted as a standard for measurement of D_c , and until recently, the only practical method for a track inspector to flag or find alignment exceptions. More computationally efficient methods are available for determining D_c , and would be more readily adapted for real-time determination of D_c .
- Is D_c the correct measurement? D_c is determined in two dimensions, while track guides rolling stock in three dimensions. Modeling the trackway in three or four dimensions (x, y, z, time) may provide a more comprehensive perspective as shown in [this video](#)². The video fly through of the Hamlet Terminal before resurfacing enables the discovery of relationships between tracks not apparent in a two dimensional profile.
- Can RTK track observations be considered as a diagnostics tool to provide actionable information for identifying track defects? Additional study is required to determine if actionable information can be derived from RTK GNSS track observations for the identification of track alignment defects.
- How can RTK add value as a change management tool? RTK GNSS provides the ability to ground-truth asset locations determined from LiDAR surveys, and accurately record the work typically performed during track inspections, such as replacing sheared frog bolts or insulated track joints. Recording track maintenance activity over time provides

²<http://www.youtube.com/watch?v=mOeuHxUPRBc>

the ability to perform geographic trending analysis in turn leading to the identification of geologic, alinement, or weather induced factors affecting the railway.

- Can RTK be used to observe the behavior of CWR³ movement due to seasonal temperature effects? Rail expands and contracts with temperature. Anecdotal evidence of track movement as the railway shifts in response to long-term seasonal temperature differences can be quantified through further study of this phenomenon by RTK GNSS.
- Can areas of rail breakage or warping⁴ be modeled using RTK track observations? Short-term temperature fluctuations that exceed the railway's neutral temperature limit imparts tensile/compressive forces in the rail. Further study of short-term temperature fluctuation by RTK GNSS may provide sufficient position accuracy to study this phenomena.
- To what extent will GPS Block IIF satellites reduce data dropouts from overhead structures as experienced during experiment 2 mainline surveys? The addition of the L5 signal and higher power (+3db) of the 12 scheduled⁵ Block IIF and Block III⁶ satellites will have a positive benefit for RTK users.
- Is an RTK GNSS survey by Hi-Rail possible in the deep mountain valleys, as in the southern coal fields of West Virginia? Coal accounts for the majority of freight carried by rail [?]. The narrow, steep valleys of southern West Virginia present a challenge for maintaining continuous GNSS and data coverage. Further study could identify the major factors impacting the use of RTK GNSS in challenging geography.

3. Track Occupancy

- Can mobile RTK, in conjunction with LiDAR derived track centerlines, be used as a basis for a wireless LDS? Class I railroads are flying LiDAR missions over their track to quickly produce baseline locations of track and wayside assets in anticipation of meeting PTC regulation by 2015. Further study in looking at the combination of LiDAR derived centerlines with mobile RTK GNSS would establish if the combination is suitable for use in and LDS.
- Can RTK enabled locomotives take advantage of the unused bandwidth of wayside repeater to transmit train location as part of an LDS? Wayside repeaters relay digitized voice packet to rail company movement authority. Unused capacity exists for other data. Narrow banding by the FCC will double and eventually quadruple the communication channels available in the AAR VHF and UHF bands. Further study using existing wayside radio assets to communicate RTK correctors to mobile units would provide knowledge as to the extent of coverage available to areas underserved by public wireless or cellular networks.

³Continuously Welded Rail

⁴Aka "sun kinks".

⁵first launch scheduled May 2010

⁶First scheduled launch 2013.

- Is the civilian-use safety-of-life signal from GPS BlockIIF sufficient to insure the use of GPS as part of a vital LDS?
- Can determining the track occupancy of a railcar in a transit of a yard assist “right track, right train” consist makeup? Correctors transmitted by the yard communications system would enable low-cost GPS receivers

Implications

1. Hump yard profile

Hump yard stakeholders can consider the relative safety costs when selecting a survey method in preparation for yard-wide resurfacing or to identify grade problems.

2. Track Alinement
3. Track Occupancy

Appendix A

Experiment 1, Automatic Classification Yard Profile by RTK GPS Mounted to a Locomotive During Humping Operations.

Subject: CSX Hamlet Terminal, Hamlet, North Carolina

Contents

- Ad hoc reference station OPUS reports, pages ?? through ??.
- National Geodetic Survey permanent identification datasheet, EB1559, page ??.
- Figure ??, elevation color map of bowl tracks, ??.
- Table ?? track profile drawing hyperlinks, page ??.
- Figures ?? through ??, profile drawing thumbnails by track group, pages ?? to ??.
- Figure ?? Relative vertical precision color map of bowl tracks, ??.
- Figure ?? Histogram of relative vertical precision, ??.
- TEQC Quality Check of Satellite Positioning Data.

NGS OPUS Solution 1

FILE: 89691472.08o 000062901

NGS OPUS SOLUTION REPORT

=====

All computed coordinate accuracies are listed as peak-to-peak values.

For additional information: <http://www.ngs.noaa.gov/OPUS/about.html#accuracy>

USER: pdailey@njrati.org
RINEX FILE: 89691470.08o

DATE: February 21, 2010
TIME: 14:11:44 UTC

SOFTWARE: page5 0909.08 master50.pl 081023 START: 2008/05/26 14:21:00
EPHEMERIS: igs14811.eph [precise] STOP: 2008/05/26 21:44:00
NAV FILE: brdc1470.08n OBS USED: 18491 / 19236 : 96%\%
ANT NAME: TRM41249.00 NONE # FIXED AMB: 61 / 72 : 85%\%
ARP HEIGHT: 1.5 OVERALL RMS: 0.017(m)

REF FRAME: NAD_83(CORS96) (EPOCH:2002.0000) ITRFOO (EPOCH:2008.4010)

X:	939900.948(m)	0.025(m)	939900.245(m)	0.025(m)
Y:	-5150611.988(m)	0.008(m)	-5150610.502(m)	0.008(m)
Z:	3630563.038(m)	0.021(m)	3630562.883(m)	0.021(m)
LAT:	34 55 8.30878	0.017(m)	34 55 8.33416	0.017(m)
E LON:	280 20 30.24278	0.026(m)	280 20 30.22604	0.026(m)
W LON:	79 39 29.75722	0.026(m)	79 39 29.77396	0.026(m)
EL HGT:	110.196(m)	0.012(m)	108.805(m)	0.012(m)
ORTHO HGT:	141.772(m)	0.028(m)	[NAVD88 (Computed using GEOID03)]	

	UTM COORDINATES	STATE PLANE COORDINATES
	UTM (Zone 17)	SPC (3200 NC)
Northing (Y) [meters]	3864879.250	129874.137
Easting (X) [meters]	622559.919	549457.252
Convergence [degrees]	0.76812771	-0.37993149
Point Scale	0.99978513	0.99988936
Combined Factor	0.99976784	0.99987206

US NATIONAL GRID DESIGNATOR: 17SPU2255964879(NAD 83)

BASE STATIONS USED

PID	DESIGNATION	LATITUDE	LONGITUDE	DISTANCE(m)
DG7402	NCPO POLKTON CORS ARP	N345933.173	W0801037.858	48094.7
DK4045	NCTR TROY CORS ARP	N352201.845	W0795212.771	53345.6
DG5938	NCCA CARTHAGE CORS ARP	N352030.048	W0792305.085	53111.4

NEAREST NGS PUBLISHED CONTROL POINT
EB2854 FRUITLAND RM 2 AZIMUTH N345516.664 W0793924.904 286.2

This position and the above vector components were computed without any knowledge by the National Geodetic Survey regarding the equipment or field operating procedures used.

NGS OPUS Solution 2

FILE: 89691491.08o 000062905

NGS OPUS SOLUTION REPORT

=====

All computed coordinate accuracies are listed as peak-to-peak values.

For additional information: <http://www.ngs.noaa.gov/OPUS/about.html#accuracy>

USER: pdailey@njrati.org
RINEX FILE: 8969149w.08o

DATE: February 21, 2010
TIME: 14:15:33 UTC

SOFTWARE: page5 0909.08 master40.pl 081023 START: 2008/05/28 22:20:00
EPHEMERIS: igs14813.eph [precise] STOP: 2008/05/29 20:40:00
NAV FILE: brdc1490.08n OBS USED: 58256 / 60076 : 97%\%
ANT NAME: TRM41249.00 NONE # FIXED AMB: 157 / 181 : 87%\%
ARP HEIGHT: 1.5 OVERALL RMS: 0.017(m)

REF FRAME: NAD_83(CORS96) (EPOCH:2002.0000) ITRFOO (EPOCH:2008.4082)

X:	939900.953(m)	0.013(m)	939900.250(m)	0.013(m)
Y:	-5150611.985(m)	0.034(m)	-5150610.499(m)	0.034(m)
Z:	3630563.028(m)	0.016(m)	3630562.873(m)	0.016(m)
LAT:	34 55 8.30856	0.008(m)	34 55 8.33393	0.008(m)
E LON:	280 20 30.24299	0.008(m)	280 20 30.22626	0.008(m)
W LON:	79 39 29.75701	0.008(m)	79 39 29.77374	0.008(m)
EL HGT:	110.189(m)	0.037(m)	108.798(m)	0.037(m)
ORTHO HGT:	141.765(m)	0.045(m)	[NAVD88 (Computed using GEOID03)]	

	UTM COORDINATES	STATE PLANE COORDINATES
	UTM (Zone 17)	SPC (3200 NC)
Northing (Y) [meters]	3864879.243	129874.130
Easting (X) [meters]	622559.924	549457.257
Convergence [degrees]	0.76812774	-0.37993146
Point Scale	0.99978513	0.99988936
Combined Factor	0.99976784	0.99987206

US NATIONAL GRID DESIGNATOR: 17SPU2255964879(NAD 83)

BASE STATIONS USED

PID	DESIGNATION	LATITUDE	LONGITUDE	DISTANCE(m)
DG7402	NCPO POLKTON CORS ARP	N345933.173	W0801037.858	48094.7
DK4045	NCTR TROY CORS ARP	N352201.845	W0795212.771	53345.6
DI1682	NCLU LUMBERTON CORS ARP	N343736.336	W0790439.695	62252.3

NEAREST NGS PUBLISHED CONTROL POINT
EB2854 FRUITLAND RM 2 AZIMUTH N345516.664 W0793924.904 286.2

This position and the above vector components were computed without any knowledge by the National Geodetic Survey regarding the equipment or field operating procedures used.

Data Sheet EB1559 Retrieval The NGS Data Sheet

```

DATABASE = ,PROGRAM = datasheet, VERSION = 7.60
1      National Geodetic Survey,   Retrieval Date = MAY 27, 2008
EB1559 ****
EB1559 DESIGNATION - ROCKINGHAM RESET
EB1559 PID       - EB1559
EB1559 STATE/COUNTY- NC/RICHMOND
EB1559 USGS QUAD - HAMLET (1982)
EB1559
EB1559          *CURRENT SURVEY CONTROL
EB1559
EB1559* NAD 83(2007)- 34 54 31.49602(N)    079 41 01.64429(W)    ADJUSTED
EB1559* NAVD 88     -      118.731 (meters)    389.54 (feet)    ADJUSTED
EB1559 -----
EB1559 EPOCH DATE -      2002.00
EB1559 X       -      937,719.254 (meters)    COMP
EB1559 Y       -     -5,151,650.434 (meters)    COMP
EB1559 Z       -      3,629,619.608 (meters)    COMP
EB1559 LAPLACE CORR-      -4.82 (seconds)    DEFLEC99
EB1559 ELLIP HEIGHT-      87.199 (meters)    (02/10/07) ADJUSTED
EB1559 GEOID HEIGHT-      -31.48 (meters)    GEOID03
EB1559 DYNAMIC HT -      118.622 (meters)    389.18 (feet)    COMP
EB1559
EB1559 ----- Accuracy Estimates (at 95% Confidence Level in cm) -----
EB1559 Type    PID    Designation        North   East   Ellip
EB1559 -----
EB1559 NETWORK EB1559 ROCKINGHAM RESET      1.29   1.06   2.74
EB1559 -----
EB1559 MODELED GRAV-      979,707.4 (mgal)    NAVD 88
EB1559
EB1559 VERT ORDER - FIRST    CLASS II
EB1559
EB1559.The horizontal coordinates were established by GPS observations
EB1559.and adjusted by the National Geodetic Survey in February 2007.
EB1559
EB1559.The datum tag of NAD 83(2007) is equivalent to NAD 83(NSRS2007).
EB1559.The horizontal coordinates are valid at the epoch date displayed above.
EB1559.The epoch date for horizontal control is a decimal equivalence
EB1559.of Year/Month/Day.
EB1559
EB1559.The orthometric height was determined by differential leveling
EB1559.and adjusted in June 1991.
EB1559
EB1559.The X, Y, and Z were computed from the position and the ellipsoidal ht.
EB1559
EB1559.The Laplace correction was computed from DEFLEC99 derived deflections.
EB1559
EB1559.The ellipsoidal height was determined by GPS observations
EB1559.and is referenced to NAD 83.
EB1559
EB1559.The geoid height was determined by GEOID03.
EB1559
EB1559.The dynamic height is computed by dividing the NAVD 88
EB1559.geopotential number by the normal gravity value computed on the
EB1559.Geodetic Reference System of 1980 (GRS 80) ellipsoid at 45
EB1559.degrees latitude (g = 980.6199 gals.).
EB1559
EB1559.The modeled gravity was interpolated from observed gravity values.
EB1559
EB1559;           North      East      Units Scale Factor Converg.
EB1559;SPC NC     - 128,755.617  547,117.399  MT 0.99989040  -0 23 40.8
EB1559;SPC NC     - 422,425.72   1,795,001.00  SFT 0.99989040  -0 23 40.8
EB1559;UTM 17     - 3,863,714.200  620,243.197  MT 0.99977820  +0 45 11.9
EB1559

```

EB1559! - Elev Factor x Scale Factor = Combined Factor
 EB1559!SPC NC - 0.99998631 x 0.99989040 = 0.99987671
 EB1559!UTM 17 - 0.99998631 x 0.99977820 = 0.99976452
 EB1559
 EB1559: Primary Azimuth Mark Grid Az
 EB1559:SPC NC - ROCKINGHAM RM 1 AZIMUTH 063 44 34.0
 EB1559:UTM 17 - ROCKINGHAM RM 1 AZIMUTH 062 35 41.3
 EB1559
 EB1559|-----|
 EB1559| PID Reference Object Distance Geod. Az |
 EB1559| dddmmss.s |
 EB1559| EB3564 ROCKINGHAM RM 1 AZIMUTH 0632053.2 |
 EB1559| EB3565 ROCKINGHAM RM 2 25.344 METERS 08611 |
 EB1559| EB1561 ROCKINGHAM RM 4 18.703 METERS 09503 |
 EB1559| EB3563 ROCKINGHAM RM 20.840 METERS 16626 |
 EB1559| EB1560 ROCKINGHAM RM 3 30.681 METERS 19004 |
 EB1559| EB2850 HAMLET SEABOARD RR WATER TANK APPROX. 3.1 KM 2044531.0 |
 EB1559| EB1562 PACE APPROX. 0.7 KM 2144024.4 |
 EB1559|-----|
 EB1559
 EB1559 SUPERSEDED SURVEY CONTROL
 EB1559
 EB1559 NAD 83(2001)- 34 54 31.49597(N) 079 41 01.64418(W) AD() 1
 EB1559 ELLIP H (03/13/03) 87.214 (m) GP() 4 2
 EB1559 NAD 83(1986)- 34 54 31.50606(N) 079 41 01.64801(W) AD() 1
 EB1559 NAD 83(1986)- 34 54 31.50078(N) 079 41 01.65069(W) AD() 1
 EB1559 NAD 27 - 34 54 30.94100(N) 079 41 02.45300(W) AD() 1
 EB1559 NAVD 88 (07/24/98) 118.73 (m) 389.5 (f) LEVELING 3
 EB1559 NGVD 29 (10/06/93) 118.999 (m) 390.42 (f) ADJUSTED 1 2
 EB1559
 EB1559. Superseded values are not recommended for survey control.
 EB1559.NGS no longer adjusts projects to the NAD 27 or NGVD 29 datums.
 EB1559
 EB1559_U.S. NATIONAL GRID SPATIAL ADDRESS: 17SPU2024363714(NAD 83)
 EB1559_MARKER: DS = TRIANGULATION STATION DISK
 EB1559_SETTING: 7 = SET IN TOP OF CONCRETE MONUMENT
 EB1559_SP_SET: CONCRETE POST
 EB1559_STAMPING: ROCKINGHAM 1918 1980
 EB1559_MARK LOGO: NGS
 EB1559_PROJECTION: PROJECTING 5 CENTIMETERS
 EB1559_MAGNETIC: N = NO MAGNETIC MATERIAL
 EB1559_STABILITY: C = MAY HOLD, BUT OF TYPE COMMONLY SUBJECT TO
 EB1559+STABILITY: SURFACE MOTION
 EB1559_SATELLITE: THE SITE LOCATION WAS REPORTED AS SUITABLE FOR
 EB1559+SATELLITE: SATELLITE OBSERVATIONS - July 28, 1993
 EB1559
 EB1559 HISTORY - Date Condition Report By
 EB1559 HISTORY - 1980 MONUMENTED NGS
 EB1559 HISTORY - 1980 GOOD NGS
 EB1559 HISTORY - 1982 GOOD LOCENG
 EB1559 HISTORY - 19930728 GOOD NCGS
 EB1559
 EB1559 STATION DESCRIPTION
 EB1559
 EB1559'DESCRIBED BY NATIONAL GEODETIC SURVEY 1980 (HDM)
 EB1559'1.5 MI NE FROM HAMLET.
 EB1559'1.6 MILES NORTHEAST ALONG N.C. 177 FROM INTERSECTION WITH U.S. 74
 EB1559'IN HAMLET, ACROSS HIGHWAY FROM INTERSECTION WITH SR 1627 AND IN A
 EB1559'VACANT LOT BESIDE A VACANT FRAME HOUSE, 74.0 FEET SOUTHEAST OF
 EB1559'CENTERLINE OF HIGHWAY, 89.0 FEET NORTHWEST OF NORTHWEST RAIL,
 EB1559'63.2 FEET WEST OF POWER POLE 4004 WITH REFERENCE TAG, 30.2 FEET SOUTH
 EB1559'OF 18 INCH OAK WITH REFERENCE TAG AND 28.2 FEET NORTH OF 12 INCH
 EB1559'OAK WITH REFERENCE TAG.
 EB1559'THE MARK IS 1.3 FT NE FROM A WITNESS POST.

EB1559' THE MARK IS ABOVE LEVEL WITH HIGHWAY.

EB1559

EB1559 STATION RECOVERY (1980)

EB1559

EB1559'RECOVERY NOTE BY NATIONAL GEODETIC SURVEY 1980 (CLN)

EB1559'THE STATION MARK AND REFERENCE MARK 3 WERE RECOVERED. THE STATION
EB1559'MARK HAD BEEN DISTURBED AND WAS DUG OUT AND THE SUB-SURFACE MARK
EB1559'LOWERED AND BOTH MARKS RESET. REFERENCE MARK 3 WAS FOUND IN GOOD
EB1559'CONDITION. REFERENCE MARK 2 WAS FOUND WITH TOP OF MARK BROKEN OFF.
EB1559'REFERENCE MARK 1 WAS SEARCHED FOR BUT WAS NOT FOUND. A REFERENCE MARK
EB1559'4 WAS ESTABLISHED AT THIS TIME.

EB1559'

EB1559'A COMPLETE NEW DESCRIPTION FOLLOWS.

EB1559'

EB1559'STATION IS ABOUT 1-1/2 MILES NORTHEAST OF HAMLET AND 0.05 MILE
EB1559'SOUTHWEST OF THE JUNCTION OF STATE HIGHWAY 177 AND SR1672 AND JUST
EB1559'WEST OF A SMALL FRAME HOUSE THAT IS ABANDONED AND FALLING APART.

EB1559'

EB1559'STATION MARKS ARE STANDARD DISKS STAMPED--ROCKINGHAM 1918 1980--,
EB1559'SURFACE DISK IS SET IN THE TOP OF A CYLINDRICAL CONCRETE POST THAT IS
EB1559'12-INCHES IN DIAMETER AND FLUSH WITH THE GROUND. SUB-SURFACE MARK IS
EB1559'SET IN AN IRREGULAR MASS OF CONCRETE 3.5 FEET BELOW GROUND SURFACE.
EB1559'THEY ARE 28.2 FEET NORTH OF A 12-INCH OAK TREE WITH A REFERENCE TAG,
EB1559'30.2 FEET SOUTH OF AN 18-INCH OAK TREE WITH A REFERENCE TAG, 63.2 FEET
EB1559'WEST OF POWERLINE POLE 4004 WITH A REFERENCE TAG, 74 FEET SOUTHEAST OF
EB1559'THE CENTERLINE OF STATE ROUTE 177 AND 89 FEET NORTHWEST OF THE
EB1559'NORTHWEST RAIL OF RAILROAD TRACKS AND 1.3 FEET NORTHEAST OF A METAL
EB1559'WITNESS POST.

EB1559'

EB1559'REFERENCE MARK 3 IS A STANDARD DISK STAMPED--ROCKINGHAM NO 3 1933-,
EB1559'SET IN THE TOP OF A 14-INCH SQUARE CONCRETE POST THAT PROJECTS 2
EB1559'INCHES. IT IS 1.5 FEET WEST SOUTHWEST OF A TELEPHONE LINE POLE WITH A
EB1559'REFERENCE TAG, 34 FEET NORTHWEST OF THE NORTHWEST RAIL OF RAILROAD
EB1559'TRACKS, 63.1 SOUTHWEST OF ANOTHER TELEPHONE POLE WITH A REFERENCE TAG
EB1559'AND 117.8 FEET SOUTHEAST OF THE CENTERLINE OF STATE ROUTE 177.

EB1559'

EB1559'REFERENCE MARK 4 IS A STANDARD DISK STAMPED--ROCKINGHAM 1918 NO 4
EB1559'1980--, SET IN THE TOP OF A CYLINDRICAL CONCRETE POST THAT IS
EB1559'14-INCHES IN DIAMETER AND PROJECTS 3 INCHES. IT IS 1.7 WEST OF
EB1559'POWERLINE POLE 4004, WITH A REFERENCE TAG, 38 FEET SOUTHEAST OF THE
EB1559'SOUTHEAST CORNER OF A CONCRETE BLOCK, WELL HOUSE, 59.5 FEET NORTHEAST
EB1559'OF A TELEPHONE LINE POLE WITH A REFERENCE TAG AND 40.9 FEET NORTHWEST
EB1559'OF THE NORTHWEST RAIL OF RAILROAD TRACKS.

EB1559'

EB1559'TO REACH THE STATION FROM THE JUNCTION OF US HIGHWAY 74 AND STATE
EB1559'HIGHWAY 177, GO NORTHEASTERLY ON STATE HIGHWAY 177 FOR 1.6 MILES TO
EB1559'THE MARK ON THE RIGHT.

EB1559'

EB1559'THE STATION IS A STANDARD NGS DISK STAMPED--ROCKINGHAM 1918 1980--,
EB1559'SET INTO THE TOP OF A ROUND CONCRETE MONUMENT 12 INCHES IN DIAMETER
EB1559'FLUSH WITH GROUND LOCATED 89 FEET NW OF NW RAIL OF RAILROAD TRACKS, 74
EB1559'FEET SE OF CENTERLINE OF ST 177, 63.2 FT W FROM PLP 4004 W/TAG, 30.2
EB1559'FT S FROM 18 INCH OAK W/TAG, AND 28.2 FT N FROM 12 INCH OAK W/TAG.

EB1559'

EB1559'THE UNDERGROUND MARK IS A STANDARD NGS DISK STAMPED--ROCKINGHAM 1918
EB1559'1980--, SET INTO AN IRREGULAR MASS OF CONCRETE 3.5 FEET BELOW THE
EB1559'SURFACE.

EB1559'

EB1559'REFERENCE MARK NO 3 IS A STANDARD CGS DISK STAMPED--ROCKINGHAM NO 3
EB1559'1933--, SET INTO THE TOP OF A SQUARE CONCRETE MONUMENT 14 INCHES ON
EB1559'SIDE PROJECTING 2 INCHES ABOVE THE GROUND LOCATED 63.1 FT SW FROM TELE
EB1559'POLE W/TAG, 34 FT NW OF NW RAIL, 117.8 FT SE FROM CENTERLINE ST RT
EB1559'177, AND 1.5 FT WSW FROM TEL POLE W/TAG.

EB1559'

EB1559'REFERENCE MARK NO 4 IS A STANDARD NGS DISK STAMPED--ROCKINGHAM 1918 NO
EB1559'4 1980--, SET INTO THE TOP OF A ROUND CONCRETE MONUMENT 14 INCHES IN
EB1559'DIAMETER PROJECTING 3 INCHES ABOVE THE GROUND LOCATED 40.9 FT NW OF NW
EB1559'RAIL, 1.7 FT W FROM PLP NO 4004 W/TAG, 59.5 FT NE FROM TEL POLE W/TAG,
EB1559'AND 38.0 FT S OF SE CORNER CONCRETE BLOCKWELL HOUSE.

EB1559

EB1559 STATION RECOVERY (1982)

EB1559

EB1559'RECOVERY NOTE BY LOCAL ENGINEER (INDIVIDUAL OR FIRM) 1982 (DR)
EB1559'STATION WAS RECOVERED IN GOOD SHAPE. I DID NOT CHECK FOR REFERENCE
EB1559'MARKS, HOWEVER, I DID FIND THAT NCGS STATION SARGES IS VISIBLE FROM
EB1559'ROCKINGHAM.

EB1559

EB1559 STATION RECOVERY (1993)

EB1559

EB1559'RECOVERY NOTE BY NORTH CAROLINA GEODETIC SURVEY 1993 (LWA)
EB1559'RECOVERED AS DESCRIBED. THE ROAD IS SR 1627 (EARLE FRANKLIN ROAD)NOT
EB1559'SR 1672. MARK IS IN A JUNK YARD AND LINES-OF-SIGHT ARE BLOCKED TO
EB1559'REFERENCE MARKS.

*** retrieval complete.

Elapsed Time = 00:00:01

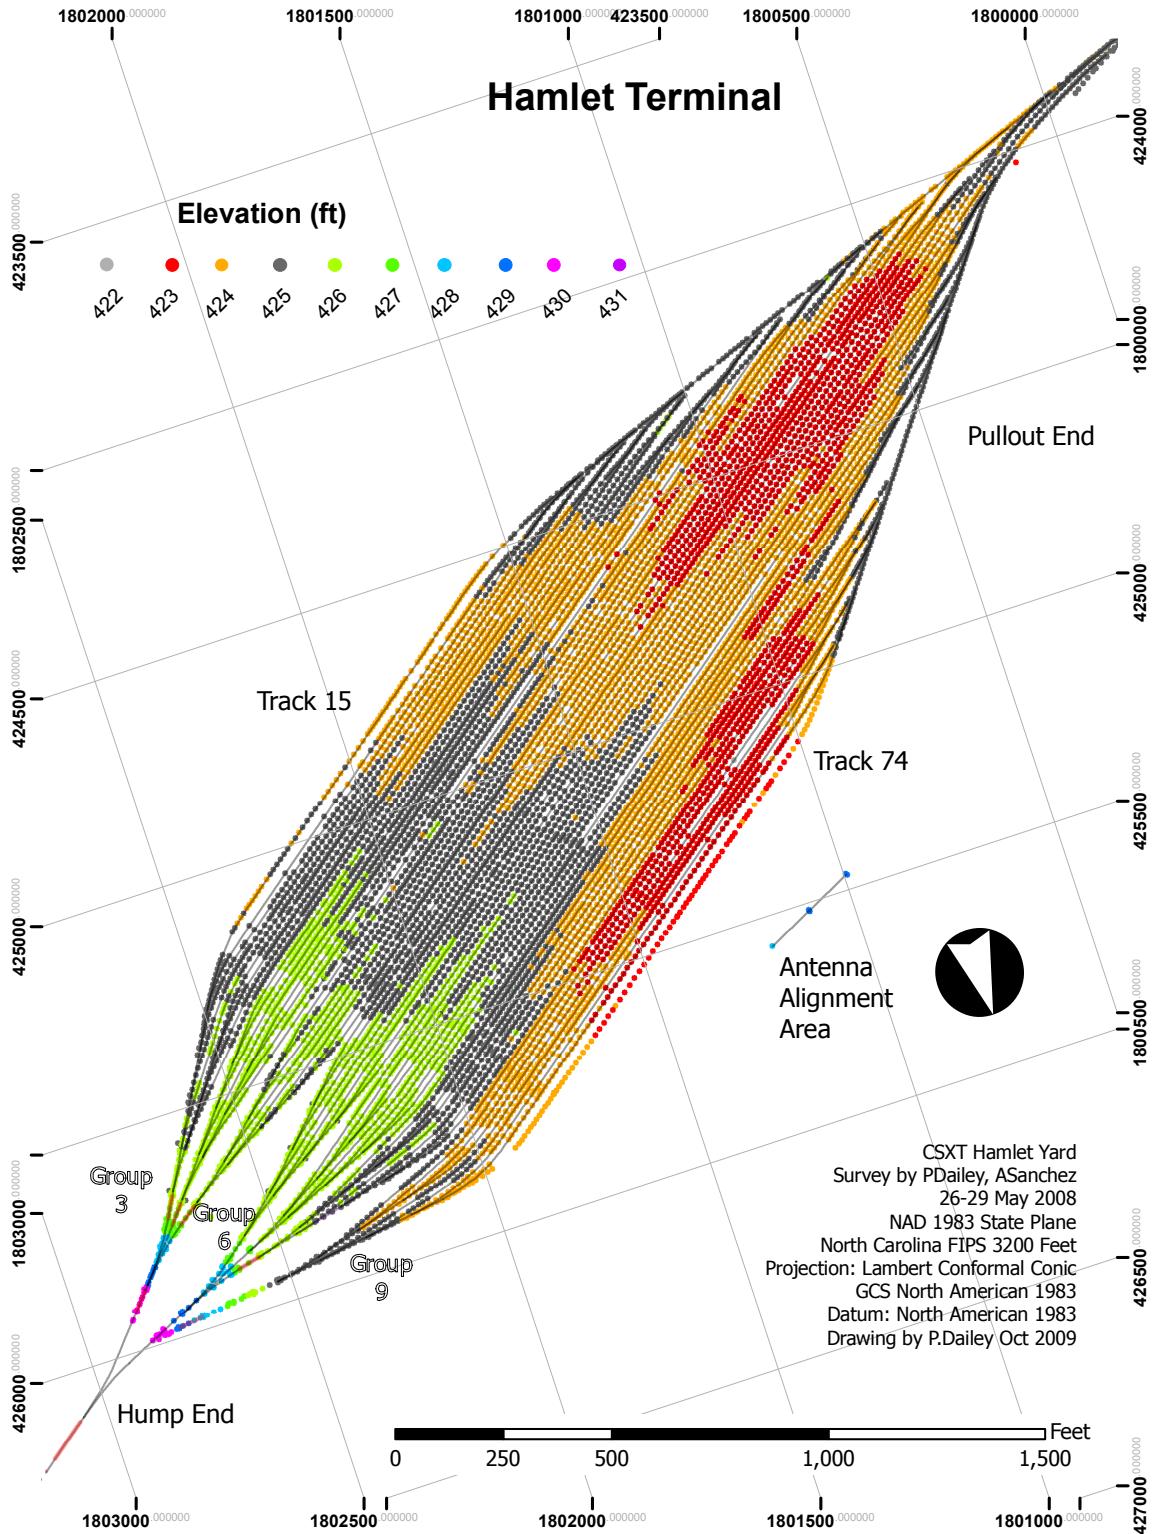


Figure 1: Hump Yard Elevation Color Map

Table 1: Hump Yard Profiles


Group 3	Group 4	Group 5	Group 6	Group 7	Group 8	Group 9
Track 15	Track 25	Track 33	Track 41	Track 49	Track 57	Track 65
Track 17	Track 26	Track 34	Track 42	Track 50	Track 58	Track 66
Track 18	Track 27	Track 35	Track 43	Track 51	Track 59	Track 67
Track 19	Track 28	Track 36	Track 44	Track 52	Track 60	Track 68
Track 20	Track 29	Track 37	Track 45	Track 53	Track 61	Track 69
Track 21	Track 30	Track 38	Track 46	Track 54	Track 62	Track 70
Track 22	Track 31	Track 39	Track 47	Track 55	Track 63	Track 71
Track 23	Track 32	Track 40	Track 48	Track 56	Track 64	Track 72
Track 24						Track 74

Table ?? note: Track group headings are hyperlinked to Excel workbooks containing track elevation data. Track numbers are hyperlinked to drawings.


Hamlet Terminal track number designation

The 1955 Hamlet terminal design planned for eleven groups. However only seven of the eleven track groups were constructed, totaling 58 tracks. Track groups one and two were never constructed, however track numbering follows the original eleven group numbering convention. Consequently, track numbering begins in group 3 with track 15, skips 16, and continue sequentially from track 17 through track 72, skips 73, concluding with track 74 in group 9.


Figure 2: Group 3 Track Profile Thumbnails

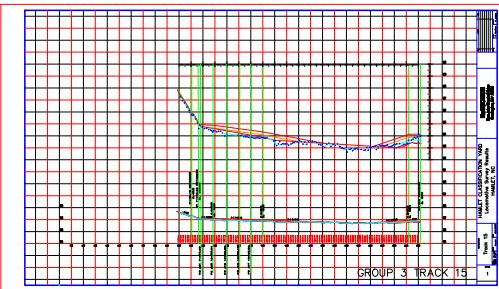


Track 15

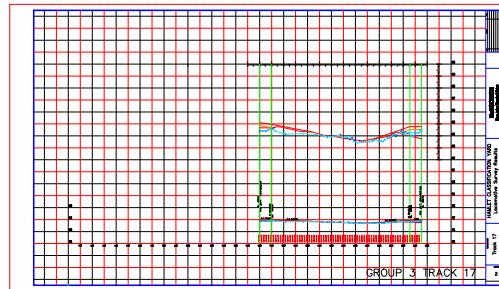


Track 17

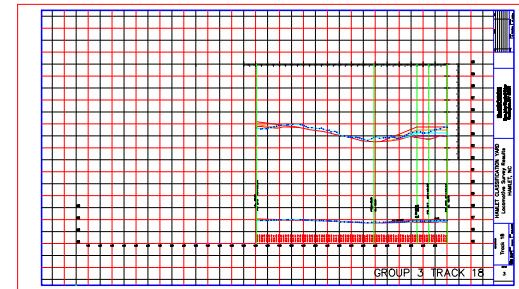

Track 18

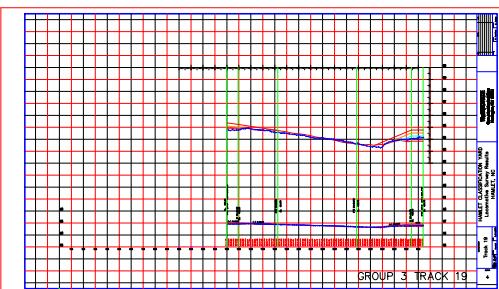

Track 19

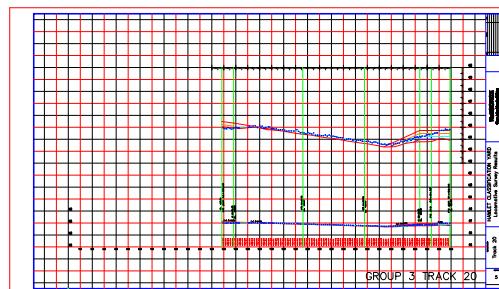

Track 20




Track 21



Track 22




Track 23

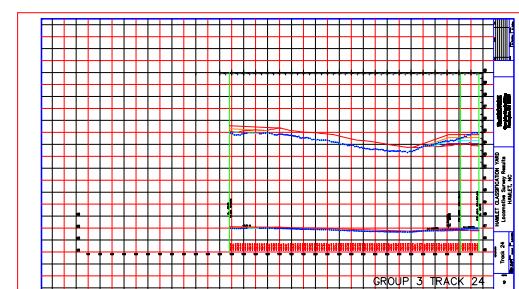


Track 24


Figure 3: Group 4 Track Profile Thumbnails

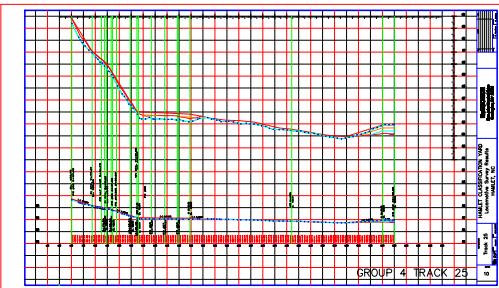


Track 25

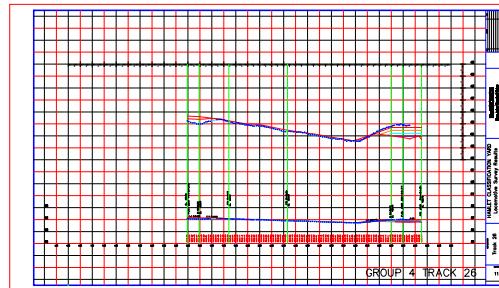


Track 26

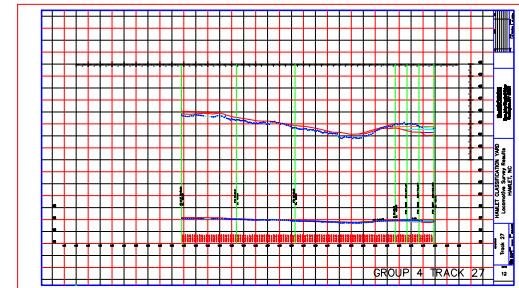


Track 27

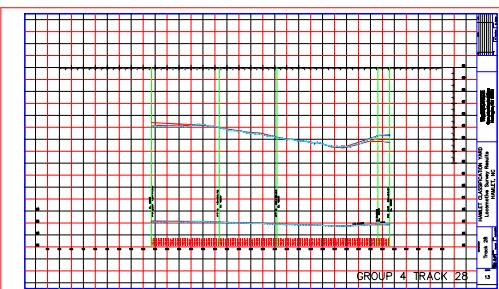

Track 28

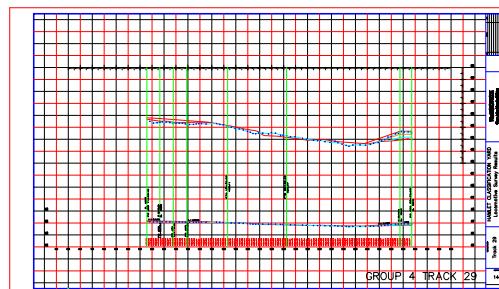


Track 29

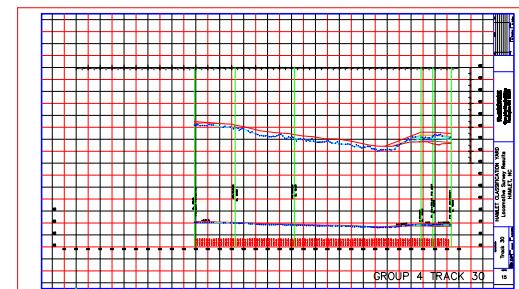

Track 30



Track 31

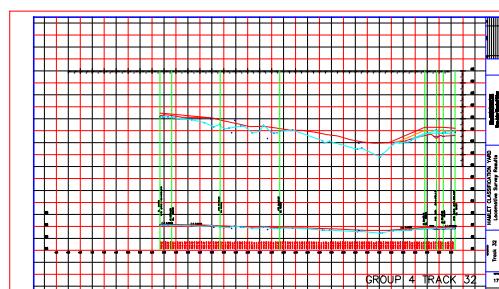

Track 32

Figure 4: Group 5 Track Profile Thumbnails



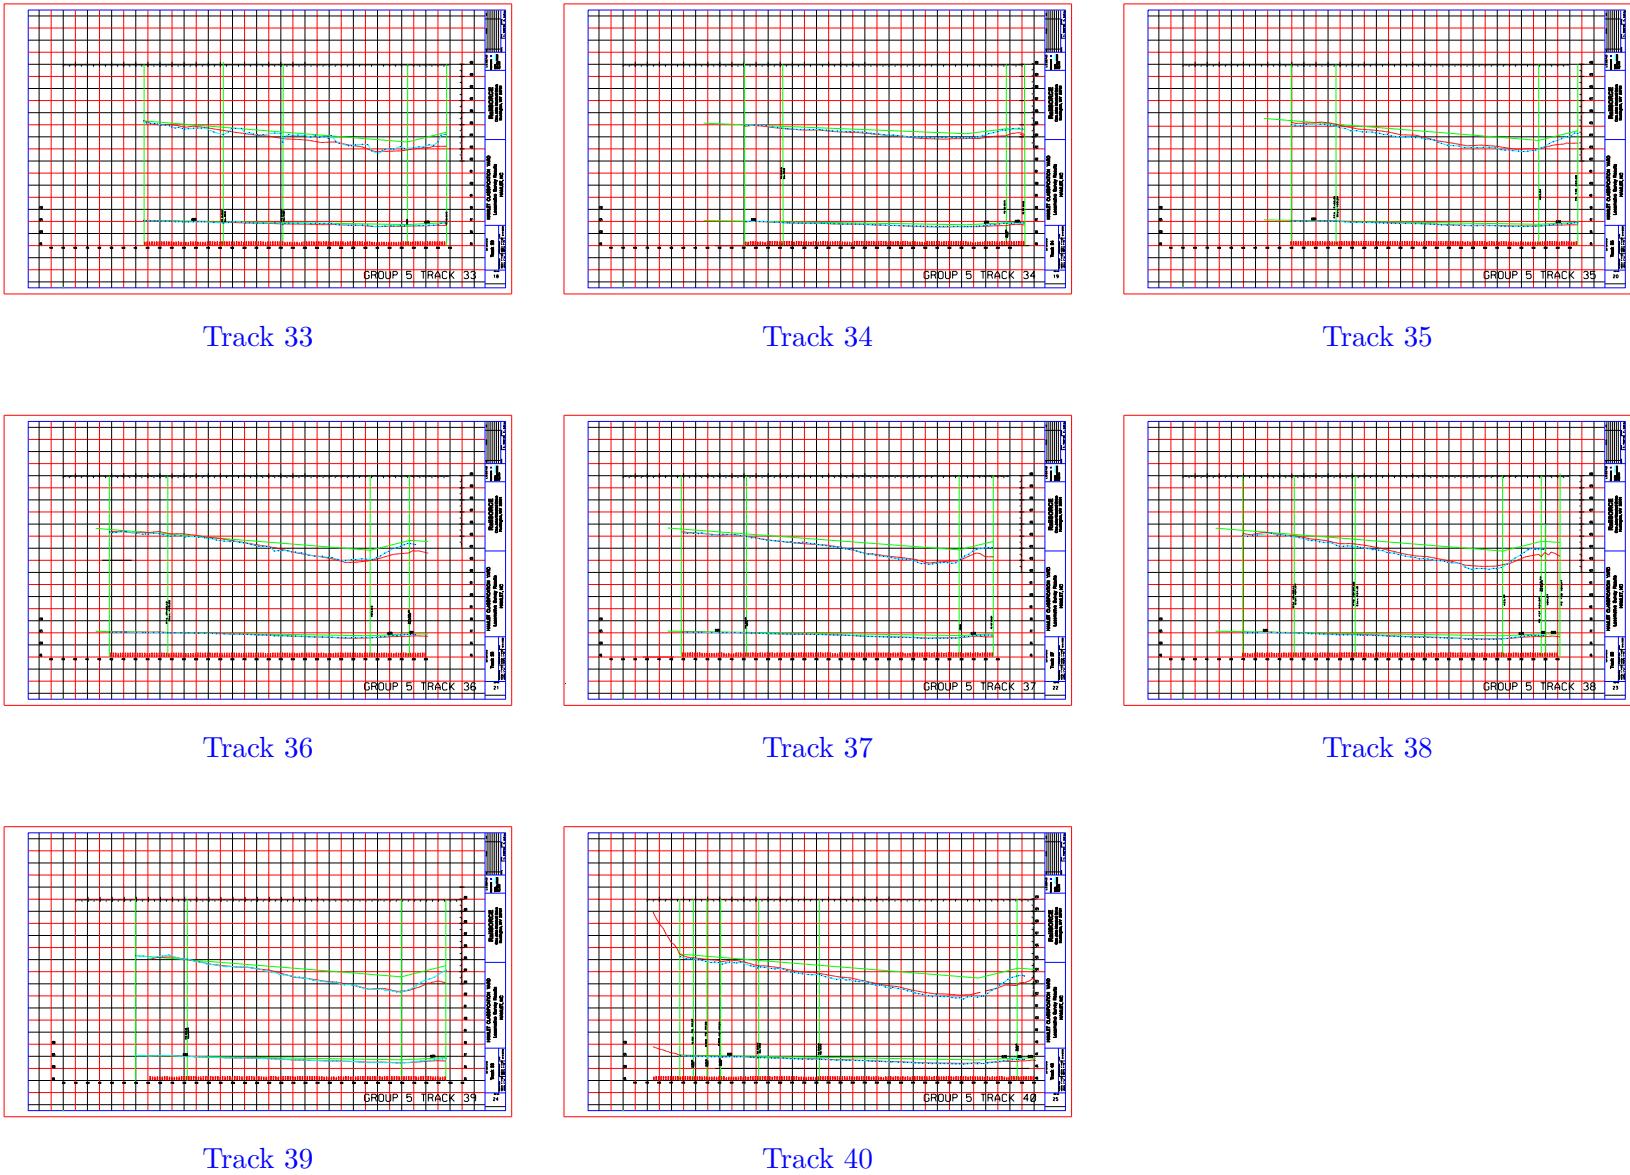



Figure 5: Group 6 Track Profile Thumbnails

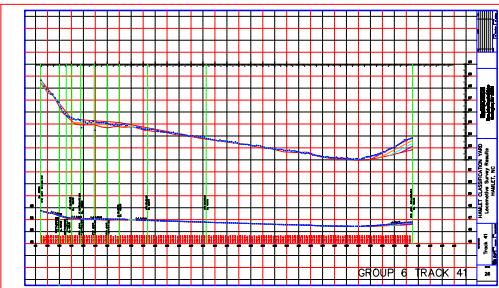


Track 41

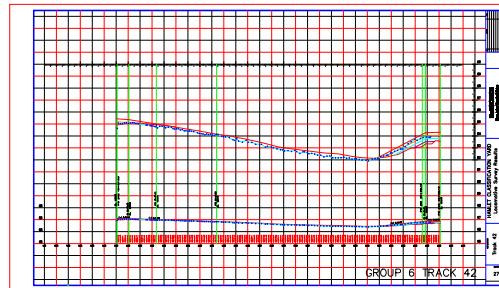


Track 42

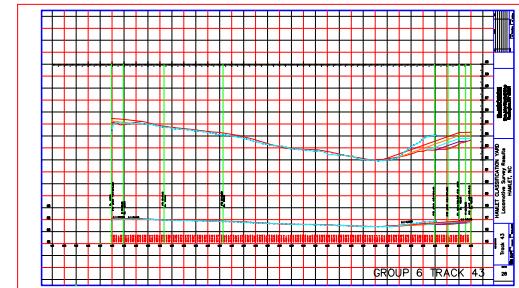


Track 43

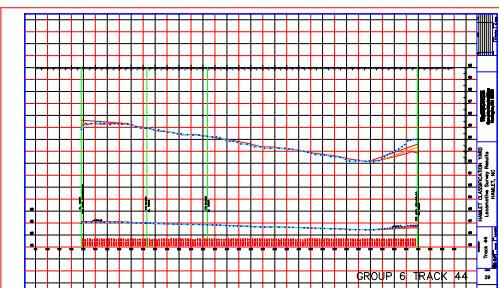


Track 44

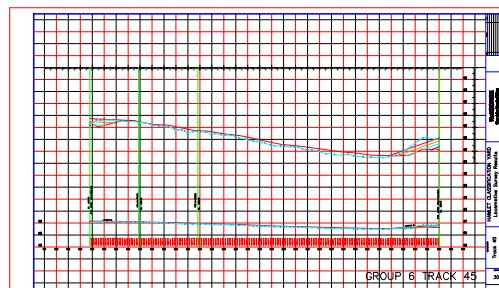


Track 45

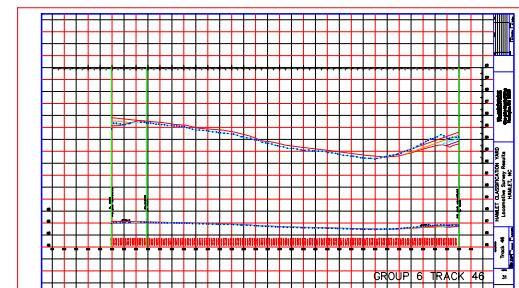

Track 46

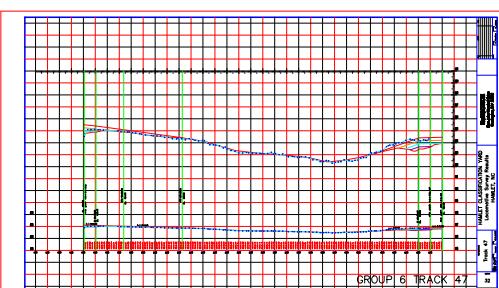


Track 47

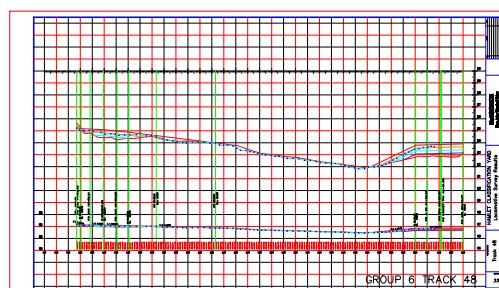


Track 48


Figure 6: Group 7 Track Profile Thumbnails

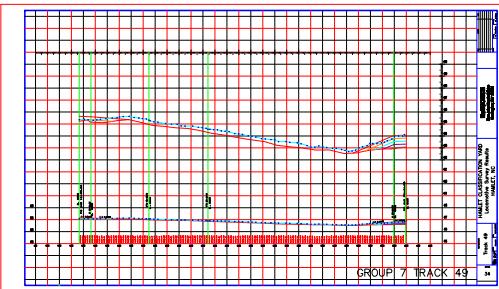


Track 49

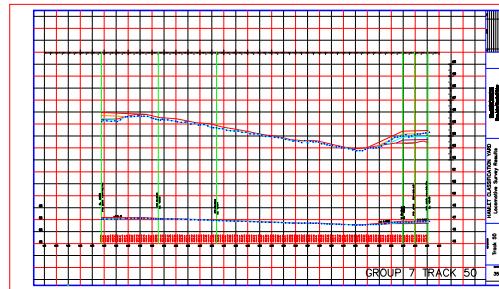


Track 50

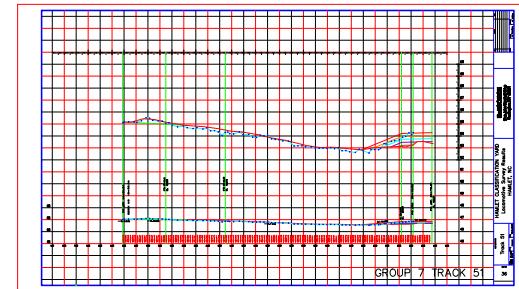


Track 51

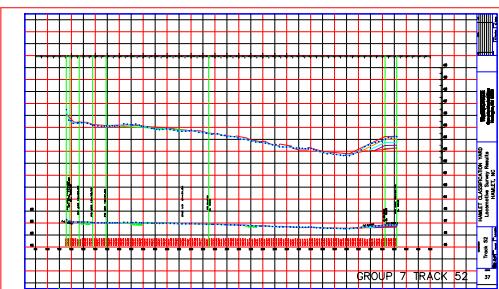


Track 52

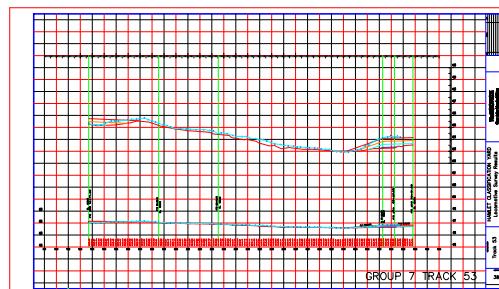


Track 53

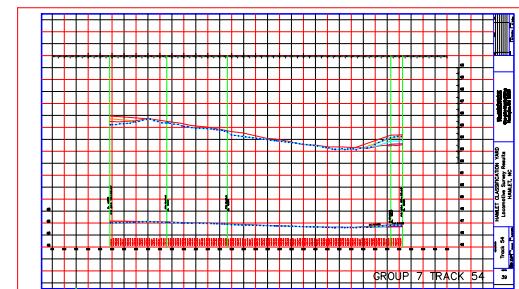

Track 54

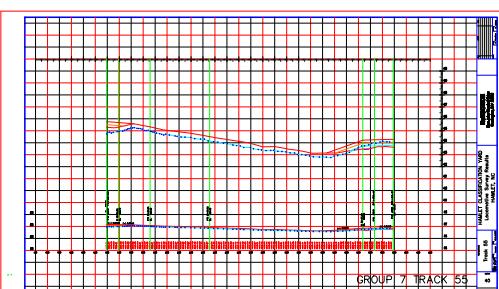


Track 55

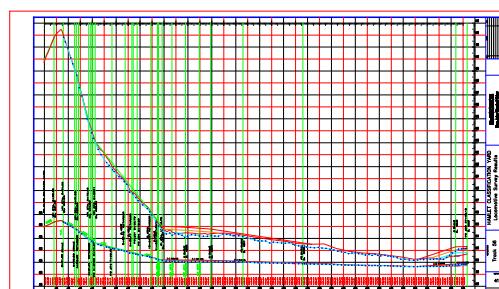


Track 56


Figure 7: Group 8 Track Profile Thumbnails

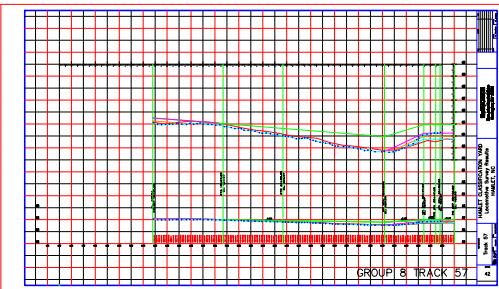


Track 57

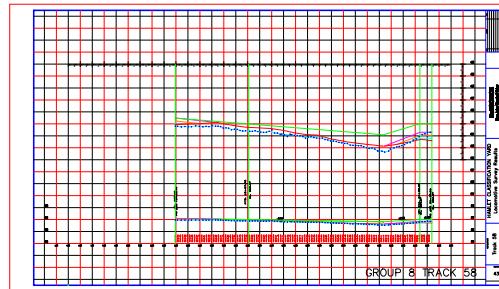


Track 58

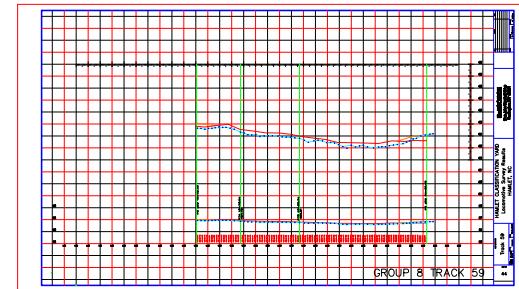


Track 59

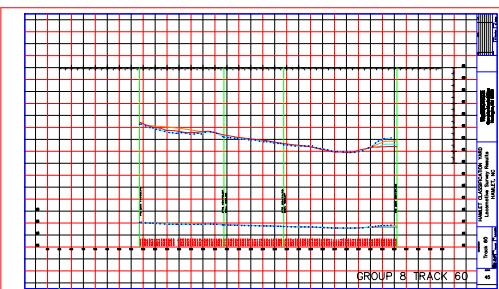


Track 60

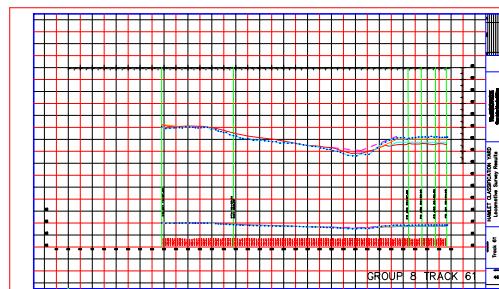


Track 61

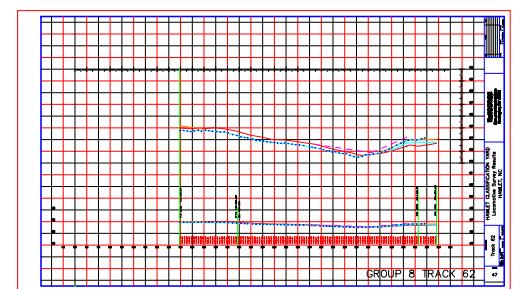

Track 62

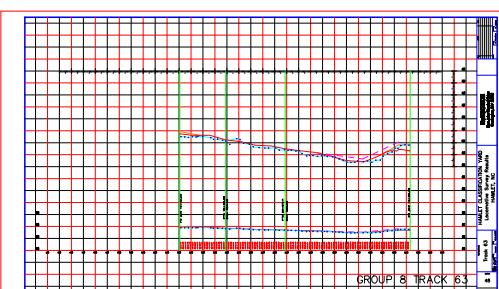


Track 63

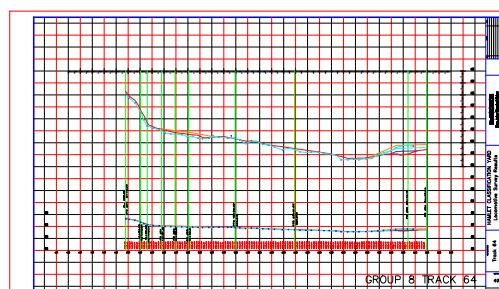


Track 64


Figure 8: Group 9 Track Profile Thumbnails

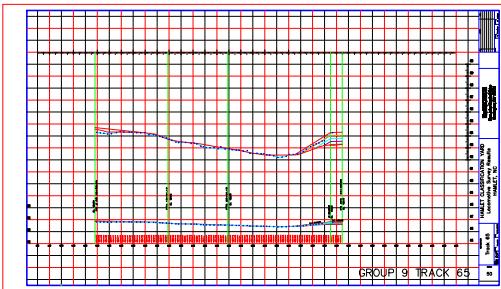


Track 65

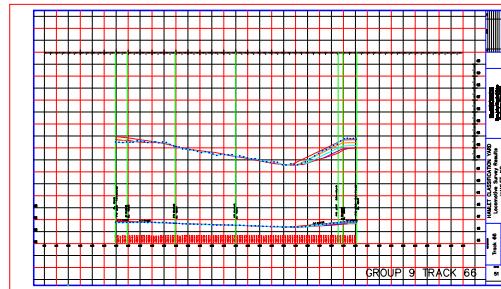


Track 66

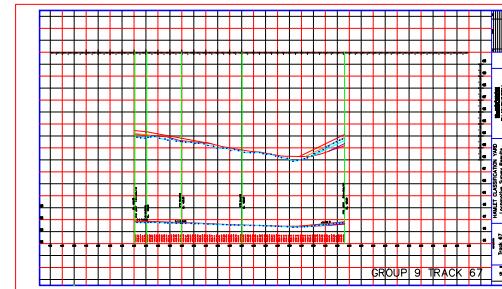


Track 67

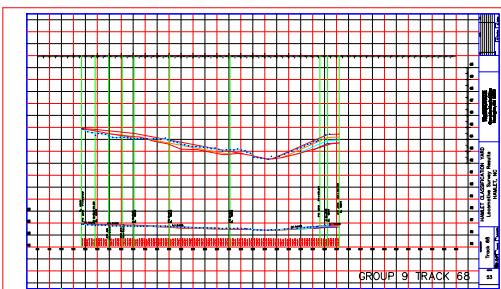


Track 68

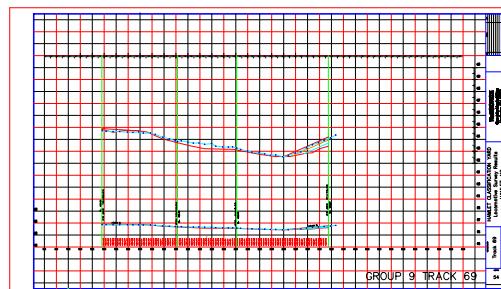


Track 69

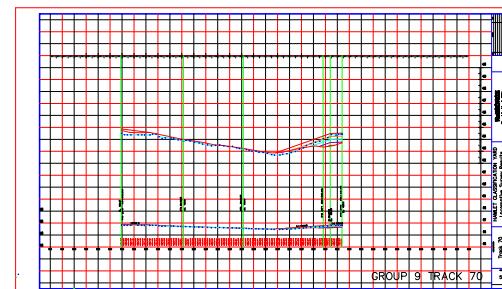


Track 70

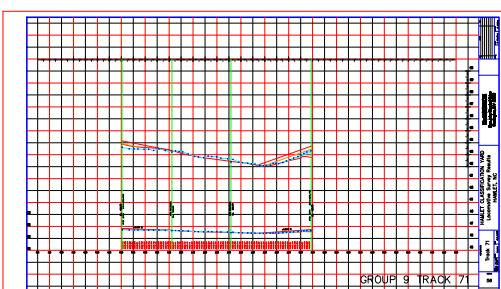

Track 71

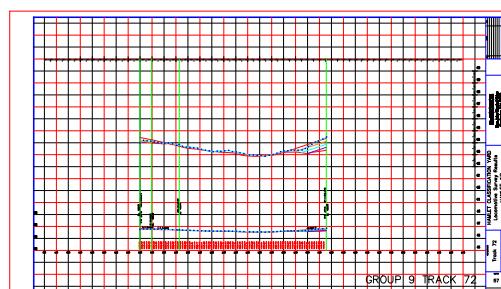

Track 72

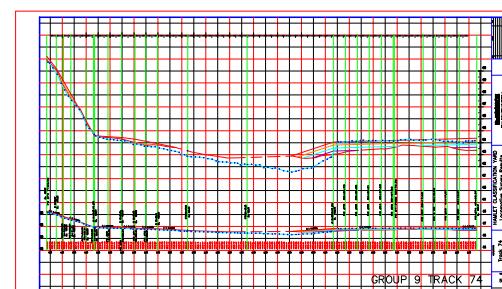

Track 74

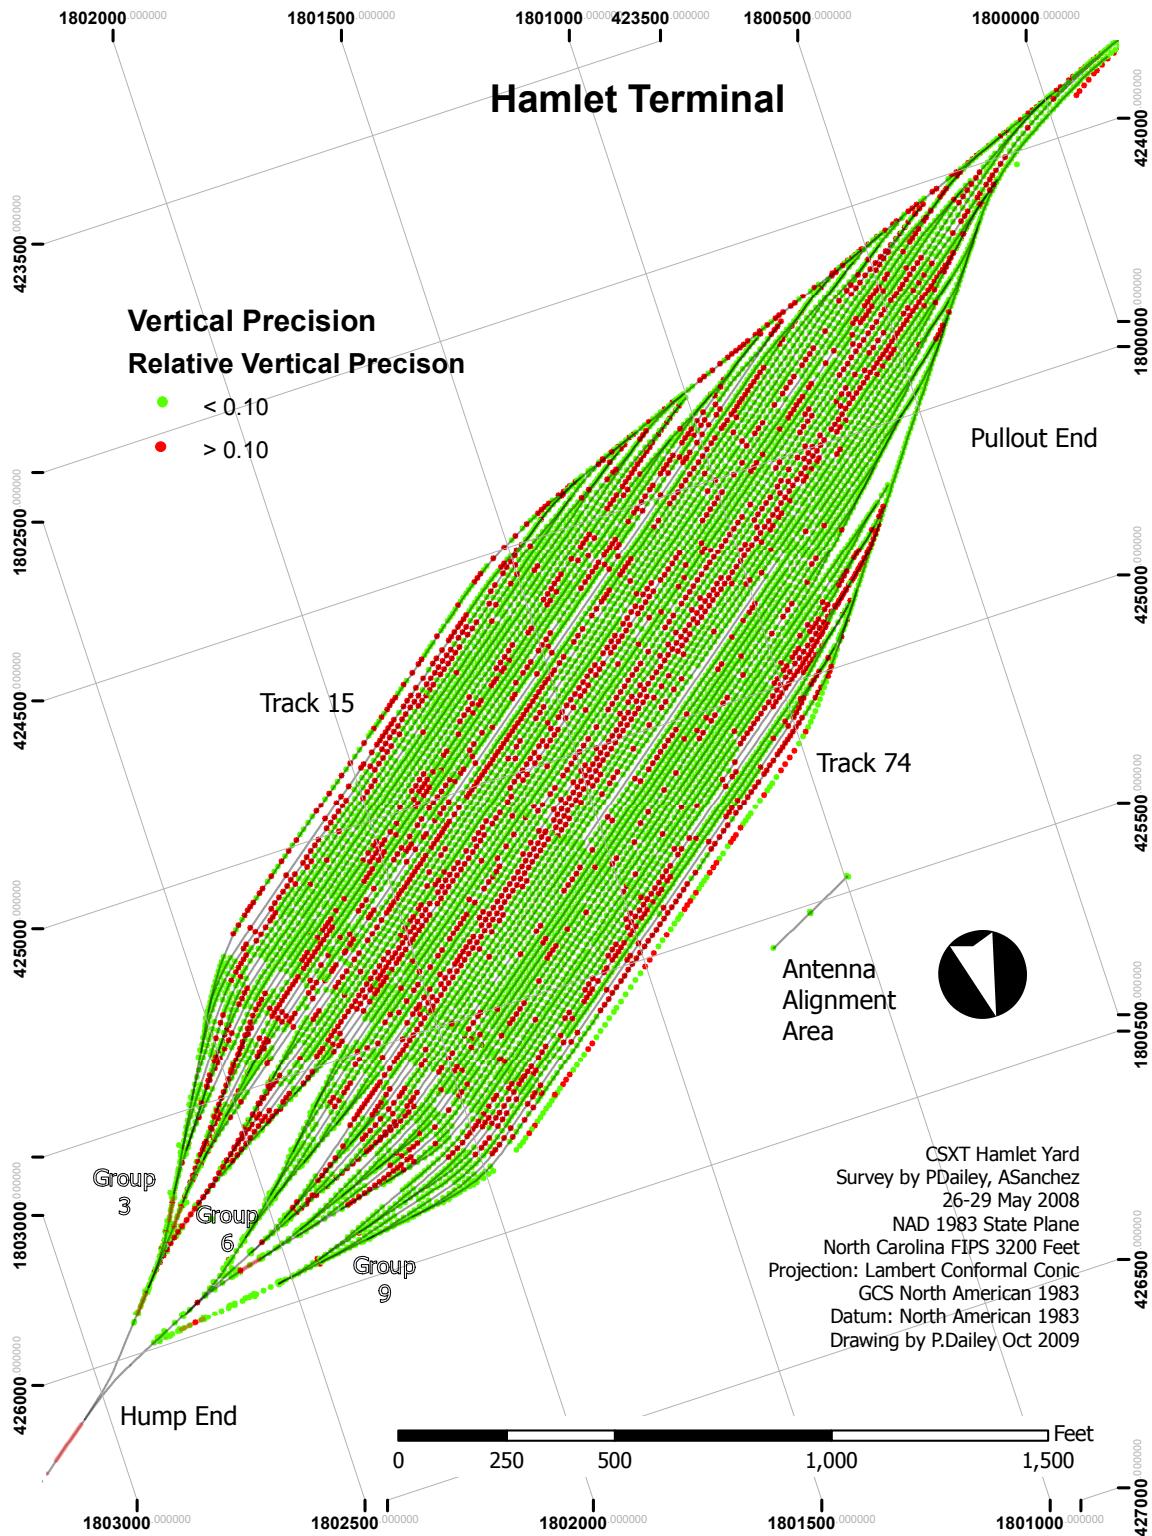


Figure 9: Plan View: Relative Vertical Precision Color Map

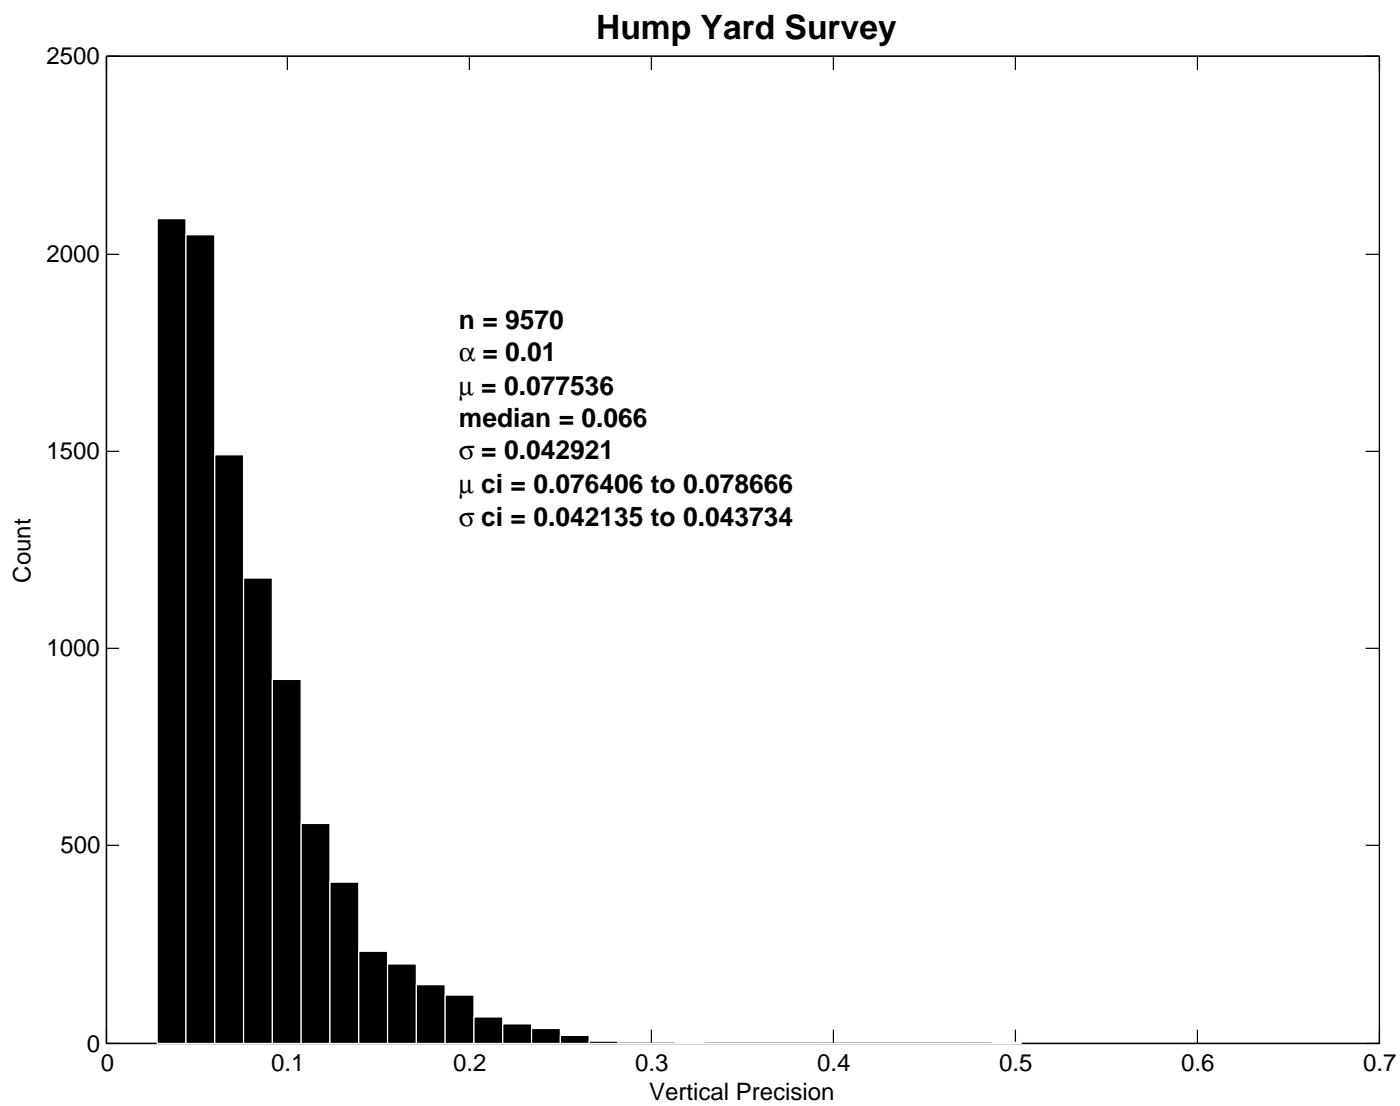


Figure 10: Relative Vertical Precision Histogram

Reference Station TEQC Report, 26 May 2008 14:21-21:44 UTC

version: teqc 2009Oct19

```

Rx tracking capability : 24 SVs
Poss. # of obs epochs : 1771
Epochs w/ observations : 1771
Epochs repeated : 0 (0.00\%)
Possible obs > 0.0 deg: 17729
Possible obs > 10.0 deg: 14739
Complete obs > 10.0 deg: 14666
    Missed obs > 10.0 deg: 59
    Deleted obs > 10.0 deg: 14
Obs w/ SV duplication : 0 (within non-repeated epochs)
Moving average MP1 : 0.379945 m
Moving average MP2 : 0.516314 m
Points in MP moving avg : 50
No. of Rx clock offsets : 0
Total Rx clock drift : 0.000000 ms
Rate of Rx clock drift : 0.000 ms/hr
Avg time between resets : Inf minute(s)
Freq no. and timecode : 2 10368 3fc000
Report gap > than : 10.00 minute(s)
epochs w/ msec clk slip : 23
other msec mp events : 0 (: 384) {expect ~= 1:50}
IOD signifying a slip : >400.0 cm/minute
IOD slips < 10.0 deg* : 0
IOD slips > 10.0 deg : 0
IOD or MP slips < 10.0*: 0
IOD or MP slips > 10.0 : 191
* or unknown elevation
      first epoch   last epoch   hrs   dt #expt #have  \%   mp1   mp2 o/slps
SUM 08 5 26 14:21 08 5 26 21:44 7.379 15 14739 14666 100 0.38 0.52    77

```

Processing parameters are:

```

Receiver tracking capability : 24 SVs
Maximum ionospheric rate (L1) : 400.00 cm/min
Report data gap greater than : 10.00 min
Expected rms of MP1 multipath : 50.00 cm
Expected rms of MP2 multipath : 65.00 cm
Multipath slip sigma threshold : 4.00 cm
\% increase in MP rms for C/A | A/S : 100.00 \%
Points in MP moving averages : 50
Minimum signal to noise for L1 : 0
Minimum signal to noise for L2 : 0
Elevation mask (cutoff) : 10.00 degrees
Elevation comparison threshold : 25.00 degrees
Orbit path spline fit sample time : 10 min
SVs w/ code data for position try : 5
Width of ASCII summary plot : 72
Data indicators on summary plot : yes
Do ionospheric observable : yes
Do ionospheric derivative : yes
Do high-pass ionosphere observable : no
Do multipath observables : yes
Do 1-ms receiver clock slips : yes
Tolerance for 1-ms clock slips : 1.00e-02 ms
Do receiver LLI slips : yes

```

```

Do plot file(s) : yes

Observations start : 2008 May 26 14:21:30.000
Observations end : 2008 May 26 21:44:00.000
Observation interval : 15.0000 second(s)

      SV #+hor <ele> #+mask <ele> #reprt #compl   L1    L2    P1    P2    CA    L2C
----- ----- ----- ----- ----- ----- ----- ----- ----- ----- ----- ----- ----- ----- -----
G10    204  6.67    51 11.76    51    44    47    47    0    47    51    0
G18   1332 47.02   1231 50.47   1231  1231  1231  1231    0  1231  1231  0
G21    980 48.20    875 53.40    875    875    875    875    0   875   875   0
G24    671 35.75    570 41.22    570    570    570    570    0   570   570   0
G26    498 23.02    378 28.77    378    378    378    378    0   378   378   0
G29    812 12.42    498 17.07    497    496    497    496    0   496   497   0
G09   1119 37.70   1012 41.16   1012  1011  1012  1011    0  1011  1012  0
G15    679 29.33    546 35.28    542    542    542    542    0   542   542   0
G06    888 11.65    568 15.42    558    553    557    554    0   554   558   0
G22   1682 43.62   1565 46.47   1553  1553  1553  1553    0  1553  1553  0
G14   1693 42.02   1581 44.64   1578  1578  1578  1578    0  1578  1578  0
G05   1217 22.51    958 27.27    954    954    954    954    0   954   954   0
G12   1077 17.79    806 22.11    803    803    803    803    0   803   803   0
G30   1266 26.70   1046 31.19   1042  1042  1042  1042    0  1042  1042  0
G31   1163 47.77   1064 51.76   1060  1060  1060  1060    0  1060  1060  0
G32   1030 41.03    908 45.88    904    904    904    904    0   904   904   0
G16    578 31.76    476 37.52    472    472    472    472    0   472   472   0
G20    562 24.12    454 28.66    452    452    452    452    0   452   452   0
G23    278 11.33    152 16.66    148    148    148    148    0   148   148   0

Obs below mask ( 10.00 deg) : 18
Obs above mask w/ no L1 : 5
Obs above mask w/ no L2 : 10
Obs above mask w/ no P1 | CA : 0
Obs above mask w/ no P2 | L2C : 10
Obs above mask w/ low L1 S/N : 0
Obs above mask w/ low L2 S/N : 0

Obs reported w/ code | phase : 14698
Obs deleted (any reason) : 32
Obs complete : 14666

No. of Rx clock offsets : 0
Total Rx clock drift : 0.000000 ms
Rate of Rx clock drift : 0.000000 ms/hr

      elev (deg) tot slps <ION rms, m>      5=\%      1|m      15=\%      2|m
85 - 90      0    0  0.000000
80 - 85     179   0  0.000000
75 - 80     225   0  0.000000
70 - 75     373   0  0.000000
65 - 70     806   0  0.000000
60 - 65    1019   0  0.000000
55 - 60    1163   0  0.000000
50 - 55     897   0  0.000000
45 - 50     890   0  0.000000

```

40 - 45	1025	0	0.000000
35 - 40	1207	0	0.000000
30 - 35	1082	0	0.000000
25 - 30	1408	0	0.000000
20 - 25	1206	0	0.000000
15 - 20	1625	0	0.000000
10 - 15	1542	0	0.000000
5 - 10	18	0	0.000000
0 - 5	0	0	0.000000
< 0	0	0	0.000000

MP1 RMS summary (per SV):

SV	obs>10	# del	<elev>	MP1 rms [m]	slips		L1 rx		L2 rx		slips		L1 rx		L2 rx	
					< 25	> 25	< 25	> 25	< 25	> 25	< 25	> 25	< 25	> 25	< 25	> 25
G10	51	7	13.36	0.923253	0	2	5	0	0	0	0	0	0	0	0	0
G18	1231	0	50.50	0.347035	2	0	0	14	1	1	1	1	1	1	1	1
G21	875	0	53.43	0.325922	2	0	0	9	1	1	1	1	1	1	1	1
G24	570	0	41.25	0.397141	2	0	0	5	1	1	1	1	1	1	1	1
G26	378	0	28.88	0.412081	3	0	0	2	1	1	1	1	1	1	1	1
G29	497	1	17.22	0.618820	6	1	1	1	1	1	1	1	1	1	1	1
G09	1012	1	41.24	0.312861	2	1	1	11	0	0	0	0	0	0	0	0
G15	542	0	35.11	0.370183	3	0	0	4	1	1	1	1	1	1	1	1
G06	558	5	15.65	0.610298	7	3	5	0	0	0	0	0	0	0	0	0
G22	1553	0	46.80	0.367457	5	1	1	15	0	0	0	0	0	0	0	0
G14	1578	0	44.76	0.384592	3	1	1	18	0	0	0	0	0	0	0	0
G05	954	0	27.43	0.391200	6	2	2	8	0	0	0	0	0	0	0	0
G12	803	0	22.25	0.414531	6	1	1	4	0	0	0	0	0	0	0	0
G30	1042	0	31.34	0.396713	4	1	1	10	0	0	0	0	0	0	0	0
G31	1060	0	51.99	0.289880	2	1	1	12	0	0	0	0	0	0	0	0
G32	904	0	46.13	0.304541	2	1	1	10	0	0	0	0	0	0	0	0
G16	472	0	37.92	0.357017	2	1	1	5	0	0	0	0	0	0	0	0
G20	452	0	28.92	0.379451	2	1	1	4	0	0	0	0	0	0	0	0
G23	148	0	17.37	0.384658	2	1	1	0	0	0	0	0	0	0	0	0

```

mean MP1 rms : 0.379997 m
total mean elevation : 39.02 degrees
# MP1 obs > 10 : 14666
# qc MP1 slips < 25 : 61
# Rvr L1 slips < 25 : 18
# Rvr L2 slips < 25 : 23
# qc MP1 slips > 25 : 132
# Rvr L1 slips > 25 : 6
# Rvr L2 slips > 25 : 6

```

elev (deg)	tot slps	<MP1 rms, m>	5=\%	1 m	15=\%	2 m
85 - 90	0	0	0.000000			
80 - 85	179	2	0.239693	##		
75 - 80	225	3	0.210178	##		
70 - 75	373	4	0.243548	##		
65 - 70	806	12	0.229097	##		
60 - 65	1019	10	0.235793	#		
55 - 60	1163	19	0.257506	###		
50 - 55	897	8	0.301766	#		
45 - 50	890	14	0.313660	###		

40 - 45	1025	12	0.279523	##
35 - 40	1207	17	0.304659	##
30 - 35	1082	16	0.335762	##
25 - 30	1408	15	0.378914	##
20 - 25	1206	14	0.421666	##
15 - 20	1625	24	0.478295	##
10 - 15	1542	23	0.682098	##
5 - 10	18	0	0.643854	
0 - 5	0	0	0.000000	
< 0	0	0	0.000000	

MP2 RMS summary (per SV):

SV	obs>10	# del	<elev>	MP2 rms [m]	slips		L1 rx		L2 rx		slips		L1 rx		L2 rx	
					< 25	> 25	< 25	> 25	< 25	> 25	< 25	> 25	< 25	> 25	< 25	> 25
G10	51	7	13.36	1.413000	0	2	5	0	0	0	0	0	0	0	0	0
G18	1231	0	50.50	0.396074	2	0	0	14	1	1	1	1	1	1	1	1
G21	875	0	53.43	0.388736	2	0	0	9	1	1	1	1	1	1	1	1
G24	570	0	41.25	0.385116	2	0	0	5	1	1	1	1	1	1	1	1
G26	378	0	28.88	0.464846	3	0	0	2	1	1	1	1	1	1	1	1
G29	497	1	17.22	0.962715	6	1	1	1	1	1	1	1	1	1	1	1
G09	1012	1	41.24	0.436712	2	1	1	11	0	0	0	0	0	0	0	0
G15	542	0	35.11	0.562902	3	0	0	4	1	1	1	1	1	1	1	1
G06	558	5	15.65	1.008073	7	3	5	0	0	0	0	0	0	0	0	0
G22	1553	0	46.80	0.463067	5	1	1	15	0	0	0	0	0	0	0	0
G14	1578	0	44.76	0.501127	3	1	1	18	0	0	0	0	0	0	0	0
G05	954	0	27.43	0.622019	4	2	2	8	0	0	0	0	0	0	0	0
G12	803	0	22.25	0.632334	6	1	1	4	0	0	0	0	0	0	0	0
G30	1042	0	31.34	0.606855	4	1	1	10	0	0	0	0	0	0	0	0
G31	1060	0	51.99	0.417034	2	1	1	12	0	0	0	0	0	0	0	0
G32	904	0	46.13	0.376080	2	1	1	10	0	0	0	0	0	0	0	0
G16	472	0	37.92	0.464800	2	1	1	5	0	0	0	0	0	0	0	0
G20	452	0	28.92	0.395601	2	1	1	4	0	0	0	0	0	0	0	0
G23	148	0	17.37	0.561845	2	1	1	0	0	0	0	0	0	0	0	0

```

mean MP2 rms      : 0.516399 m
total mean elevation : 39.02 degrees
# MP2 obs > 10      : 14666
# qc MP2 slips < 25 : 59
# Rvr L1 slips < 25 : 18
# Rvr L2 slips < 25 : 23
# qc MP2 slips > 25 : 132
# Rvr L1 slips > 25 : 6
# Rvr L2 slips > 25 : 6

```

elev (deg)	tot slps	<MP2 rms, m>	5=\%	1 m	15=\%	2 m
85 - 90	0	0	0.000000			
80 - 85	179	2	0.206162	##		
75 - 80	225	3	0.253823	##		
70 - 75	373	4	0.242799	##		
65 - 70	806	12	0.258877	##		
60 - 65	1019	10	0.265736	#		
55 - 60	1163	19	0.272441	###		
50 - 55	897	8	0.318394	#		
45 - 50	890	14	0.347364	###		

40 - 45	1025	12	0.451888	##
35 - 40	1207	17	0.418142	##
30 - 35	1082	16	0.522575	##
25 - 30	1408	15	0.569631	##
20 - 25	1206	14	0.597640	##
15 - 20	1625	24	0.673954	##
10 - 15	1542	21	0.993207	##
5 - 10	18	0	0.735622	
0 - 5	0	0	0.000000	
< 0	0	0	0.000000	

S/N L1 summary (per elevation bin):

elev (deg)	tot	SN1	sig	mean	0 5	1 0
85 - 90	0	0.000		0.000		
80 - 85	179	0.686		6.966	###	
75 - 80	225	0.511		6.920	##	
70 - 75	374	0.456		6.893	#	
65 - 70	806	0.342		6.931	#	
60 - 65	1020	0.388		6.888	#	
55 - 60	1164	0.358		6.912	#	
50 - 55	897	0.432		6.833	#	
45 - 50	891	0.500		6.718	#	
40 - 45	1026	0.526		6.620	#	
35 - 40	1207	0.509		6.307	#	
30 - 35	1083	0.361		6.014	#	
25 - 30	1408	0.342		5.929	#	
20 - 25	1208	0.556		5.617	#	
15 - 20	1625	0.684		5.297	###	
10 - 15	1562	0.924		4.624	####	
5 - 10	18	1.339		4.167	#####	
0 - 5	0	0.000		0.000		
< 0	0	0.000		0.000		

S/N L2 summary (per elevation bin):

elev (deg)	tot	SN2	sig	mean	0 5	1 0
85 - 90	0	0.000		0.000		
80 - 85	179	0.796		8.648	###	
75 - 80	225	0.744		8.364	###	
70 - 75	374	0.665		8.535	###	
65 - 70	806	0.485		8.176	#	
60 - 65	1020	0.293		8.016	#	
55 - 60	1164	0.431		8.145	#	
50 - 55	897	0.330		8.020	#	
45 - 50	891	0.309		7.969	#	
40 - 45	1026	0.439		7.834	#	
35 - 40	1207	0.516		7.326	#	
30 - 35	1083	0.454		7.141	#	
25 - 30	1408	0.488		6.959	##	
20 - 25	1207	0.529		6.574	#	
15 - 20	1625	0.466		6.226	#	
10 - 15	1558	0.436		5.937	#	
5 - 10	18	1.420		5.389	#####	
0 - 5	0	0.000		0.000		
< 0	0	0.000		0.000		

Appendix B

Experiment 2: Determining Horizontal Alinement of Mainline Track with HiRail Mounted RTK GNSS.

Subject area: CSX Kanawha Subdivision, mile post reference 494-523 Barboursville, West Virginia to Russell, Kentucky

Contents

- Rail company track charts and RTK GNSS alinement model output, Kanawha Subdivision mile post 494 to 523.
- Listing of software modeling the string lining method to determine the degree of curvature from RTK GNSS measurements.

C&O - KANAWHA




West  VAL. SEC. 11 WV

Figure 11: CSX Track Chart, Kanawha Subdivision, mile post 492 to 496.



Student Version of MATLAB

Figure 12: Hi-Rail Alinement, Kanawha Sub, MP 494-496

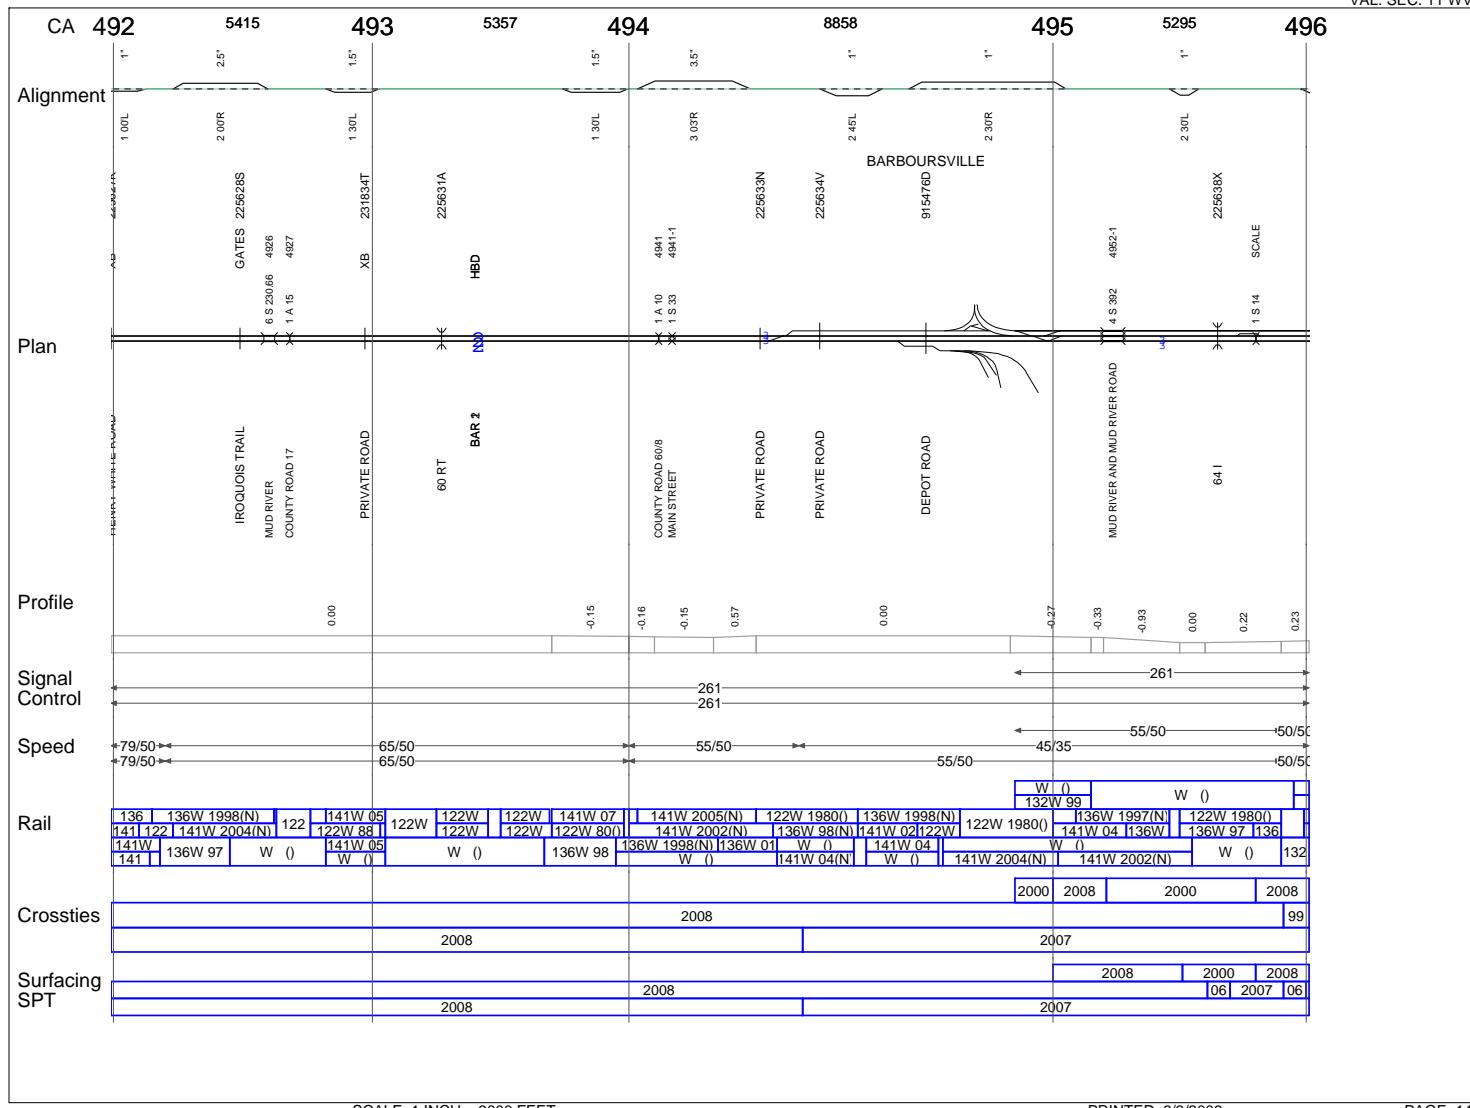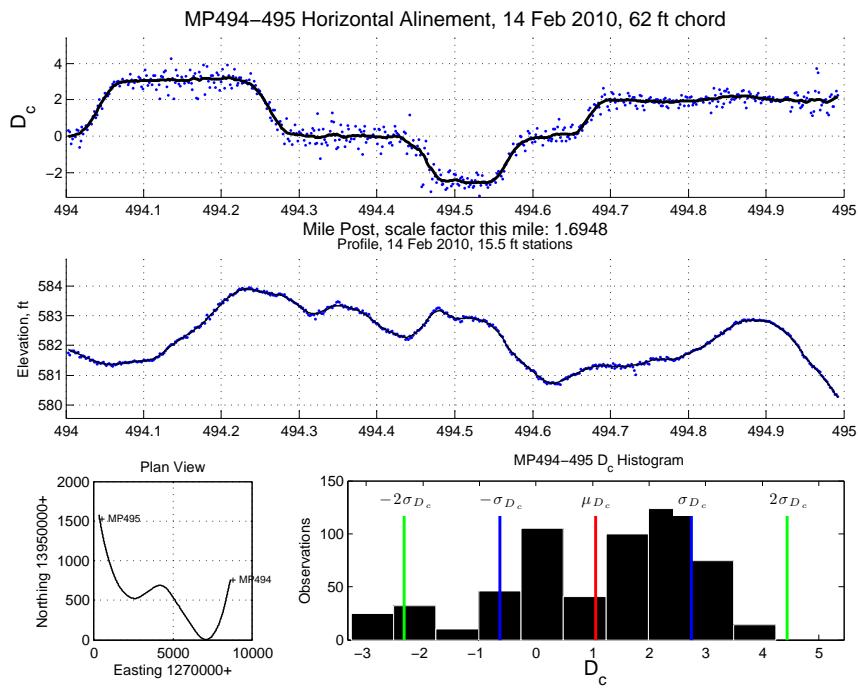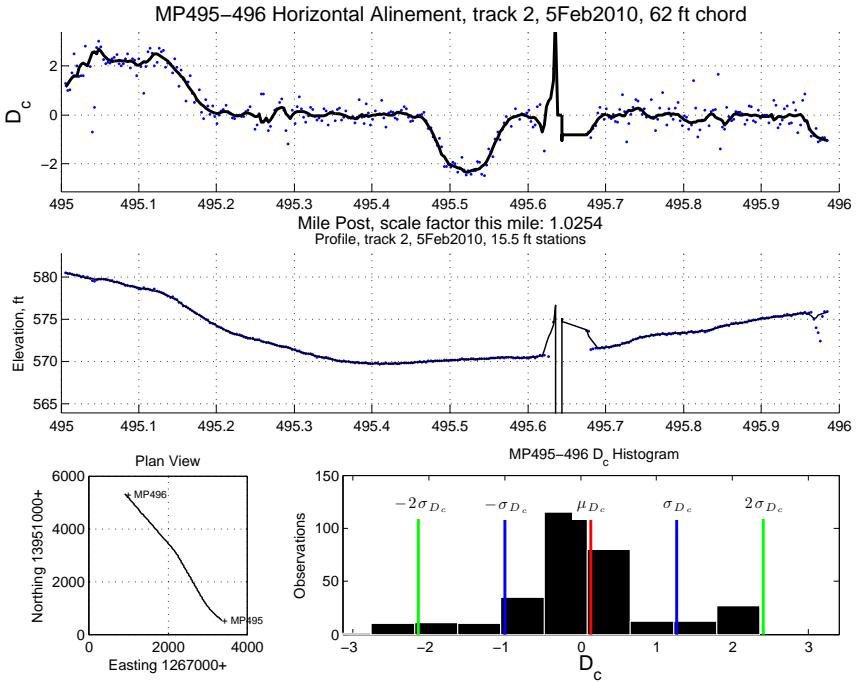

Student Version of MATLAB

Figure 13: Hi-Rail Alinement, Kanawha Sub, MP 495-496

C&O - KANAWHA




West  VAL. SEC. 11 WV

Figure 14: Track Chart, Kanawha Subdivision, mile post 496 to 501.



Student Version of MATLAB

Figure 15: Hi-Rail Alinement, Kanawha Sub, MP 496-497

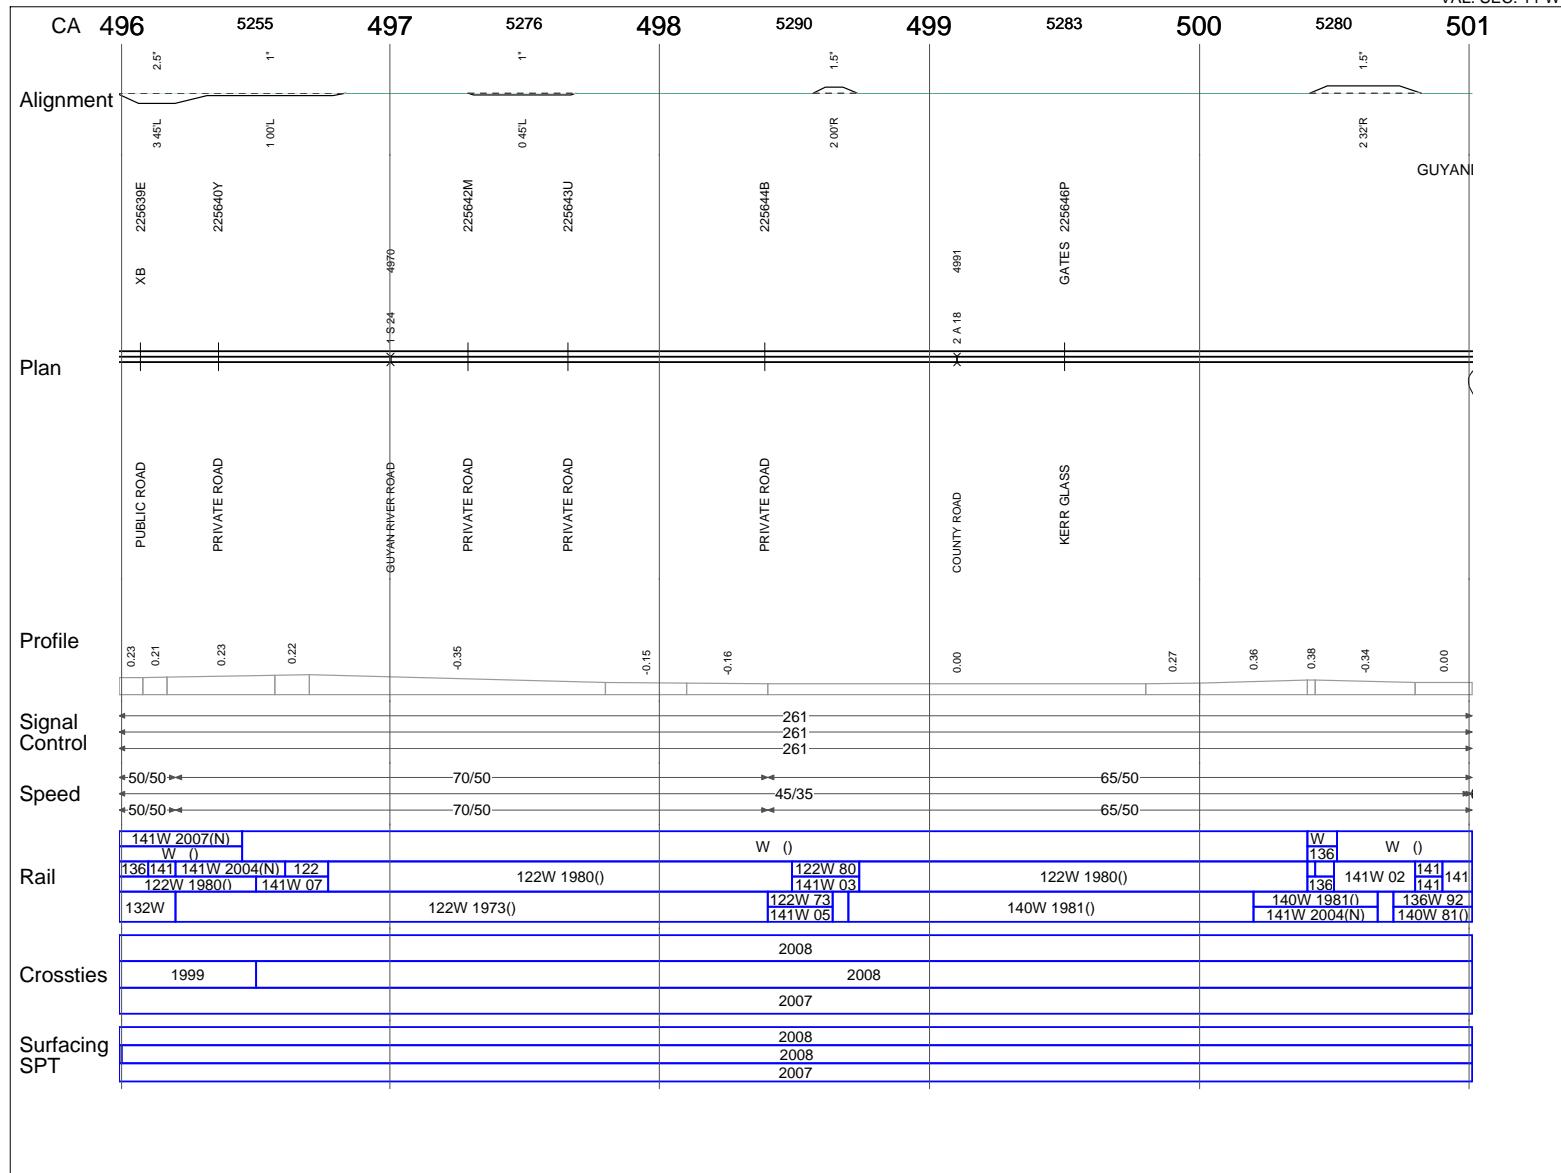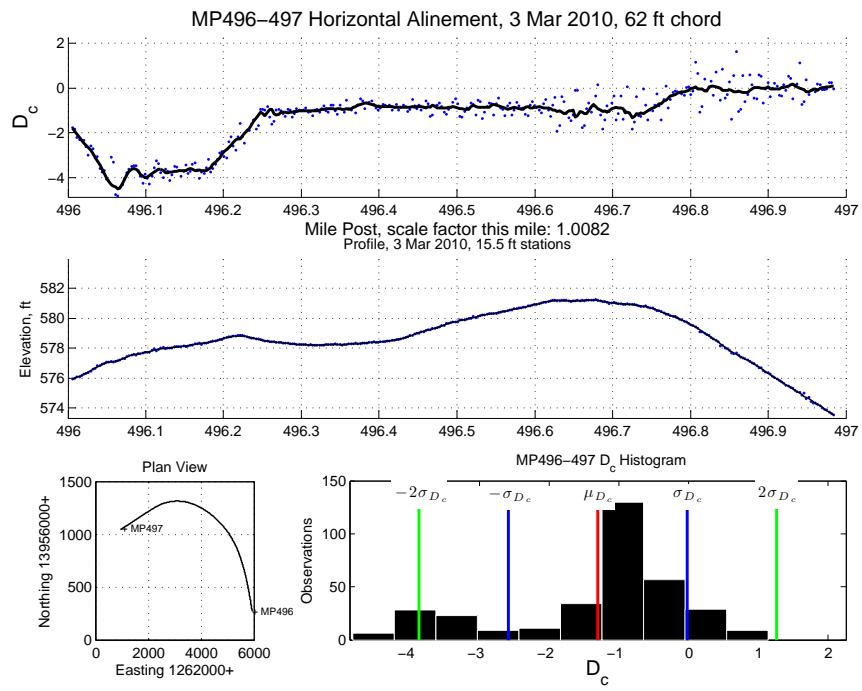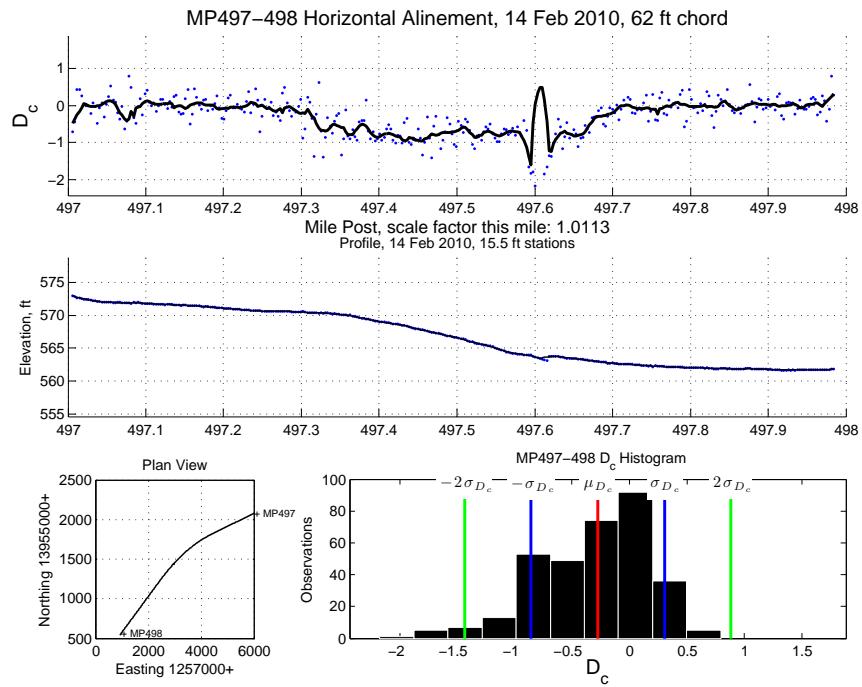

Student Version of MATLAB

Figure 16: Hi-Rail Alinement, Kanawha Sub, MP 497-498

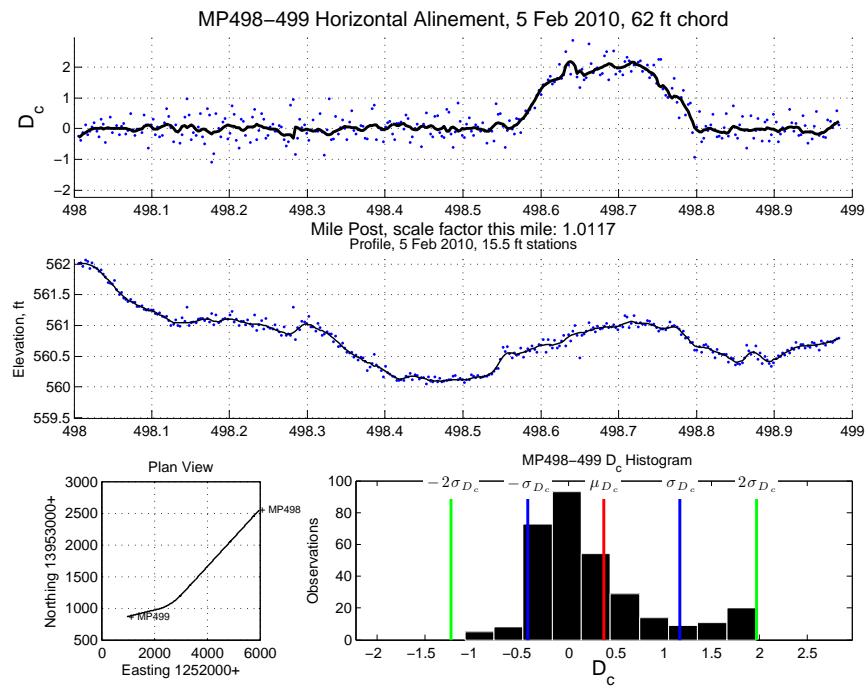


Figure 17: Hi-Rail Alinement, Kanawha Sub, MP 498-499


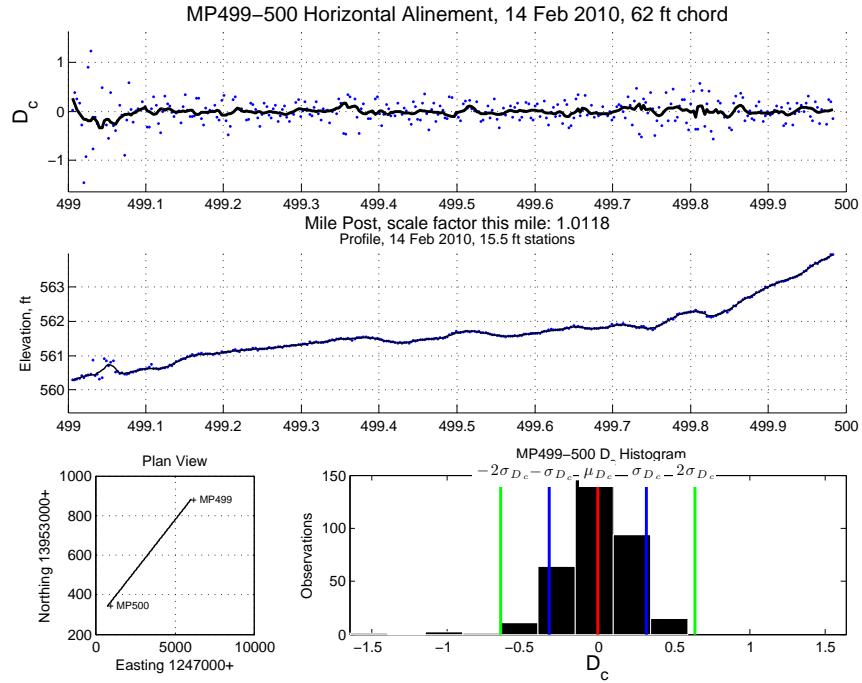


Figure 18: Hi-Rail Alinement, Kanawha Sub, MP 499-500

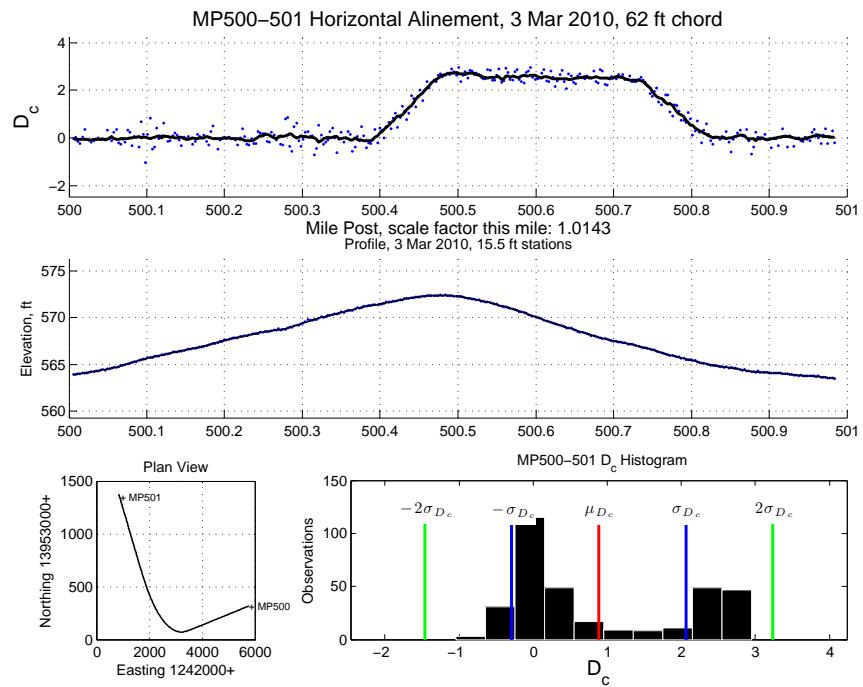

Student Version of MATLAB

Figure 19: Hi-Rail Alinement, Kanawha Sub, MP 500-501

C&O - KANAWHA

West 
VAL. SEC. 11 WV



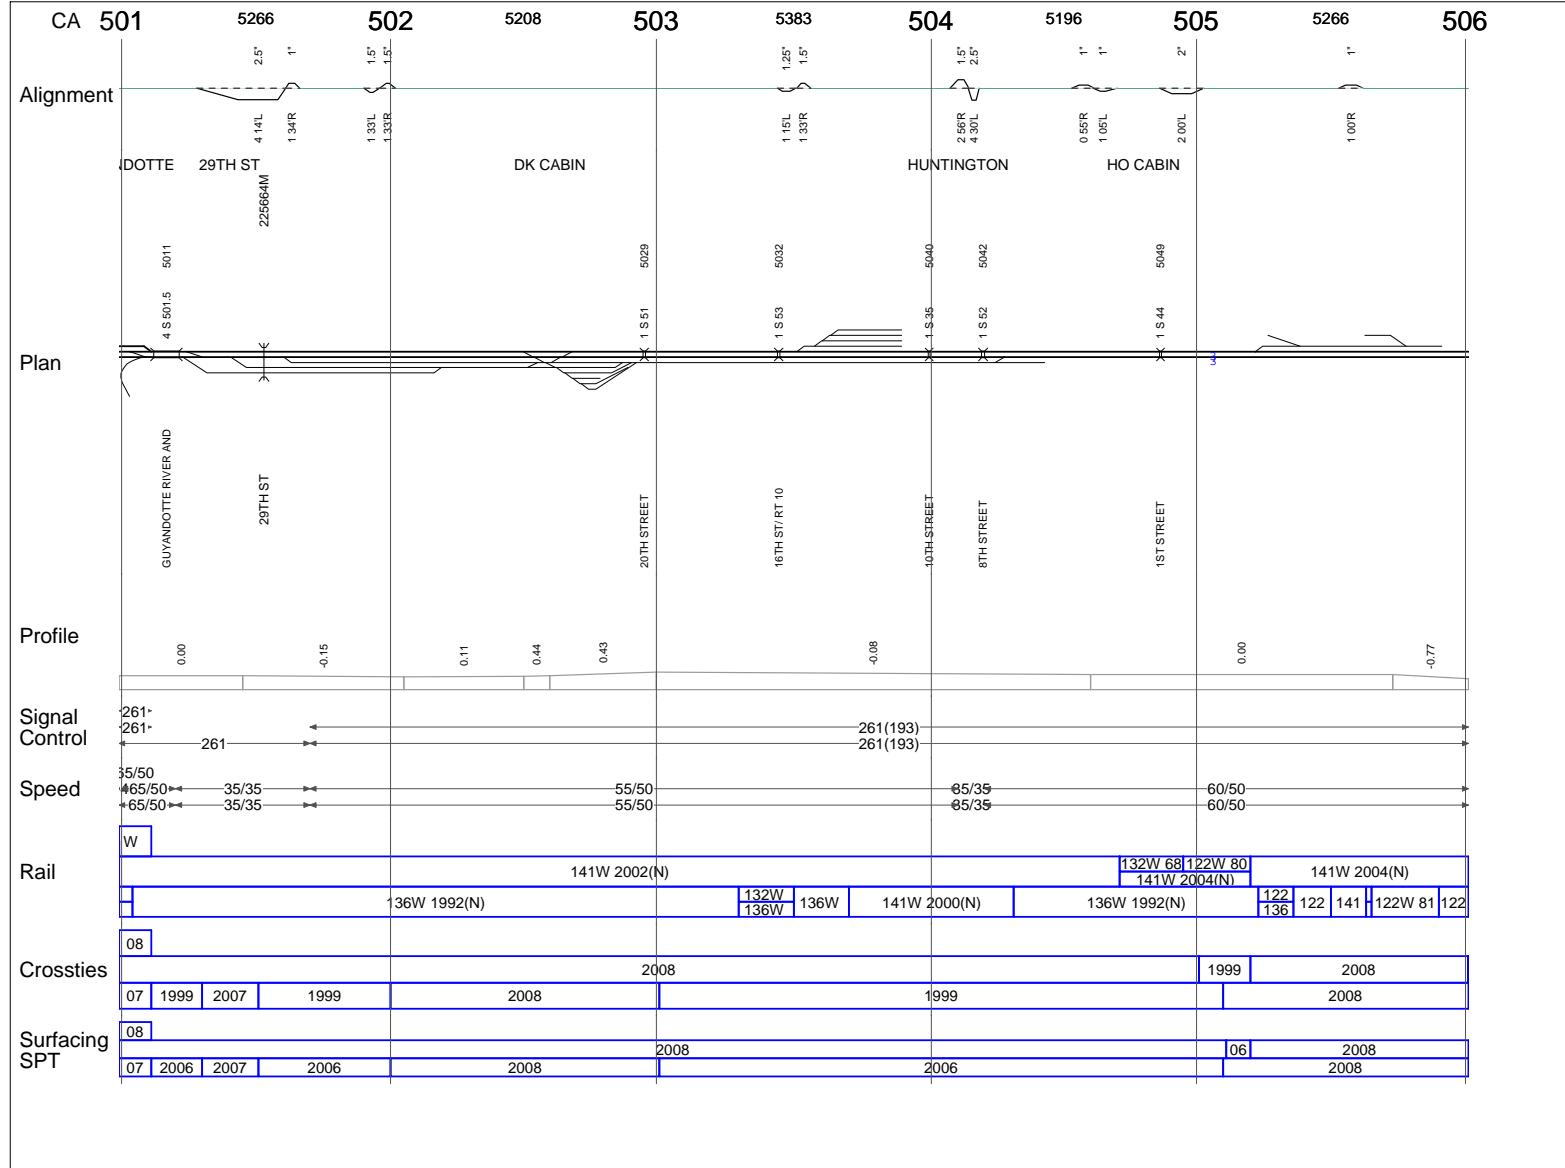


Figure 20: Track Chart, Kanawha Subdivision, mile post 501 to 506.

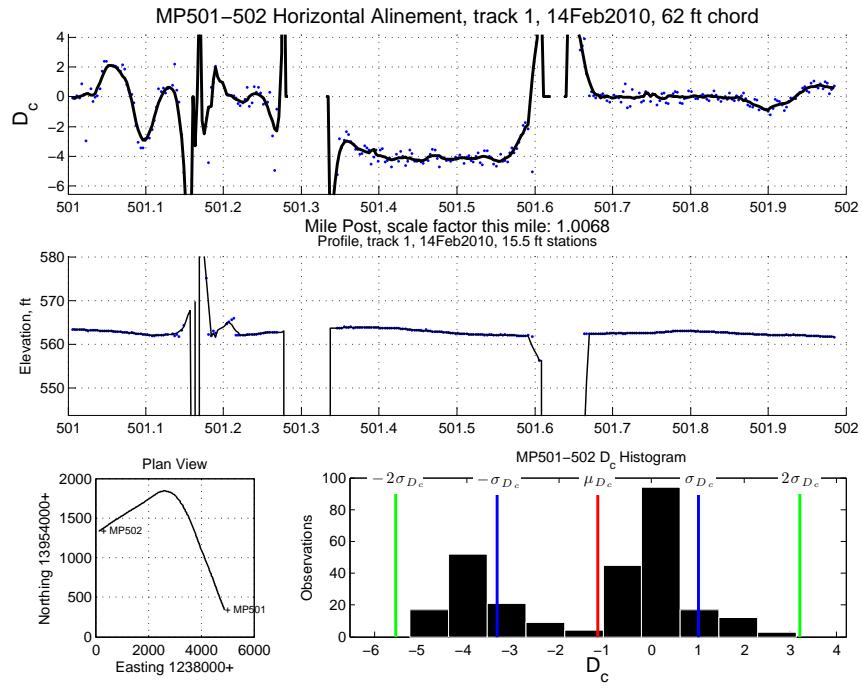


Student Version of MATLAB

Figure 21: Hi-Rail Alinement, Kanawha Sub, MP 501-502

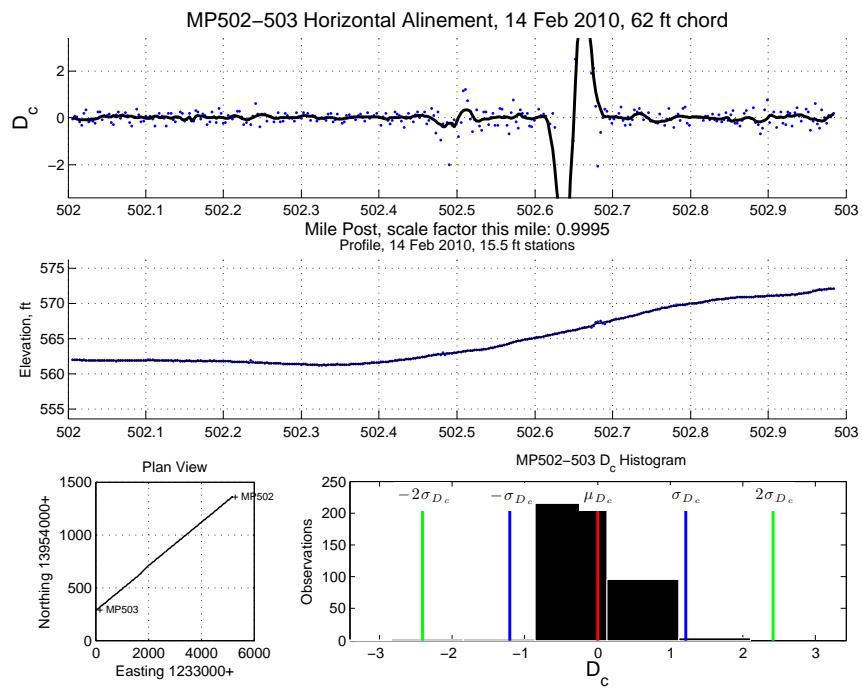


Student Version of MATLAB

Figure 22: Hi-Rail Alinement, Kanawha Sub, MP 502-503

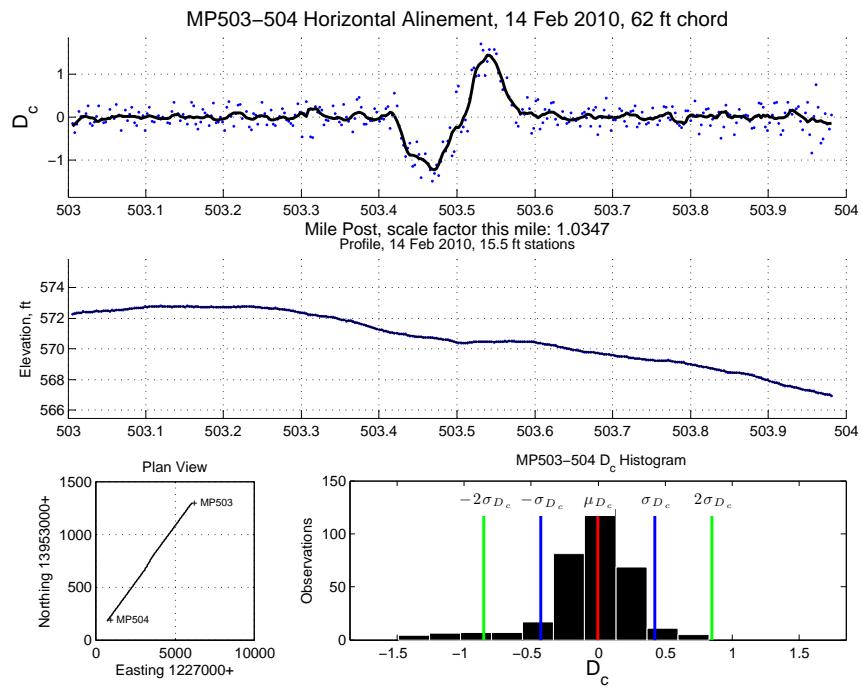


Student Version of MATLAB

Figure 23: Hi-Rail Alinement, Kanawha Sub, MP 503-504

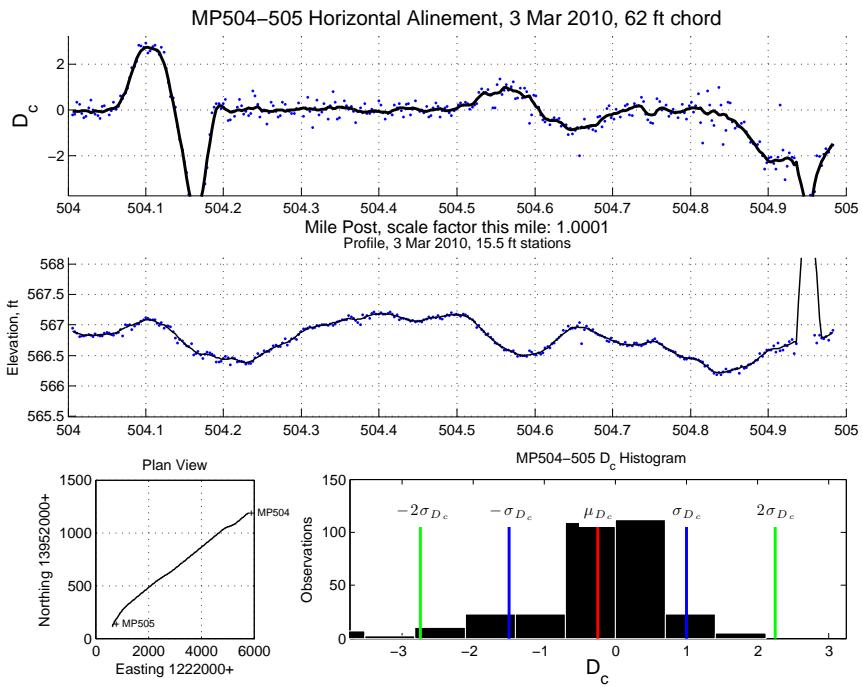


Student Version of MATLAB

Figure 24: Hi-Rail Alinement, Kanawha Sub, MP 504-505

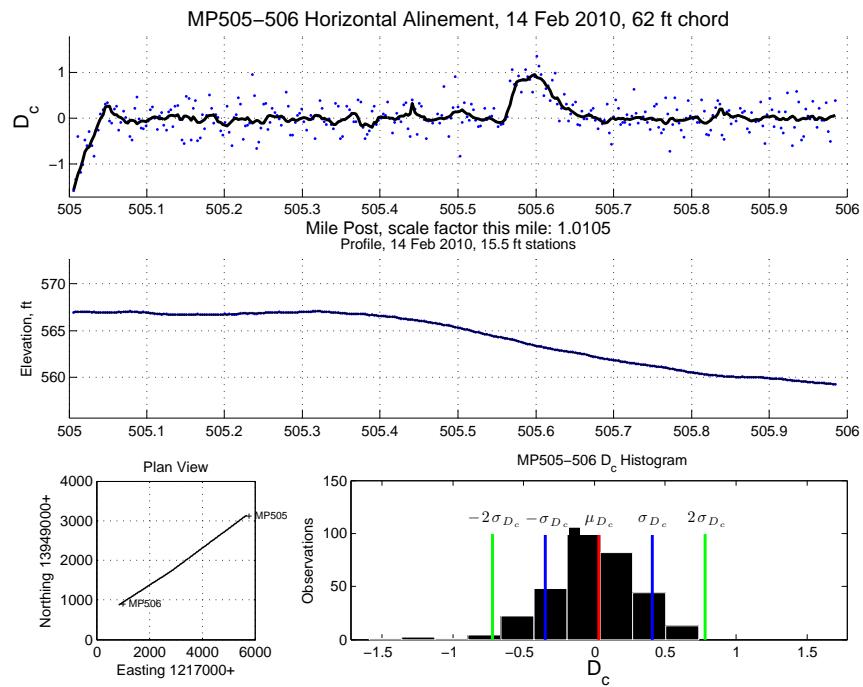

C&O - KANAWHA

West  VAL. SEC. 11 WV

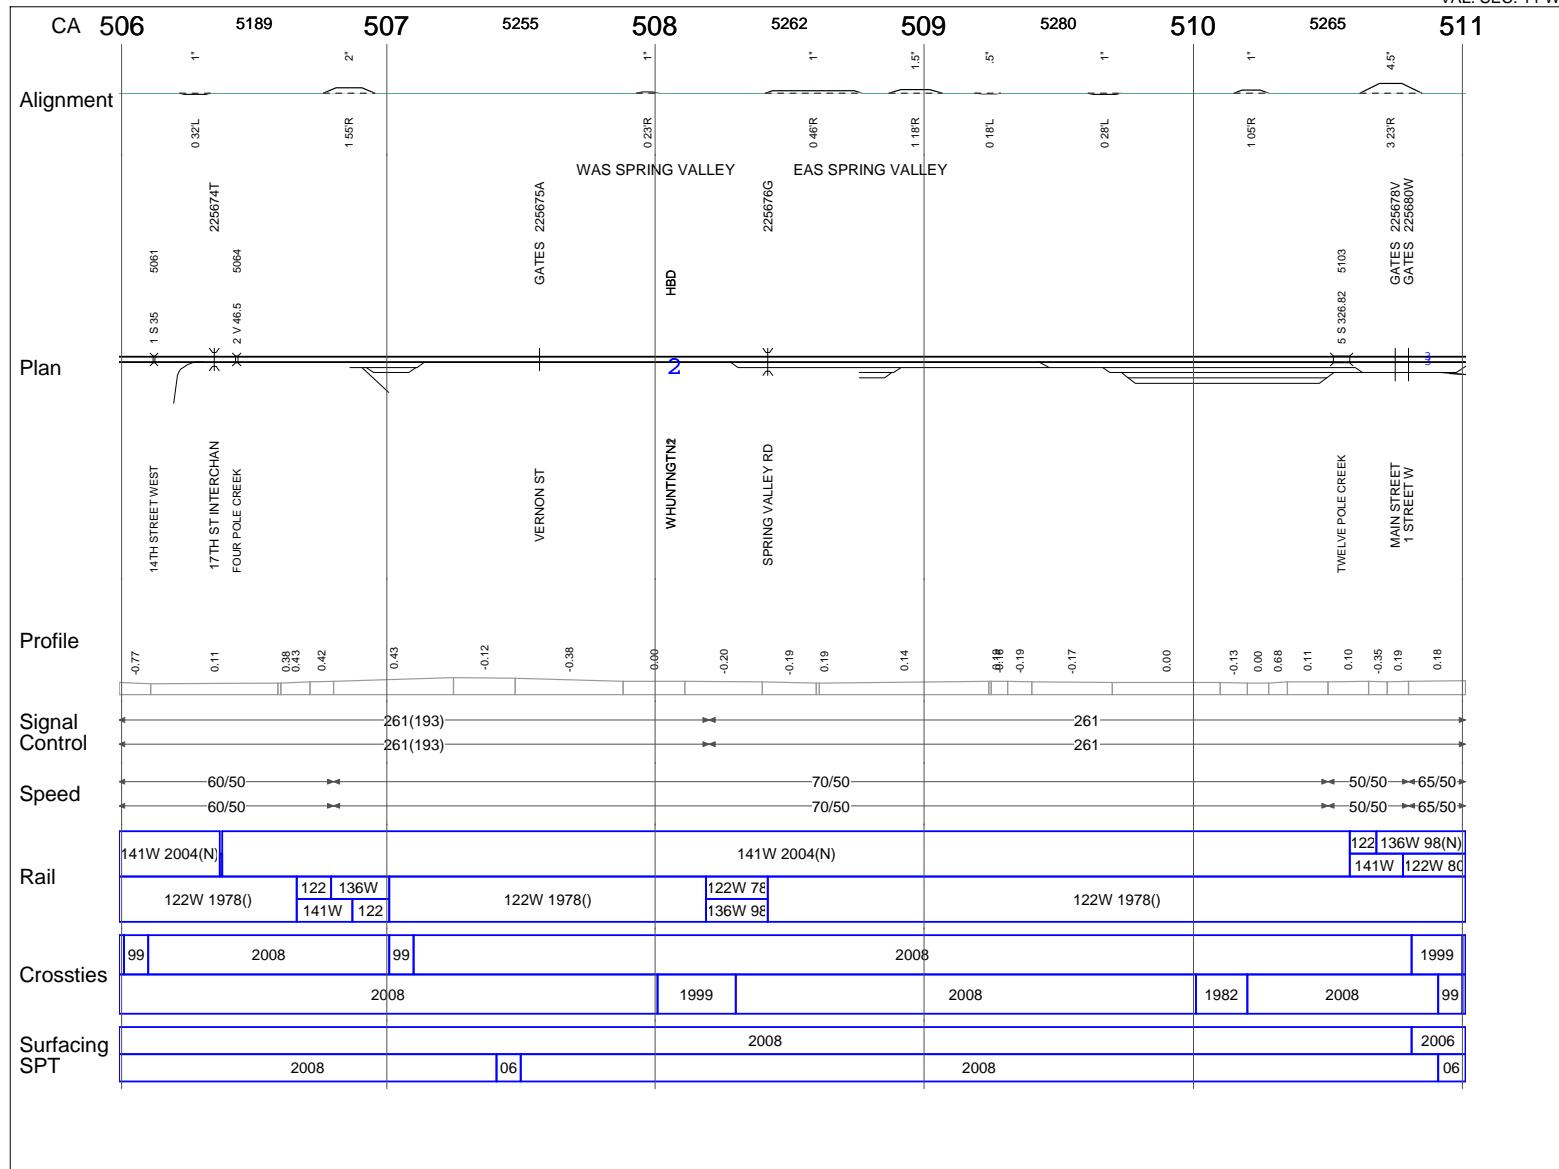


SCALE: 1 INCH = 3000 FEET

PRINTED: 6/3/2009


PAGE: 17

Figure 26: Track Chart, Kanawha Subdivision, mile post 506 to 511.

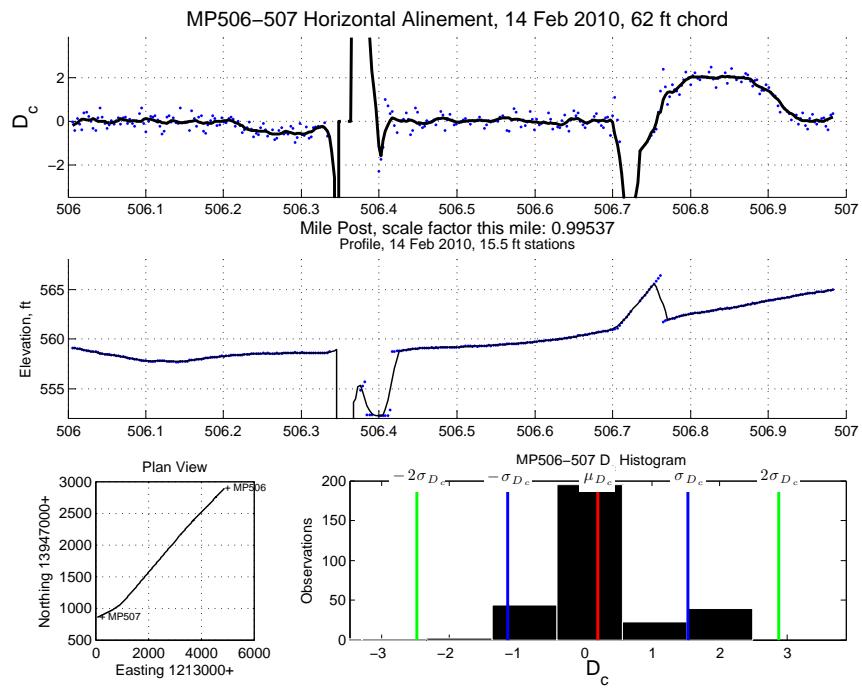


Student Version of MATLAB

Figure 27: Hi-Rail Alinement, Kanawha Sub, MP 506-507

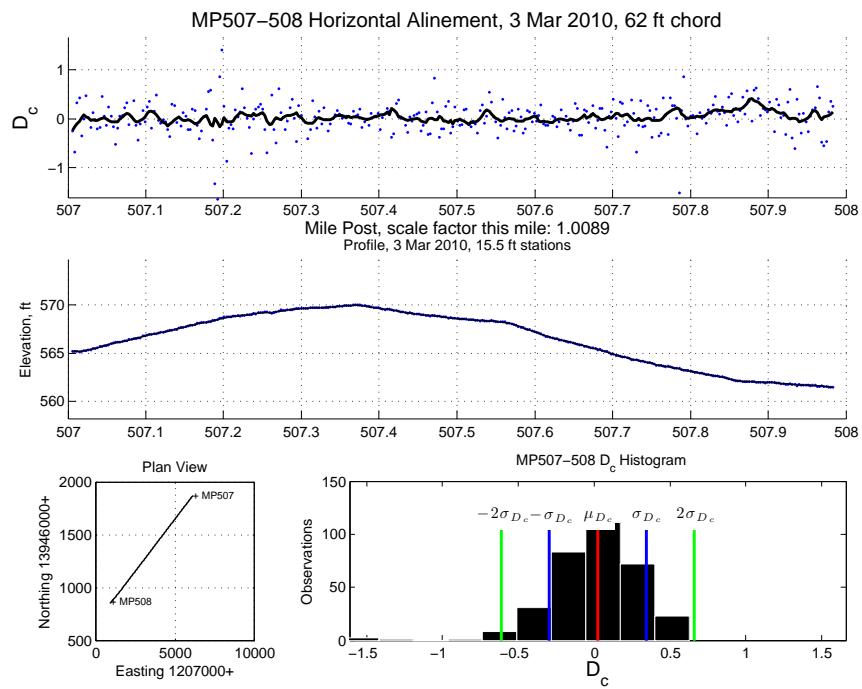


Student Version of MATLAB

Figure 28: Hi-Rail Alinement, Kanawha Sub, MP 507-508

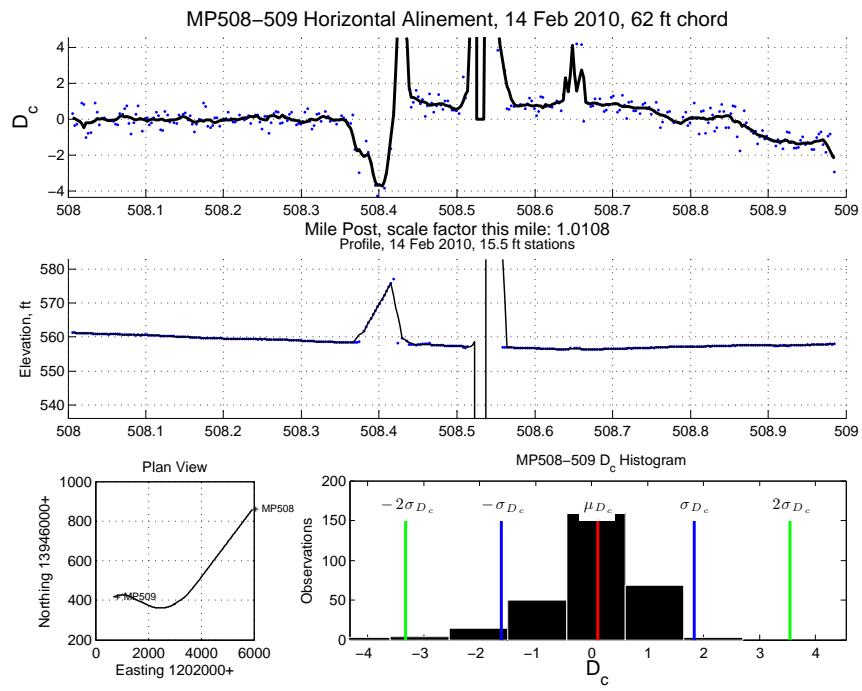


Student Version of MATLAB

Figure 29: Hi-Rail Alinement, Kanawha Sub, MP 508-509

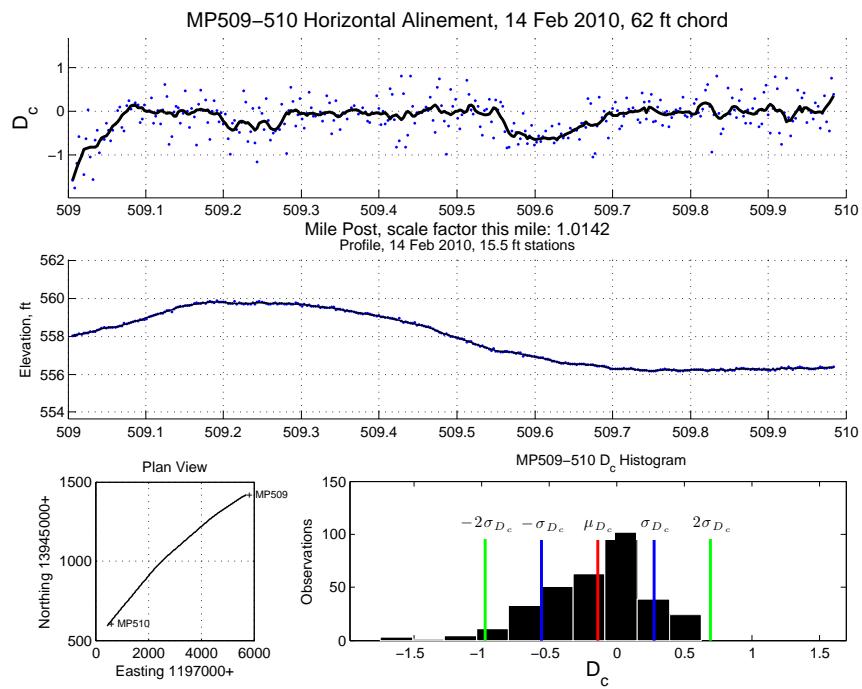

Student Version of MATLAB

Figure 30: Hi-Rail Alinement, Kanawha Sub, MP 509-510

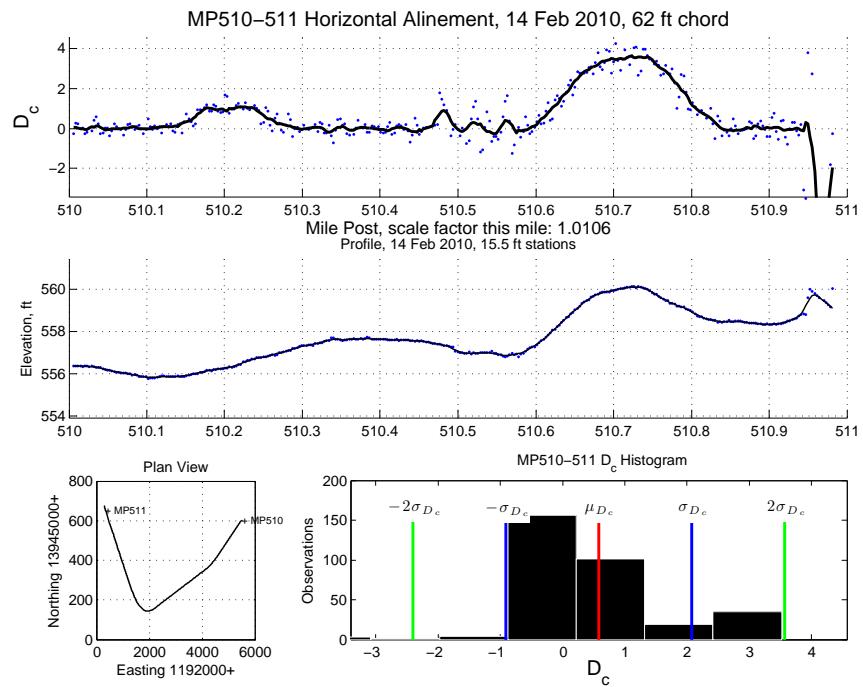

Student Version of MATLAB

Figure 31: Hi-Rail Alinement, Kanawha Sub, MP 510–511

C&O - KANAWHA

West ~~WV~~
VAL. SEC. 11 WV - 31 KY

102



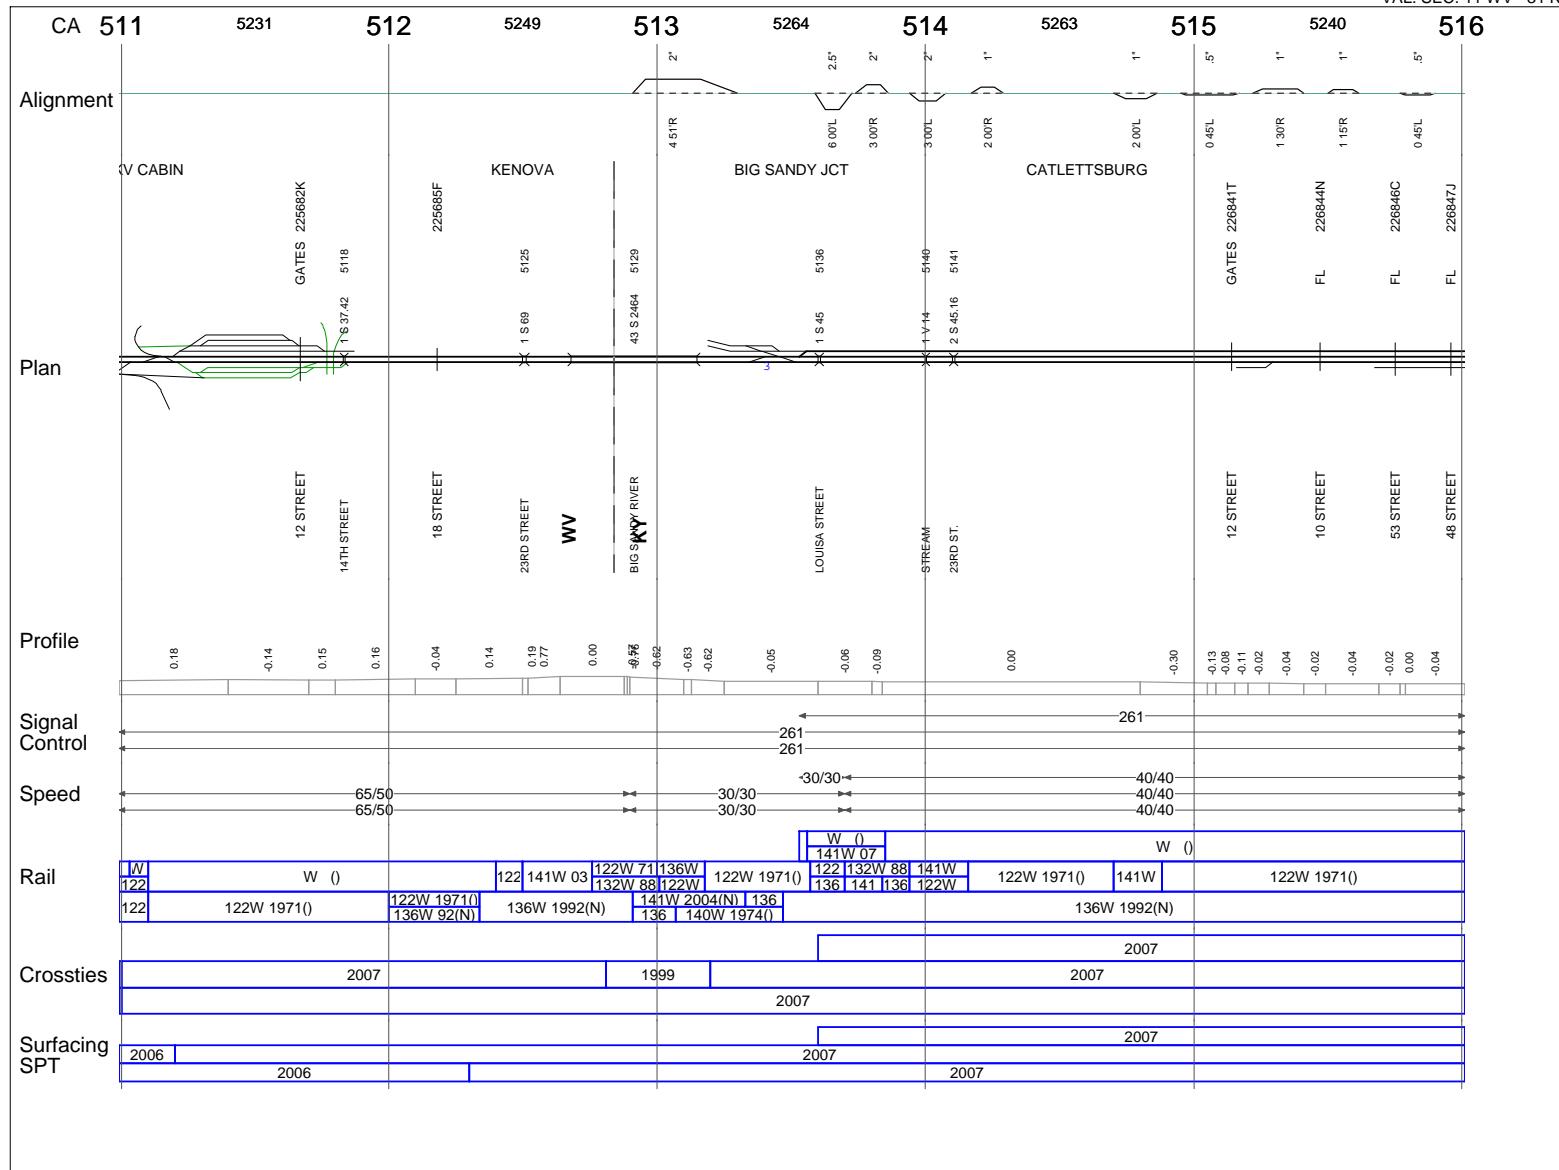


Figure 32: Track Chart, Kanawha Subdivision, mile post 511 to 516.

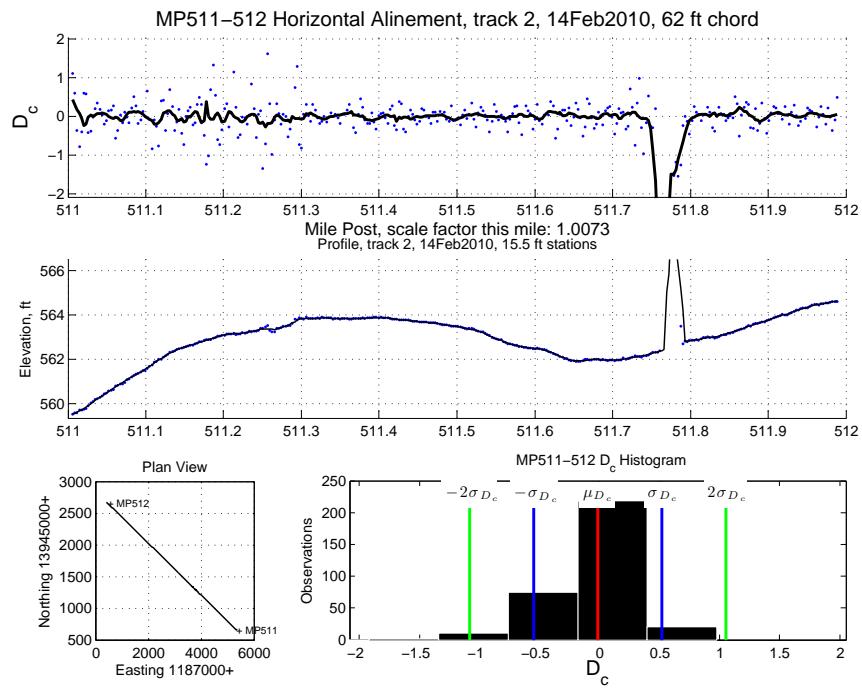


Student Version of MATLAB

Figure 33: Hi-Rail Alinement, Kanawha Sub, MP 511-512

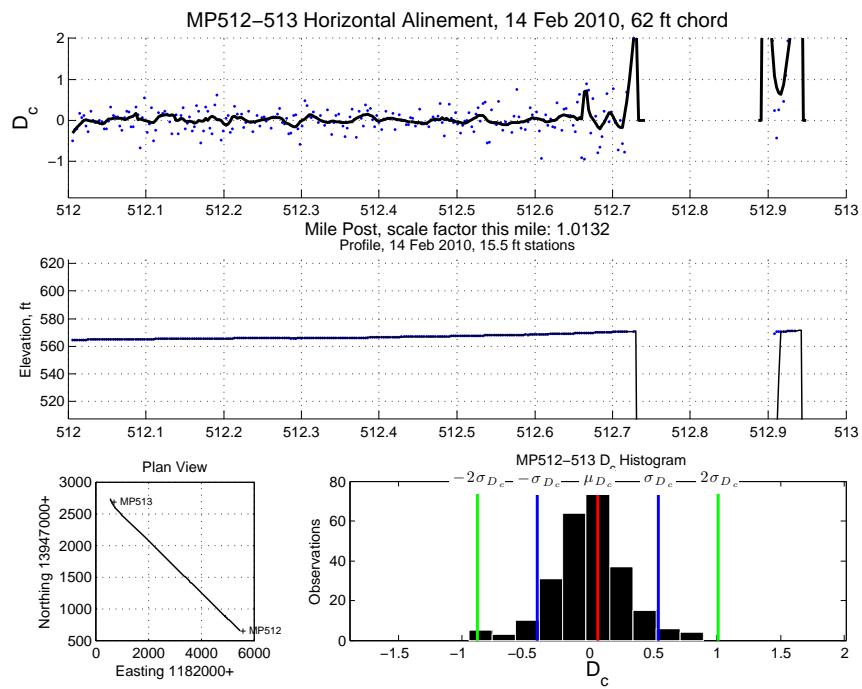


Student Version of MATLAB

Figure 34: Hi-Rail Alinement, Kanawha Sub, MP 512-513

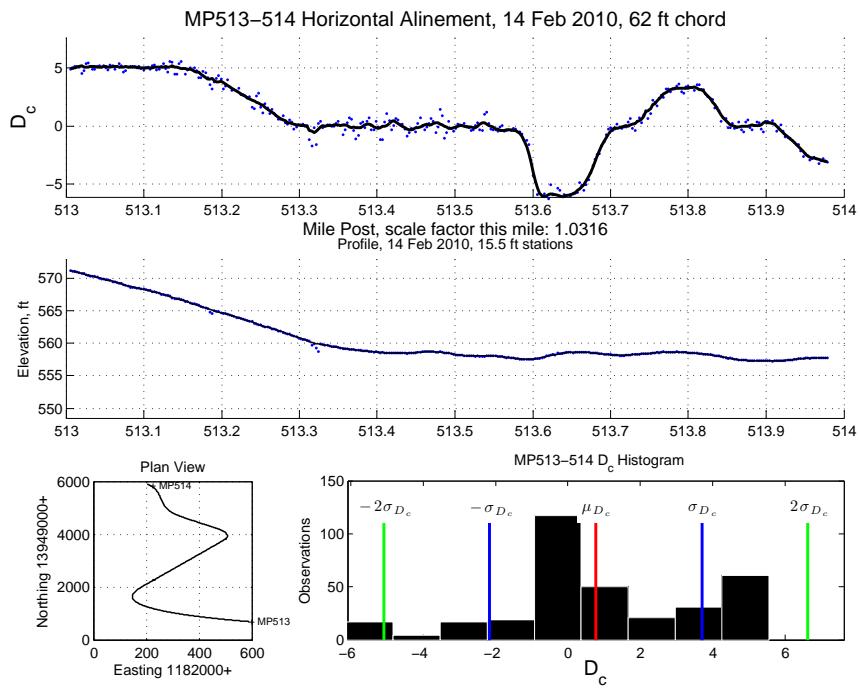


Student Version of MATLAB

Figure 35: Hi-Rail Alinement, Kanawha Sub, MP 513-514

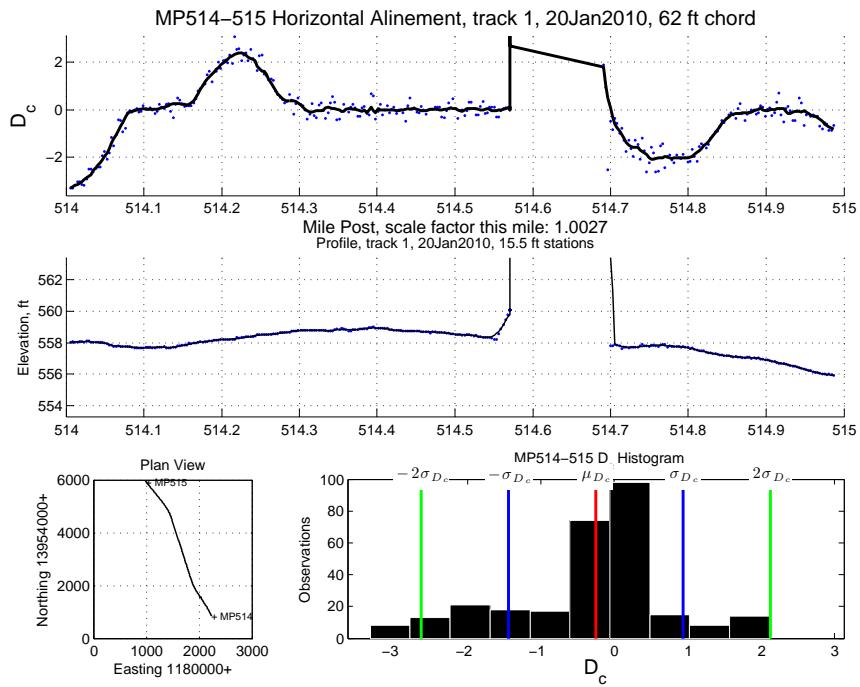

Student Version of MATLAB

Figure 36: Hi-Rail Alinement, Kanawha Sub, MP 514-515

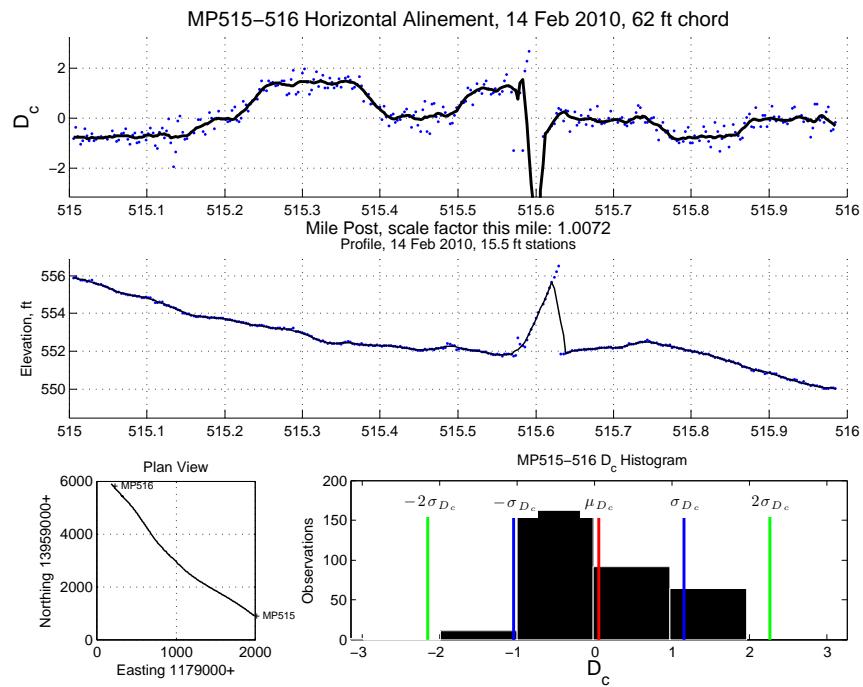

Student Version of MATLAB

Figure 37: Hi-Rail Alinement, Kanawha Sub, MP 515-516

C&O - KANAWHA

West ~~900C~~
VAL. SEC. 31 KY



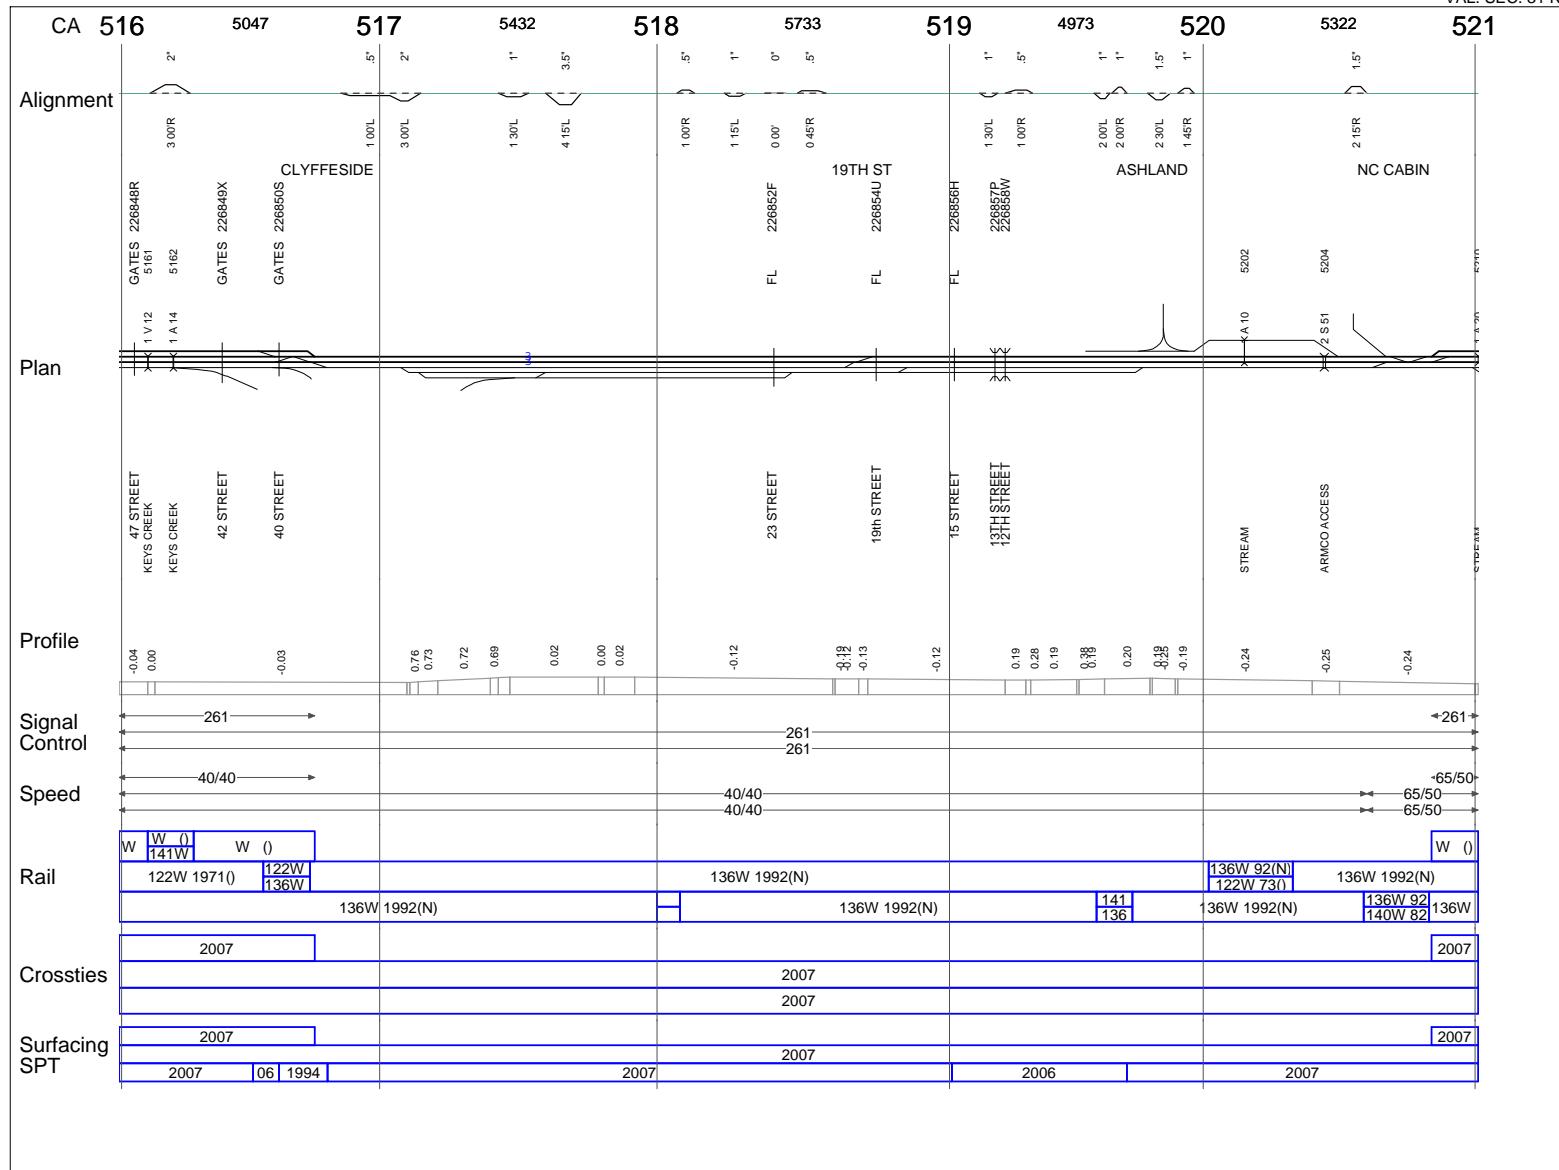


Figure 38: Track Chart, Kanawha Subdivision, mile post 516 to 521.

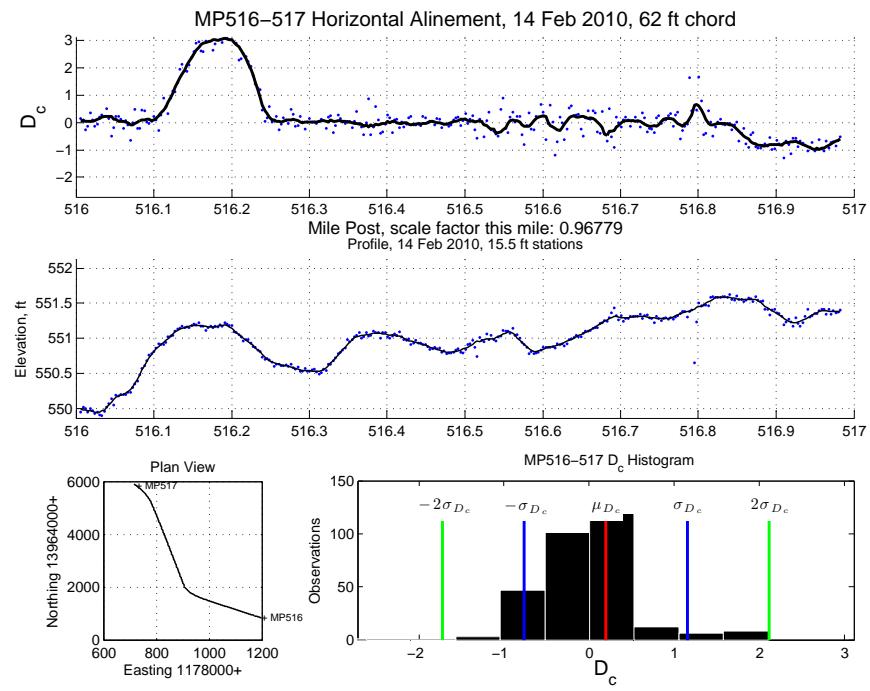


Student Version of MATLAB

Figure 39: Hi-Rail Alinement, Kanawha Sub, MP 516-517

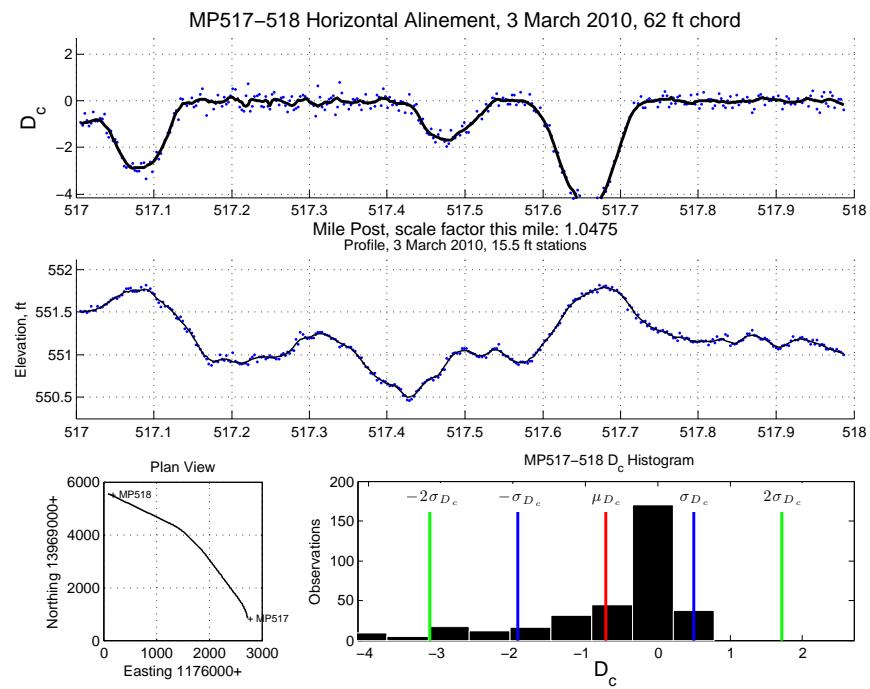


Student Version of MATLAB

Figure 40: Hi-Rail Alinement, Kanawha Sub, MP 509-510

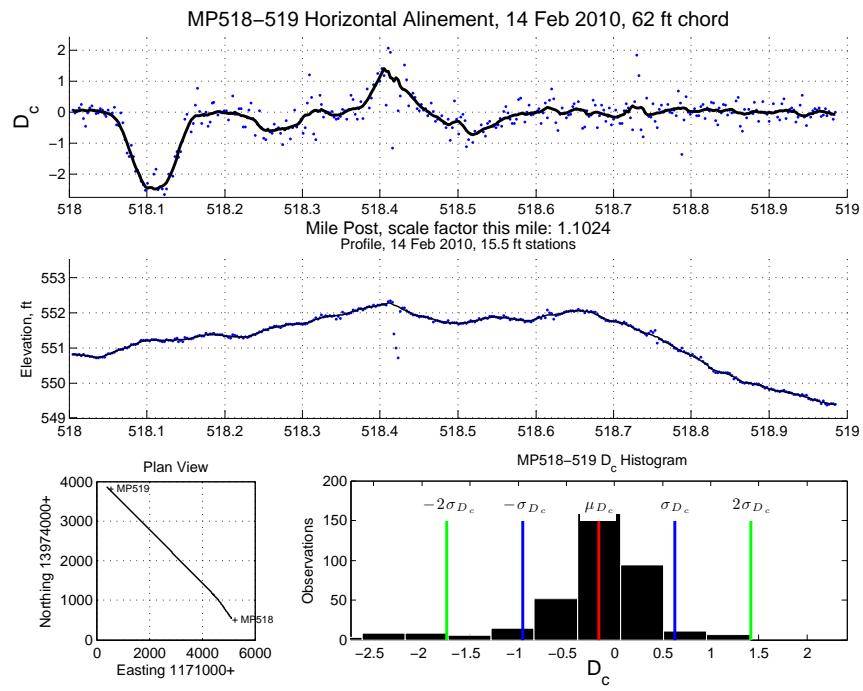

Student Version of MATLAB

Figure 41: Hi-Rail Alinement, Kanawha Sub, MP 518-519

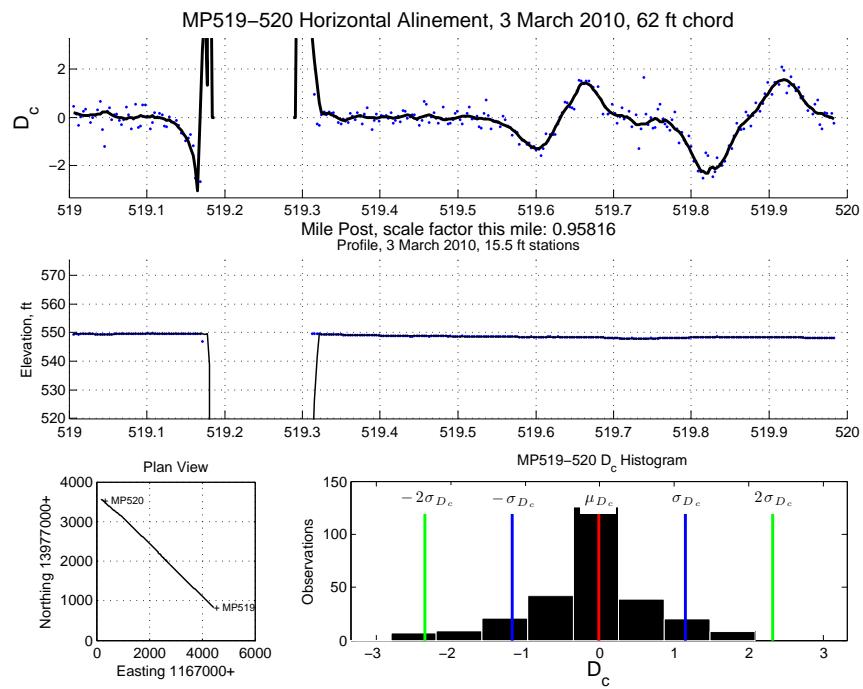

Student Version of MATLAB

Figure 42: Hi-Rail Alinement, Kanawha Sub, MP 519-520

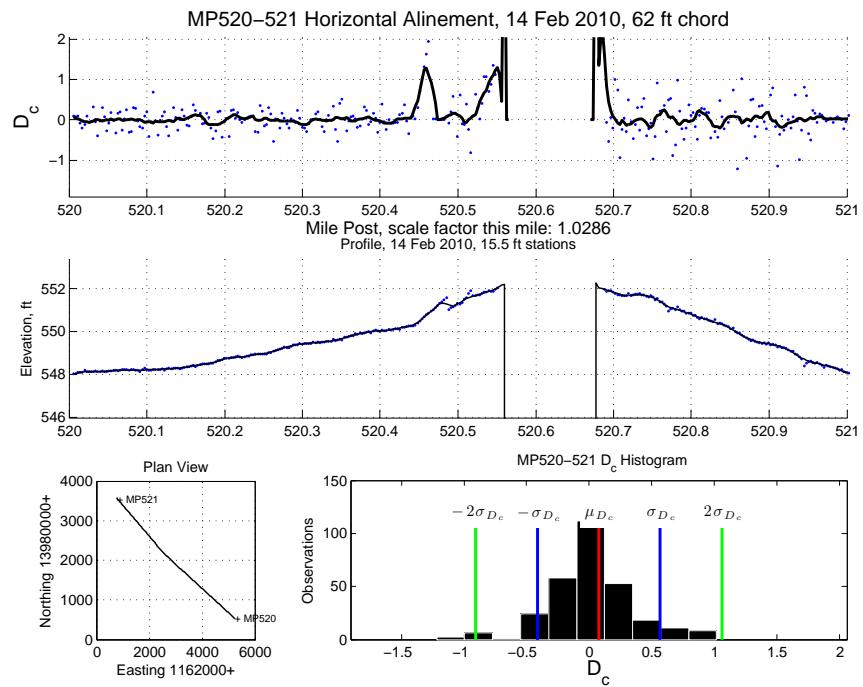


Figure 43: Hi-Rail Alinement, Kanawha Sub, MP 520-521

C&O - KANAWHA /RUSSELL

West ~~900C~~
VAL. SEC. 31 KY



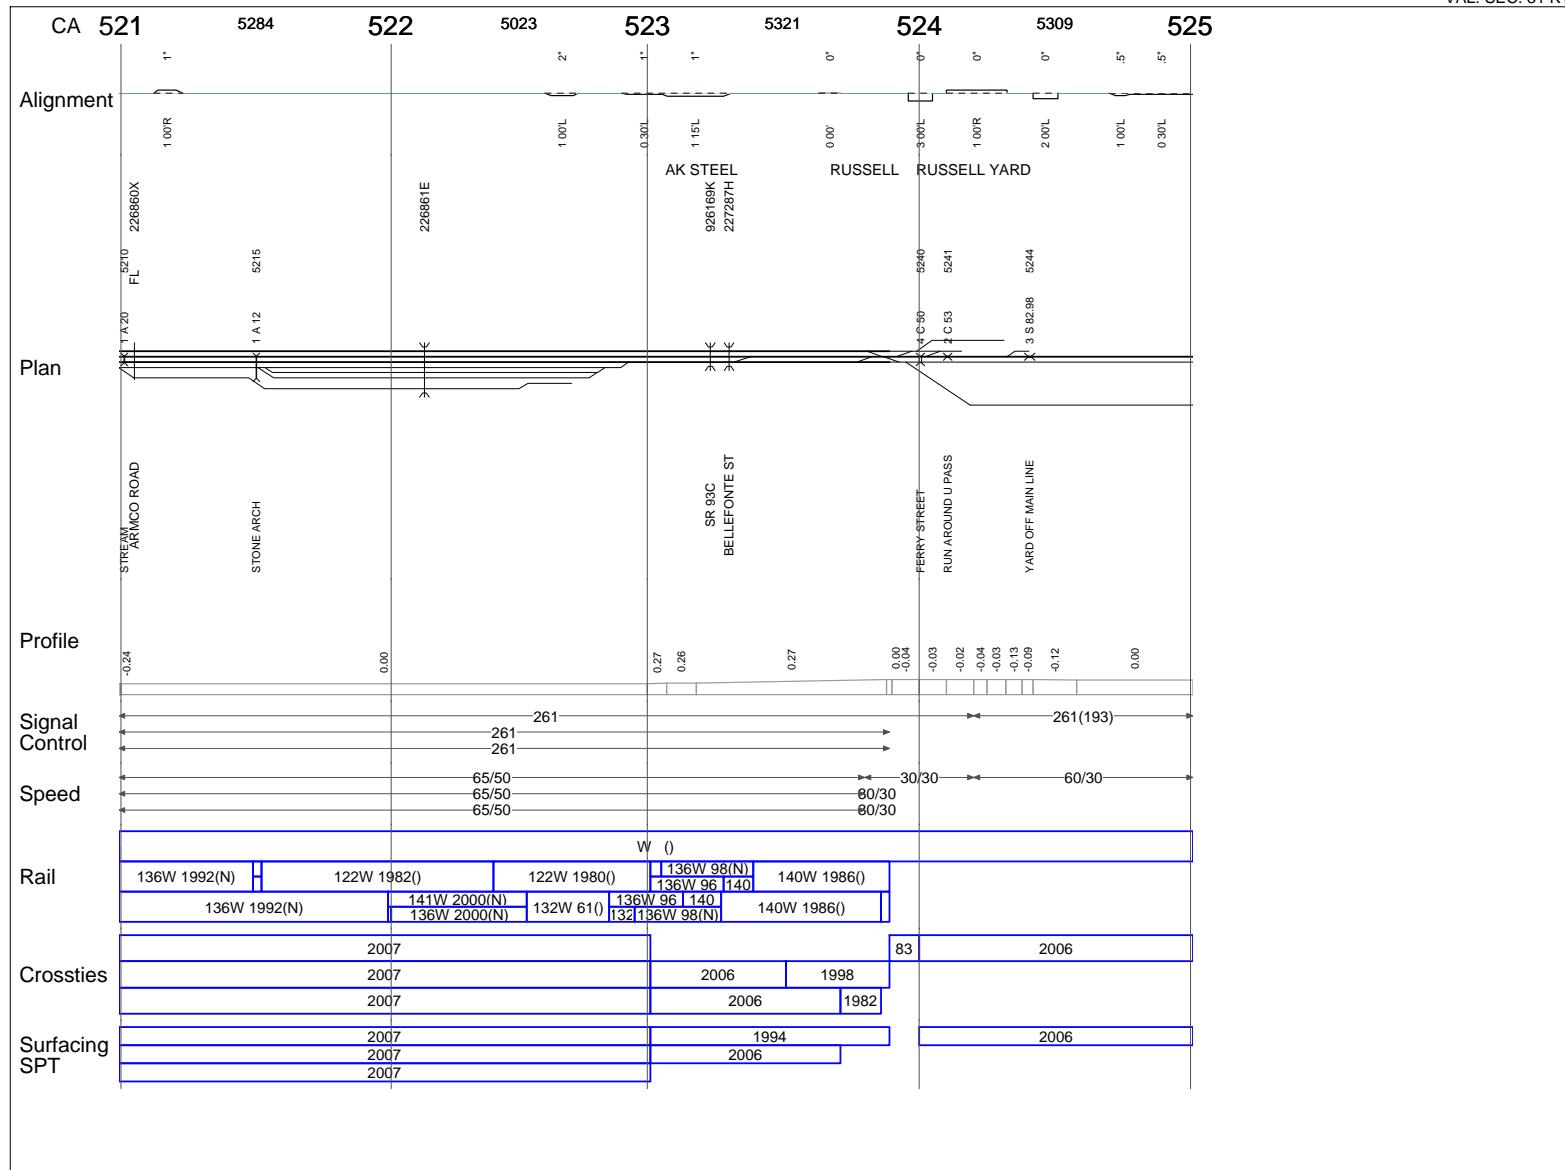


Figure 44: Track Chart, Kanawha Subdivision, mile post 521 to 525.

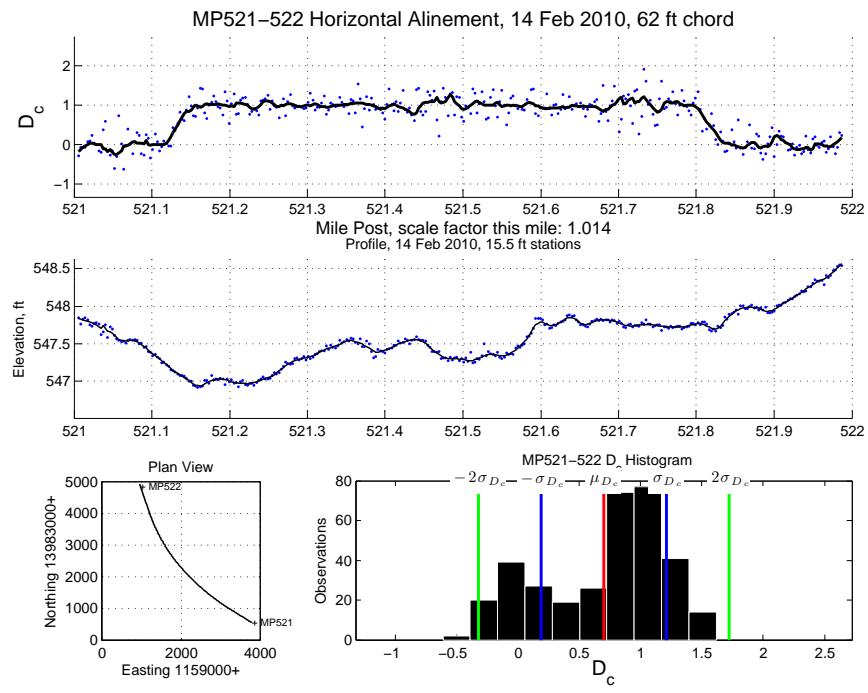

Student Version of MATLAB

Figure 45: Hi-Rail Alinement, Kanawha Sub, MP 521-522

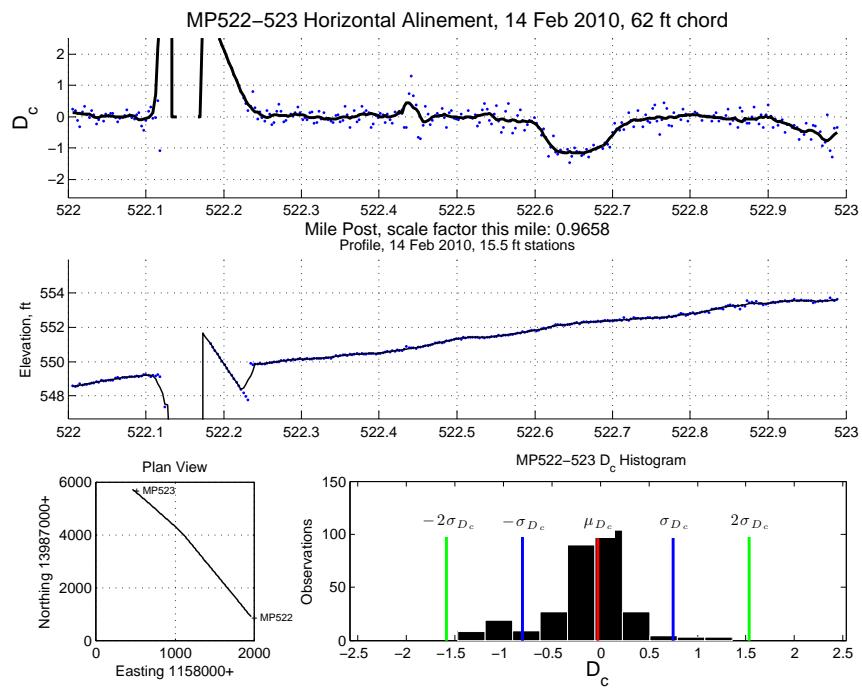

Student Version of MATLAB

Figure 46: Hi-Rail Alinement, Kanawha Sub, MP 522-523

String Line Model Functions

Code listings available by following embedded hyperlink to PDF in code segment title.

- [Track alignment runner.m](#): A Matlab script that reads a file containing track mile post locations, reads a file containing center line⁷ observations, call various sub functions to determine and display the D_c vs. mile post reference modeled after the string line method.
- [getIntLinesCircle.m](#): A Matlab function that returns the coordinates of the intersection between a circle, given the origin and radius, with an ordered series of lines defined by Cartesian coordinate pairs.
- [findMidOrdDistance.m](#): A Matlab function that returns distance between a chord's mid ordinate and an ordered series of line segments defined by (x, y) coordinate pairs.
- [plotDOC.m](#): A Matlab function that plots track D_c and elevation profile vs mile post reference; a plan view of track observations; and histogram of D_c .
- [slope2Az.m](#): A Matlab function that determines an azimuth (and back azimuth) from north in degrees given the input in radians from the +X-axis.
- [perpDist2line.m](#): A Matlab function that determines the perpendicular distance from a point to a line.

⁷Or other track reference i.e., right, left, gauge, or field side of rail.

Bibliography

Leonard Allen, J. Brent Mason, and Jeff Stevens. Rail Borne Track Asset Mapping. In *Proceedings of the AREMA 2006 Annual Conferences*. American Railway Engineering and Maintenance-of-Way Association, June 2006.

Gil Barnes. Head of CSX Hump Yard Engineering. Personal interview, May 16 2007.

Eric W. Beshers, James R. Blaze, and Randolph R. Resor. Scheduled Railroading and The Viability of Carload Service. Technical report, Office of Policy, Federal Railroad Administration, March 16 2004. URL http://www.fra.dot.gov/downloads/policy/policy_carload_study_2004.pdf.

Ron Bright. Head of CSX Track Inspection. Personal interview, May 19 2009.

Peter Dailey. Hump operations. Internet, May 2008a. URL <http://www.youtube.com/watch?v=ndryMwF41Kk>.

Peter J Dailey. Hump Yard Car Stall Blocking Group Switch. Internet, 2008b. URL http://www.youtube.com/watch?v=ygl_X9RER70.

Lou Epstey. UNAVCO Translate, Edit, and Quality Check software. <http://facility.unavco.org/software/teqc/teqc.html>, March 2010. URL <http://facility.unavco.org/software/teqc/teqc.html>.

FRA. Differential GPS: An Aid to Positive Train Control. Technical report, Federal Railroad Administration, 1995. URL www.navcen.uscg.gov/dgps/dgeninfo/traincontrol/dgps4a.pdf.

FRA. Analysis of Antennas to Improve Differential Global Positioning System (DGPS) Reception on Locomotives. Research result, Federal Railroad Administration, August 2000. URL http://www.fra.dot.gov/downloads/Research/rr00_03.pdf.

FRA. *Track Safety Standards Compliance Manual*. Federal Railroad Administration, Office of Safety Assurance and Compliance Track and Structures Division, Washington, D.C., April 2007. URL http://www.fra.dot.gov/downloads/safety/track_compliance_manual/TCM20TOC.PDF.

Fugro EarthData, Inc. LiDAR Mapping Fact Sheet, 2007. URL http://www.fugroearthdata.com/pdfs/FCT_Lidar-Educational_11-07.pdf.

Fugro N.V. OmniSTAR Worldwide DGPS Service. Internet, September 2009. URL <http://www.fugro.com/survey/satellite/omnistar.asp>.

Ralph Glaus. *Kinematic Track Surveying by Means of a Multi-Sensor Platform*. PhD thesis, Swiss Federal Institute Of Technology, 2006.

Thomas F. Hickerson. *Route Location and Design*. McGraw-Hill Book Company, New York, New York, fifth edition, 1964.

KGS. Kentucky Geodetic Survey's Geodetic Control in Kentucky. Internet, October 2009. URL <http://ngs.ky.gov/index.html>.

Edwin R. Kraft. Priority car sorting in railroad classification yards using a continuous multi-stage method. USPTO 6,418,854, July 16, 2002.

Alfred Leick. *GPS Satellite Surveying*. John Wiley and Sons, Hoboken, NY, 3rd edition, 2004.

MDOT. Michigan Department Of Transporation CORS. Internet, September 2009. URL <http://www.mdotcors.org/>.

Thomas J. Meyer and Thomas R. Metzger. Locomotive Location System and Method. USPTO patent 7,209,810, April 24, 2007.

Charles W. Moorman. Freight Rail Perspectives on Capacity Issues: Summary of Remarks. In *Workshop to Support FRA Railroad Research and Development*. Transportation Research Board, April 5-6 2006.

NCGS. North Carolina Geodetic Survey. Internet, October 2009. URL <http://www.ncgs.state.nc.us/>.

NSC Office of Science and Technology Policy. NSTC-6 U.S. Global Positioning System Policy. Presidential Directive, March 1996. URL http://www.hq.nasa.gov/office/codez/new/policy/pddnsc_6.htm.

ODOT. Ohio Department of Transportation Aerial Engineering Virtual Reference System Real Time Kinematic Network. Internet, September 2009. URL <http://www.dot.state.oh.us/Divisions/ProdMgt/Aerial/Pages/VRSRTK.aspx>.

Gary Pruitt and Carl Eric Fly. NDGPS Assessment Final Report. Technical Report DTFH61-04-D-00002, United States Department of Transportation, March 2008. URL http://www.navcen.uscg.gov/ndgps/ndgps%20assessment%20report_final.pdf%.

Randolph R. Resor, Michail E. Smith, and Pradee Patel. Positive Train Control (PTC): Calculating Benefits and Cost of a New Railroad Control Technology. *Journal of the Transportation Research Forum*, 44(2):77–98, 2005.

Richard Begley, Peter Dailey, Carlos Ramirez Alejandro Sanchez. Autonomous Railcar Tracking. FRA Research Result, 2010 (in press).

Anthony Szwilski, Richard Begley, John Ball, and Peter Dailey. Multi-sensor Mobile System to Monitor Track Super structure and Substructure: Initial Studies with Non-Invasive Technologies. In *National AREMA Conference*, Chicago, Illinois, 2003. American Railway Engineering and Maintenance-of-Way Association.

Anthony B. Szwilski, W. Brad Kerchof, John Tomlin, Peter J. Dailey, Zhibin Sheng, and Richard Begley. Rapid Surveying Of A Classification Yard Employing High-Accuracy DGPS (RTK). In *Proceedings of the AREMA 2005 Annual Conferences*. The American Railway Engineering and Maintenance of Way Association, September 25-28 2005. URL http://www.arema.org/eseries/scriptcontent/custom/e_arema/library/2005_Conference_Proceedings/00048.pdf.

The Mathworks, Inc. *Curve Fitting Toolbox 2*. The MathWorks, Inc., 3 Apple Hill Drive Natick, MA 01760-2098, Online only: Revised for Version 2.1 (Release 2009b) edition, September 2009. URL http://www.mathworks.com/access/helpdesk/help/pdf_doc/curvefit/curvefit.pdf.

TRAINS. North America's Hump Yards. *TRAINS Magazine*, June and July 2002. URL <http://www.trains.com/trn/default.aspx?c=a&id=537>.

Trimble. *R7 GNSS User Guide*. Trimble Navigation Limited, version 4.0 revision a edition, 2009. URL http://tr1.trimble.com/dscgi/ds.py/Get/File-449958/R7-5700Receivers_4A_UG_7441.pdf.

Trimble Navigation Limited. 5700 CORS System. Internet, 2006. URL <http://www.trimble.com/5700cors.shtml>.

Union Pacific Railroad. Union Pacific Railroad Precision Measurement Vehicle Operations, 2008. URL <http://www.uprr.com/aboutup/telecom/groups.shtml#2>.

United States Code. Rail Safety Improvement Act of 2008, Public Law 110-432. GPO, 2008. URL http://frwebgate.access.gpo.gov/cgi-bin/getdoc.cgi?dbname=110_cong_pub%lic_laws&docid=f:publ432.110.

United States Naval Observatory. Block II Satellite Information. Internet, March 2010. URL <ftp://tycho.usno.navy.mil/pub/gps/gpsb2.txt>.

USC. United States Code, Title 49, Part 213, Subpart C - Track Geometry, 2009a. URL <http://ecfr.gpoaccess.gov/cgi/t/text{text-idx?c=ecfr;sid=a92f8f8c60b5a%4769b34869f7324af63;rgn=div5;view=text;node=49%3A4.1.1.1.8;idno=49;cc=ecfr#49:%4.1.1.1.8.3>.

USC. United States Code, Title 49 Part 214, Subpart C, Roadway Worker Protection. USGPO, 2009b. URL <http://ecfr.gpoaccess.gov/cgi/t/text{text-idx?c=ecfr&sid=e1e054ac618be974227886aec39b5522&rgn=div6&view=text&node=49:4.1.1.1.9.3&idno=49>.

USC. United States Code, Title 49, Part 214, Subpart D, On-Track Roadway Maintenance Machines and Hi-Rail Vehicles. USGPO, 2009c. URL <http://ecfr.gpoaccess.gov/cgi/t/text{text-idx?c=ecfr&sid=e1e054ac618be974227886aec39b5522&rgn=div6&view=text&node=49:4.1.1.1.9.4&idno=49>.

USDOD. Global Positioning System Standard Postioning Service Performance Standard. Technical report, US Department Of Defense, 2001. URL <http://www.navcen.uscg.gov/GPS/geninfo/2001SPSPerformanceStandardFINAL.pdf>.

USDOT. National Transportation Statistics, Annual Publication, 2008. URL http://www.bts.gov/publications/national_transportation_statistics.

Rodney Van Pelt. CSX Roadmaster. Personal interview, November 5, 2009.

WAAS Test Team. Wide Area Augmentation System Performance Analysis Report. Quarterly Report 29, FAA/William J. Hughes Technical Center, Atlantic City International Airport, NJ 08405, July 2009. URL <http://www.nstb.tc.faa.gov/reports/waaspan29.pdf>.