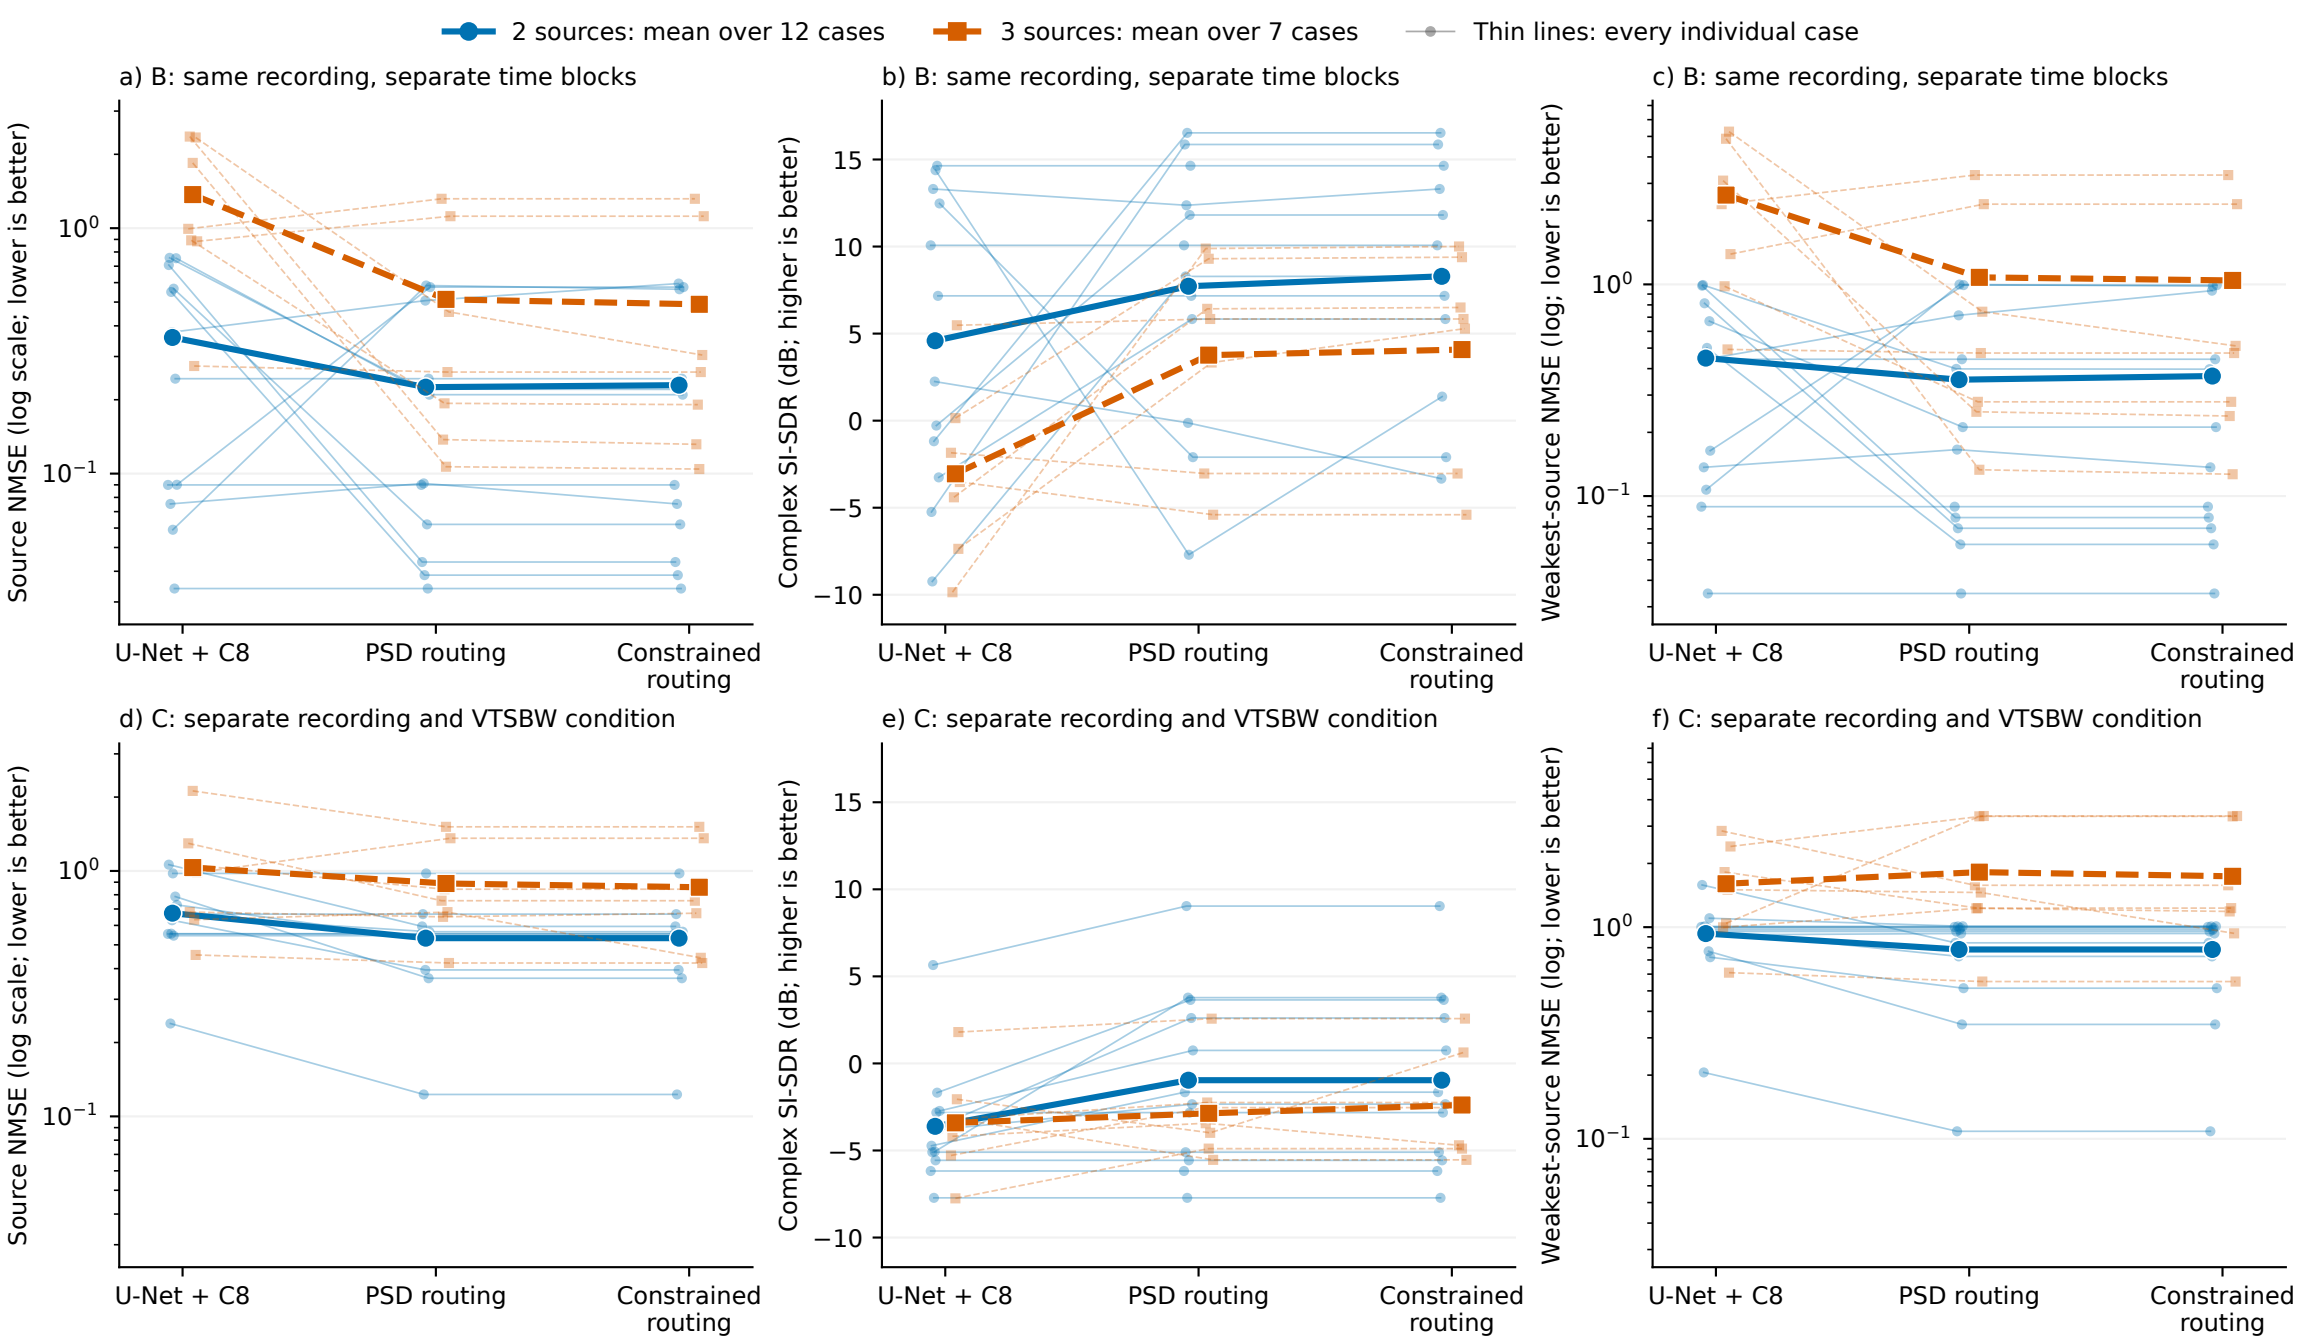

2 sources: mean over 12 cases
3 sources: mean over 7 cases
Thin lines: every individual case
a) B: same recording, separate time blocks
b) B: same recording, separate time blocks
c) B: same recording, separate time blocks
d) C: separate recording and VTSBW condition
e) C: separate recording and VTSBW condition
f) C: separate recording and VTSBW condition
Source NMSE (log scale; lower is better)
Complex SI-SDR (dB; higher is better)
Weakest-source NMSE (log; lower is better)
U-Net + C8
PSD routing
Constrained routing