


Drone RF waveform reconstruction: architecture comparison






RFUAV same-band development validation | seed 0 | common completed budget: 3 epochs

WaveNet, cycle 10 WaveNet, cycle 15 STFT U-Net

2 recorded components

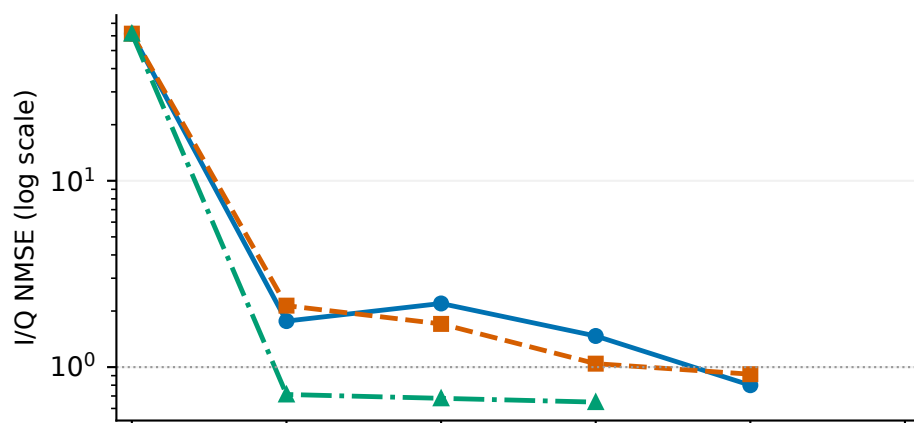

3 recorded components

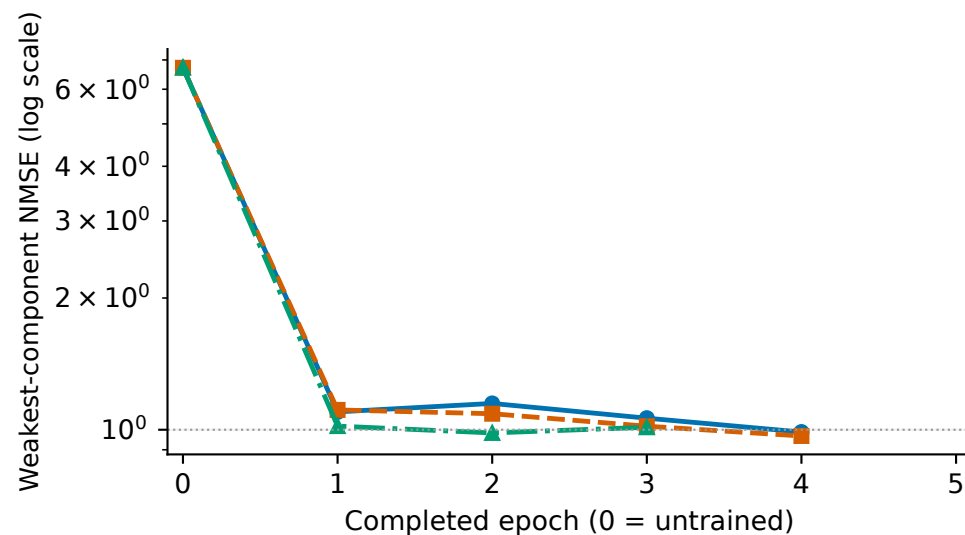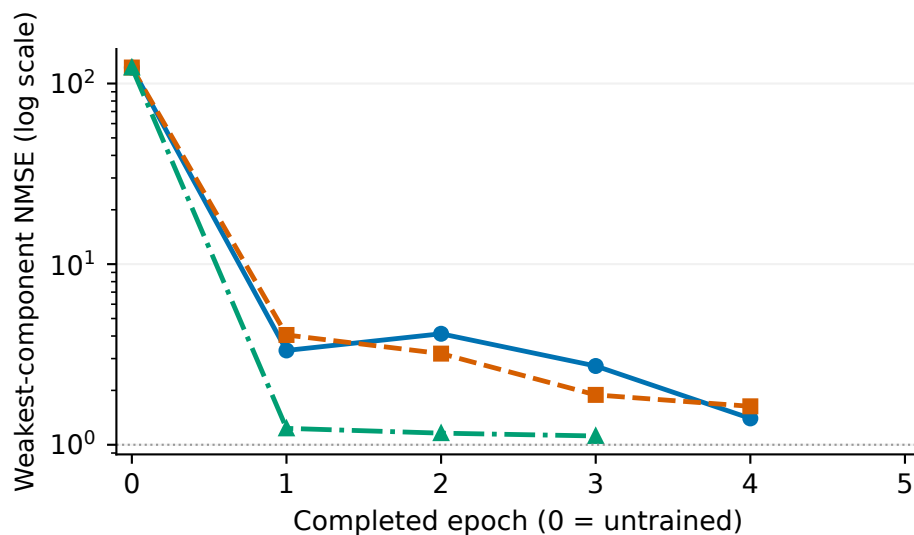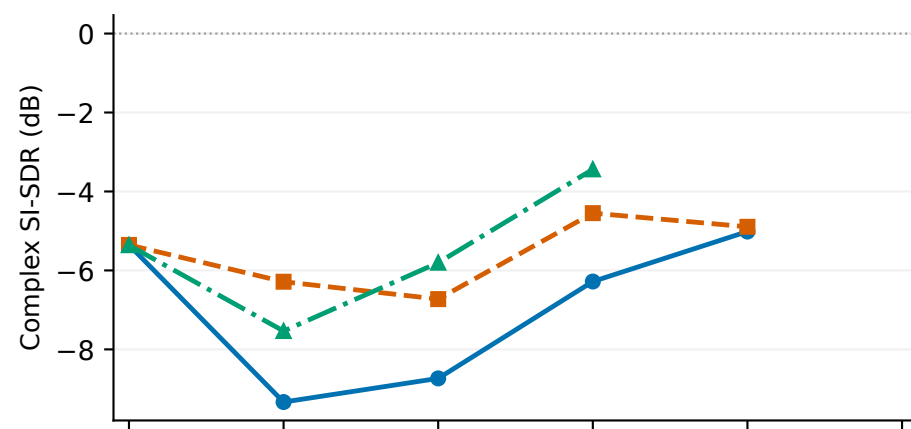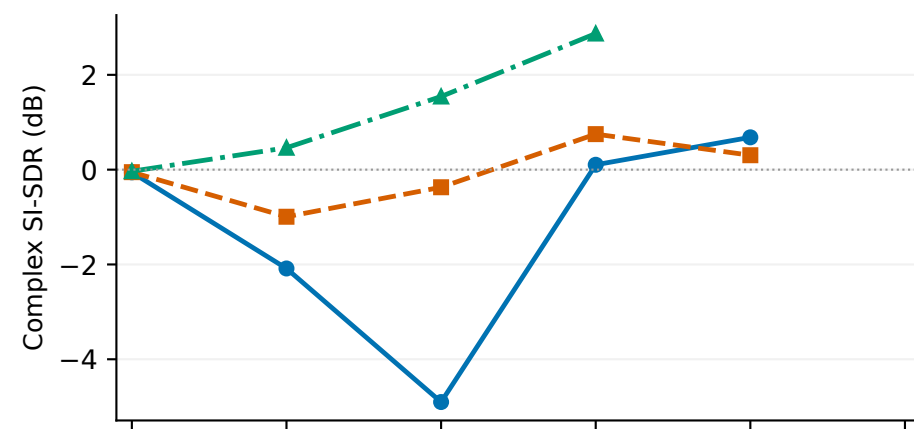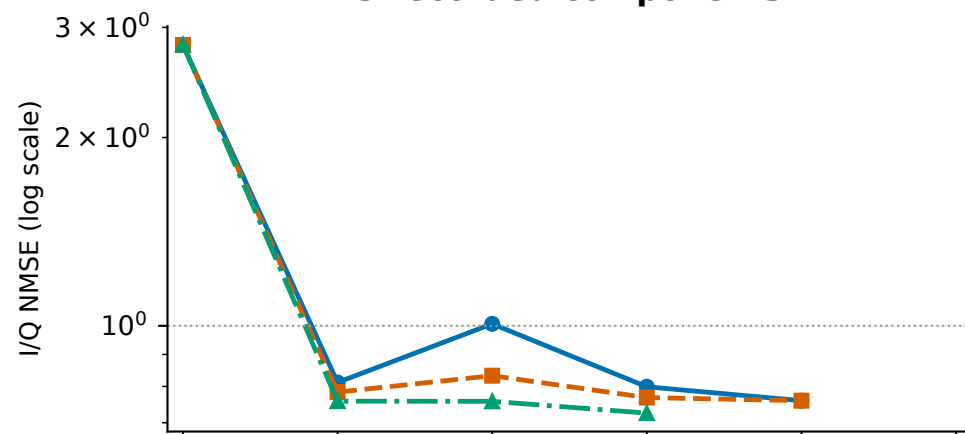

210 mixtures per source count; 75 updates/epoch; model capacities differ. Raw epoch values, no smoothing.

Lower NMSE and higher SI-SDR are better. Dotted NMSE=1 is the zero-output reference.

NMSE axes are logarithmic. Reused development validation, not a held-out test.