
FAERS

RELIABLE ENERGY FOR A BRIGHTER TOMORROW

made in UAE صنع في الامارات

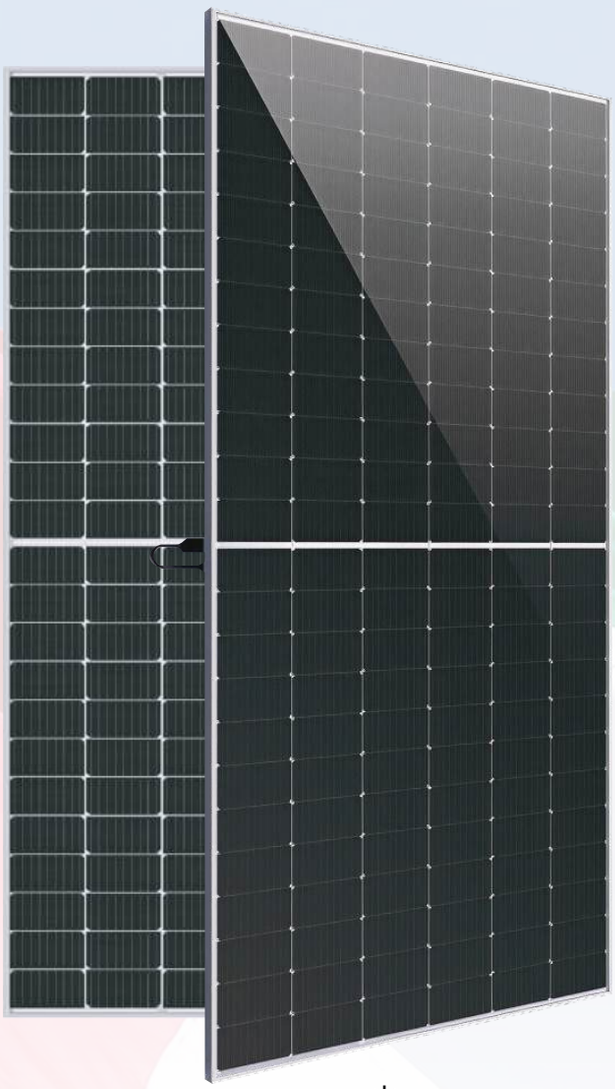

FAERS ULTRA

700-740W

TOPCON Bifacial Dual Glass

740W MAXIMUM POWER OUTPUT

23.82% MAXIMUM MODULE EFFICIENCY

0~+5W POWER TOLERANCE

15 YEARS
PRODUCT WARRANTY ON MATERIALS

30 YEARS
LINEAR POWER OUTPUT WARRANTY

PID RESISTANCE


INTRODUCTION

- N-TYPE TOPCON+MBB TECHNOLOGY FOR LOWER LCOE
- DOUBLE-SIDED POWER GENERATION, HIGHER YIELD
- ULTRA-LOW DEGRADATION, LONGER WARRANTY, HIGHER OUTPUT
- UNIVERSAL SOLUTION FOR RESIDENTIAL AND C&I APPLICATION

MORE POWER

- COMPATIBLE WITH MAINSTREAM TRACKERS, COST EFFECTIVE PRODUCT FOR UTILITY POWER PLANT
- BETTER SHADING TOLERANCE
- UP TO 4.5% LOWER LCOE UP TO 5-6% LOWER SYSTEM COST
- COMPREHENSIVE LID / LETID MITIGATION TECHNOLOGY, UP TO 50% LOWER DEGRADATION

LINEAR PERFORMANCE WARRANTY

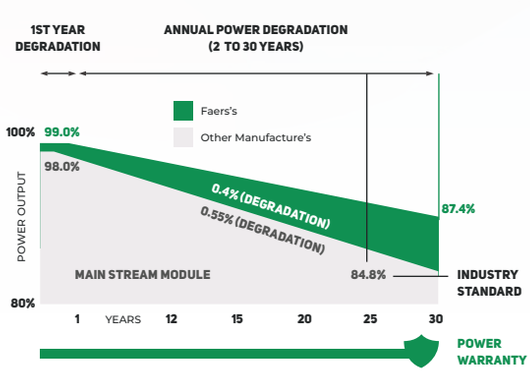



SYSTEM AND PRODUCT CERTIFICATIONS

EU·28 WEEE COMPLIANT

FAERS ULTRA 700-740W

TOPCON Bifacial Dual Glass

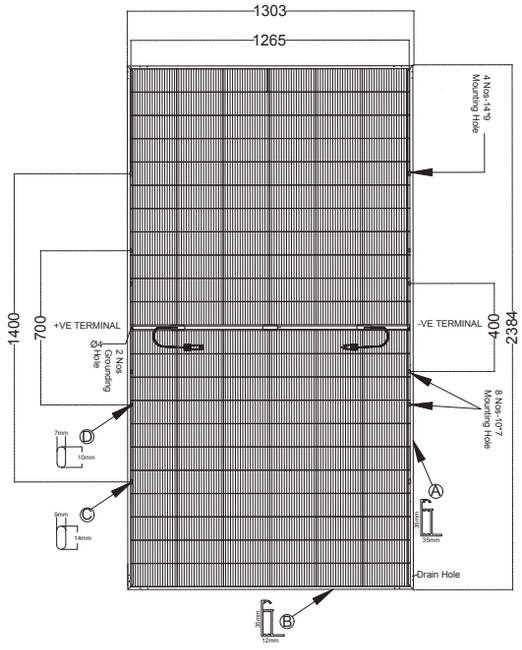

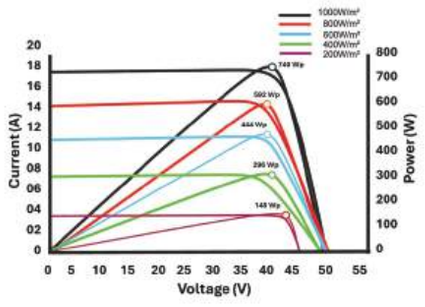

PACKAGING CONFIGURATION

Container	40 Feet	Pieces/Pallet	31
Panel/Container	558	Pallets/Container	18

MECHANICAL CHARACTERISTICS

Cell type	Topcon Bifacial
No.of cells	132 [2 x (11 x 6)]
Dimensions	2384×1303×35mm
Weight	37.5 kg
Front Glass	2.0mm, Anti-Reflection Coating
Back Glass	2.0mm, Heat Strengthened Glass
Frame	Anodized Aluminum Alloy
EVA	Transparent EVA
Junction Box	IP68, 3 diodes 35amp
Output Cables	4 mm2 (IEC), 12 AWG (UL)
Connectors	MC4 compatible Connectors
Cable Length	400 mm (Customize length available)

Sr.№	Model Name	System Voltage (V)	Electrical Rating							Fuse rating (A)	L (mm)	W (mm)	Frame Height	H (mm)	№.of Bypass diodes	№.of cells per by pass diode (№)
			Voc (V)	Vm (V)	Isc (A)	Im (A)	Pm (W)	Eff	FF%							
Model-I-66 cell family cell size 210 x 210 mm - g12																
1	FAERS-66H-740	1500	49.6	41.3	18.9	17.9	740	23.8	78.6	35	2384	1303	35	Y-35/35 & X -35/12	3	44 cell half cut
2	FAERS-66H-735	1500	49.5	41.2	18.8	17.8	735	23.6	78.6	35	2384	1303	35		3	44 cell half cut
3	FAERS-66H-730	1500	49.3	41.1	18.8	17.7	730	23.5	78.6	35	2384	1303	35		3	44 cell half cut
4	FAERS-66H-725	1500	49.2	41.0	18.7	17.6	725	23.3	78.6	35	2384	1303	35		3	44 cell half cut
5	FAERS-66H-720	1500	49.0	40.8	18.6	17.6	720	23.1	78.6	35	2384	1303	35		3	44 cell half cut
6	FAERS-66H-715	1500	48.8	40.7	18.6	17.5	715	23.0	78.6	35	2384	1303	35		3	44 cell half cut
7	FAERS-66H-710	1500	48.7	40.6	18.5	17.4	710	22.8	78.6	35	2384	1303	35		3	44 cell half cut
8	FAERS-66H-705	1500	48.5	40.5	18.4	17.4	705	22.7	78.6	35	2384	1303	35		3	44 cell half cut
9	FAERS-66H-700	1500	48.4	40.4	18.4	17.3	700	22.5	78.6	35	2384	1303	35		3	44 cell half cut

TEMPERATURE CHARACTERISTIC

Temperature coefficients of Pmax	-0.288% °C
Temperature coefficients of Voc	-0.24% °C
Temperature coefficients of Isc	+0.047% °C

BNPI GAIN DEPEND ON ALBEDO USE FOR REFLECTION

	STC Condition Output	700	705	710	715	720	725	730	735	740
5%	Maximum Power Pmax	735	740.2	745.5	750.7	756	761.2	766.5	771.7	777
	Module Efficiency STC (%)	23.6	23.8	24.0	24.1	24.3	24.5	24.6	24.8	25.0
10%	Maximum Power Pmax	770	775.5	781	786.5	792	797.5	803	808.5	814
	Module Efficiency STC (%)	24.7	24.9	25.1	25.3	25.5	25.6	25.8	26.0	26.2
15%	Maximum Power Pmax	805	810.7	816.5	822.2	828	833.7	839.5	845.2	851
	Module Efficiency STC (%)	25.9	26.1	26.2	26.4	26.6	26.8	27.03	27.2	27.4

As part of continuous innovation and R&D improvement, the specification and key feature outline in the datasheet may be subject to minor changes and are not guaranted “Zakh Renewable Energy & Engineering Manufacturing FZ-LLC” reserve the right to update the information provided at any time without prior notice.