

**DESIGNED & DIMENSIONED IN MILLIMETERS
(INCHES FOR REFERENCE)**

DO NOT
SCALE FROM
THIS PRINT

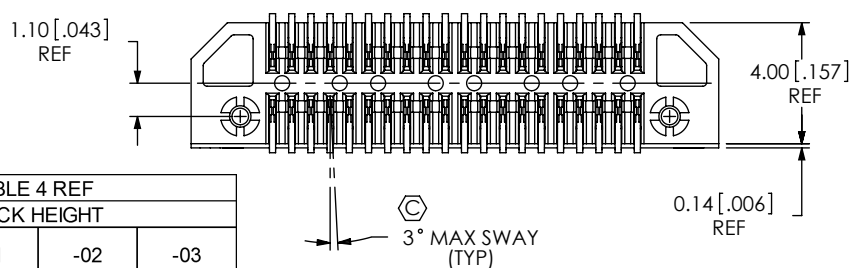
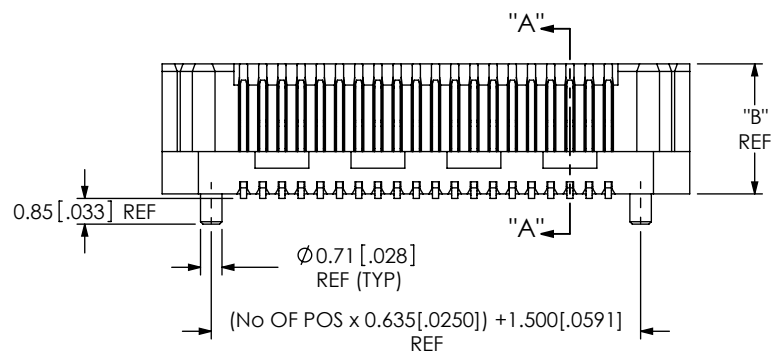
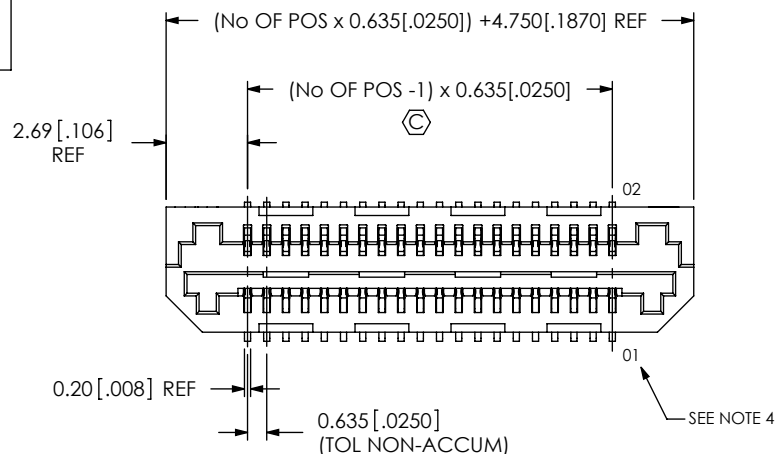



FIG 1
LSS-120-01-XX-DV-A SHOWN

TABLE 4 REF			
STACK HEIGHT			
LSS LEAD STYLE	-01	-02	-03
-01	6.0MM		
-02	9.0MM	12.0MM	
-03	7.0MM	10.0MM	8.0MM

NOTES:

1.  REPRESENTS A CRITICAL DIMENSION.
2. BURR ALLOWANCE: .038 [.0015].
3. MINIMUM PUSHOUT FORCE; TERMINALS: .5 LBS, CONTACTS: .5 LB.
4. PIN 01 WILL MATE WITH CONTACT 02 ON MATING CONNECTOR.
5. MEASURE FROM TOP OF VERTICAL WALL.
6. MINIMUM PULL OUT FORCE FOR -LC IS .75 LB.

LSS-1XX-XX-XX-DV-XX-XX

NO OF POSITIONS _____
-05, -10, 20, -30, -40, -50
(PER ROW)

LEAD STYLE _____

-01: 3 mm (SEE TABLE 3)

-02: 6 mm (SEE TABLE 3)

-03: 4 mm (SEE TABLE 3)

PLATING SPECIFICATION

-L: 10μ" GOLD IN CONTACT AREA,
MATTE TIN ON TAIL
(USE C-185-XX-LM)

-F: 3µ" GOLD IN CONTACT AREA,
MATTE TIN ON TAIL
(USE C-185-XX-FM)

* -LM: 10μ" GOLD IN CONTACT AREA,
MATTE TIN ON TAIL
(USE C-185-XX-LM)

*-FM: 3μ" GOLD IN CONTACT AREA,
MATTE TIN ON TAIL
(USE C-185-XX-FM)

L OPTION
 -K: POLYIMIDE FILM
 (USE K-DOT-.138-.250-.005)
 (SEE FIG 2, SHT 2)
 -TR: TAPE & REEL
 (SEE FIG 4, SHT 2)


OPTION

-A: ALIGNMENT PIN
(REQUIRED FOR -01 LEAD STYLE;
OPTIONAL FOR -02 & -03)
-LC: LOCKING CLIP
(-02 & -03 LEAD STYLES ONLY)
(USE LC-08-TM-01)
(SEE FIG 3, SHT 2)
(SEE NOTE 6)

— ROW SPECIFICATION

-DV: DOUBLE VERTICAL

* = FOR EXISTING CUSTOMERS ONLY

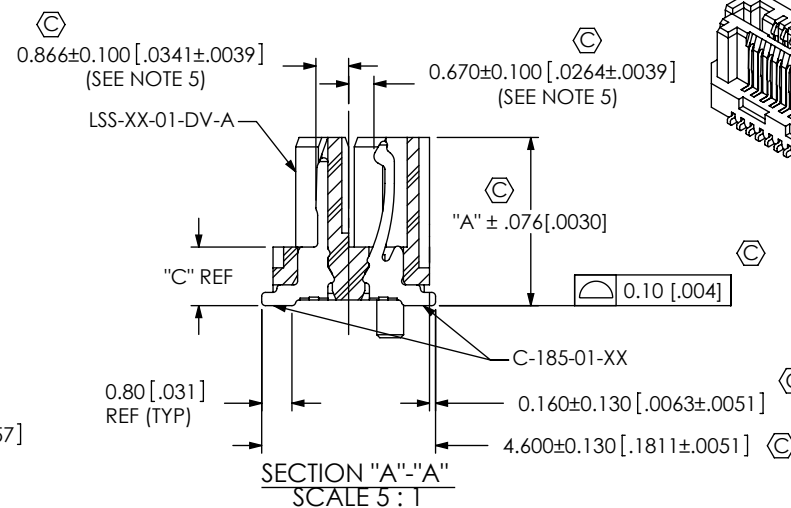

BODY HT	"A"	"B"	"C"
-01	4.496 [.1770]	4.300 [.1693]	1.596 [.0628]
-02	7.493 [.2950]	7.300 [.2874]	4.593 [.1808]
-03	5.493 [.2163]	5.300 [.2087]	2.593 [.1027]

TABLE 3		
LEADSTYLE	BODY	PIN
-01	LSS-XX-01-DV-A	C-185-01-X
-02	LSS-XX-02-DV-XX	C-185-02-X
-03	LSS-XX-03-DV-XX	C-185-03-X

UNLESS OTHERWISE SPECIFIED,
DIMENSIONS ARE IN MILLIMETERS.

TOLERANCES ARE:

DECIMALS	ANGLES
.X: $\pm .3$ [.01]	2°
.XX: $\pm .13$ [.005]	
.XXX: $\pm .051$ [.0020]	

PROPRIETARY NOTE

THIS DOCUMENT CONTAINS INFORMATION
CONFIDENTIAL AND PROPRIETARY TO
SAMTEC, INC. AND SHALL NOT BE REPRODUCED
OR TRANSFERRED TO OTHER DOCUMENTS OR
DISCLOSED TO OTHERS OR USED FOR ANY
PURPOSE OTHER THAN THAT WHICH IT WAS
OBTAINED WITHOUT THE EXPRESSED WRITTEN
CONSENT OF SAMTEC, INC.

MATERIAL: DO NOT SCALE DRAWING
INSULATOR: LCP, COLOR: BLACK
CONTACT: PHOS BRONZE

SHEET SCALE: 4:1

DESCRIPTION:
.635mm TERMINAL/SOCKET COMBO

DWG. NO.


0. LSS-1XX-XX-XX-DV-XX-XX

BY: CHAD F

07/01/2002	SHEET 1 OF 2
------------	--------------

F:\DWG\MISC\MKTG\LSS-1XX-XX-XX-DV-XX-XX-MKT.SLDDRW

FIG 2
-K: POLYIMIDE FILM OPTION
(USE K-DOT-.138-.250-.005)

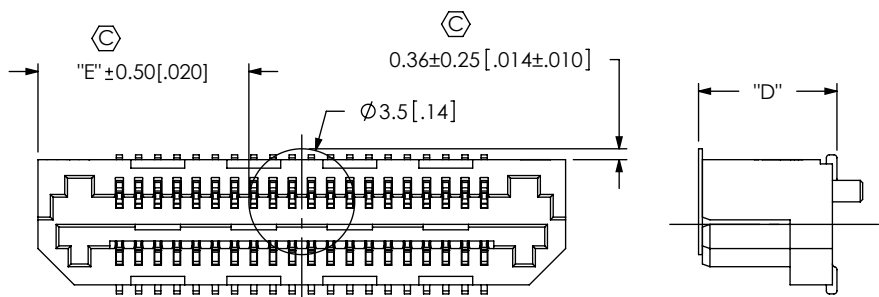

$$E = ((\text{NO OF POS} \times 0.635 [.0250]) + 4.750 [.1870]) / 2 - 1.75 [.0689]$$

TABLE 2	
BODY HT	"D"
-01	4.58 [.180]
-02	7.58 [.298]
-03	5.58 [.220]

FIG 3
-LC: LOCKING CLIP OPTION
(USE LC-08-TM-01)
-02 & -03 LEAD STYLES ONLY
(SEE NOTE 6, SHT. 1)




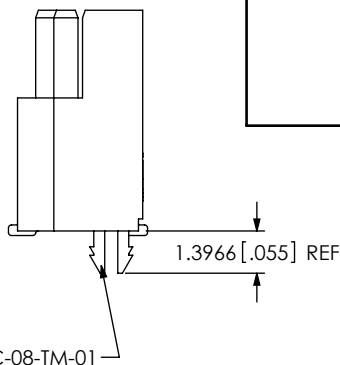


FIG 4

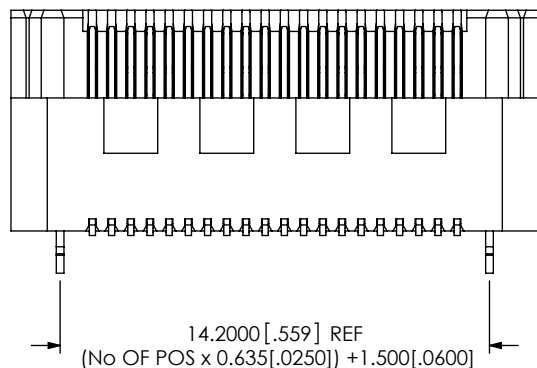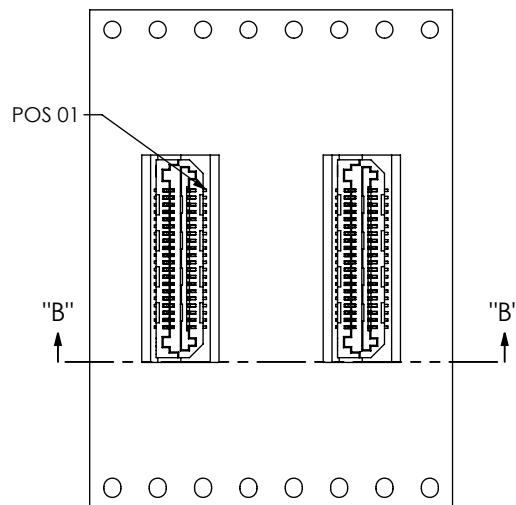


USER DIRECTION OF UN-REELING
POCKET NOT DETAILED





SECTION "B"-"B"
SCALE 1.5 : 1

TAPE & REEL

LEAD STYLE	OPTION	PACKAGING TUBE	PLUG
-01	-A	PT-1-24-13-09	TP-24
-02	-A, -LC	PT-1-24-01-25	TP-03
-03	-A, -LC	PT-1-24-11-09	TP-09



TUBE: PT-1-24-13-09
PLUG: TP-24



TUBE: PT-1-24-11-09
PLUG: TP-09

LOAD PARTS WITH PIN #1 IN DIRECTION OF ARROW.

PROPRIETARY NOTE

THIS DOCUMENT CONTAINS INFORMATION
CONFIDENTIAL AND PROPRIETARY TO
SAMTEC, INC. AND SHALL NOT BE REPRODUCED
OR TRANSFERRED TO OTHER DOCUMENTS OR
DISCLOSED TO OTHERS OR USED FOR ANY
PURPOSE OTHER THAN THAT WHICH IT WAS
OBTAINED WITHOUT THE EXPRESSED WRITTEN
CONSENT OF SAMTEC, INC.

DO NOT SCALE DRAWING

SHEET SCALE: 4:1

samtec

520 PARK EAST BLVD, NEW ALBANY, IN 47150
PHONE: 812-944-6733 FAX: 812-948-5047
e-Mail: info@SAMTEC.com code 55322

DESCRIPTION:

.635mm TERMINAL/SOCKET COMBO

DWG. NO.

LSS-1XX-XX-XX-DV-XX-XX

BY: CHAD F

07/01/2002

SHEET 2 OF 2